


# CALLDBPROC - SQL

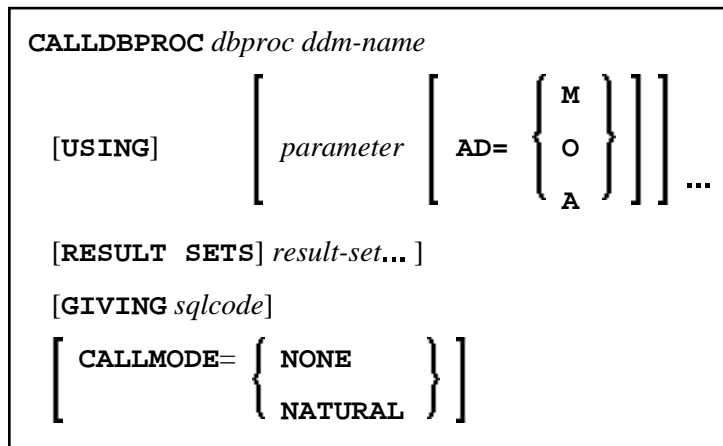

This chapter covers the following topics:

- Function
- Restriction
- Syntax Description
- Example

For an explanation of the symbols used in the syntax diagram, see *Syntax Symbols*.

Belongs to Function Group: *Database Access and Update*

See also *CALLDBPROC - SQL* in the *Natural for DB2* part of the *Database Management System Interfaces* documentation.

## Function

The CALLDBPROC statement is used to invoke a stored procedure of the SQL database system to which Natural is connected.

The stored procedure can be either a Natural subprogram or a program written in another programming language.

In addition to the passing of parameters between the invoking object and the stored procedure, CALLDBPROC supports "result sets"; these make it possible to return a larger amount of data from the stored procedure to the invoking object than would be possible via parameters.

The result sets are "temporary result tables" which are created by the stored procedure and which can be read and processed by the invoking object via a READ RESULT SET statement.

### Note:

In general, the invoking of a stored procedure could be compared with the invoking of a Natural subprogram: when the CALLDBPROC statement is executed, control is passed to the stored procedure;

after processing of the stored procedure, control is returned to the invoking object and processing continues with the statement following the CALLDBPROC statement.

## Restriction

This statement is available only with Natural for DB2.

## Syntax Description

Syntax Element	Description
<i>dbproc</i>	<p><b>Stored Procedure to be Invoked:</b></p> <p>As <i>dbproc</i> you specify the name of the stored procedure to be invoked. The name can be specified either as an alphanumeric variable or as a constant (enclosed in apostrophes).</p> <p>The name must adhere to the rules for stored procedure names of the target database system.</p> <p>If the stored procedure is a Natural subprogram, the actual procedure name must not be longer than 8 characters.</p>
<i>dgm-name</i>	<p><b>Name of a Natural Data Definition Module:</b></p> <p>The name of a DDM must be specified to provide the "address" of the database which executes the stored procedure. For further information, see <i>dgm-name</i>.</p>
[USING] <i>parameter</i>	<p><b>Parameter(s) to be Passed:</b></p> <p>As <i>parameter</i>, you can specify parameters which are passed from the invoking object to the stored procedure. A <i>parameter</i> can be</p> <ul style="list-style-type: none"> <li>● a host-variable (optionally with INDICATOR and LINDICATOR clauses),</li> <li>● a constant, or</li> <li>● the keyword NULL.</li> </ul> <p>See further details on <i>host-variable</i>.</p>

Syntax Element	Description						
AD=	<p><b>Attribute Definition:</b></p> <p>If the <i>parameter</i> is a <i>host-variable</i>, you can mark it as follows:</p> <table border="1"> <tr> <td>AD=O</td> <td>Non-modifiable, see session parameter AD=O.  (Corresponding procedure notation in DB2 for z/OS: IN.)</td> </tr> <tr> <td>AD=M</td> <td>Modifiable, see session parameter AD=M.  (Corresponding procedure notation in DB2 for z/OS: INOUT.)</td> </tr> <tr> <td>AD=A</td> <td>For input only, see session parameter AD=A.  (Corresponding procedure notation in DB2 for z/OS: OUT.)</td> </tr> </table> <p>If the <i>parameter</i> is a constant, AD cannot be explicitly specified. For constants, AD=O always applies.</p>	AD=O	Non-modifiable, see session parameter AD=O.  (Corresponding procedure notation in DB2 for z/OS: IN.)	AD=M	Modifiable, see session parameter AD=M.  (Corresponding procedure notation in DB2 for z/OS: INOUT.)	AD=A	For input only, see session parameter AD=A.  (Corresponding procedure notation in DB2 for z/OS: OUT.)
AD=O	Non-modifiable, see session parameter AD=O.  (Corresponding procedure notation in DB2 for z/OS: IN.)						
AD=M	Modifiable, see session parameter AD=M.  (Corresponding procedure notation in DB2 for z/OS: INOUT.)						
AD=A	For input only, see session parameter AD=A.  (Corresponding procedure notation in DB2 for z/OS: OUT.)						
RESULT SETS <i>result-set</i>	<p><b>Field for Result-Set Locator Variable:</b></p> <p>As <i>result-set</i> you specify a field in which a result-set locator is to be returned.</p> <p>A result set has to be a variable of format/length I4.</p> <p>The value of a result set variable is merely a number which identifies the result set and which can be referenced in a subsequent READ RESULT SET statement.</p> <p>The sequence of the <i>result-set</i> values correspond to the sequence of the result sets returned by the stored procedure.</p> <p>The contents of the result sets can be processed by a subsequent READ RESULT SET statement.</p> <p>If no result set is returned, the corresponding result-set variable will contain 0.</p> <p>Multiple result sets can be specified.</p> <p>See also <i>Result Sets</i> (in the <i>Natural for DB2</i> part of the <i>Database Management System Interfaces</i> documentation).</p>						

Syntax Element	Description				
GIVING <i>sqlcode</i>	<p><b>GIVING <i>sqlcode</i> Option:</b></p> <p>This option may be used to obtain the SQL code of the SQL CALL statement invoking the stored procedure.</p> <p>If this option is specified and the SQL code of the stored procedure is not 0, no Natural error message will be issued. In this case, the action to be taken in reaction to the SQL code value has to be coded in the invoking Natural object.</p> <p>The <i>sqlcode</i> field has to be a variable of format/length I4.</p> <p>If the GIVING <i>sqlcode</i> option is omitted, a Natural error message will be issued if the SQL code of the stored procedure is not 0.</p>				
CALLMODE=	<p><b>CALLMODE Parameter:</b></p> <p>Possible settings are:</p> <table border="1"> <tbody> <tr> <td>CALLMODE=NATURAL</td> <td> <p>This setting applies if the stored procedure is a Natural subprogram which is defined with PARAMETER STYLE GENERAL or PARAMETER STYLE GENERAL WITH NULL, otherwise specify NONE (default).</p> <p>This setting also has an impact on internal parameters that are passed to/from the stored procedure. For details, see <i>CALLMODE=NATURAL</i> in the section <i>CALLDBPROC</i> of the <i>Natural for DB2</i> documentation.</p> </td> </tr> <tr> <td>CALLMODE=NONE</td> <td>This is the default.</td> </tr> </tbody> </table>	CALLMODE=NATURAL	<p>This setting applies if the stored procedure is a Natural subprogram which is defined with PARAMETER STYLE GENERAL or PARAMETER STYLE GENERAL WITH NULL, otherwise specify NONE (default).</p> <p>This setting also has an impact on internal parameters that are passed to/from the stored procedure. For details, see <i>CALLMODE=NATURAL</i> in the section <i>CALLDBPROC</i> of the <i>Natural for DB2</i> documentation.</p>	CALLMODE=NONE	This is the default.
CALLMODE=NATURAL	<p>This setting applies if the stored procedure is a Natural subprogram which is defined with PARAMETER STYLE GENERAL or PARAMETER STYLE GENERAL WITH NULL, otherwise specify NONE (default).</p> <p>This setting also has an impact on internal parameters that are passed to/from the stored procedure. For details, see <i>CALLMODE=NATURAL</i> in the section <i>CALLDBPROC</i> of the <i>Natural for DB2</i> documentation.</p>				
CALLMODE=NONE	This is the default.				

## Example

The following example shows a Natural program that calls the stored procedure DEMO\_PROC to retrieve all names of table PERSON that belong to a given range.

Three parameter fields are passed to DEMO\_PROC: the first and second parameters pass starting and ending values of the range of names to the stored procedure, and the third parameter receives a name that meets the criterion.

In this example, the names are returned in a result set that is processed using the READ RESULT SET statement.

```

DEFINE DATA LOCAL
1 PERSON VIEW OF DEMO-PERSON
  2 PERSON_ID
  2 LAST_NAME
1 #BEGIN      (A2) INIT <'AB'>
1 #END        (A2) INIT <'DE'>
1 #RESPONSE  (I4)
1 #RESULT     (I4)
1 #NAME      (A20)
END-DEFINE

```

...

```
CALLDBPROC 'DEMO_PROC' DEMO-PERSON #BEGIN (AD=O) #END (AD=O) #NAME (AD=A)
  RESULT SETS #RESULT
  GIVING #RESPONSE

READ RESULT SET #RESULT INTO #NAME FROM DEMO-PERSON
  GIVING #RESPONSE
  DISPLAY #NAME
END-RESULT

...

END
```

For further examples, see *Example of CALLDBPROC/READ RESULT SET* in the section *CALLDBPROC* of the *Natural for DB2* documentation.