


%Y - Control of PF-Key Lines

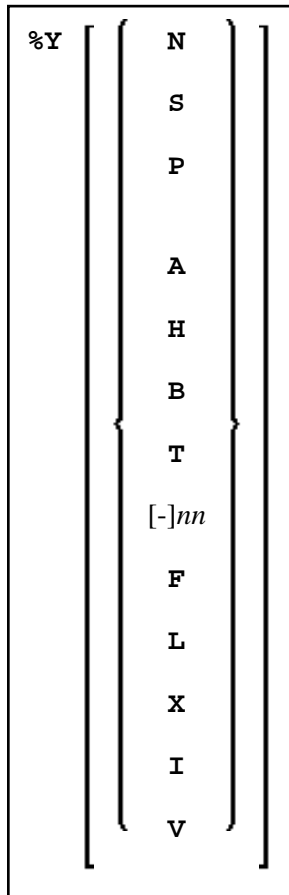

Alternatively, you may specify:

```
%Y=color-code [color-code] [color-code]
```

The terminal command %Y is used to control the display of the Natural PF-key lines.

Note:

On graphical user interfaces, this command is ignored.

This chapter covers the following topics:

- Display Format of Function-Key Lines
- Single- and Double-Line Display
- Positioning of Function-Key Lines
- Range of Displayed Function Keys
- Intensified or Reverse Video Display of Function-Key Lines

- Coloring of Function-Key Lines

Display Format of Function-Key Lines

Command	Function
%YN	Displays the function-key lines in normal tabular Software AG format.
%YS	Displays the function-key lines in sequential format, and only showing those keys to which names have been assigned (PF1=value,PF2=value,etc.).
%YP	Displays the function-key lines in PC-like sequential format; corresponds to %YS, except that "Fn=" instead of "PFn=" is displayed before the names.

Single- and Double-Line Display

Command	Function
%YA	All-line display. Displays both function-key lines.
%YH	Half display. Displays only one function-key line; for normal tabular display mode (%YN), this is the line with the function-key names; for the other two display modes (%YS and %YP), this is the upper line to be displayed.

Positioning of Function-Key Lines

Command	Function
%YB	Displays the function-key lines at the bottom of the screen.
%YT	Displays the function-key lines at the top of the screen.
%Ynn	Displays the function-key lines on line <i>nn</i> on the screen.
%Y- <i>nn</i>	Displays the function-key lines on the <i>nn</i> th line from the bottom of the screen. If the line number <i>nn</i> or <i>-nn</i> is not within the current screen, the function-key lines will not be displayed.

Range of Displayed Function Keys

Command	Function
%YF	Displays the first range of function keys (that is, usually 1 to 12).
%YL	Displays the last range of function keys (that is, usually 13 to 24).
%YX	Is used to toggle-switch between the two displays.

Intensified or Reverse Video Display of Function-Key Lines

Command	Function
%YI	Displays the function-key lines intensified. Enter %YI again to switch back from intensified to non-intensified display.
%YV	Displays the function-key lines in reverse video. Enter %YV again to switch back from reverse video display to normal display.

Coloring of Function-Key Lines

Command	Function
%Y= <i>color-code</i> (<i>s</i>)	<p>Displays the function-key lines in the specified colors. The <i>color-codes</i> you can specify are the same as with the session parameter CD).</p> <p>You can specify up to three <i>color-codes</i>: the first <i>color-code</i> refers to the first function-key line (the one displaying the function-key numbers), the second <i>color-code</i> refers to the second function-key line (the one displaying the function-key names), and the third <i>color-code</i> refers to the background of both lines.</p> <p>For example, %Y=GRPIYE would cause the characters in the first line to be displayed in green, the characters in the second line in pink, and the background of both lines in yellow.</p>