

## **Adabas Review**

### **Concepts and Facilities**

Version 4.3.2

September 2009

This document applies to Adabas Review Version 4.3.2 and to all subsequent releases.

Specifications contained herein are subject to change and these changes will be reported in subsequent release notes or new editions.

Copyright © Software AG 2009. All rights reserved.

The name Software AG, webMethods and all Software AG product names are either trademarks or registered trademarks of Software AG and/or Software AG USA, Inc. Other company and product names mentioned herein may be trademarks of their respective owners.

## Table of Contents

1 Concepts and Facilities .....	1
2 Introduction .....	3
Collecting Data in Local Mode .....	4
Collecting Data in Hub Mode .....	5
Collecting History Data .....	12
Reports .....	12
Autostarted Reports .....	13
Repositories .....	14
User Profile System .....	14
Storage Requirements .....	15
3 About Review Reports .....	21
Overview .....	22
Interactive and Batch Reports .....	23
Report Commands .....	23
Components of a Report Definition .....	23
Report Display Program .....	26
List Report Functions .....	27
4 Summary of Features .....	29
Index .....	31

---

# 1 Concepts and Facilities

---

•	<a href="#">Introduction</a>
•	<a href="#">About Review Reports</a>
•	<a href="#">Summary of Features</a>



# 2 Introduction

---

- Collecting Data in Local Mode ..... 4
- Collecting Data in Hub Mode ..... 5
- Collecting History Data ..... 12
- Reports ..... 12
- Autostarted Reports ..... 13
- Repositories ..... 14
- User Profile System ..... 14
- Storage Requirements ..... 15

Adabas Review provides a set of tools for monitoring the performance of Adabas environments and the applications executing within them. Information retrieved about Adabas usage helps you tune application programs to achieve maximum performance with minimal resources.

Adabas Review runs in

- local mode in the Adabas address space. Under z/VM, Adabas Review runs in local mode only.
- hub mode as a server in its own address space with a client interface in the Adabas address space.

See the *Adabas Review 4.3.2 Release Notes* for a matrix of supported Adabas versions and other requirements.

This chapter covers the following topics:

## Collecting Data in Local Mode

---

In local mode, the Adabas Review processor is installed as an extension to ADALOG.



**Note:** Adabas Review supports only command log record layout format 5 (CLOGLAY-OUT=5).

The data collection process is partly accomplished by the Adabas Review processor, which is an Adabas processor with two modes of execution: interactive and batch.

- In batch, the processor runs as a batch job that processes sequential Adabas command log datasets.
- In interactive mode, data is collected by providing code (RAOSLOCL) that runs as an extension to ADALOG. Adabas calls this module and passes information about resource usage for each command processed by the Adabas nucleus.

This module, in conjunction with the Adabas Review processor and an intermediate Review buffer accumulates and tabulates the Adabas information based on various user-defined data requirements.


The Adabas Review data may be

- displayed in an online environment from the Adabas Review user interface;
- saved automatically in the Adabas Review repository;
- printed automatically when the Adabas nucleus terminates; or
- downloaded directly to a personal computer (PC) using Entire Connection.



## Collecting Data in Local Mode

The following graphic shows the Adabas Review data collection process for local mode.

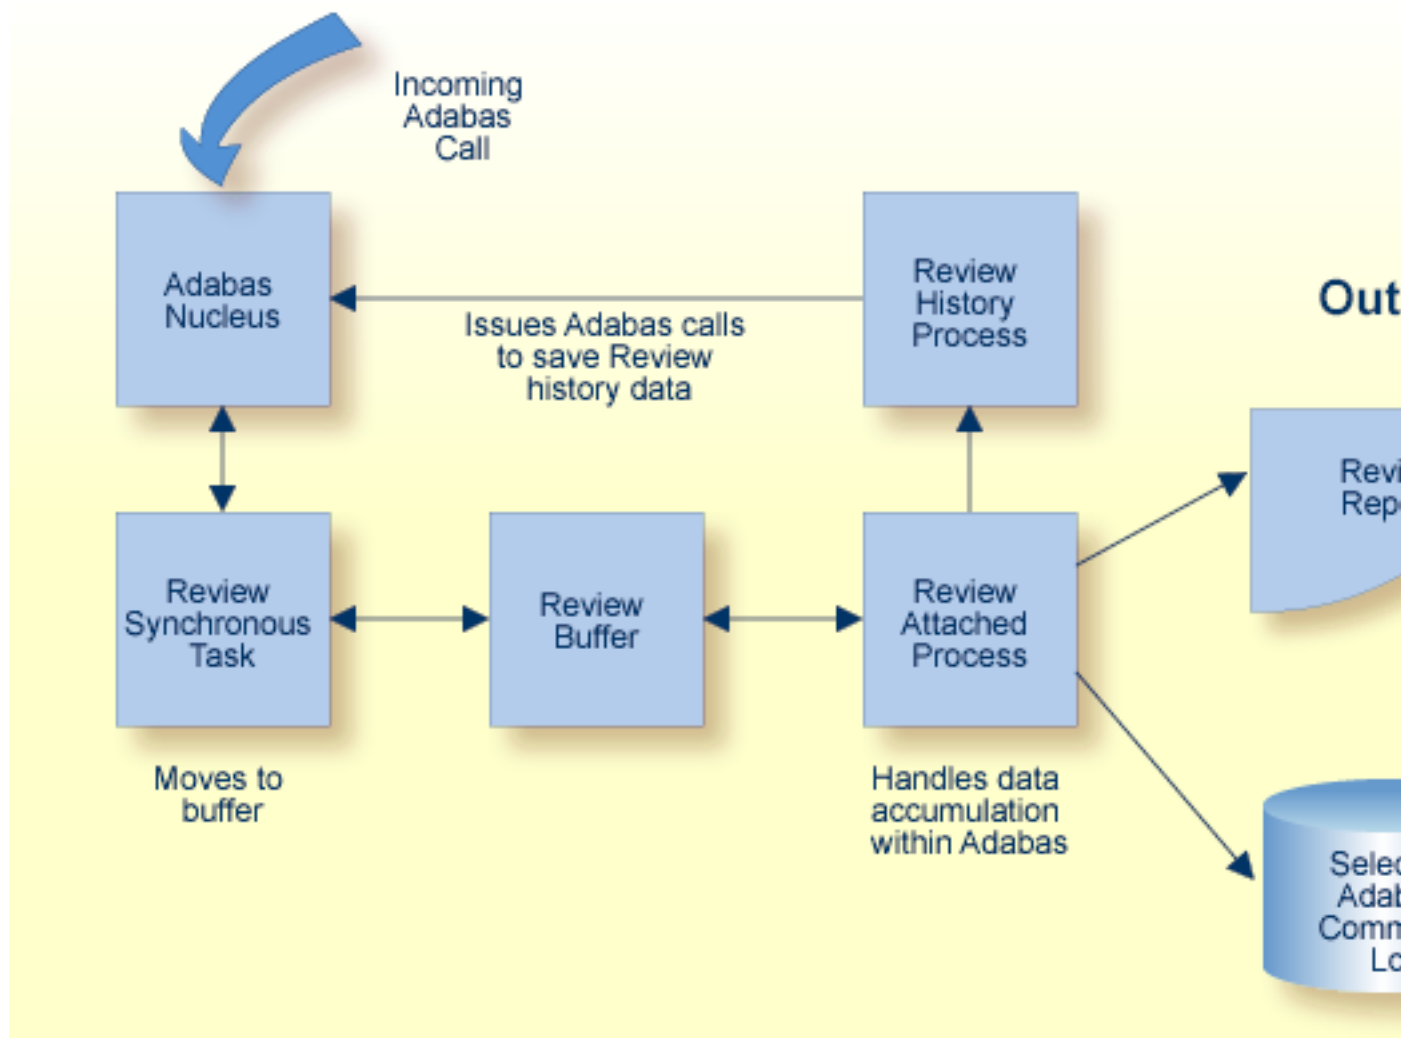

## Collecting Data in Hub Mode

In hub mode, Adabas Review uses a client/server approach to collecting data:

- an interface (the client) resides on each Adabas nucleus; and
- the hub (the server) resides in its own address space, partition, or region.

The interface uses the existing Adabas interregion communication process: ADALNK, ADASVC, and ADAMPM. This process is consistent across the targeted platforms for Adabas Review. If

systems are networked correctly, hub mode supports a multiple platform, multiple operating system, Adabas database environment.

## The Server Hub

The Adabas Review hub is a centralized data collector and reporting interface that combines proven components of Adabas and Review.

It handles the data consolidation and reporting functions for monitoring an Adabas database, including usage information related to applications, commands, minimum command response time (CMDRESP), I/O activity, and buffer efficiency.

The interactive reporting facility allows you to pinpoint problems quickly, providing detailed and summary data about Adabas activities. Specific information about each database is also available.

The centralized collection server has several advantages:

- A single hub collects information from multiple Adabas nuclei, Adabas Parallel Services clusters, or Adabas Cluster Services (support for IBM's parallel sysplex environment) clusters.
- Because a single hub can support multiple Adabas nuclei, the number of Adabas Review nuclei required to support an enterprise-wide distribution of Adabas nuclei is reduced. This minimizes resource requirements and increases performance.
- Isolating the Review subtask from the Adabas nucleus enhances the performance of the Adabas main task and minimizes the impact of future Adabas releases on the functioning of Adabas Review.

The hub comprises

- ADAREV, a logic module that manages and supervises the incoming Review data calls and requests;
- REVHUB, a module to establish and maintain the environmentals for Adabas Review; and
- the Review DB nucleus and subsystems including RAOSAUTO, the autostarted report parameter generation routine, and RAOSHIST, the historical data population routine.

## The Client Interface

The Adabas Review interface constructs and then transmits the Review data from the Adabas nucleus to the Adabas Review hub. An Adabas Review interface is integrated with each Adabas nucleus that is monitored.

The interface comprises

- ADALOG, the Adabas command logging module;
- ADACLX, the Adabas command log extension module that is responsible for acquiring additional information not present in the Adabas command log record; and

- ADARVU, which handles the environment conditions for ADACLX and the Adabas API requirements for transmitting the Review data to the Adabas Review hub.

### **Interface Calls**

To maximize performance, the ADARVU module issues an "optimistic" call from an ADABAS nucleus to the Adabas Review hub without waiting for a completion or "post" from the hub; ADARVU assumes that the Review data was successfully passed to the hub.


However, ADARVU does perform an initialization step to ensure that the hub is active prior to any command processing by the Adabas nucleus. If the hub is not active, ADARVU informs you using WTOs and/or a user exit. If a user exit is used, you are given the option to wait for the hub to be activated, or continue initialization and call the hub only when it is active.

On the hub side of the call, the elimination of the cross-memory "post" call enhances performance by reducing the overhead of active communication with the Adabas clients. This allows the hub to remain a passive data collector.

### **Example Client/Server Environment**

The following graphic shows the major components of the Adabas Review interface (Adabas nucleus address space) and hub (Adabas Review hub address space) in a client/server architecture

.

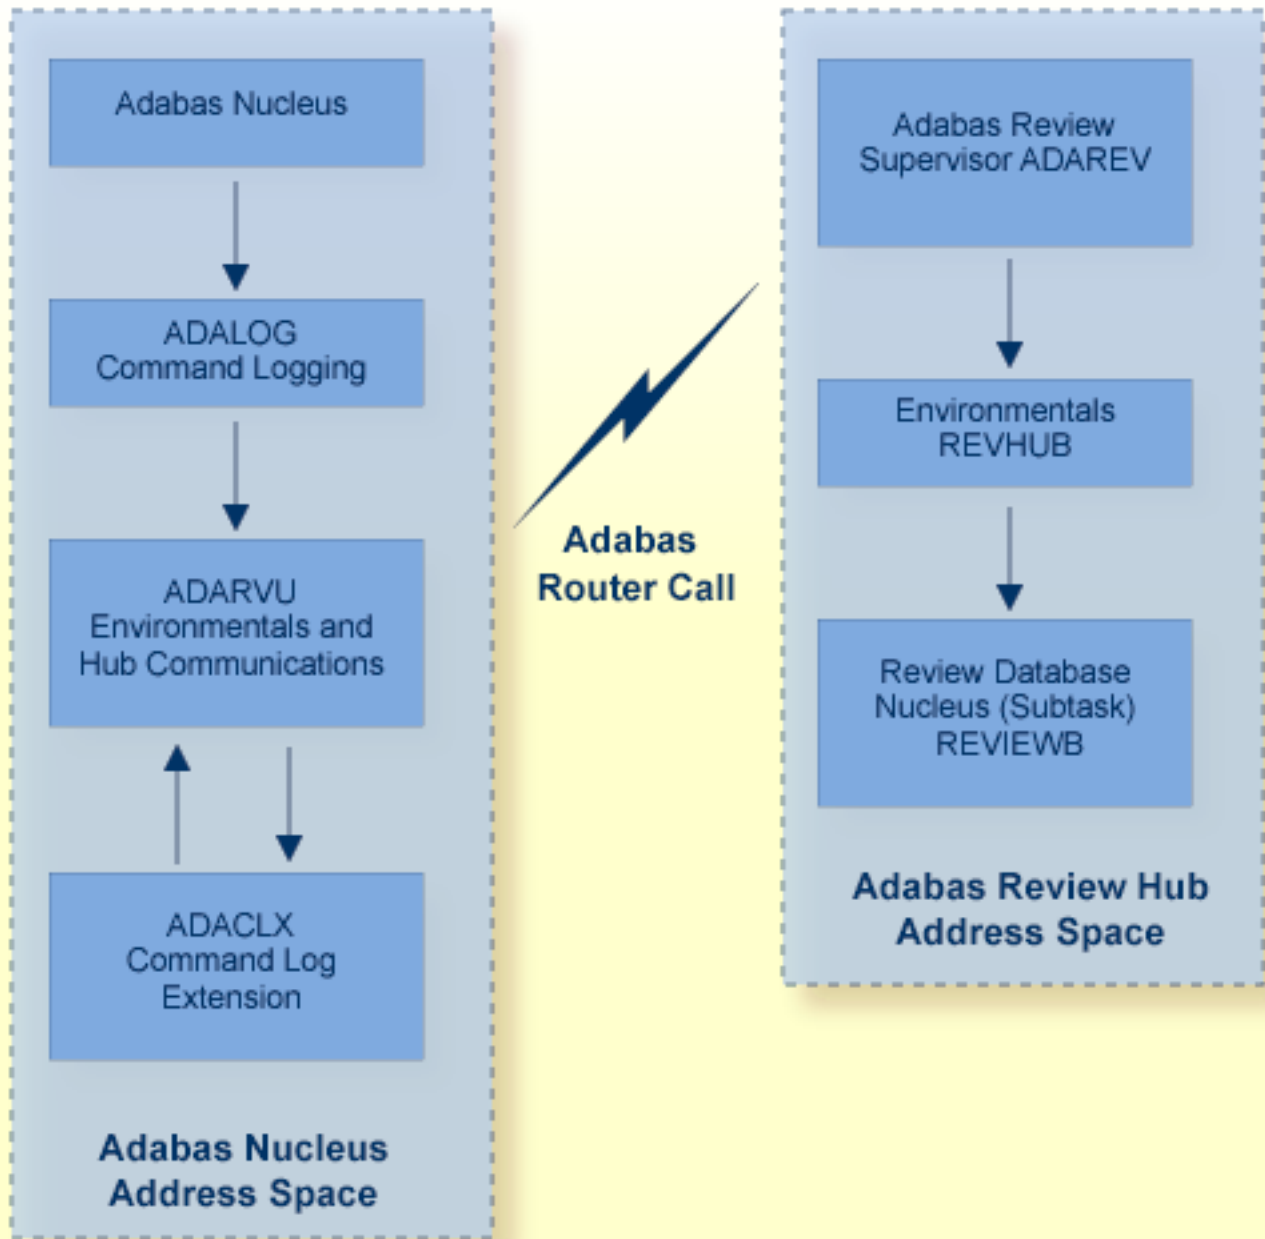

## Command Log Processing

The data collection process is partly accomplished by the hub (server) component REVIEWB, the Adabas Review command log processing routine.



**Note:** Adabas Review supports only command log record layout format 5 (CLOGLAY-OUT=5).

REVIEWB has two modes of execution: interactive and batch.

- In interactive mode, it runs as an Adabas Review *subtask*; that is, a unit of work that the operating system treats as separately detachable.
- In batch mode, it runs as a batch job that processes sequential Adabas command log datasets.

At initialization, REVIEWB reads any autostarted report definitions the user has defined and collects data according to the reports' criteria. REVIEWB also processes requests to start, view, and purge reports from the Adabas Review online system.

### Interactive Mode

In interactive mode, Adabas responds to requests and calls the interface module ADARVU from ADALOG (Adabas's command logging module) if `REVIEW=dbid` is specified in the Adabas initialization parameters. Adabas passes to ADARVU information about resource usage for each command processed by the Adabas nucleus.

Adabas Review link routine exits are used to pass TP system and Natural information from the user's address space (origin of the Adabas call) to the Adabas address space and, using an extension of the Adabas user buffer, on to ADARVU.

ADARVU queues Adabas command log records received from ADALOG to REVIEWB through an intermediate REVIEW-BUFFER in the hub (server) address space. REVIEWB processes the records, accumulating and tabulating various data according to the criteria specified in any user-defined reports that are active.

The resulting nucleus statistics may be

- displayed in an online environment from the Adabas Review user interface;
- saved automatically in an Adabas file called the Adabas Review repository;
- printed automatically when the Adabas nucleus terminates; or
- downloaded directly to a personal computer (PC) using Entire Connection.

## **Batch Mode**


As a batch job, Adabas Review processes Adabas command log records from a sequential dataset. If you use Adabas dual command logging, you must first use the Adabas utility function ADARES CLCOPY to generate a sequential command log dataset suitable for input into Adabas Review.

When Adabas Review executes as a batch job, input report parameters that define the data collection criteria selected by the user are read from statements in the RVUPARM dataset or the RVUAUT1/RVUAUT2 datasets. These statements can be generated using the GENCARD statement.

The storage allocated for reports is exactly the same as that for Adabas Review executing in interactive (online) mode. However, since REVIEWB is reading the command log records directly from a sequential file, no REVIEW-BUFFER is allocated.

## **Example Hub Mode Data Collection Process**

The following graphic shows the Adabas Review data collection process for hub mode. When monitoring multiple databases, Adabas Review allows you to switch from one database to another and provide reports for each.

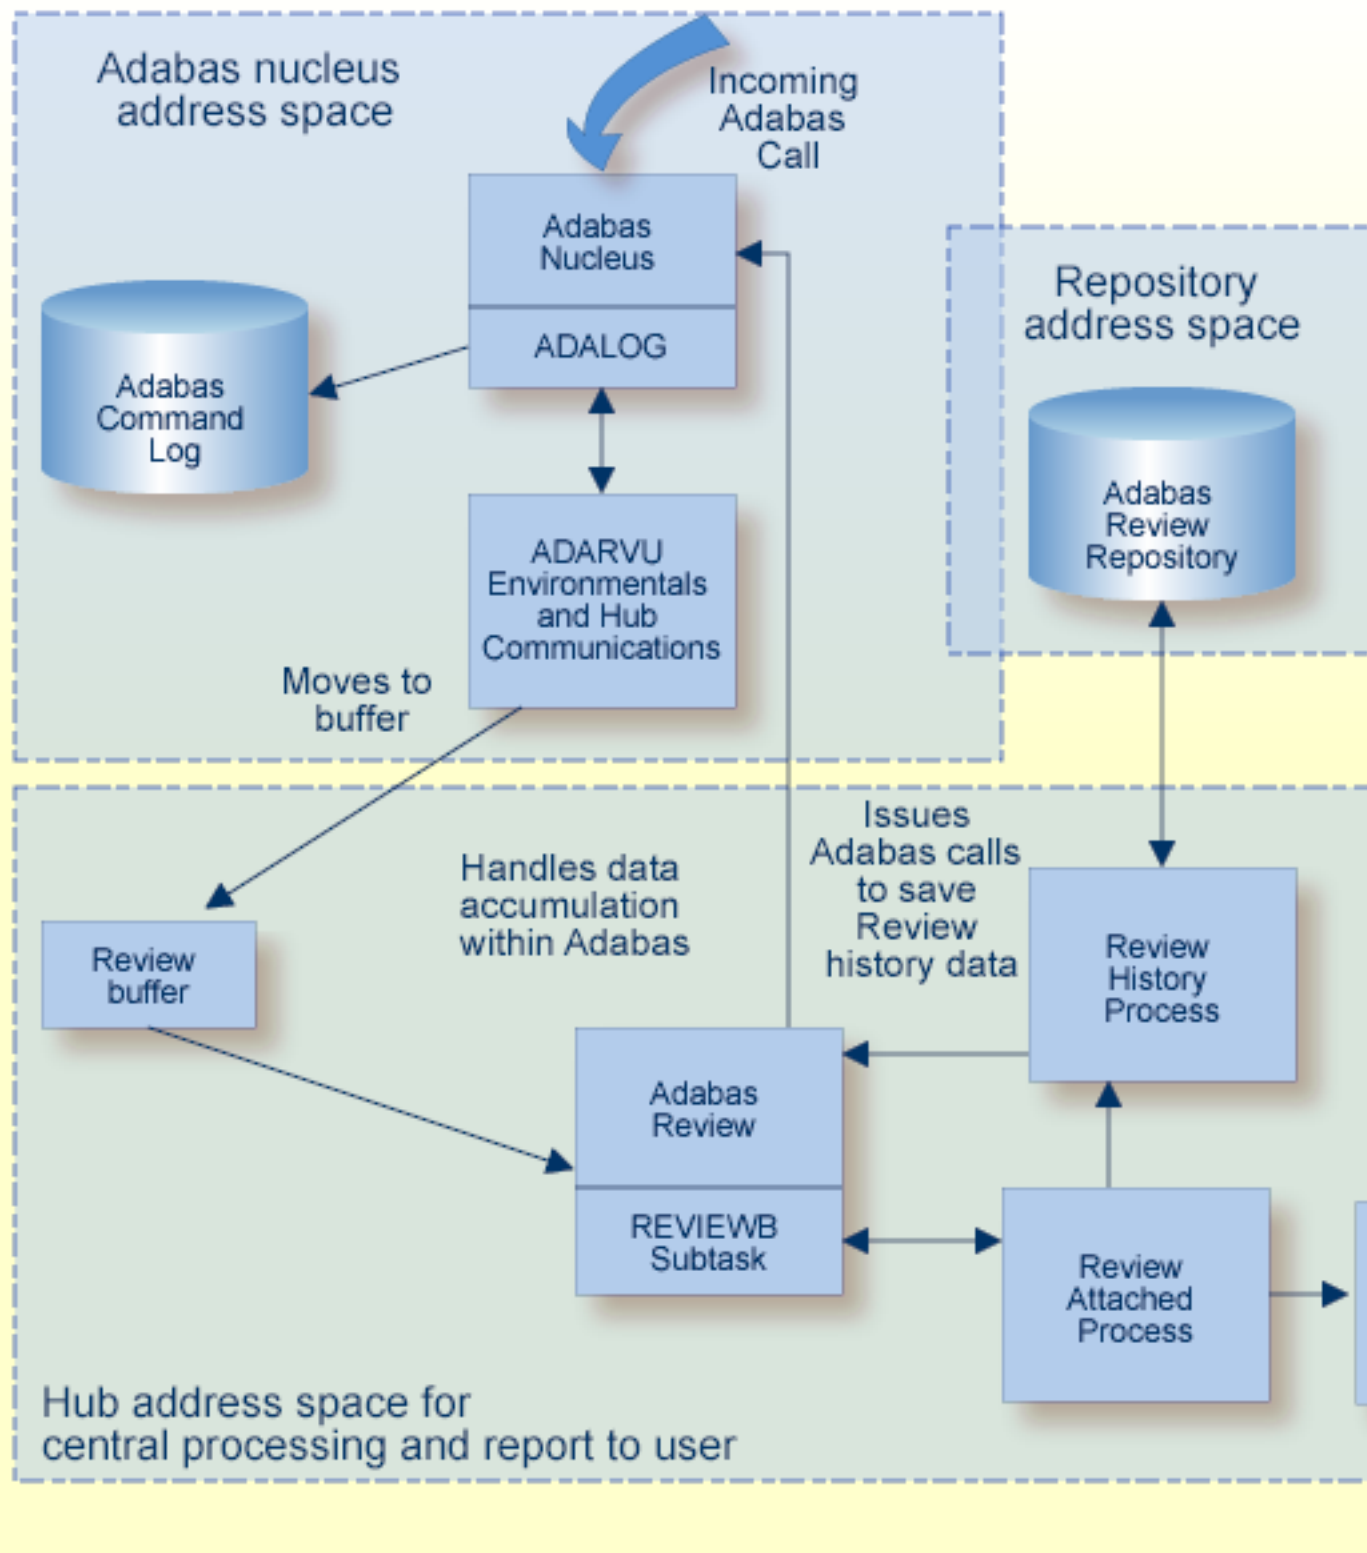

## Collecting History Data

---

History data collection is controlled by RAOSHIST, the Adabas Review historical data population routine.

### OS/390, z/OS, VSE/ESA, and BS2000

- RAOSHIST executes as a subtask of Adabas Review. At initialization, RAOSHIST reads the RVUALT dataset to determine if there are any historical records from the previous Adabas Review session that should be written to the Adabas Review repository. History records are written to RVUALT if the database on which the Adabas Review repository resides is unavailable during Adabas Review termination.
- During normal execution of Adabas Review, REVIEWB is responsible for adding history records generated by detail history reports and by summary history reports that have a history interval.

### z/VM

RAOSHIST is executed by an EXEC or a job, and adds records read from the RVUALT file to the Adabas Review repository file. All history records are written to the RVUALT file in z/VM.

## Reports

---

Online or as a stand-alone batch job, Adabas Review processes Adabas command log records and generates reports according to user-defined reporting criteria. The flexible reporting structure of Adabas Review allows you to view the same data in many different ways.

- [Report Definition](#)
- [Natural Display Program](#)
- [Started Reports](#)

### Report Definition

Adabas Review uses a set of instructions called a **report definition** to specify the types of data to be collected. Prepared report definitions supplied with Adabas Review may be modified and custom reports may be created.

Report definitions can be created or modified using menu-driven Natural programs. Report options and processing rules allow you to specify the conditions under which the data is to be captured. Report definitions are kept in the Adabas Review repository.



## Natural Display Program

When a report definition is saved, Adabas Review generates a Natural display program that is executed when you wish to view the collected data. This display program is executed

- to view data currently being collected by the interactive Adabas Review processor.
- to retrieve and display or download historical data that has been saved and stored in the Adabas Review repository.



**Note:** No display program is created for buffer pool reports.

The Natural display program generates normal Natural `FIND` and `READ` statements against a Review DDM to access the data being collected by Adabas Review. By default, the Natural program displays the data at the Adabas Review user's terminal. Options exist, however, to download the data directly to a personal computer (PC).

## Started Reports

Once the report definitions are edited and saved, the reports can be started. Starting a report tells the Adabas Review data collection process to start accumulating data based on the report definition parameters.

Adabas Review users can display buffer pool information, display active databases, and access the Adabas Online System, if it is available. Adabas Review administrators are also allowed to define and display target objects.

## Autostarted Reports

Adabas Review reports can be set to start automatically whenever Review initializes.

Then `RAOSAUTO`, the Adabas Review autostarted report parameter generation routine, generates the report definition control statements and writes them to one of two parameter files, `RVUAUT1` or `RVUAUT2`, alternating between them by writing to the older file.

When Adabas starts, the files are read by Adabas Review using the `RVUAUT1` and `RVUAUT2` statements in the job stream.



**Note:** Under z/OS, the installation procedure defines the statements `RVUAUT1` and `RVUAUT2` so that they point to members of a PDS. To avoid constant compression of these datasets, the statements may point to sequential datasets.

`RAOSAUTO` automatically regenerates the control statements for all autostarted reports when you make changes to an autostarted report, delete an autostarted report, or modify the target definition for the database being monitored by the reports.

In exceptional circumstances (e.g., the source library becomes too full and requires compressing), you can force regeneration of the control statements for all autostarted reports by either issuing the `GENAUTO` command or entering the parameters manually using batch parameter statements.

Additionally, when you issue the `GENCARD` command, `RAOSAUTO` generates report parameter cards for user-specified reports and directs them to a user-specified output file.

In *z/OS*, *VSE/ESA*, and *BS2000*, `RAOSAUTO` executes as a subtask of Adabas Review and is only active when

- an autostarted report definition is saved in the online system;
- `GENAUTO` (or `GENCARD`) is executed in the online system; or
- a database target definition is saved in the online system.

In *z/VM*, `RAOSAUTO` executes as an `EXEC`. The `GENAUTO` and `GENCARD` commands are not available in *z/VM*.

## Repositories

---

The Adabas Review repository is an Adabas file used for storing report definitions, historical data, and target definitions. In hub mode, it cannot run in the hub address space.

Depending on the configuration at your site, more than one Adabas Review repository may be associated with your system. For example, if your site is running Adabas Review against more than one database, you may choose to have an Adabas Review repository for each database.

The Review command `SETFILE` (or `SET`) may be used to access different Adabas Review repositories and the reports stored on them.

## User Profile System

---

Adabas Review administrators use the user profile system to generate profiles that define access rules for Review users. Access rules specify the systems or the functions within systems that a particular user is allowed to use.

User profiles may be created for new users, changed for existing users, and purged when no longer required.

A user profile is not required for each user. Review provides a default profile to allow access for users who do not have a profile defined.

When a user logs on, Review searches for the user's profile. If one is not found, the default profile is used.

If the default profile is customized so that the access rules meet the needs of the majority of Review users, the need for individual user profiles can be eliminated.

If a user has access needs that are different from the majority, a user profile can be created to accommodate those needs. Such a profile is generated by customizing a copy of the default profile.

## Storage Requirements

---

Adabas Review must allocate storage to execute. Storage is required for

- the Adabas Review hub, if used;
- the REVIEW-BUFFER, used as a queueing area for Adabas command log records;
- reports that are executing;
- users accessing the database from the Adabas Review online system; and
- work areas used in Adabas Review's processing.

The type, purpose, and size of these storage areas is discussed in the following sections.

Adabas Review allocates storage "above the line" whenever it is permitted by the architecture of the machine and the operating system on which it is executing.

In z/OS , Adabas Review allocates all storage from z/OS subpool 5. This allows you to accurately determine the exact amount of storage Adabas Review is using with a z/OS monitoring package.

### Storage for the Hub

If you use Adabas Review in hub mode, the hub has a separate storage requirement for its operating queues and working areas. The queues are used to buffer the incoming command log records from the clients until the records can be sent to REVIEWB.

Two queues, both controlled by the database administrator (DBA), are used by the Adabas Review hub: the command queue (sized using the ADARUN parameter NC) and the attached buffer (sized using the ADARUN parameter NAB). See the *Adabas Operations Documentation* for more information.

## Command Queue

The command queue stores information about the client nucleus such as job name, internal ID, etc. Each entry in the command queue represents one command log record from a client.

An entry exists for the time that a command log record is queued and awaiting selection from the hub until the time that the record is sent to REVIEWB. Once the command log record is sent to REVIEWB, the entry is released from the command queue.

This means that the command queue must be large enough to accommodate the backlog of command log records from the client nuclei. If the command queue is too small, it is possible that command log records will be dropped by the hub.

The ADARUN parameter that controls the command queue size is *NC*. The value of this parameter should be set higher for the hub than it is for individual client nuclei.

The *NC* value should be set to handle the arrival rate based on

- the number of clients;
- their respective command processing limits;
- the processing power of the CPU(s); and
- the priority settings of the nuclei and hub address spaces, partitions, or regions.

## Example

If a client nucleus can process 2000 command per second, then the expected arrival rate at the hub is also 2000 commands log records per second.

There is no general rule for estimating the *NC* requirements for a particular hub. However, in this example, you could start with *NC*=1000 and monitor the results.

## Attached Buffer

The attached buffer is used to store the contents of the command log records and their associated data extensions.

As with the command queue, an element within the attached buffer is allocated to hold the command log record for the duration of time that the record is queued for selection, up to the time the record can be sent to REVIEWB. The element is freed once the record is sent to REVIEWB.

Also like the command queue, the attached buffer must be large enough to hold the queued command log records for the time required to stage the records for REVIEWB. Software AG recommends setting the parameter high to ensure that command log data is not dropped by the hub.

The ADARUN parameter controlling the attached buffer size is *NAB*. The value of this parameter should also be set higher for the hub than it is for individual client nuclei.

The NAB value must be large enough to buffer the data passed by the client nuclei. The amount of data passed by a client nucleus depends upon the Adabas Review report requirements, i.e., whether control buffers are required, or the I/O list option is being used.

### Example

The average size of a command log record and extensions, excluding control buffers, is 2500 bytes.

One approach would be to compute

$$NAB = (NC * 2500 / 4096)$$

- where 4096 is the size of one NAB segment. If NC=1000 (see the example) , the starting value would be

$$NAB = (1000 * 2500 / 4096) = 610$$

This computation assumes that there are no control buffers or I/O list elements being passed to the hub.

### Storage for the REVIEW-BUFFER

REVIEW-BUFFER is used to queue Adabas command log records to be sent to REVIEWB. In hub mode, it is located in the hub (server) address space.

The BUFFER-SEGMENTS parameter specifies the size of the REVIEW-BUFFER. Each buffer segment is 128 bytes. The default value for BUFFER-SEGMENTS is as follows:

Operating System	Default Value
OS/390 or z/OS	2000 (250 kilobytes)
VSE/ESA	700 (87 kilobytes)
z/VM, or BS2000	400 (50 kilobytes)

#### For OS/390, z/OS, VSE/ESA, and BS2000

For OS/390, z/OS, VSE/ESA (version 1.3 and above), and BS2000, it is possible to execute with a REVIEW-BUFFER that is one megabyte.

A larger REVIEW-BUFFER provides a larger queueing area for command log records being sent to REVIEWB and decreases the possibility that Adabas will have to wait for REVIEWB to process these records in the event that REVIEW-BUFFER becomes full.

## For z/VM

In z/VM systems, the fact that REVIEWB does not execute as a subtask of Adabas Review but is called synchronously only when the REVIEW-BUFFER is full has the following consequences:

- A **larger** REVIEW-BUFFER means that REVIEWB is called less often but with more command log records to process. Since Adabas is unable to process incoming calls until REVIEWB has processed the contents of the REVIEW-BUFFER, a considerable delay may be experienced when REVIEWB is called.
- A **smaller** REVIEW-BUFFER means that REVIEWB is called more often but with fewer command log records to process so that the processing delay is less for each processing cycle.



**Note:** The Adabas RVUEXI parameter `CMS-FULLSYNCH` may be used to force REVIEWB to process each command log instead of waiting for the REVIEW-BUFFER to become full.

## Storage for Reports

### For Control Blocks

When a report is started, either using autostarted report definition parameters or by an online Adabas Review user, storage is allocated for control blocks that define the criteria for the collection of the data.

Typically, the storage allocation for control blocks is two (2) kilobytes, but may be as much as four (4) kilobytes if the report is a history report or the report specifies the collection of many fields.

### For Data Collection Areas

In addition to the report control blocks, storage is allocated for the collection of data. The data collection areas are allocated in two (2) kilobyte pieces and a subsequent data collection area is only allocated when the current area is full.

### Total Storage Limit

The total storage allocation for a report is limited by the `MAXSTORE` report parameter. When the total storage allocation for a report is equal to the `MAXSTORE` value, the report is marked as inactive and stops accumulating data. When a report is purged, all storage associated with the report is deallocated.

### **Storage for Online Users**

Adabas Review's online system uses Adabas calls to start, view, or purge a report. Each request requires that Adabas Review perform some processing to fulfill the request.

- Each request from the Adabas Review online system results in the allocation of a piece of storage (about 500 bytes or  $1/2$  kilobyte) that is deallocated when the request has been satisfied.
- To maintain the integrity of each request, Adabas Review allocates an area for each user requesting Adabas Review to service a request. For example, a request to view a report requires an Adabas call for each record that is to be viewed online.
- In cases where more than one user is viewing the same or different reports, Adabas Review must remember the status of each user between Adabas calls.

### **Storage for Work Areas**

Adabas Review allocates storage for work areas and areas used for reading from and writing to files. These areas are typically small and are kept and used throughout the time that Adabas Review is active.





# 3 About Review Reports

---

- Overview ..... 22
- Interactive and Batch Reports ..... 23
- Report Commands ..... 23
- Components of a Report Definition ..... 23
- Report Display Program ..... 26
- List Report Functions ..... 27

This chapter describes Adabas Review report types and components, and discusses the display programs used for report output:

## Overview

---

This section provides an overview of Adabas Review reporting features.

### What Does Adabas Review Report?

Adabas Review retrieves performance information about Adabas by collecting data in the form of reports.

Reports capture command log information and provide information about both online and batch transactions. Reports collect data about multiple teleprocessing environments and batch programs that are all using the same database.

### What is an Adabas Review Report?

An Adabas Review report has two parts: a definition and a display program.

- A *report definition* is a set of parameters that specify the data to be captured and a set of processing rules that identify the conditions under which the data is to be captured.
- A *report display program* is a Natural program that specifies the appearance of the report output, whether viewed online or downloaded to a personal computer (PC).

### How are Adabas Review Reports created?

The Edit Report (ER) function is used to create Adabas Review report definitions. In addition, Software AG delivers prepared report definitions called *supplied reports* with Adabas Review. Supplied reports may be modified to meet the requirements at a particular site. Detailed information about supplied reports is provided in the *Adabas Review User's Guide*.

## Interactive and Batch Reports

---

Reports can be run in either interactive or batch mode:

- In *interactive mode*, Adabas passes information to Adabas Review about resource usage for each command processed by the Adabas nucleus. Online reports are started with the `START` command.
- In *batch mode*, Adabas Review runs as a batch job that processes sequential Adabas or Adabas Review command log datasets. Batch parameter statements are generated for the report and submitted in the job stream.

## Report Commands

---

Adabas Review provides commands to

- modify report definitions;
- modify display programs;
- control report data collection; and
- direct report output.

## Components of a Report Definition

---

An Adabas Review report definition comprises database fields to be monitored, processing rules, and option parameters, all either entered on screens or selected from lists:

- **database fields**  
from which a report extracts data are listed in the order in which they are to be displayed.
- **processing rules**  
identify the conditions under which the data is to be captured by describing how field values are to be extracted for the report.
- **report option parameters**  
specify whether Adabas Review will perform physical command logging, and whether data accumulated by the report will be written to a history file. History data may be used when analyzing database performance trends.

### Database Fields

The selection of database fields defines the subject of the Adabas Review report.

A field identifies a type of information to be collected by the report; for example, information about an Adabas command, the Natural program issuing the command, the Adabas nucleus, the teleprocessing monitor, or the operating system being used. The PF11 (Flds) option is used to display a list of all available Adabas Review report fields.

Up to 20 fields may be used in a particular report. However, the number of fields that can be displayed is limited to the total line size (250 bytes) that can be displayed when a report is viewed online.

Fields to be displayed in a report are entered on the Edit Report screen of the Edit Report (ER) function as shown in the following example:

```

20:35:15          A D A B A S - R E V I E W          YYYY-MM-DD
                  Edit Report                        LOCL=00009

Report Name: _____ DBID to Monitor: _____

+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| Field   | Order  | Sum   | Min  | Max  | Avg   | Pct   | Rate | Round |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
| _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ | _____ |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
Page 1

Command: _____
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help Optns Exit          Save Start - +          Rules Flds Menu
    
```

Detailed information about individual fields is provided in the *Adabas Review User's Guide*.

### Report Processing Rules

Report processing rules are used to set conditions on or limit the data collected by the report.

Processing rules are entered on the Report Processing Rules screen of the Edit Report (ER) function as shown in the following example:

```

20:24:56          A D A B A S - R E V I E W          YYYY-MM-DD
                  Report Processing Rules            LOCL=00009

REPORT ONE

+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| Field  | Op     | Value                                     | And/Or |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| _____ | _____ | _____ | _____ |
| _____ | _____ | _____ | _____ |
| _____ | _____ | _____ | _____ |
| _____ | _____ | _____ | _____ |
| _____ | _____ | _____ | _____ |
| _____ | _____ | _____ | _____ |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
    
```

```

|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
                                     Page 1
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
Command: _____
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help  Optns Exit          Save Start -      +                      Flds  Menu

```

An Adabas Review report processing rule is specified by a field, a relational operator (equal to, less than, greater than, not equal to), and a specific value or range of values.

If there are multiple processing rules, the appropriate logical operator (AND or OR) must also be specified.

Fields used in processing rules are not displayed in the report results unless they are listed on the Edit Report screen.

### Report Option Parameters

Values for report option parameters can be entered on the Report Options screen of the Edit Report (ER) function as shown in the following example:

```

19:30:50          ***** R E V I E W *****          YYYY-MM-DD
                  Report Options For:                  LOCL=00222
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| Detail/Sum ..... S   Log ..... N   History ..... N   |
| AutoStart ..... N   File ..... RVLOG   History Int ... ____ |
| Break ..... Y   Num of Logs ..... _2   HISTORY DBID ... __223 |
| Wrapping ..... N   Log Size ..... 99999   HISTORY FNR .... __22 |
| Print ..... Y   User Exit ... ____   History SVC ..... 237 |
| Rstrt/Intrvl Y ____ |
| Max Restarts: 999999 |
| Max K ..... _16   Buffers to Log |
| ADALimit ..... _1 |-----+-----+-----+-----+-----+
| Display By .. SORTED   CB: Y   FB: Y   SB: Y   Detail Exit.. ____ |
| Entries ..... 999999   RB: Y   VB: Y   IB: Y   Summary Exit: ____ |
| Limit ..... 99999999   IO: Y   EX1: N   EX2: N   Cmd .... CL Sum .... N |
| Page/Line... _55 / 133 |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
Command: _____
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help          Exit          Accpt          Dflts          Menu

```

Adabas Review is delivered with report options defaults:

- You can modify these defaults for all subsequent reports.
- You can modify the default values for a particular report, either new or existing.

Detailed information about using the Report Options screen is provided in the *Adabas Review User documentation*.

### Report User Exits

Adabas Review provides two report user exits: one for detail reports and one for summary reports.

- A *detail report user exit* is driven when a command log record is selected for the report. Only records that pass the processing rules are provided to the user exit. This exit may be used to create SMF records, accounting records, or for any other purpose.
- A *summary report user exit* is driven when a specified Adabas command is selected for the report; and/or a report is summarized. You may control the conditions that trigger the exit.

When creating a report, the user exit is specified on the Report Options screen or in the batch REPORT statement. The actual report user exit must be provided in an executable library accessible to Adabas Review.

## Report Display Program

---

Once data has been accumulated for a report, the results can be

- saved to a file;
- viewed online;
- downloaded to a personal computer (PC) using Entire Connection; or
- printed when the Adabas nucleus terminates.

Once a report has been defined, the SAVE command is issued and the report definition is written to the Adabas Review repository.

A unique Natural program, the Adabas Review report display program, is generated automatically whenever a report is created or modified using the Edit Report (ER) function. This program determines how the report data will be viewed online or downloaded to a PC. It controls the appearance of the report output for an active database or for historical data.

You may use the Review-generated display program as it is created, or you may modify it for your individual needs.

The display program is executed when the `VIEW` command is issued to display the report results online.



**Note:** The output of reports that print at database termination is not controlled by a display program. At database termination, a `SYSOUT` from Adabas is written by `REVIEWB`. The format of this output cannot be modified by the Adabas Review user.

## List Report Functions

Adabas Review provides three list functions for reports, which are accessible from the Adabas Review (DB system) menu:

Code	List . . .	This function lists . . .
LR	Report	existing Adabas Review reports by name. Reports may be edited, started, and purged using the commands in this function.
LH	History Reports	reports that have accumulated history data in the Adabas Review repository.
LS	Started Reports	reports that are currently accumulating data.

The lists displayed by the `LH` and `LS` functions are subsets of the list displayed by the `LR` function.

From the resulting lists, certain commands can be issued against a particular report that allow you to maintain report definitions, manage started reports, and manage the output they produce.

The commands are entered on the selection line preceding the name of the report.





# 4

## Summary of Features

---

The major features of Adabas Review include the following:

- Supports *multiple Adabas nuclei clustered under a single database ID*, either in a single operating system image (Adabas Parallel Services) or under OS/390 and IBM parallel sysplex, across multiple operating system images (Adabas Cluster Services).
- Can *monitor several databases (DBIDs)* and provide reports for each.
- Can be configured in a straight-forward, uniform, and consistent way under all targeted operating system platforms in a *client/server environment*.
- *Collects, reports, and controls data centrally*. The hub is a true data collection point unencumbered by dependencies on internal operations and structures of the Adabas nucleus.
- Provides unencumbered Adabas operation. The hub *reduces overhead* by eliminating the Review subtask from the Adabas address space, partition, or region.
- Allows you to *customize command logging*. Adabas Review can physically log selected commands and/or buffers based on parameters within the Adabas Review report definitions. Each command log corresponds to a particular report definition, and contains only those records that have been selected as meaningful for the end user.
- Allows you to *customize analysis tools*. Adabas Review reports may be customized to perform functions such as cost accounting and application debugging.
- *Collects history data*. Data collected for Adabas Review reports can be written to the Adabas Review repository at specified intervals and stored as history data. The data can be used in trend analysis.
- Provides *more than 40 sample report definitions*, which may be used without modification, or edited to suit specific site requirements.
- The Edit Report function provides *interactive screens* to help you create a report or edit an existing one.
- Supports a *wide range of data types*. More than 340 data fields are available for specifying the types of data to be collected by Adabas Review.

- Provides *user-defined data fields*. Adabas Review provides a mechanism for defining up to five data fields to meet user specifications.
- *Data can be retrieved online*. Adabas Review reports are executed online or in batch mode. Data collected by Adabas Review reports may be viewed online.
- Provides an *online display of Adabas availability*. The Available Availability (AA) function displays a profile of the databases that are monitored by Adabas Review.
- Provides *access to Adabas Online System (AOS)*, an online Adabas maintenance product.

# Index

---

## A

- Adabas
  - interregion communication, 5
  - multiple nuclei, 29
  - user buffer extension, 9
- Adabas Cluster Services, 29
  - use with, 6
- Adabas Online System, 13, 30
- Adabas Parallel Services
  - use with, 6
- Adabas Review
  - allocating storage for, 15
  - defined, 4
  - purpose of, 4
  - structure of, 4, 6
    - diagram, 7
  - summary of features, 29
  - supplied reports, 29
- ADACLX
  - command log extension module, 6
- ADALNK, 5
- ADALOG
  - command logging module, 6
  - interface client component, 9
- ADAMPM, 5
- ADARES CLCOPY function
  - hub mode batch command log processing, 10
- ADAREV
  - hub server component, 6
- ADARUN parameters
  - NAB to size the attached buffer, 15, 16
  - NC to size the command queue, 15, 16
  - REVIEW=, 9
- ADARVU
  - interface client component, 7, 9
  - transferring data to the hub, 7
- ADASVC, 5
- Autostarted reports, 13

## B

- BUFFER-SEGMENTS parameter, 17

## C

- Client / server architecture, 5
  - diagram, 7

- Client/server approach, 29
- CLOGLAYOUT=5
  - only supported format, 4, 9
- CMDRESP field
  - minimum command response time, 6
- Command log processing, 29
- Components
  - hub server, 6
    - diagram, 7
  - interface client, 6
    - diagram, 7

## D

- Data types supported, 29
- Database fields
  - user-defined, 30
- Databases
  - multiple, 29

## G

- GENAUTO command, 14
- GENCARD command, 14

## H

- History data, 29
  - collecting, 12
- Hub concept, 29
- Hub mode
  - collecting data in
    - diagram, 10
  - requirements for use, 5
- Hub server
  - advantages of, 6
  - components, 6
    - diagram, 7
  - defined, 6
  - location, 5
  - storage requirements, 15
    - attached buffer, 16
    - command queue, 16
  - transferring data to, 7

## I

- Interface client
  - components, 6

- diagram, 7
- defined, 6
- location, 5
- transferring data to the hub, 7

## L

- Link routine exits, 9
- List functions
  - for reports, 27
- Local mode
  - collecting data in, 4
  - interactive and batch execution modes, 4

## M

- MAXSTORE
  - report parameter, 18
- Multiple databases
  - monitoring, 10

## R

- RAOSAUTO, 13
  - hub server component, 6
- RAOSHIST, 12
  - hub server component, 6
- RAOSLOCL, 4
- Reports
  - autostarted, 13
  - batch mode, 22
  - components, 22
  - database fields
    - defined, 23
  - display programs
    - defined, 22
    - described, 26
    - purpose, 13
  - interactive mode, 22
  - list functions, 27
  - MAXSTORE parameter, 18
  - option parameters
    - defined, 23
  - overview, 22
  - processing rules
    - components, 25
    - defined, 23
    - multiple, 25
  - report definitions
    - components, 23
    - defined, 12, 22
  - starting, 13
  - storage for control blocks, 18
  - storage requirements, 15
  - supplied, 22
- Repositories, 4, 9
  - defined, 14
  - multiple, 14
  - restricted location in hub mode, 14
- REXHUB
  - hub server component, 6
- Review DB
  - nucleus and subsystems
    - hub server component, 6

- REVIEW-BUFFER, 9, 10
  - storage requirements, 15, 17
- REVIEWB
  - hub server component, 9
  - interactive and batch execution modes, 9
- RVUALT
  - alternate history data, 12
- RVUAUT1, 10, 13
- RVUAUT2, 10, 13
- RVUEXI parameters
  - BS2000-FULLSYNCH, 18
  - CMS-FULLSYNCH, 18
- RVUPARM, 10

## S

- SAVE command, 26
- SET command, 14
- SETFILE command, 14
- START command, 22
- Storage
  - allocating above the 16MB line, 15
  - allocating from MVS subpool 5, 15
  - MAXSTORE report parameter, 18
  - requirements, 15
- Supplied reports, 22

## U

- User exits
  - control transfer of data to the hub, 7
- User profile system
  - default user profile, 15
  - maintaining user profiles, 14
  - purpose, 14
- Users
  - storage requirements for online use, 15, 19

## V

- VIEW command, 27

## W

- Work areas
  - storage requirements, 15, 19