

# **Event Replicator for Adabas**

## **Adabas Replication Service for webMethods Integration Server**

Version 10.15

September 2025

This document applies to Event Replicator for Adabas Version 10.15 and all subsequent releases.

Specifications contained herein are subject to change and these changes will be reported in subsequent release notes or new editions.

Copyright © 2025 Software GmbH, Darmstadt, Germany and/or its subsidiaries and/or its affiliates and/or their licensors.

The name Software AG and all Software GmbH product names are either trademarks or registered trademarks of Software GmbH and/or its subsidiaries and/or its affiliates and/or their licensors. Other company and product names mentioned herein may be trademarks of their respective owners.

Detailed information on trademarks and patents owned by Software GmbH and/or its subsidiaries is located at <https://softwareag.com/licenses>.

Use of this software is subject to adherence to Software GmbH's licensing conditions and terms. These terms are part of the product documentation, located at <https://softwareag.com/licenses> and/or in the root installation directory of the licensed product(s).

This software may include portions of third-party products. For third-party copyright notices, license terms, additional rights or restrictions, please refer to "License Texts, Copyright Notices and Disclaimers of Third-Party Products". For certain specific third-party license restrictions, please refer to section E of the Legal Notices available under "License Terms and Conditions for Use of Software GmbH Products / Copyright and Trademark Notices of Software GmbH Products". These documents are part of the product documentation, located at <https://softwareag.com/licenses> and/or in the root installation directory of the licensed product(s).

Use, reproduction, transfer, publication or disclosure is prohibited except as specifically provided for in your License Agreement with Software GmbH.

**Document ID: ARF-ARS-1015-20250929**

## Table of Contents

Preface .....	v
1 About this Documentation .....	1
Document Conventions .....	2
Online Information and Support .....	2
Data Protection .....	3
2 General Information .....	5
3 Installation .....	7
4 License .....	9
5 Configuration - Integration Server .....	11
Packages .....	12
Enable Autostart of EntireX Adapter .....	13
6 Configuration - EntireX Adapter .....	15
Creating and Managing Connections .....	16
Creating or Managing an Adabas Replication Listener Connection with the Broker as External Process .....	17
Creating or Managing an Adabas Replication Direct Listener Connection .....	20
7 Using the Adabas Replication Wizard .....	23
Introduction .....	24
Configuring a Listener .....	24
8 Create Document Type from Adabas File .....	25
9 Using the Software AG Designer .....	29
Generated Objects .....	30
Adabas Metadata Wizard .....	30
10 Common Scenarios .....	35
11 Common Usage Scenarios .....	37
12 Common Deployment Scenarios .....	39
13 Simple Deployment Using Direct RPC .....	41
14 Deployment Using EntireX Broker .....	43
15 Scenario: Notifying a User after an Adabas Database Record is Updated .....	45
Step 1 - Configure your Integration Server .....	47
Step 2 - Create Listener Objects with the Adabas Replication Wizard .....	49
Step 3 - Create Processing Logic for Flow Services .....	51
16 Scenario: Notifying a User after an Adabas Database Record is Updated .....	55
Step 1 - Configure your Integration Server .....	57
Step 2 - Create Listener Objects with the Adabas Replication Wizard .....	59
Step 3 - Create Processing Logic for Flow Services .....	61
17 Troubleshooting .....	65



---

## Preface

---

This document provides information about the Adabas Replication Service for webMethods Integration Server (ARS). It is organized as follows:

<i>General Information</i>	Contains general information about the Adabas Replication Service for webMethods Integration Server and how it works.
<i>Installation</i>	Contains installation information.
<i>License</i>	Provides licensing information.
<i>Configuration - Integration Server</i>	Describes configuration required in the webMethods Integration Server.
<i>Configuration - EntireX Adapter</i>	Describes configuration required in the webMethods EntireX Adapter and how to establish and manage connections.
<i>Using the Adabas Replication Wizard</i>	Describes how to establish and manage listener definitions using the Adabas Replication Wizard.
<i>Create Document Type from Adabas File</i>	Describes how to create document types from an Adabas file.
<i>Using the Software AG Designer</i>	Describes how to use the Software AG Designer to view and edit objects generated with the Adabas Replication Wizard.
<i>Common Usage Scenarios</i>	Common usage scenarios with the Adabas Replication Service.
<i>Common Deployment Scenarios</i>	Common deployment scenarios with the Adabas Replication Service.

---

# 1

## About this Documentation

---

■ Document Conventions .....	2
■ Online Information and Support .....	2
■ Data Protection .....	3

## Document Conventions

---

Convention	Description
<b>Bold</b>	Identifies elements on a screen.
Monospace font	Identifies service names and locations in the format <i>folder.subfolder.service</i> , APIs, Java classes, methods, properties.
<i>Italic</i>	Identifies:  Variables for which you must supply values specific to your own situation or environment. New terms the first time they occur in the text. References to other documentation sources.
Monospace font	Identifies:  Text you must type in. Messages displayed by the system. Program code.
{ }	Indicates a set of choices from which you must choose one. Type only the information inside the curly braces. Do not type the { } symbols.
	Separates two mutually exclusive choices in a syntax line. Type one of these choices. Do not type the   symbol.
[ ]	Indicates one or more options. Type only the information inside the square brackets. Do not type the [ ] symbols.
...	Indicates that you can type multiple options of the same type. Type only the information. Do not type the ellipsis (...).

## Online Information and Support

---

### Product Documentation

You can find the product documentation on our documentation website at <https://documentation.softwareag.com>.

### Product Training

You can find helpful product training material on our Learning Portal at <https://learn.software-ag.com>.

### Tech Community

You can collaborate with Software GmbH experts on our Tech Community website at <https://tech-community.softwareag.com>. From here you can, for example:



- Browse through our vast knowledge base.
- Ask questions and find answers in our discussion forums.
- Get the latest Software GmbH news and announcements.
- Explore our communities.
- Go to our public GitHub and Docker repositories at <https://github.com/softwareag> and <https://hub.docker.com/publishers/softwareag> and discover additional Software GmbH resources.

## Product Support

Support for Software GmbH products is provided to licensed customers via our Empower Portal at <https://empower.softwareag.com>. Many services on this portal require that you have an account. If you do not yet have one, you can request it at <https://empower.softwareag.com/register>. Once you have an account, you can, for example:

- Download products, updates and fixes.
- Search the Knowledge Center for technical information and tips.
- Subscribe to early warnings and critical alerts.
- Open and update support incidents.
- Add product feature requests.

## Data Protection

---

Software AG products provide functionality with respect to processing of personal data according to the EU General Data Protection Regulation (GDPR). Where applicable, appropriate steps are documented in the respective administration documentation.



## 2 General Information


---

The purpose of sending changed data to the webMethods Integration Server is to be able to process data and store it in the final destination. Very often, only a subset of the changed data is required in the target system, or the changes are used as triggers for reading and processing data that is taken from the database - based on the changes that happened.

With this release an optimized data replication from Adabas on mainframe to webMethods Integration Server is available. The solution is called Adabas Replication Service for webMethods Integration Server (ARS) and is based on the EntireX Adapter running in the context of the Integration Server but bypassing the Event Replicator Target Adapter (ART).

The EntireX Adapter receives the changed data and converts it to the iData format used in the Integration Server context. The converted data is available to a service which can be enhanced to process the data to the required needs.

From this point on, the licensed Integration Server functionality is available and can be used to process the data. A new user interface is available to read the metadata from the Event Replicator Server on the mainframe and create document types to be used in the services.

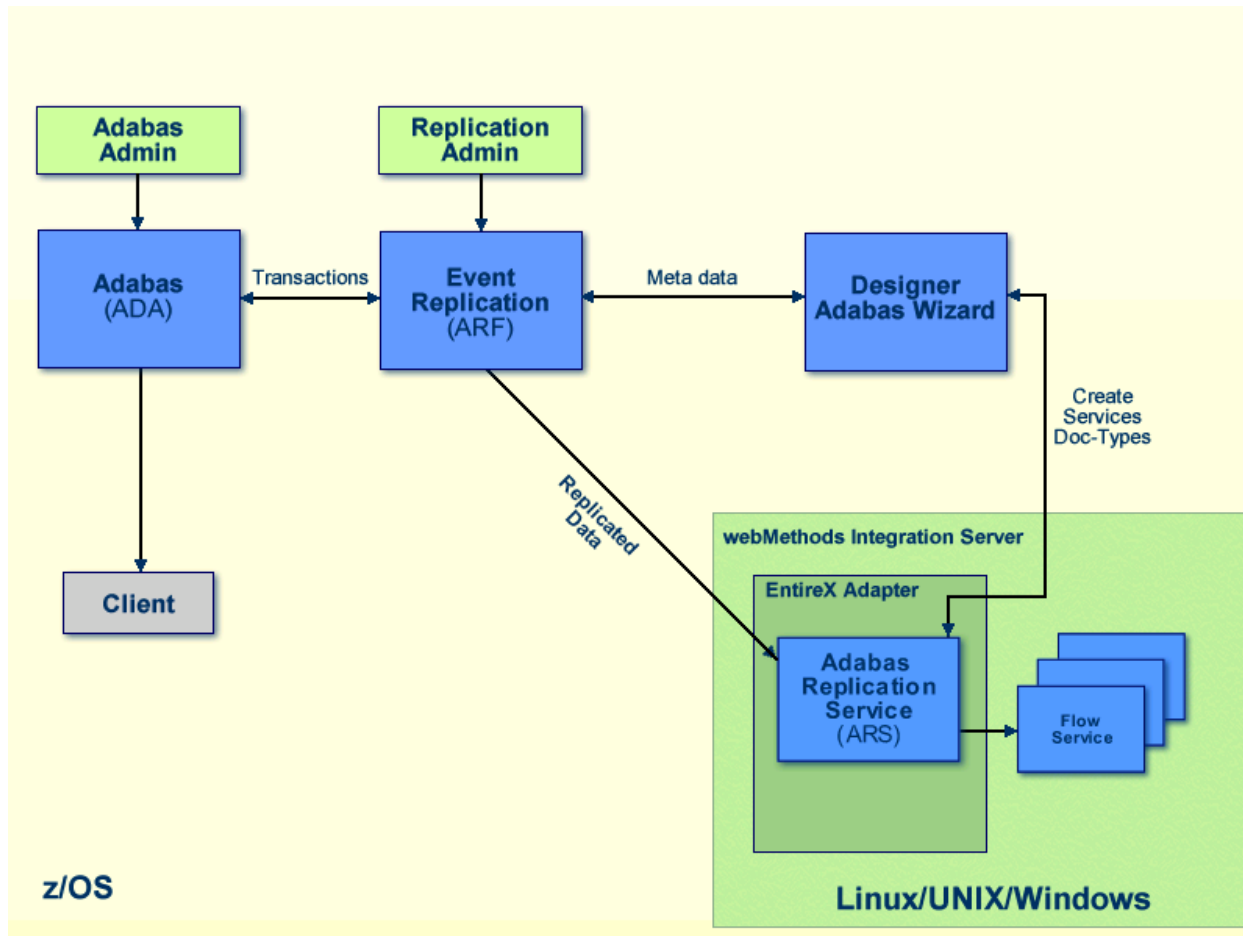

This documentation only describes the Replication functionality for the EntireX Adapter. For details concerning the EntireX Adapter itself, refer to the documentation of this product.

### About webMethods Integration Server

webMethods Integration Server is a run-time server that provides an environment for the orderly, efficient, and secure, execution of services. It supports the integration of diverse services and facilitates communication between systems. Integration Server decodes client requests, identifies the requested services, invokes the services, passes data to them in the expected format, encodes the output produced by the services, and returns output to the clients. Additionally, Integration Server authenticates clients, verifies that they are authorized to execute the requested service, maintains audit-trail logs, and promotes throughput using facilities such as service results caching.

# 3

## Installation

---

To use the Adabas Replication Service for webMethods Integration Server, the following products must be installed:

- webMethods Integration Server 10.3 or above.



**Note:** webMethods Integration Server is not part of the Adabas Replication Service for webMethods Integration Server package and requires a separate licensing.

- webMethods EntireX Adapter 10.3 or above.

To develop your own Integration Service services using the Software AG Designer the following products/components must be installed along with the Software AG Designer:

- Adabas Event Replicator 10.3 or above.
- Service Development 10.3 or above.



## 4 License

---

To use the Adabas Replication Service for webMethods Integration Server a separate license is required. The license file can be maintained in the **License Information** node of the EntireX Adapter.





# 5 Configuration - Integration Server

---

■ Packages .....	12
■ Enable Autostart of EntireX Adapter .....	13

This section provides information on the basic configuration steps required on the webMethods Integration Server in order to use the Adabas Replication Service for webMethods Integration Server.

## Packages

Before you begin, ensure that the EntireX Adapter package is available on the webMethods Integration Server.

➤ To ensure that the EntireX Adapter package is available on the webMethods Integration Server

- 1 In the webMethods Integration Server Administration interface go to **Packages > Management**.

**WEBMETHODS**  
Integration Server

**Server**

- Scheduler
- Service Usage
- Statistics

**Logs**

**Packages**

- Management**
- Publishing
- Subscribing

**Solutions**

**Adapters**

**webMethods Cloud**

**Security**

**Settings**

Packages > Management

- [Install Inbound Releases](#)
- [Activate Inactive Packages](#)
- [Recover Packages](#)
- [Browse Folders](#)
- [View Locked Elements](#)
- [Filter Packages](#)

**Package List**

Package Name	Home	Reload	Enabled	Loaded
<a href="#">Default</a>			✓ Yes	✓ Yes
<a href="#">Event-Replication</a>			✓ Yes	✓ Yes
<a href="#">WmART</a>			✓ Yes	✓ Yes
<a href="#">WmARTExtDC</a>			✓ Yes	✓ Yes
<a href="#">WmAssetPublisher</a>			✓ Yes	✓ Yes
<a href="#">WmCloud</a>			✓ Yes	✓ Yes
<a href="#">WmEntireX</a>			✓ Yes	✓ Yes
<a href="#">WmFlatFile</a>			✓ Yes	✓ Yes

- 2 Click on **WmEntireX** for details. A screen similar to the following should be displayed:

**WEBMETHODS**  
Integration Server

▼ Server

Scheduler

Service Usage

Statistics

► Logs

▼ Packages

Management

Publishing

Subscribing

► Solutions

▼ Adapters

EntireX Adapter ...

► webMethods Cloud

► Security

► Settings

Packages > Management > WmEntireX

• [Return to Packages Management](#)

• [Browse services in WmEntireX](#)

Package Information

Package Name	WmEntireX
Version	10.3.0.0.640
Build	640
Minimum Version of JVM	1.8
Package List ACL	Default
Patches Included	
Description	EntireX Adapter
Publisher	Software AG
Created on	28 Aug 2018 17:20:07
Elements Loaded	106
Elements Not Loaded	0
Startup Services	<a href="#">com.softwareag.entirex.wmadapter.Admin:startUp</a>
Shutdown Services	<a href="#">com.softwareag.entirex.wmadapter.Admin:shutDown</a>
Replication Services	None
Packages on which this package depends	WmART;*,*, WmPublic;10.1
Packages that depend on this package	None
Subscribers	None

## Enable Autostart of EntireX Adapter



**Note:** This is only required if you want to use Direct RPC Administration.

It is recommended to enable the autostart option of the EntireX Adapter in the webMethods Integration Server.

### ► To enable the EntireX autostart option

- 1 In the webMethods Integration Server Administration interface go to **EntireX Adapter > Direct RPC Administration**.

**WEBMETHODS**  
Integration Server

**EntireX Adapter**

- Connections
- Listeners
- Listener Notifications
- Adapter Settings
- Direct RPC Administration**
- Application Monitoring
- Connections Information
- Services Information
- Listeners Information
- License Information
- Adabas Replication Wizard
- Create Document Type from Adabas File
- About

Adapters > EntireX Adapter > Direct RPC Administration

- [Refresh](#)

**Configuration**

Status	Running	<a href="#">Stop</a>
Logging Level	Error	<a href="#">Change</a>
TCP Port Number	1971 listening	
SSL Port Number		
Keystore Alias (for SSL)		
Auto Start	Enabled	<a href="#">Disable</a>

**Default Encoding for RPC Clients and Servers**

Windows and Unix	ISO-8859-1	<a href="#">Change</a>
z/OS and z/VSE	CP037	<a href="#">Change</a>
BS2000	CP273	<a href="#">Change</a>

**Monitoring**

Name	Active	Maximum	Total
Servers	0	0	0
RPC Requests	0	0	0
Socket Connections	0	0	0
Secure Socket Connections	0	0	0
Direct Connections	0	0	0
Calls	-	-	0
Conversations	0	0	0

**Services**

Name	Type	Instances	Requests	Wait for Server	Action
REPTOR/SERVER/SERVICE	Adabas Replication Listener	1	0	0 (0%)	

**Servers**

Service Name	Type	Name	Host	Version	Start Time	Action
--------------	------	------	------	---------	------------	--------

- In the **Configuration** menu go to the **Auto Start** option and check whether it is set to **Enabled**. If it is not yet enabled, click on **Enable**.

If set to **Enabled**, the EntireX Adapter is launched automatically when the webMethods Integration Server starts up.

## 6 Configuration - EntireX Adapter

---

■ Creating and Managing Connections .....	16
■ Creating or Managing an Adabas Replication Listener Connection with the Broker as External Process .....	17
■ Creating or Managing an Adabas Replication Direct Listener Connection .....	20

This section provides information on the configuration steps required in the EntireX Adapter in order to use the Adabas Replication Service for webMethods Integration Server.


## Creating and Managing Connections

In the EntireX Adapter menu you can manage existing connections and create new connections. The steps required to establish a new connection and the settings that can be made depend on the connection type.

The following connection-specific instructions apply when setting up a new or managing an existing connection unless mentioned otherwise.

### ➤ To create a new connection or manage an existing connection

- 1 In the **EntireX Adapter** menu go to **Connections**.

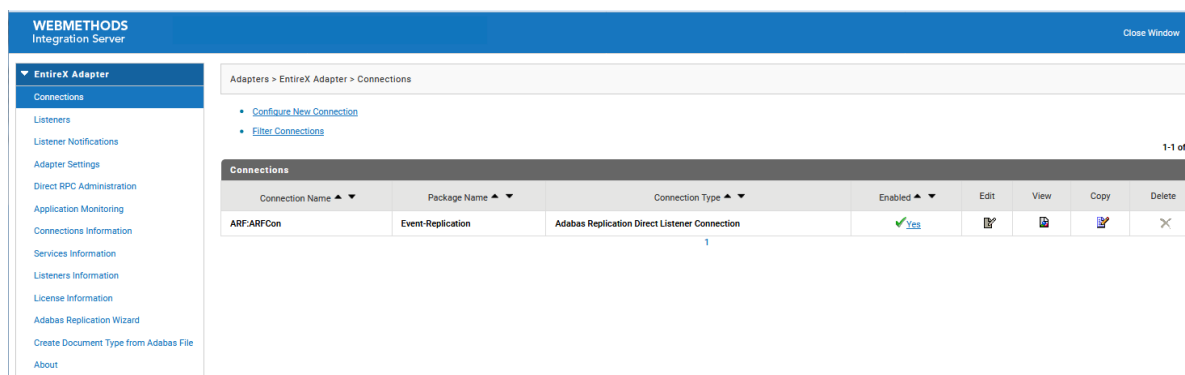

- 2 Click on **Configure New Connection** to create a new connection

Or:

Choose an existing connection and click on **Edit**.

For a new connection, the following screen is shown:

**WEBMETHODS**  
Integration Server

▼ **EntireX Adapter**

- Connections**
- Listeners
- Listener Notifications
- Adapter Settings
- Direct RPC Administration
- Application Monitoring
- Connections Information
- Services Information
- Listeners Information
- License Information
- Adabas Replication Wizard
- Create Document Type from Adabas File
- About

Adapters > EntireX Adapter > Connection Types

- [Return to EntireX Adapter Connections](#)

Connection Type	Description
<a href="#">EntireX RPC Connection</a>	Connection to an RPC Server using the EntireX Broker
<a href="#">EntireX Direct RPC Connection</a>	Direct Connection to an RPC Server
<a href="#">EntireX Reliable RPC Connection</a>	Connection to an Asynchronous RPC Server using the EntireX Broker
<a href="#">EntireX RPC Listener Connection</a>	Connection to an RPC Client using the EntireX Broker
<a href="#">EntireX Direct RPC Listener Connection</a>	Direct Connection to an RPC Client
<a href="#">EntireX Reliable RPC Listener Connection</a>	Direct connection to an Asynchronous RPC Client
<a href="#">EntireX Direct Reliable RPC Listener Connection</a>	Connection to an Asynchronous RPC Client using Direct RPC
<a href="#">IMS Connect Connection</a>	Connection to IMS Connect
<a href="#">CICS ECI Connection</a>	Connection to CICS ECI
<a href="#">CICS Socket Listener Connection</a>	Connection to CICS Socket Listener
<a href="#">Applinx Connection</a>	Connection to Applinx Server
<a href="#">ACI Server Connection</a>	Connection to ACI Server
<a href="#">COBOL Converter Connection</a>	COBOL Converter Connection
<a href="#">Adabas Replication Listener Connection</a>	Connection to an Adabas Replication Server using the EntireX Broker
<a href="#">Adabas Replication Direct Listener Connection</a>	Direct Connection to an Adabas Replication Server

- 3 Select the type of connection you want to establish.
- 4 For an existing connection or when the type of connection has been selected for a new connection, the next screen to be shown depends on the type of connection. Please refer to the following sections for details.

## Creating or Managing an Adabas Replication Listener Connection with the Broker as External Process

### ➤ To create an Adabas Replication Listener Connection

- 1 In the **EntireX Adapter** menu go to **Connections**.

Click on **Adabas Replication Listener Connection**.

The following screen is shown:

Configure Connection Type > EntireX Adapter	
Package	Default ▼
Folder Name	<input type="text"/>
Connection Name	<input type="text"/>
<b>Connection Properties</b>	
Broker ID	<input type="text"/>
Server Address	REPTOR/SERVER/SERVICE
Logon User	<input type="text"/>
Logon Password	<input type="password"/>
Retype Logon Password	<input type="password"/>
Single Conversation Mode	true ▼
<b>Connection Management Properties</b>	
Enable Connection Pooling	true ▼
Minimum Pool Size	1
Maximum Pool Size	10
Pool Increment Size	1
Block Timeout (msec)	1000
Expire Timeout (msec)	1000
Startup Retry Count	0
Startup Backoff Timeout (sec)	10
<input type="button" value="Save Connection"/>	

- 2 Provide the required parameter values. Parameters and their possible values are described in the following table:

Parameter	Description
Package	Name of the package where the connection is stored.
Folder Name	Name of the folder where the connection is stored.
Connection Name	The name of the connection.
Broker ID	The ID of the broker you want to connect to. This ID consists of a host and an optional port.  Default for the port is 1971.
Server Address	The address of the RPC server registered to the broker above.  The address is given in the format <class>/<server>/<service>.
Logon User	The name of the user to log on to the broker.
Logon Password	The password for the user above.
Retype Logon Password	Verification of the password.
Single Conversation Mode	Enables or disables the use of Single Conversation Mode.



Parameter	Description
	Default: true.
Enable Connection Pooling	<p>Enables the adapter to use connection pooling.</p> <p>Default: true.</p> <p>Refer to <i>Connection Pooling</i> under <i>EntireX Adapter Connections</i> in the <i>webMethods EntireX</i> documentation for more information on connection pooling.</p>
Minimum Pool Size	<p>If connection pooling is enabled, this field specifies the minimum number of connection objects that remain in the connection pool at all times. When the adapter creates the pool, it creates this number of connections.</p> <p>Default: 1.</p>
Maximum Pool Size	<p>The maximum number of connection objects that can exist in the connection pool. The adapter will reuse any inactive connections in the pool or, if all connections are active and the connection pool has reached its maximum size, the adapter will wait for a connection to become available.</p> <p>Default: 10.</p>
Pool Increment Size	<p>If connection pooling is enabled, this field specifies the number of connections by which the pool will be incremented if connections are needed, up to the maximum pool size.</p> <p>Default: 1.</p>
Block Timeout	<p>If connection pooling is enabled, this field specifies the number of milliseconds that the Integration Server will wait to obtain a connection before it times out and returns an error.</p> <p>Default: 1000.</p>
Expire Timeout	<p>If connection pooling is enabled, this field specifies the number of milliseconds that an inactive connection can remain in the pool before it is closed and removed from the pool.</p> <p>For example, to specify 10 seconds, specify 10000. Enter 0 to specify no timeout.</p> <p>Default: 1000.</p> <p><b>Note:</b> The adapter will never violate the Minimum Pool Size parameter. These connections remain in the pool regardless of how long they are inactive.</p>
Startup Retry Count	<p>The number of times that the system should attempt to initialize the connection pool at startup if the initial attempt fails.</p> <p>Default: 0.</p>
Startup Backoff Timeout	<p>The number of seconds that the system should wait between attempts to initialize the connection pool.</p>

- 3 Click on **Save Connection**.

## Creating or Managing an Adabas Replication Direct Listener Connection

### ➤ To create an Adabas Replication Direct Listener Connection

- 1 In the **EntireX Adapter** menu go to **Connections**.

Click on **Adabas Replication Direct Listener Connection**.

The following screen is shown:

Configure Connection Type > EntireX Adapter	
Package	Default ▼
Folder Name	<input type="text"/>
Connection Name	<input type="text"/>
<b>Connection Properties</b>	
Server Address	REPTOR/SERVER/SERVICE
<b>Connection Management Properties</b>	
Enable Connection Pooling	true ▼
Minimum Pool Size	1
Maximum Pool Size	10
Pool Increment Size	1
Block Timeout (msec)	1000
Expire Timeout (msec)	1000
Startup Retry Count	0
Startup Backoff Timeout (sec)	10
<input type="button" value="Save Connection"/>	

- 2 Provide the required parameter values. Parameters and their possible values are described in the following table:

Parameter	Description
Package	Name of the package where the connection is stored.
Folder Name	Name of the folder where the connection is stored.
Connection Name	The name of the connection.
Server Address	The address of the RPC server. The address is given in the format <class>/<server>/<service>.

Parameter	Description
Enable Connection Pooling	<p>Enables the adapter to use connection pooling.</p> <p>Default: true.</p> <p>Refer to <i>Connection Pooling</i> under <i>EntireX Adapter Connections</i> in the <i>webMethods EntireX</i> documentation for more information on connection pooling.</p>
Minimum Pool Size	<p>If connection pooling is enabled, this field specifies the minimum number of connection objects that remain in the connection pool at all times. When the adapter creates the pool, it creates this number of connections.</p> <p>Default: 1.</p>
Maximum Pool Size	<p>The maximum number of connection objects that can exist in the connection pool. The adapter will reuse any inactive connections in the pool or, if all connections are active and the connection pool has reached its maximum size, the adapter will wait for a connection to become available.</p> <p>Default: 10.</p>
Pool Increment Size	<p>If connection pooling is enabled, this field specifies the number of connections by which the pool will be incremented if connections are needed, up to the maximum pool size.</p> <p>Default: 1.</p>
Block Timeout	<p>If connection pooling is enabled, this field specifies the number of milliseconds that the Integration Server will wait to obtain a connection before it times out and returns an error.</p> <p>Default: 1000.</p>
Expire Timeout	<p>If connection pooling is enabled, this field specifies the number of milliseconds that an inactive connection can remain in the pool before it is closed and removed from the pool.</p> <p>For example, to specify 10 seconds, specify 10000. Enter 0 to specify no timeout.</p> <p>Default: 1000.</p> <p><b>Note:</b> The adapter will never violate the Minimum Pool Size parameter. These connections remain in the pool regardless of how long they are inactive.</p>
Startup Retry Count	<p>The number of times that the system should attempt to initialize the connection pool at startup if the initial attempt fails.</p> <p>Default: 0.</p>
Startup Backoff Timeout	<p>The number of seconds that the system should wait between attempts to initialize the connection pool.</p>

### 3 Click on **Save Connection**.

Once you have established a connection, you have to define a listener for each connection you want to use with the Adabas Replication Service for webMethods Integration Server. Defining listeners is described in the following section [\*Using the Adabas Replication Wizard\*](#).

# 7

## Using the Adabas Replication Wizard

---

■ Introduction .....	24
■ Configuring a Listener .....	24

## Introduction

---

The Adabas Replication Wizard can be used to generate a listener and all required objects for an existing connection. The listener will be stored in the same location as the connection.

The screenshot shows the WEBMETHODS Integration Server interface. On the left is a navigation menu with the following items: EntireX Adapter (expanded), Connections, Listeners, Listener Notifications, Adapter Settings, Direct RPC Administration, Application Monitoring, Connections Information, Services Information, Listeners Information, License Information, Adabas Replication Wizard (highlighted), Create Document Type from Adabas File, and About. The main content area shows the breadcrumb 'Adapters > EntireX Adapter > Adabas Replication Wizard' and the 'Adabas Replication Wizard' form. The form has three fields: 'Select connection' with a dropdown menu showing 'Test:Test', 'Listener Name' with an empty text box, and 'Document Types' with an empty text box. A 'Create' button is located below the fields.

## Configuring a Listener

---

Parameter	Description
Select connection	Select the connection for which the objects are generated. <b>Note:</b> The connection must be enabled so that it can be selected from the drop down menu.
Listener Name	Name of the listener.
Document Types	The wizard is able to generate listener services from existing Document types. These Document type must be entered in the Integration Server name schema. More than one Document type must be separated by a comma.

# 8

## Create Document Type from Adabas File

---

Adabas Replication Service for webMethods Integration Server is able to generate document type and Metadata from the definitions that are stored on the Replication System file.

**WEBMETHODS**  
Integration Server
 default :: daeirnd42335.eur.ad.sag :: Administrator
 Close Window

**EntireX Adapter**

- Connections
- Listeners
- Listener Notifications
- Adapter Settings
- Direct RPC Administration
- Application Monitoring
- Connections Information
- Services Information
- Listeners Information
- License Information
- Adabas Replication Wizard
- Create Document Type from Adabas File**
- About

Adapters > EntireX Adapter > Create Document Type / Metadata

**Global Format Buffer**

Name	<input type="text"/>
------	----------------------

**Source**

**Replication System File**

Node	<input type="text"/>
Port	<input type="text"/>
Database Number	<input type="text"/>
File Number	<input type="text"/>

**SYSRPTR Unload File**

File Name	<input type="text"/>
-----------	----------------------

**Target**

**Generate Document Type**

Package	<input type="text"/>
Folder	<input type="text"/>
Generate Document Type	false <input type="button" value="v"/>

**Generate Metadata**

Connection	<input type="text"/>
Table Name	<input type="text"/>
Generate Metadata	false <input type="button" value="v"/>

Create

With this function two different object types can be created from a Global Format Buffer: Document Types and Metadata.

A Document Type contains a set of fields used to define the structure and type of data in a document (IData object). For more information about the Document Type see the *webmethods Integration Server* documentation. Metadata is needed to decode the replication data from the Event Replicator for Adabas to the iData object.

The Metadata is provided when the Initial State is done. If the Metadata is not available, it can be created with this function.

26

Adabas Replication Service for webMethods Integration Server



Parameter	Description
Name	The name of the Global Format Buffer on the Replication System File.
Node	The network node where the Replicator system file can be found. This is the TCP/IP node or IP address where the Event Replicator Server nucleus resides.
Port	The port number where the Replicator system file can be found. This is the TCP/IP port number used by the Entire Net-Work TCP/IP Option on the mainframe.
Database Number	Database number of the Replication System File.
File Number	File number of the Replication System File.
File Name	Name of the SYSRPTR Unload File.
Package	Package in which the Document type is stored.
Folder	Folder in which the Document type is stored.
Generate Document Type	Check this box to generate Document type.
Connection	Connection name in the Integration Server naming schema.
Table Name	Optional. Only required when the table name is different from Global Format Buffer Name.
Generate Metadata	Check this box to generate Metadata.



**Note:** If the Replication System File is not accessible via the Entire Net-Work, the data can be generated from SYSRPTR Unload File. In this case, leave the Replication System File empty and enter the file name in **SYSRPTR Unload File**.



# 9

## Using the Software AG Designer

---


■ Generated Objects .....	30
■ Adabas Metadata Wizard .....	30

You can use the Software AG Designer to view and edit the objects generated with the Adabas Replication Wizard.

## Generated Objects

---

This picture shows object that were created by the Adabas Replication Wizard:

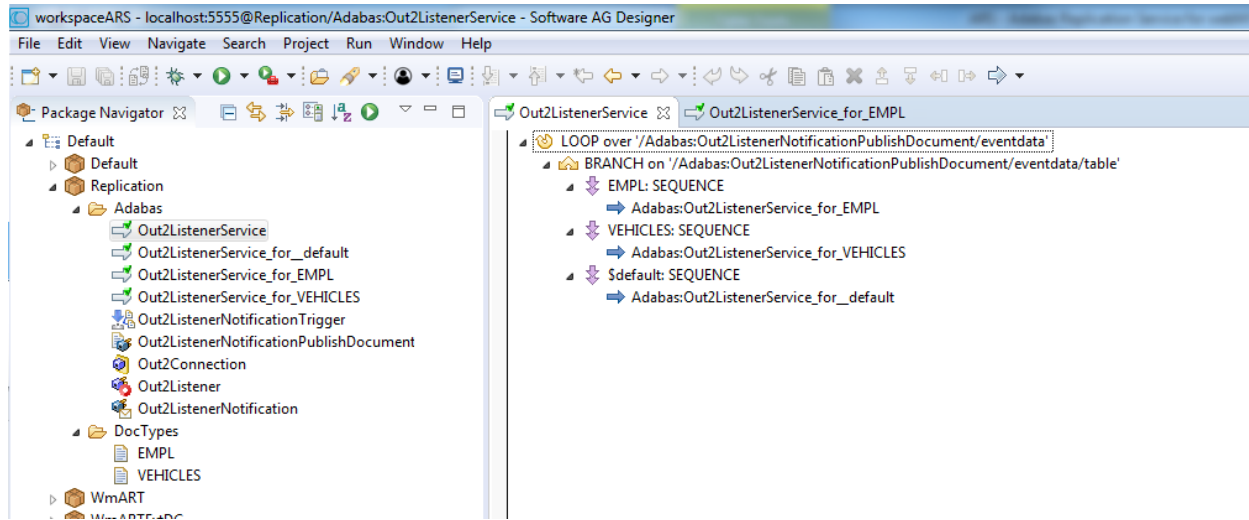

The Flow Services are the place where users should insert their logic.

## Adabas Metadata Wizard

---

The Adabas Metadata Wizard is invoked using the **New** command.

➤ To invoke the Adabas Metadata Wizard via the New command:

- 1 In the top menu of the Software AG Designer click on **File > New > Other...**

Or:


In the toolbar click on  and then select **Other...** from the menu.

Or:

Use the shortcut CTRL+N.

The **New** wizard is opened.

- 2 Navigate to **Software AG > Service Development** and click on **Adabas Metadata**.

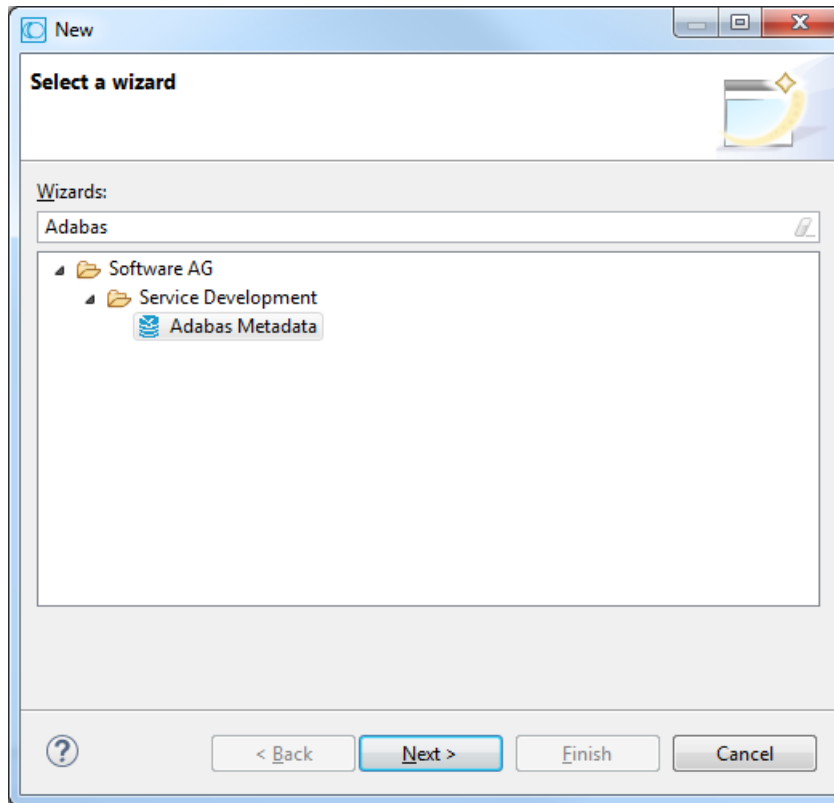

The Designer Wizard is able to create Document types and Metadata.

You can either create them using a system file or read the metadata from a SYSRPTR unload file:

The image shows a 'Source' dialog box with a title bar containing a question mark icon and standard window controls. The main area is titled 'Source' and contains the instruction 'Define the Replication Source that contains the Event Replicator definitions.' There are two radio buttons: 'System File' (selected) and 'Unload File'. Under 'System File', there is a section 'Replication System File' with four text boxes: 'Node:' (da3f), 'Port:' (3602), 'Database Number:' (22133), and 'File Number:' (89). Under 'Unload File', there is a section 'Replication Unload File' with a 'File Name:' text box and a 'Browse...' button. At the bottom, there is a row of four buttons: a help button (question mark), '< Back', 'Next >', 'Finish', and 'Cancel'.

**Source**

Define the Replication Source that contains the Event Replicator definitions.

☒ System File

Replication System File

Node: da3f

Port: 3602

Database Number: 22133

File Number: 89

☐ Unload File

Replication Unload File

File Name:  Browse...


? < Back Next > Finish Cancel

**Select Format Buffer**

Define the Replication Service that contains the Event Replicator definitions.

Format Buffer:

Type	Level	Field ID	Format
	1	PERSONNEL_ID	A8.0
GR	1	FULLNAME	
	2	FIRST_NAME	A20.0
	2	MIDDLE_NAME	A20.0
	2	NAME	A20.0
	1	MARSTAT	A1.0
	1	SEX	A1.0
GR	1	FULL_ADDRESS	
MU	2	ADDRESS_LINE	A20.0
	2	CITY	A20.0
	2	POSTCODE	A10.0
	2	COUNTRY	A3.0
GR	1	TELEPHONE	
	2	AREACODE	A6.0



**Select Service and Target**  
Define the Service and the Targets.

**Service**  
URL:   
User:   
Password:

**Document Type**  
☒ Generate Document Type  
Package:   
Folder:

**Metadata**  
☒ Generate Metadata  
Connection:   
Table Name:

? < Back Next > Finish Cancel

The parameters that can be set edited are the same as described in the table of the section [Create Document Type from Adabas File](#).



# 10

## Common Scenarios

---


- For Event-based replication, for example sending an e-mail or initiating a REST call, see [Common Usage Scenarios](#).
- For all other replication scenarios, see Getting Started.



# 11 Common Usage Scenarios

---

This chapter describes common usage scenarios with the Adabas Replication Service for webMethods Integration Server.

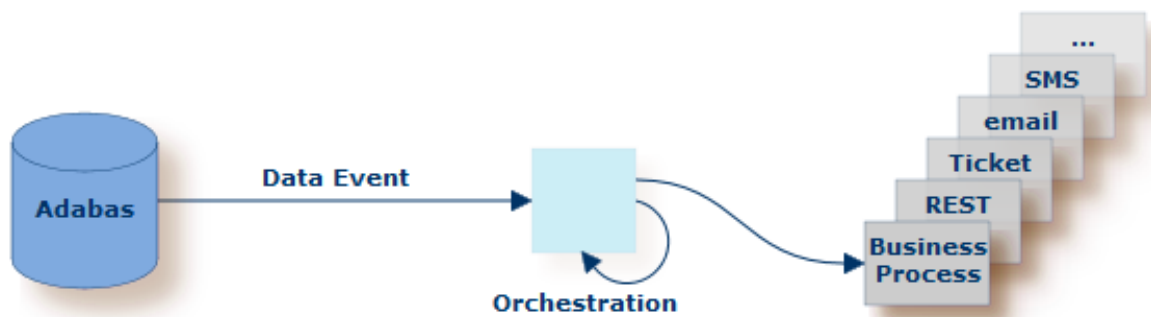

- I want to orchestrate the incoming event with other data
- I want to trigger a business process
- I want to call a REST API / resource
- I want to open a ticket in a ticketing system
- I want to send an SMS or an e-mail

To implement one of these scenarios, see [Common Deployment Scenarios](#).




# 12

## Common Deployment Scenarios

---

All **Common Usage Scenarios** described here are realized via the webMethods Integration Server.

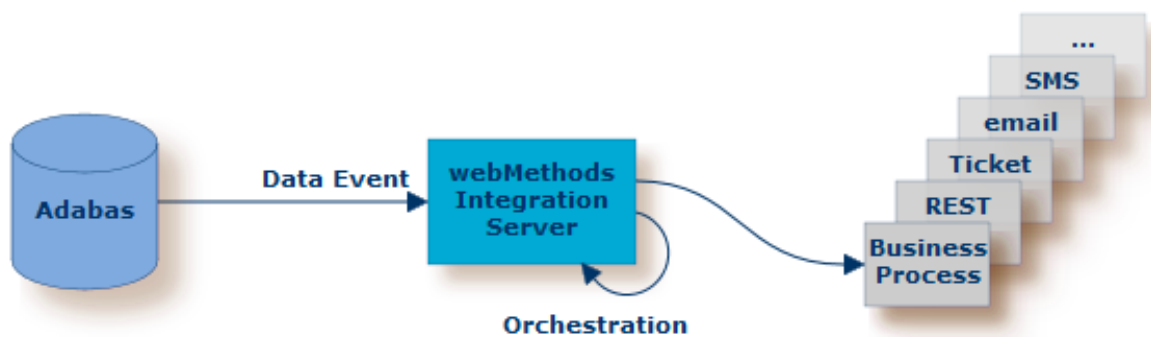

You have two architectural choices for deploying the components:

- **Simple Deployment Using Direct RPC**
- **Deployment Using EntireX Broker**




# 13

## Simple Deployment Using Direct RPC

---

All **Common Usage Scenarios** are realized via the webMethods Integration Server.

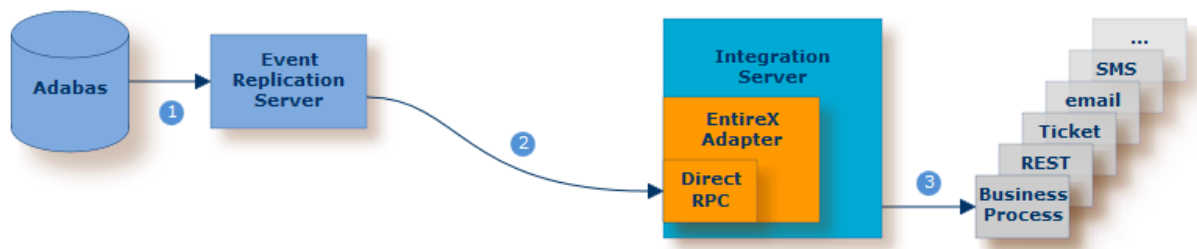

- ① Event Replicator for Adabas listens for specific actions on the database.
- ② Event Replicator for Adabas sends an XML message to Integration Server via Direct RPC of Integration Server
- ③ The EntireX Adapter listens to the respective message queue and triggers an IS service, for example starting a business process or notification by email.

See **Scenario: Notifying a User after an Adabas Database Record is Updated** for the steps required.






# 14

## Deployment Using EntireX Broker

---

All **Common Usage Scenarios** are realized via the webMethods Integration Server.

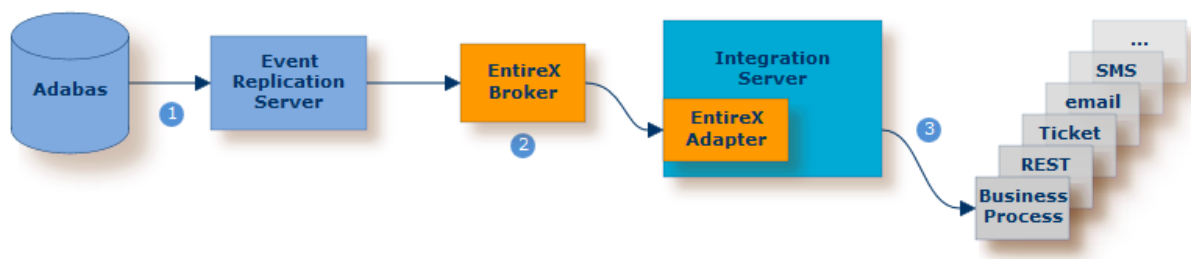

- ① Event Replicator for Adabas listens for specific actions on the database.
- ② Event Replicator for Adabas sends an XML message to Integration Server via EntireX Broker
- ③ The EntireX Adapter listens to the respective message queue and triggers an IS service, for example starting a business process or notification by email.

See **Scenario: Notifying a User after an Adabas Database Record is Updated** for the steps required.



# 15      Scenario: Notifying a User after an Adabas Database


## Record is Updated

---

- Step 1 - Configure your Integration Server ..... 47
- Step 2 - Create Listener Objects with the Adabas Replication Wizard ..... 49
- Step 3 - Create Processing Logic for Flow Services ..... 51

Scenario: I have a mainframe Adabas database and want to notify a user when a record is updated.

Solution: Use the Event Replicator for Adabas to send a message to the webMethods Integration Server via Direct RPC, and use Integration Server logic to send an email to the target user.

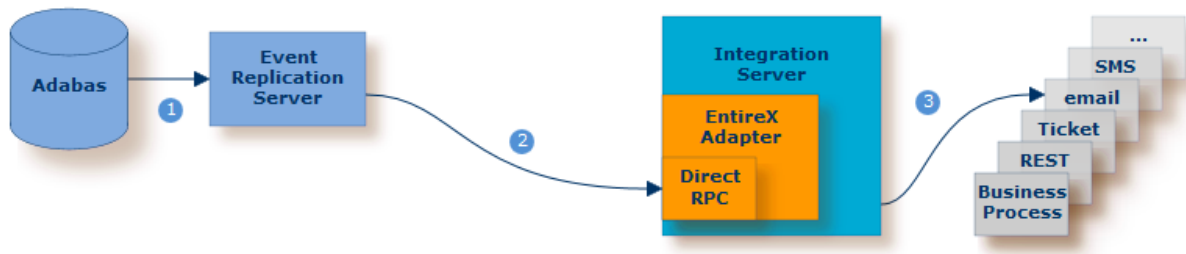

- 1 Event Replicator for Adabas listens for specific actions on the database.
- 2 Event Replicator for Adabas sends an XML message to Integration Server via Direct RPC of Integration Server
- 3 The EntireX Adapter listens to the respective message queue and triggers an IS service to send the email.

This scenario requires the following Software AG products:

- Mainframe Adabas
- Event Replicator for Adabas
- webMethods Integration Server
- EntireX Adapter

## Step 1 - Configure your Integration Server

- [Check the EntireX Adapter Package is Available](#)
- [Enable Autostart \(Optional\)](#)
- [Creating an Adabas Replication Direct Listener Connection](#)

### Check the EntireX Adapter Package is Available

Before you begin, ensure that the EntireX Adapter package is available on the webMethods Integration Server.

➤ To ensure that the EntireX Adapter package is available on the webMethods Integration Server

- 1 In the webMethods Integration Server Administration interface, go to **Packages > Management**.
- 2 Click on **WmEntireX** for details. A screen similar to this should be displayed (extract):

Package Information	
Package Name	WmEntireX
Version	10.3.0.0.640
Build	640
Minimum Version of JVM	1.8
Package List ACL	Default
Patches Included	
Description	EntireX Adapter
Publisher	Software AG

## Enable Autostart (Optional)

We recommend enabling the autostart option of the EntireX Adapter in the webMethods Integration Server; EntireX Direct RPC is then launched automatically when the Integration Server starts up.

### ➤ To enable the EntireX autostart option

- 1 In the webMethods Integration Server Administration interface go to **EntireX Adapter > Direct RPC Administration**.

Configuration		
Status	Running	<a href="#">Stop</a>
Logging Level	Error	<a href="#">Change</a>
TCP Port Number	1971 listening	
SSL Port Number		
Keystore Alias (for SSL)		
Auto Start	Enabled	<a href="#">Disable</a>

- 2 In the **Configuration** menu go to the **Auto Start** option and check whether it is set to **Enabled**. If it is not yet enabled, click on **Enable**.

## Creating an Adabas Replication Direct Listener Connection

### ➤ To create an Adabas Replication Direct Listener Connection

- 1 In the **EntireX Adapter** menu go to **Connections**. Click on **Adabas Replication Direct Listener Connection** to display the following screen:

Configure Connection Type > EntireX Adapter	
Package	Default ▼
Folder Name	<input type="text"/>
Connection Name	<input type="text"/>
Connection Properties	
Server Address	REPTOR/SERVER/SERVICE

- 2 Add the name of the package where the connection is stored.

- 3 Add the name of the folder where the connection is stored.
- 4 Add the name of the connection.
- 5 Add the server address in the format <class>/<server>/<service>.



**Note:** All other parameters are optional. Normally you can use the default values for these. All parameters are described [here](#).

- 6 Click on **Save Connection**.

In the next step, create a listener for this connection, using the Adabas Replication Wizard.

## Step 2 - Create Listener Objects with the Adabas Replication Wizard

➤ To generate a listener and all required objects for an existing connection

- 1 In the webMethods Integration Server, choose **Adapters > EntireX Adapter > Connections** and make sure the connection you created in the previous step is enabled.

EntireX Adapter Listeners		
Listener Name ▲ ▼	Package Name ▲ ▼	State ▲ ▼
Group:GroupListener	Default	Disabled ▼
Out1:Out1Listener	Default	Disabled ▼
Test:TestListener	Default	Disabled ▼
Training:TrainingListener	Default	Disabled ▼
directrpc:directListener	Default	<div> Disabled ▼  Disabled  Enabled </div>

- 2 In the Integration Server, choose **EntireX Adapter > Adabas Replication Wizard**.

The screenshot shows the EntireX Adapter console on the left and the Adabas Replication Wizard on the right. The console has a sidebar with various options, and the wizard is currently on the 'Select connection' step. A red circle highlights the 'Select connection' dropdown menu, which is set to 'Test:Test'. Below it, the 'Listener Name' field is empty, and the 'Document Types' field is also empty. A 'Create' button is at the bottom of the wizard.

**EntireX Adapter**

- Connections
- Listeners
- Listener Notifications
- Adapter Settings
- Direct RPC Administration
- Application Monitoring
- Connections Information
- Services Information
- Listeners Information
- License Information
- Adabas Replication Wizard**
- Create Document Type from Adabas File

**Adabas Replication Wizard**

Select connection: Test:Test ▼

Listener Name:

Document Types:

Create

- 3 Select the connection you created previously.
- 4 Enter the name of the new listener.
- 5 Choose Create.

The listener will be stored in the same location as the connection.



**Note:** Document types can be optionally created to restrict the scope of the listening operation. See [Create Document Type from Adabas File](#).

- 6 Make sure the listener you created is enabled. Choose **Enabled** from the drop-down menu.

The screenshot shows the EntireX Adapter console with the 'Listeners' tab selected. The 'Listeners' table is displayed, showing a list of listeners and their states. A red circle highlights the 'State' column, which has a dropdown menu open showing the options: Enabled, Disabled, and Suspended. The 'Update:UpdateListener' row is highlighted, and its state is set to 'Enabled'.

**EntireX Adapter**

- Connections
- Listeners**
- Listener Notifications
- Adapter Settings
- Direct RPC Administration
- Application Monitoring
- Connections Information
- Services Information
- Listeners Information
- License Information
- Adabas Replication Wizard
- Create Document Type from Adabas File
- About

Adapters > EntireX Adapter > Listeners

- Configure new listener
- Suspend all enabled
- Enable all suspended
- Filter Listeners

**EntireX Adapter Listeners**

Listener Name	Package Name	State
Group:GroupListener	Default	Disabled
Out1:Out1Listener	Default	Disabled
Test:TestListener	Default	Disabled
Training:TrainingListener	Default	Disabled
Update:UpdateListener	Default	Enabled
directrpc:directListener	Default	Enabled




## Step 3 - Create Processing Logic for Flow Services


In the previous step you created the required listener objects with the Adabas Replication Wizard. Now you can add your own logic to perform the actions you require. In the example below we are sending an email with the updated data in XML format.

### ➤ To customize the newly created flow service


- 1 Open the flow service created in the previous step to add your custom logic.

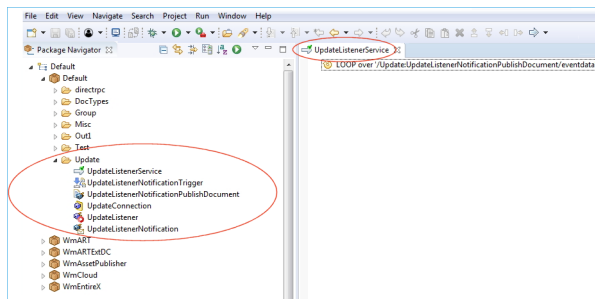

- 2 Add a flow step **BRANCH** within the **LOOP**. This enables you to decide on a specific action for a particular field.

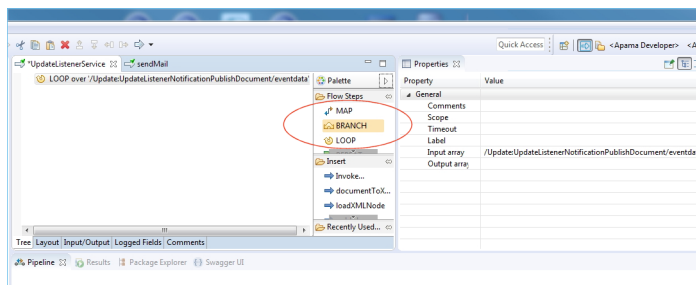


- 3 In the **Switch** property, set the path to an attribute of the event data. In this case it is the **method** attribute of the event data.

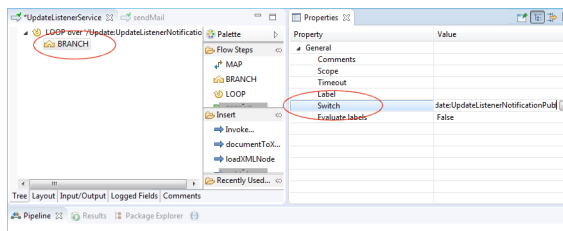


- 4 Under flow step **SEQUENCE**, specify what happens when the method has a particular value.


## Scenario: Notifying a User after an Adabas Database Record is Updated

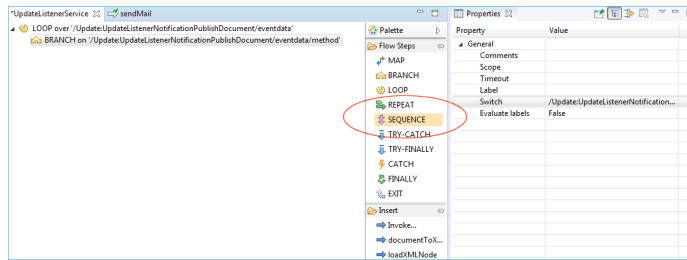


- 5 Set **Label** to **Update** and map document (the input format) to XML string.

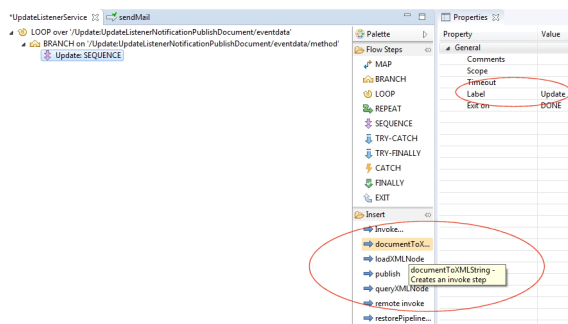



- 6 Use the `pub.sml:documentToXMLString` service from the `WmPublic` package to document from fields an XML string that can be sent via email.

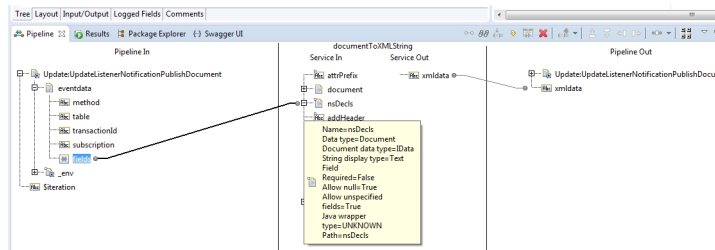


- 7 Specify the mail protocol, in our example "smtp". To send the mail you can use the public flow service `pub.client:smtp` from the `WmPublic` package.



- 8 Set the SMPT parameters.
- Some fields are coded manually, for example **to**. These fields are marked with the icon .
  - Other fields are filled dynamically with values from the flow service, for example **subject**.

These fields are marked with the icon 

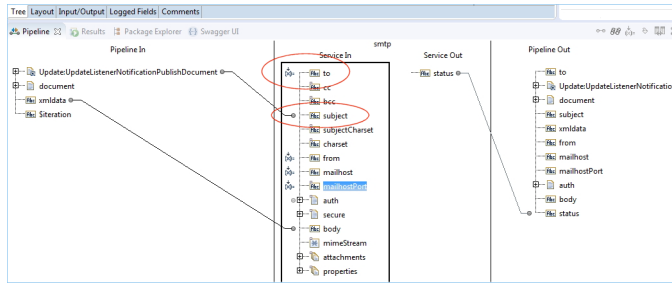

The result of these steps is an email where

- the subject is dynamically filled with the value from the flow service
- the addresse is coded manually in a mapping operation
- the body is converted to XML and contains the fields that have been updated

```

EMPL
From: GER@eur.ad.sag
To: Gerth, Matthias
Subject: <?xml version="1.0"?>
<IDM>1128</IDM>
<CITY>Auckland</CITY>
<DEPT>SALED1</DEPT>
    
```



# 16      Scenario: Notifying a User after an Adabas Database


## Record is Updated

---

- Step 1 - Configure your Integration Server ..... 57
- Step 2 - Create Listener Objects with the Adabas Replication Wizard ..... 59
- Step 3 - Create Processing Logic for Flow Services ..... 61

Scenario: I have a mainframe Adabas database and want to notify a user when a record is updated.

Solution: Use the Event Replicator for Adabas to send a message to the webMethods Integration Server via EntireX Broker, and use Integration Server logic to send an email to the target user.

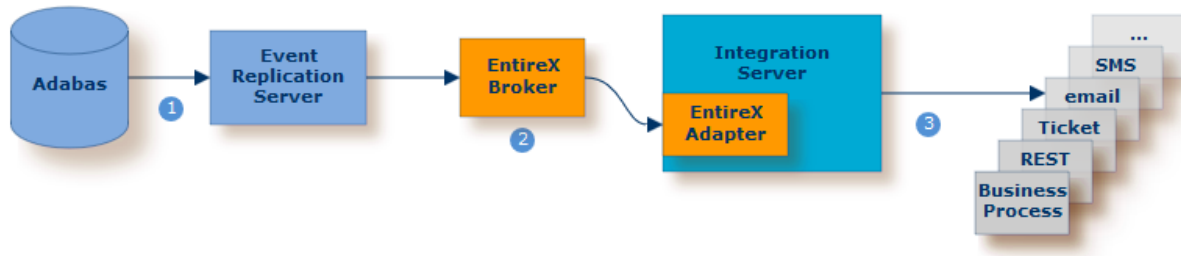

- 1 Event Replicator for Adabas listens for specific actions on the database.
- 2 Event Replicator for Adabas sends an XML message to Integration Server via EntireX Broker
- 3 The EntireX Adapter listens to the respective message queue and triggers an IS service to send the email.

This scenario requires the following Software AG products:

- Mainframe Adabas
- Event Replicator for Adabas
- webMethods Integration Server
- EntireX Broker
- EntireX Adapter

## Step 1 - Configure your Integration Server

- [Check the EntireX Adapter Package is Available](#)
- [Creating an Adabas Replication Listener Connection](#)

### Check the EntireX Adapter Package is Available

Before you begin, ensure that the EntireX Adapter package is available on the webMethods Integration Server.

➤ To ensure that the EntireX Adapter package is available on the webMethods Integration Server

- 1 In the webMethods Integration Server Administration interface, go to **Packages > Management**.
- 2 Click on **WmEntireX** for details. A screen similar to this should be displayed (extract):

Package Information	
Package Name	WmEntireX
Version	10.3.0.0.640
Build	640
Minimum Version of JVM	1.8
Package List ACL	Default
Patches Included	
Description	EntireX Adapter
Publisher	Software AG

### Creating an Adabas Replication Listener Connection

➤ To create an Adabas Replication Listener Connection

- 1 In the **EntireX Adapter** menu go to **Connections**. Click on **Adabas Replication Listener Connection** to display the following screen:

Adapters > EntireX Adapter > Configure Connection Type

- [Return to EntireX Adapter Connection Types](#)

**Configure Connection Type > EntireX Adapter**

Package	Default
Folder Name	
Connection Name	

**Connection Properties**

Broker ID	
Server Address	REPTOR/SERVER/SERVICE
Logon User	
Logon Password	
Retype Logon Password	
Single Conversation Mode	true

- 2 Add the name of the package where the connection is stored.
- 3 Add the name of the folder where the connection is stored.
- 4 Add the name of the connection.
- 5 Add the ID of the broker you are using for this task.
- 6 Add the server address in the format <class>/<server>/<service>.
- 7 Add the user ID and password (if applicable).



**Note:** All other parameters are optional. Normally you can use the default values for these. All parameters are described [here](#).

- 8 Click on **Save Connection**.

In the next step, create a listener for this connection, using the Adabas Replication Wizard.



## Step 2 - Create Listener Objects with the Adabas Replication Wizard

➤ To generate a listener and all required objects for an existing connection

- 1 In the webMethods Integration Server, choose **Adapters > EntireX Adapter > Connections** and make sure the connection you created in the previous step is enabled.

EntireX Adapter Listeners		
Listener Name ▲ ▼	Package Name ▲ ▼	State ▲ ▼
Group:GroupListener	Default	Disabled ▼
Out1:Out1Listener	Default	Disabled ▼
Test:TestListener	Default	Disabled ▼
Training:TrainingListener	Default	Disabled ▼
directrpc:directListener	Default	<div> Disabled ▼  Disabled  Enabled </div>

- 2 In the Integration Server, choose **EntireX Adapter > Adabas Replication Wizard**.

▼ EntireX Adapter

- Connections
- Listeners
- Listener Notifications
- Adapter Settings
- Direct RPC Administration
- Application Monitoring
- Connections Information
- Services Information
- Listeners Information
- License Information
- Adabas Replication Wizard**
- Create Document Type from Adabas File

Adabas Replication Wizard

Select connection ▼ Test:Test ▼

Listener Name

Document Types

Create


- 3 Select the connection you created previously.
- 4 Enter the name of the new listener.
- 5 Choose Create.

The listener will be stored in the same location as the connection.



**Note:** Document types can be optionally created to restrict the scope of the listening operation. See [Create Document Type from Adabas File](#).

- 6 Make sure the listener you created is enabled. Choose **Enabled** from the drop-down menu.

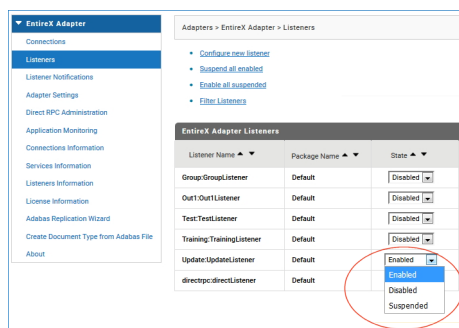


## Step 3 - Create Processing Logic for Flow Services


In the previous step you created the required listener objects with the Adabas Replication Wizard. Now you can add your own logic to perform the actions you require. In the example below we are sending an email with the updated data in XML format.

### ➤ To customize the newly created flow service


- 1 Open the flow service created in the previous step to add your custom logic.

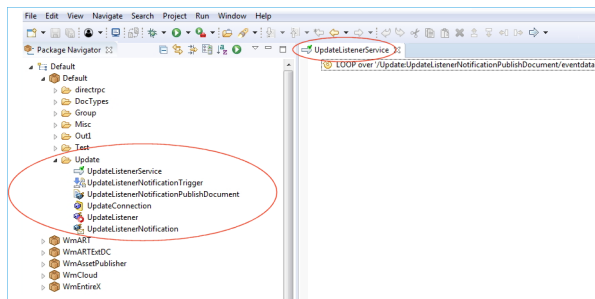

- 2 Add a flow step **BRANCH** within the **LOOP**. This enables you to decide on a specific action for a particular field.

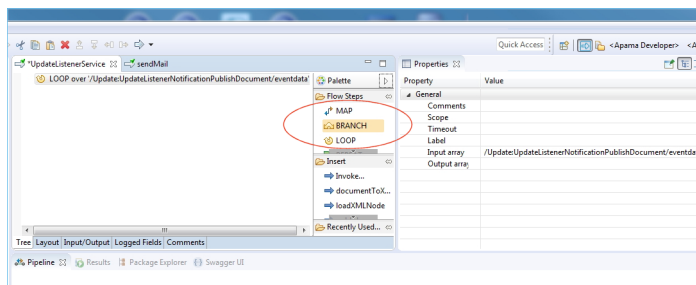


- 3 In the **Switch** property, set the path to an attribute of the event data. In this case it is the **method** attribute of the event data.

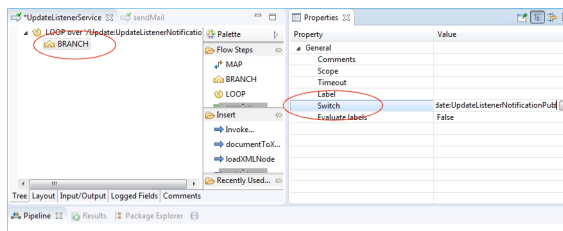


- 4 Under flow step **SEQUENCE**, specify what happens when the method has a particular value.


## Scenario: Notifying a User after an Adabas Database Record is Updated

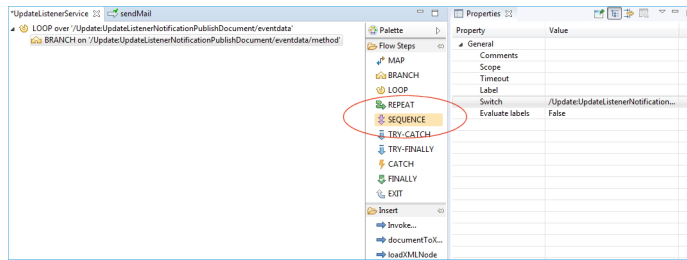


- 5 Set **Label** to **Update** and map document (the input format) to XML string.

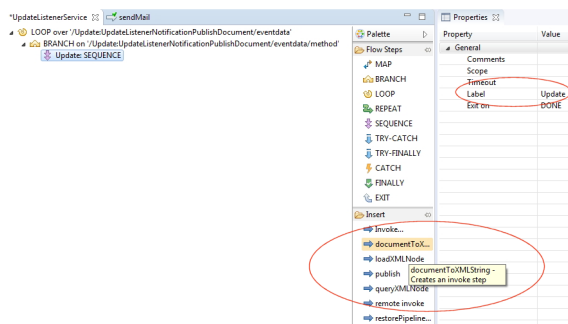



- 6 Use the `pub.sml:documentToXMLString` service from the `WmPublic` package to create, from a document, an XML string that can be sent via email.

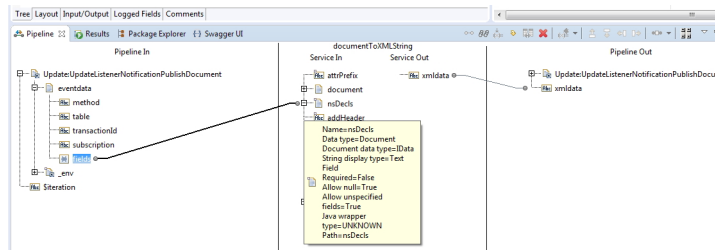


- 7 Specify the mail protocol, in our example "smtp". To send the mail you can use the public flow service `pub.client:smtp` from the `WmPublic` package.

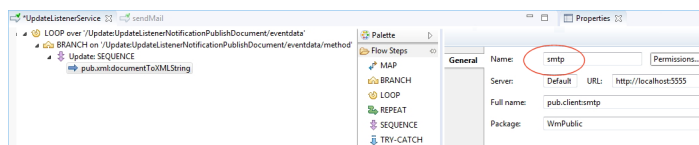

- 8 Set the SMPT parameters.
- Some fields are coded manually, for example **to**. These fields are marked with the icon .
  - Other fields are filled dynamically with values from the flow service, for example **subject**.

These fields are marked with the icon 

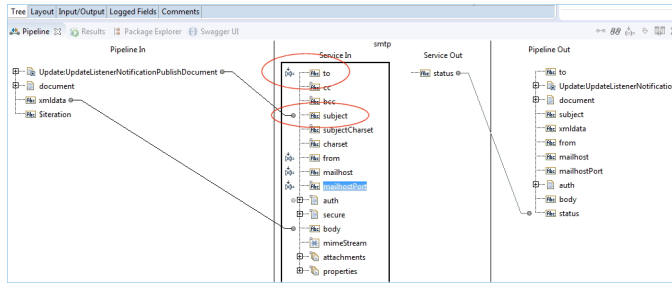

The result of these steps is an email where

- the subject is dynamically filled with the value from the flow service
- the addressee is coded manually in a mapping operation
- the body is converted to XML and contains the fields that have been updated

```

EMPL
From: GER@eur.ad.sag
To: Gerth, Matthias
Subject: <?xml version="1.0"?>
<ID>1128</ID>
<CITY>Auckland</CITY>
<DEPT>SALED1</DEPT>
    
```



# 17

## Troubleshooting

---

<div>▼ EntireX Adapter</div> <div>Connections</div> <div>Listeners</div> <div>Listener Notifications</div> <div>Adapter Settings</div> <div>Direct RPC Administration</div> <div>Application Monitoring</div> <div>Connections Information</div> <div>Services Information</div> <div>Listeners Information</div> <div>License Information</div> <div>Adabas Replication Wizard</div> <div>Create Document Type from Adabas File</div> <div>About</div>	Adapters > EntireX Adapter > Listeners Information			
	<div>• <a href="#">Refresh</a></div> <div>• <a href="#">Reset Statistics</a></div>			
	<div>Listeners</div>			
	Name	Subprogram / Service or Notification	Success	Error
	UpdateUpdateListener	~/UpdateUpdateListenerNotification	23	0

