

EspAuto

User Manual





READ ME FIRST

Copyright Reserved ©

This document contains proprietary information that is protected by copyright law. All rights are reserved. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system or translated into any language in any form or by any means, that is electronic, mechanical, magnetic, optical, chemical, manual or otherwise, in whole or in part, without the prior written consent of Cronus Consulting (Pty) Ltd.

Disclaimer

Cronus Consulting (Pty) Ltd hereby disclaims any and all guarantees and warranties for the correct use and application of the ESP software.

Cronus Consulting (Pty) Ltd reserves the right to revise and make changes to the software and the content of this document from time to time without obligation to notify any person of the changes.

Ownership

The ESP Products are developed by, and is fully owned by Cronus Consulting (Pty) Ltd.



TABLE OF CONTENTS

READ ME FIRST	2
1. INTRODUCTION	5
1.1 PURPOSE	5
1.2 PRODUCT OVERVIEW	5
2. MENU OVERVIEW AND FUNCTION SELECTION	6
3. FUNCTION OVERVIEW	9
3.1 JS400 MAINTAIN - BASE CALENDARS	9
3.2 JS402 MAINTAIN - ESPAUTO DATES	11
3.3 JS403 VIEW - ESPAUTO VARIABLES	13
3.4 JS405 MAINTAIN - ESPAUTO JOBS	14
3.5 JS410 MAINTAIN - ESPAUTO JOBS PER SCHEDULE ID	17
3.6 JS415 MAINTAIN - ESPAUTO JOB PREDECESSORS	22
3.7 JS416 MAINTAIN - ESPAUTO JOB FILE EVENTS	25
3.8 JS417 MAINTAIN - ESPAUTO JOB CONCURRENCY	27
3.9 JS420 MAINTAIN - ESPAUTO JOB TRIGGERS	28
3.10 JS421 MAINTAIN - FILE EVENTS PER SUB SYSTEM	34
3.11 JS422 MAINTAIN - FILE EVENT TRIGGERS	36
3.12 JS425 VIEW - FORECAST SCHEDULED JOBS	37
3.13 JS426 EXTRACT - FORECAST SCHEDULED JOBS (CSV FORMAT)	39
3.14 JS430 SUBMIT - ESPAUTO JOB (DEMAND)	40
3.15 JS434 VIEW - ESPAUTO JOB LINKS	42
3.16 JS435 VIEW - ESPAUTO JOB HISTORY BY SCHEDULED DATE/TIME	43
3.17 JS436 VIEW - ESPAUTO JOB HISTORY BY START DATE/TIME	45
3.18 JS437 VIEW - ESPAUTO JOB STATISTICS	47
3.19 JS438 VIEW - FILE EVENT LOG	48
3.20 JS439 DELETE - FILE EVENT HISTORY	50
3.21 JS440 MAINTAIN - ESPAUTO JOB QUEUE	51
3.22 JS445 REPORT - AUTO SCHEDULED JOBS	54
3.23 JS447 DELETE - ESPAUTO HISTORY	55
3.24 JS480 EXTRACT - SCHEDULE PER SCHEDULED ID	56
3.25 JS481 LOAD - SCHEDULE PER SCHEDULED ID	57
3.26 JS482 DELETE - SCHEDULE PER SCHEDULED ID	58
3.27 JS490 MAINTAIN - SUPPORT GROUPS	59
3.28 JS491 MAINTAIN - SUPPORT LEVELS	61
3.29 JS492 MAINTAIN - SCHEDULED JOB NOTIFICATION	63
3.30 JS493 MAINTAIN - ESPAUTO SETUP	66



4. ESPAUTO API'S	68
4.1 JSP451	68
4.2 JSP452	70
4.3 JSP460	71
4.4 JSP461	73
4.5 JSP470	76
4.6 JSP471	79
5. ESPAUTO VARIABLES	82
6. AUTO SCANNER	84
7. USER EXITS.....	85



1. INTRODUCTION

1.1 Purpose

Provides the functionality required to setup and maintain complex batch schedules. Once these schedules have been created, they provide an automated batch environment whereby jobs are scheduled to run at specific dates and times.

1.2 Product Overview

EspAuto is an add-on product to EspBatch as it makes use of the underlying batch submission process and monitoring facility provided by EspBatch. This enhances ease of use by providing a central submission mechanism for all batch jobs.

Key features:

- **Calendars:** Base calendars provide the functionality to setup the specific day(s) that a job is allowed to run on for a given year. These dates can be adjusted at job level.
- **Schedule ID's:** Provides the ability to define multiple schedules for a single batch job.
- **Predecessors:** Allows for the definition of one or more predecessors for a given job. Predecessors are defined per job and schedule id.
- **File Events:** Allows for the definition of one or more file events for a given job. File events are defined per job and schedule id.
- **Triggers:** Allows for the definition of one or more triggered jobs for a given job. Triggered jobs are defined per job and schedule id.
- **Concurrency:** Definition of scheduled jobs that may not run concurrently.
- **Notification:** Notification via E-mail on completion/failure of a job
- **Cycle Jobs:** Auto scheduled jobs with a given start/end time and interval.
- **Forecasting:** Visual representation of dates that jobs have been specified to run on.
- **Reporting:** Reports providing info on jobs that ran for a specified date range.



2. MENU OVERVIEW AND FUNCTION SELECTION

Once a user logs on the EspBatch/EspAuto menu will be displayed with all functions that the user has access to. The following information is displayed on the menu screen.

```

CRONUS01
MAP902      *** Cronus Consulting - DEV *** V7.3.1      17:56:12.1
MAM902      - JS : EspBatch - Job Scheduler -          2023/07/14
                                                    UDB: 31

JS400      Maintain - Base Calendars
JS402      Maintain - EspAuto Dates
JS403      View    - EspAuto Variables
JS405      Maintain - EspAuto Jobs
JS410      Maintain - EspAuto Jobs per Schedule ID
JS415      Maintain - EspAuto Job Predecessors
JS416      Maintain - EspAuto Job File Events
JS417      Maintain - EspAuto Job Concurrency
JS420      Maintain - EspAuto Job Triggers
JS421      Maintain - File Events per Sub System
JS422      Maintain - File Event Triggers
JS425      View    - Forecast Scheduled Jobs
JS426      Extract - Forecast Scheduled Jobs (CSV Format)
JS430      Submit  - EspAuto Job (Demand)
JS434      View    - EspAuto Job Links
PID.....: 3948707      ** Start of Data **          O/S: EY712
Printer.: PRT01          NSC: ESPBATCH
Function: [ ] Data:      ESP: MENUADM
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
          Uexit Quit          PgDn SetPr          Logof

```

Screen Layout:


- Top line - Object name, main heading, EspSoft version and system time.
- Second line - Object name, menu name and system date.
- Third Line - Current value of Natural UDB parameter.
- Lines 4 to 18 - Available menus/functions.
- Line 19 - O/S Process/Terminal Id and User Id
- Line 20 - Default Printer (If the user has not specified a default printer, then the value of Printer 1 defined on **JS002 Maintain - EspBatch Codes** with Code Type/Value **REPORT/DEFAULTS** is displayed).
The Natural Security User ID.
- Line 21 - Function selection area and EspMenu User ID. **MENUADM** is displayed if the user has administrator privileges.
- Line 22 and 23 - Available function keys.

**Function keys:**

- PF2 - Invoke user exit **ESPUX001**. This user exit can be customized for your environment. It should contain code that transfers the user to the correct system location after exiting **EspMenu**. Function key is enabled if "**Enable User Exit**" is set to **Yes** using function **MA001 Maintain - EspMenu Setup**.
- PF3 - Return to Main/Previous Menu
- PF7 - Page Backward
- PF8 - Page Forward
- PF9 - Set up default printers
- PF12 - Logoff

Function / Menu selection can be done as follows:

- All menu and function selection are cursor sensitive and can be accomplished by positioning the cursor on the line containing the desired menu or function and then pressing <ENTER>.
- Typing the menu or function name in the function selection area. Parameters required by the function can be typed in the data area, which will be passed to the function.

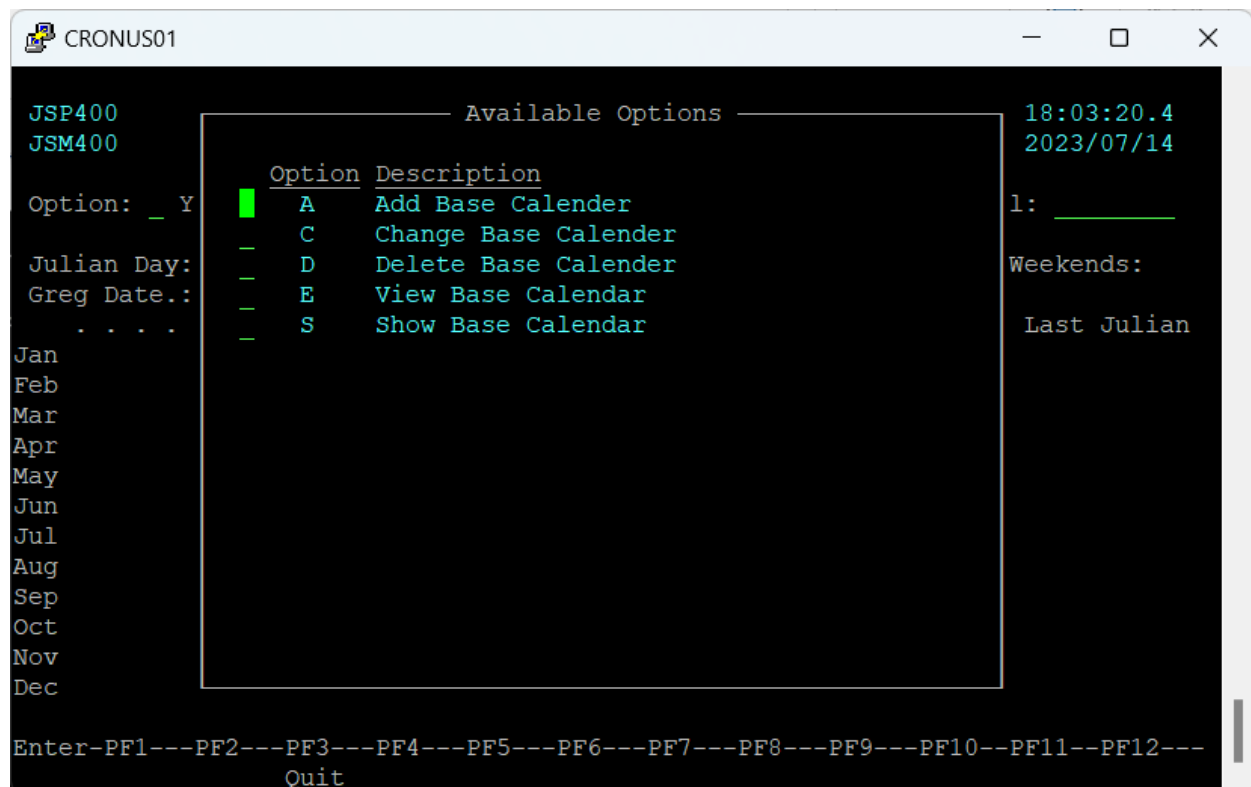



Once a function is selected that contains an OPTION field, the user will be required to enter a valid option, the option entered by the user will be validated against the predefined access set up for that user, thus only allowing the user to perform actions at function level according to their security profile. If the option field is omitted and the <ENTER> key is pressed, a window containing valid options will be displayed allowing the user to choose the desired option. Option selection can be accomplished by marking the desired option or by placing the cursor in the line containing the option and pressing <ENTER>.

The **JS4*** range of functions is used to define and monitor Auto Scheduled Jobs.



3. FUNCTION OVERVIEW

3.1 JS400 Maintain - Base Calendars

This function is used to maintain the base calendars used for the auto scheduling of batch jobs. Base Calendars define the days of the year which an auto scheduled job can run.

Function Options:

- A** - Add Base Calendar
- C** - Change Base Calendar
- D** - Delete Base Calendar
- E** - View Base Calendar
- S** - Show Base Calendar


All days marked with an **X** are valid run days. The Exclude Weekends acts as a toggle to either select or deselect weekend days as valid run days. Entering an '**N**' in this field will include weekends (Saturday and Sunday), a '**Y**' will exclude weekends (Saturday and Sunday).

If <ENTER> is pressed while the cursor is positioned on a given day within a given month, the Julian Day and Gregorian Date fields will be updated to reflect the current cursor position.



If the **“Copy from Year”** and **“Cal”** fields are specified when adding a new calendar with option **“A”**, a new calendar will be created by making a copy of the calendar specified in the **Copy from Year** and **Cal** fields.

The current calendar can be updated at any stage by pressing **PF5**. If **PF3** is pressed and the calendar has been changed after the last **PF5** key press a window is displayed prompting the user if changes should be saved.

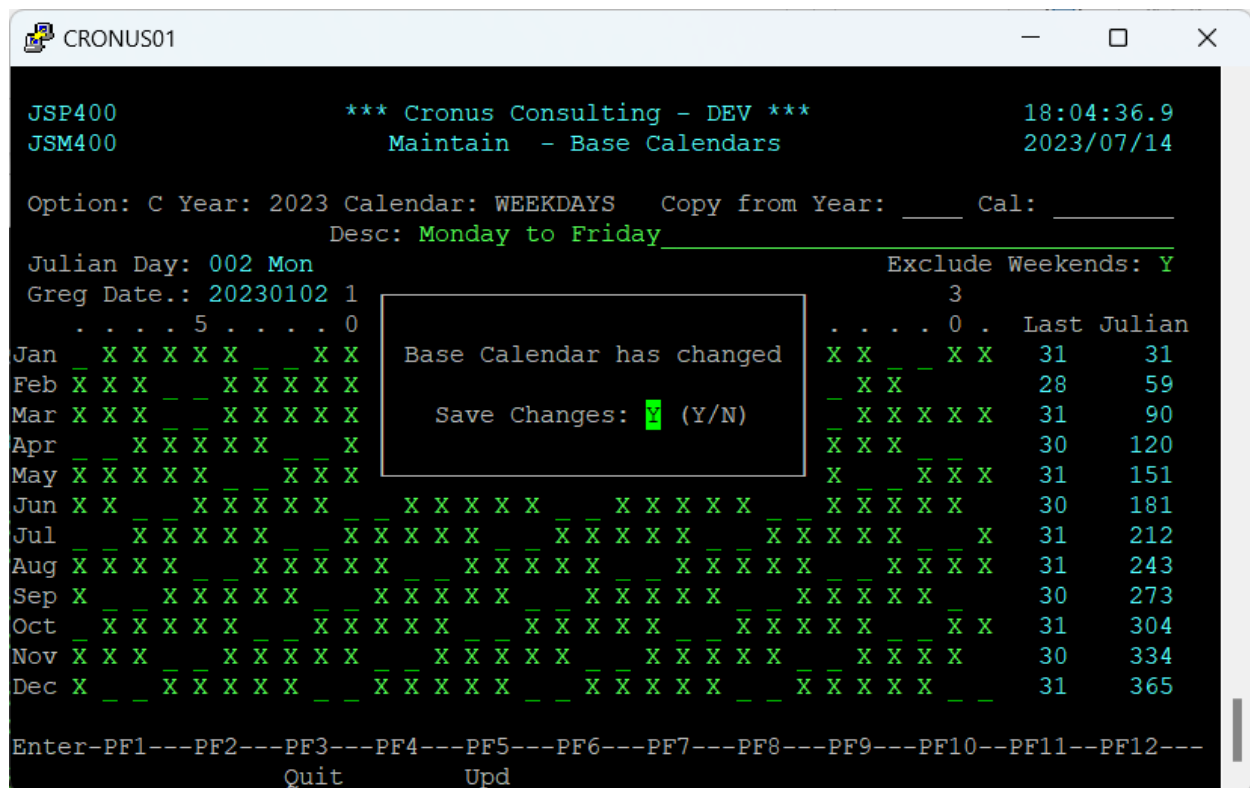

When changes are made to a base calendar, all scheduled jobs linked to the base calendar via function **“JS410 Maintain - EspAuto Jobs per Schedule ID”** will automatically be updated to reflect the changes made.

A Base calendar may not be deleted if it is linked to one or more Scheduled Jobs.



3.2 JS402 Maintain - EspAuto Dates

This function is used to maintain the **work days** and **holidays** that are used when scheduling jobs via functions **JS410** and **JS420**. On function **JS410** the **Include Holidays/Workdays** fields refer to the values defined for “**Holidays**” and “**Work Days**” for the corresponding year specified. The trigger conditions on function **JS420** allow for a value specification of “**HOLIDAY**” and “**WORKDAY**” that reference “**Holidays**” and “**Work Days**” defined on this function.

Function Options:

- A** - Add Dates
- C** - Change Dates
- D** - Delete Dates
- E** - View Dates

```

CRONUS01
JSP402          *** Cronus Consulting - DEV ***          08:51:02.9
JSM402          Maintain - EspAuto Dates                2023/07/17

Option: C   Year: 2023                                Copy from Year: ____

Work Days.....: Mon: ☒ Tue: ☒ Wed: ☒ Thu: ☒ Fri: ☒ Sat: ☐ Sun: ☐

Last Day of Week: SUN

----- Holidays -----
No MMDD Description                                     No MMDD Description
01 0101 New Year's Day                                   02 0116 Martin Luther King Day
03 0220 Presidents Day                                 04 0529 Memorial Day
05 0619 Juneteenth                                       06 0704 Independence Day
07 0904 Labor Day                                        08 1009 Columbus Day
09 1111 Veterans Day                                    10 1123 Thanksgiving
11 1225 Christmas day                                  12      _____
13      _____                                     14      _____
15      _____                                     16      _____
17      _____                                     18      _____
19      _____                                     20      _____
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
                                           Quit      Upd
  
```

If the “**Copy from Year**” field is specified when adding new EspAuto Dates with option “**A**”, the “**Work Days**”, “**Last Day of Week**” and “**Holidays**” will automatically be set to the same values as defined for the EspAuto Dates in the “**Copy from Year**” field.



When changes are made to any of the EspAuto Dates, all scheduled jobs defined on function **JS410 Maintain - EspAuto Jobs per Schedule ID** will automatically be updated to reflect the changes made.

The current EspAuto Dates can be updated at any stage by pressing **PF5**. If **PF3** is pressed and the EspAuto Dates have been changed after the last **PF5** key press a window is displayed prompting the user if changes should be saved.

```

CRONUS01
JSP402          *** Cronus Consulting - DEV ***          08:54:51.7
JSM402          Maintain - EspAuto Dates                2023/07/17

Option: C   Year: 2023                               Copy from Year: ____

Work Days.....: Mon: X Tue: X Wed: X Thu: X Fri: X Sat: _ Sun: _

Last Day of Week: SUN

-----
No MMDD Description
01 0101 New Year's Day_
03 0220 Presidents Day_
05 0619 Juneteenth_____
07 0904 Labor Day_____
09 1111 Veterans Day_____
11 1225 Christmas day_____
13 _____
15 _____
17 _____
19 _____
06 0704 Independence Day_____
08 1009 Columbus Day_____
10 1123 Thanksgiving_____
12 _____
14 _____
16 _____
18 _____
20 _____

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
                               Quit      Upd
  
```

EspAuto Dates have changed
 Save Changes: ☒ (Y/N)



3.3 JS403 View - EspAuto Variables

This function is used to view EspAuto variables that are defined within the trigger conditions specified on **JS420**. Any variable that is created via the “**SET / ESET**” keyword within the conditional trigger logic will be displayed via this function.

```

CRONUS01
*** Cronus Consulting - DEV ***
JSP403 View 08:32:47.4
JSM403 - EspAuto Variables 2023/07/18

Master Job No  Var Name  Var Value  Date  Time
          2  RUNJOB    FUSER    20230718  08:31:05
9000001471472  RUNJOB    FUSER    20230718  08:32:44

*** End of Data ***
Restart at Master Job No:  Variable Name:
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
Quit PgDn
  
```

Variables created during normal job execution are identified by the Master Job No and Variable name.

When schedule forecasts are generated using functions **JS425 View - Forecast Scheduled Jobs** and **JS426 Extract - Forecast Scheduled Jobs (CSV Format)** the Master Job No is created by adding the process id to the value 90000000000000 (In the example above variable **RUNJOB** has a Master Job No of **9000001471472** – which indicates that the process id was **1471472** when the forecast was generated). The process id that will be used to create the Master Job No is displayed on functions **JS425 & JS426**. Note that if more than one schedule forecast is generated using the same session the previous forecasts variables will be overwritten.



3.4 JS405 Maintain - EspAuto Jobs

This function is used to maintain the run parameters for auto scheduled jobs. A job cannot be submitted via the auto scheduler if it has not been defined via this function.

Function Options:

- A** - Add Job
- C** - Change Job
- D** - Delete Job
- E** - View Job
- L** - Links
- T** - Triggered by Job

```

CRONUS01

JSP405          *** Cronus Consulting - DEV ***          08:36:14.3
JSM405          Maintain - EspAuto Jobs                  2023/07/18

Option: C Sched User.: CRONUS__ Name: DBBACKUP Type: SCL__ Links:
Description: End of Day Backup
SCL User...: CRONUS__ Name: DBBACKUP Type: SCL__
Description: Backup Adabas DB 31

Execute Job.....: Y          Abort if SCL does not exist: Y
Use Scanned Date for Parm.: Y      Pass Date to Triggered Jobs: Y
Submit Triggered Jobs.....: Y      Lead Time.....: 04:00
Submit User ID.....: espbatch

Auto Restart Return Code...: 80__ , 90__ Auto Restart Attempts.....: 2_
RC Check - Return Code.....: 4__ : 8__ RC Check - Action.....: C (C/A)
                          12__ : 16__                          A

Last Completion Date/Time...:
Last Completion Code.....: 0
Last Updated by User.....: EY712
Last Update Date/Time.....: 2023-07-18 08:36
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
Quit      Upd

```

Required Fields:

- SCL User - The User library of the SCL to be submitted.
- SCL Name - The Name of the SCL to be submitted.
- SCL Type - The Type of the SCL to be submitted. If the **SCL User**, **SCL Name** & **SCL Type** fields are left blank they will default to the **Sched User**, **Name** & **Type** fields.



Note: If a SCL with the Name and Type specified exists in SCL User Library “**OVERRIDE**” then the SCL in User Library “**OVERRIDE**” will be submitted.

- Execute Job - Valid values are **Yes** and **No**. If **No** is specified the batch job will not be executed, however it will be removed from all jobs in the queue awaiting its completion and if any triggered jobs have been defined, they will be submitted.
- Abort if SCL does not exist - Valid values are **Yes** and **No**.
If this field is set to **Yes** and **Execute Job** has a value of **Yes** and the specified SCL does not exist, the job will abort.
If this field is set to **No** and **Execute Job** has a value of **Yes** and the specified SCL does not exist. The job status will be updated to **Complete** at execution time without attempting to execute the SCL, however it will be removed from all jobs in the queue awaiting its completion and if any triggered jobs have been defined, they will be submitted.
- Use Scanned Date for Parm's - Valid values are **Yes** and **No**. If **Yes** is specified, the submission date will be used for parameter substitution in stead of the current system date.
- Pass Date to Triggered Jobs - Valid values are **Yes** and **No**. The scanned date is passed to all jobs that are triggered from this job.
- Submit Triggered Jobs - Valid values are **Yes** and **No**. If **Yes** is specified all defined triggered jobs will be scheduled on completion of the current Job.
- Lead Time - If a Lead Time is specified it will override the system default set with function **JS493 Maintain - EspAuto Setup**. The Lead Time specified is used to determine whether predecessor(s)/file event(s) are added. If the predecessor/file event has completed within the specified **Lead Time** window (scheduled Date/Time - Lead time) it will not be added. Thus, if Job **B** has a **predecessor** of **A** and job **B** is scheduled to run at **08H00** and has a Lead Time of **6 hours**, Job **A** will not be added as a predecessor if it completed between **02H00** and **08H00**. In addition, lead time checking can be turned on/off by setting the value of **LEADTIMECHK** to **Yes** or **No** using function **JS493 Maintain - EspAuto Setup**.



-
- Submit User ID - If the Submit User ID has been specified, the batch job will be submitted as that User ID. If no User ID is specified, the job will be submitted with the same User ID that EspAuto is running as.
 - Auto Restart Return Code - Defines the return code(s) for which a job should automatically be restarted. If a job completes with a return code that is equal to 1 of the return codes specified, the job is restarted automatically.
 - Auto Restart Attempts - The number of times the system will attempt to restart the job. If no value is entered it will default to 4.
The job is restarted after 30 seconds.
 - RC Check – Return Code - Allows for the specification of 2 return code ranges that are checked when a job completes/aborts, if the job completes/aborts within one of the return code ranges its status will be set in accordance with the action “Abort/Complete” specified. **If no RC Check value is specified for a triggered job the RC Check value(s) defined on the job that triggered the job are used.**

The rest of the fields are for information purposes only and are updated by the system.

The scheduled job can be updated at any stage by pressing **PF5**. If **PF3** is pressed and the scheduled job has been changed after the last PF5 key press a window is displayed prompting the user if changes should be saved.

Option “**L**inks” will display all scheduled links to the job (Scheduled, Predecessors, Predecessors To, Concurrency, Triggered By, Triggers, File Event Predecessors and File Event Triggers).

Option “**T**riggered by Job” only displays jobs that trigger the job.



3.5 JS410 Maintain - EspAuto Jobs per Schedule ID

The function is used to set up the auto scheduled run dates and times for a batch job. The Schedule ID allows a job to be scheduled with multiple date/time specifications. Only jobs defined with this function will automatically be scheduled via the Auto Scanner.

Function Options:

- A** - Add Scheduled Job
- C** - Change Scheduled Job
- D** - Delete Scheduled Job
- E** - View Scheduled Job
- S** - Show Scheduled Dates
- X** - Copy Scheduled Jobs

```

CRONUS01
*** Cronus Consulting - DEV ***
JSP410      Maintain - EspAuto Jobs per Schedule ID
JSM410      2023/07/18 08:47:29.7

Option: C Year: 2023 User: CRONUS_ Name: REQUEST_ Type: SCL_ ID: _1
Copy Year: _ User: _ Name: _ Type: _ ID: _

Description...: User Requests Count: 1
Base Calendar.: WEEKDAYS Monday to Friday
Scheduled Time: 07:00 Roll: N Hold: N Last Date Scanned: Time:
Cycle Interval: 01:15 Stop: 20:00
Day/Week: _ _ _ _ _ (-1,-2 for last or 2'nd last Day/Week)
Weekly...: Sun: _ Mon: X Tue: X Wed: X Thu: X Fri: X Sat: _
Monthly...: Jan: X Feb: X Mar: X Apr: X May: X Jun: X
              Jul: X Aug: X Sep: X Oct: X Nov: X Dec: X

Include.: Holidays: _ Workdays: _ (Holidays & Workdays defined on JS402)

-Include: _ _ _ _ _ (Day)
-Exclude: _ _ _ _ _ (Day)
-Include: _ _ _ _ _ (Julian)
-Exclude: _ _ _ _ _ (Julian)

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
              Quit      Upd      Parm      Comm
  
```

Required Fields:

- Base Calendar - The name of the Base Calendar to be used. A Job will only run on a given date if that day is specified on the base calendar. The



days defined on the base calendar can be overridden by using the **Roll**, **Include** and **Exclude** options on this screen.

- Scheduled Time - Time that the job is scheduled to run.
- Roll - The value of this field determines what action should be taken if a job cannot run on a specified day since the day was not specified on the selected Base Calendar.

Valid values are:

- **B** – Roll Backwards: If the date specified within this function is not defined on the specified base calendar, scheduling will take place on the first date that has been defined on the base calendar prior to the selected date. A job will not be scheduled more than once for a given date due to a “Roll Backwards” action.
- **F** – Roll Forwards: If the date specified within this function is not defined on the specified base calendar, scheduling will take place on the first subsequent base calendar date. A job will not be scheduled more than once for a given date due to a “Roll Forward” action.
- **D** – Drop: The job will not be scheduled if the date is not defined on the specified base calendar
- **N** – No Roll: Base calendar is not evaluated; jobs are scheduled according to the dates specified within this function

- Hold - Hold indicator.

Valid values are:

- **Y** – Job is submitted in hold status. Must be released to start execution.
- **N** – Job is not submitted in hold.
- **R** - Job is submitted in hold status. Must be released to start execution. Hold is removed after next execution.

- Cycle Interval - Cycle interval in hours and minutes. Cycle jobs repeat until the specified stop time.
- Cycle Stop - Cycle stop time. If no cycle stop time is specified, the cycle will stop at 23H59.
- Day/Week - Used to specify a specific day(s) on which the job should run. Entering a value of ‘-1’ specifies the last day of the month. A negative value calculates the run day working backwards from the last day of the month.

Roll Indicator **N** or **D**: Run date is calculated using days



specified on Base Calendar.

Roll Indicator **F** or **B**: Run data is rolled forward/backward to 1'st date on Base Calendar.

- Weekly - Used to specify to Day(s) of the week on which the job should run.
- Monthly - Used to specify the months of the year that jobs are to run.
- Include Holidays - Evaluates Holidays defined on **JS402 Maintain - EspAuto Dates**. Valid values are: **Y** – Include Holidays, **N** – Exclude Holidays, **Blank** – Holidays are not evaluated for inclusion/exclusion.
- Include Workdays - Evaluates Workdays defined on **JS402 Maintain - EspAuto Dates**. Valid values are: **Y** – Include Workdays, **N** – Exclude Workdays, **Blank** – Workdays are not evaluated for inclusion/exclusion. Note that Holidays are evaluated before Workdays, thus a positive/negative result on evaluation of a Holiday will take precedence.
- Include (Day) - Multiple days in **format DD** can be specified. A job will always run on the specified Day, regardless of the Base Calendar, Roll Indicator and run Dates specified. Entering a value of '**-1**' specifies the last day of the month. Negative values calculate the run day working backwards from the last day of the month.
- Exclude(Day) - Multiple days in **format DD** can be specified. A job will not run on the specified Day, regardless of the Base Calendar, Roll Indicator and run Dates specified. Entering a value of '**-1**' specifies the last day of the month. Negative values calculate the run day working backwards from the last day of the month.
- Include (Julian) - Multiple dates in **Julian Day** format can be specified. A job will always run on the specified Julian Day, regardless of the Base Calendar, Roll Indicator and run Dates specified.
- Exclude (Julian) - Multiple dates in **Julian Day** format can be specified. A job will not run on the specified Julian Day, regardless of the Base Calendar, Roll Indicator and run Dates specified.

Dynamic parameters can be defined by pressing **PF6** and are available to all jobs that form part of the schedule. The specified parameters can then be used as dynamic variables within the submitted SCL's by prefixing the variable name with an ampersand "&".



In the example below variable “**RUNTYPE**” has been assigned a value of “**DAILY**”.

Dynamic Parameters	
Year: 2022	User: START
Name: CRONUS	Type: SCL
ID: 1	
Parm Name	Parm Value
1 RUNTYPE	DAILY
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
 Quit Ins PgDn

The rest of the fields are for information purposes only and are updated by the system.

The scheduled job can be updated at any stage by pressing **PF5**. If **PF3** is pressed and the scheduled job has been changed after the last **PF5** key press a window is displayed prompting the user if changes should be saved.

If the **Copy** fields are specified when adding a new scheduled job with option **A**, a new scheduled job will be created by making a copy of the scheduled job specified in the **Copy** fields.

Multiple scheduled jobs can be copied from one year to another by making use of option **X**, the scheduled jobs to be copied can be limited by specifying the User, Name, Type and Id, the wildcard character “*” can be used within the User, Name & Type fields.

```

JSP410          *** Cronus Consulting - DEV ***          08:55:01.8
JSM410          Maintain - EspAuto Jobs per Schedule ID  2023/07/18

Option: X Year: 2023 User: CRONUS_ Name: BACKUP*_ Type: SCL_ ID: 1_
Copy Year: 2024 User: _ Name: _ Type: _ ID: _
  
```



Note that all jobs that match the selection criteria (User, Name, Type & ID) for the year being copied to are deleted before the copy takes place irrespective of whether the job exists for the year being copied from. In the example provided all jobs that start with Scheduled Name "**BACKUP**" will be deleted for 2024, then all jobs if any that start with user "**BACKUP**" for 2023 will be copied to 2024.

The **Show** option will display a calendar highlighting the dates that the job is scheduled to run. Note that run dates are not highlighted for past dates. If past dates are still highlighted this indicates that the job was scheduled to run for the specified date – the most likely cause for this would be that the Auto Scanner did not run.





3.6 JS415 Maintain - EspAuto Job Predecessors

This function is used to maintain predecessors per scheduled job.

Function Options:

- C** - Change Predecessors
- E** - View Predecessors

```

CRONUS01
JSP415          *** Cronus Consulting - DEV ***          12:35:30.5
JSM415          Maintain - EspAuto Job Predecessors      2023/07/18

Option: C User: CRONUS__ Name: FUSER__ Type: SCL__
Description: Daily FUSER Backup

  No  ID  User  Name  Type  L/N/S  U/R  LeadTi  Description
  --  --  ---  ---  ---  ---  --  ---  ---
   1   1  CRONUS  BACKUP  SCL  -      N   00:00  Daily Adabas Backup
   2   -  -      -      -      -      -   00:00
   3   -  -      -      -      -      -   00:00
   4   -  -      -      -      -      -   00:00
   5   -  -      -      -      -      -   00:00
   6   -  -      -      -      -      -   00:00
   7   -  -      -      -      -      -   00:00
   8   -  -      -      -      -      -   00:00
   9   -  -      -      -      -      -   00:00
  10   -  -      -      -      -      -   00:00
  11   -  -      -      -      -      -   00:00
  12   -  -      -      -      -      -   00:00

      **** End of Data ****

Restart at Sch-ID:  User:  Name:  Type:
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
      Quit      Upd      PgUp  PgDn
  
```

If a scheduled job has predecessors defined for it the job will not start execution until the predecessors have completed execution. Different predecessors can be defined per Schedule Id.

(L/N/S):

- **L** - Job will only wait for completion of predecessor if it is currently loaded.
- **N** - This predecessor will only apply to the next run, thereafter the predecessor will automatically be removed.
- **S** - Ignore predecessor for next run, after the next run this field is automatically reset so that the predecessor is added for subsequent runs.

**Unconditional Release (U/R):**

- **Y** - Predecessor is removed from this job whether the job **Completes** or **Aborts**.
- **N** - Predecessor is removed from this job when the job **Completes** successfully.

LeadTi:

If lead time is specified for the predecessor, it will take precedence over the lead time specified for the job on **JS405 Maintain - EspAuto Jobs**.

The predecessors can be updated at any stage by pressing **PF5**. If **PF3** is pressed and the predecessors have been changed after the last PF5 key press a window is displayed prompting the user if changes should be saved.

```

CRONUS01
*** Cronus Consulting - DEV ***
JSP415
JSM415
Maintain - EspAuto Job Predecessors
13:07:47.1
2023/07/18

Option: C User: CRONUS Name: FUSER Type: SCL
Description: Daily FUSER Backup

No  ID  User  Name  Description
1   1  CRONUS  REQUE  User Requests
2
3
4
5
6
7
8
9
10
11
12

Job Schedule has changed
Save Changes: Y (Y/N)

**** End of Data ****
Restart at Sch-ID: User: Name: Type:
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
Quit      Upd      PgUp    PgDn
  
```

Note that jobs will inherit predecessors from scheduled jobs that are bypassed due to conditional trigger logic if "INHERETPRED" is set to "Y" on function "JS493 – Maintain - EspAuto Setup"



Example:

Job B has 2 predecessors:	Jobs B1 & B2
Job C has 1 predecessor:	Job B
Job B is bypassed:	Conditional trigger logic defined on function JS420 Maintain - EspAuto Job Triggers.
Job C inherits Job B's predecessors:	Jobs B1 & B2



3.7 JS416 Maintain - EspAuto Job File Events

This function is used to maintain file events per scheduled job. File events must be defined using function **JS421 Maintain - File Events per Sub System** before they can be added.

Function Options:

- C** - Change File Events
- E** - View File Events

```

CRONUS01

JSP416          *** Cronus Consulting - DEV ***          15:07:34.8
JSM416          Maintain - EspAuto Job File Events       2023/07/19

Option: C User: CRONUS_ Name: DBBACKUP Type: SCL_
Description: End of Day Backup

  No  ID  Sub System  File Name  O/C  N/S
  --  --  -
  1   1  PERM         db031.adabck  O    -
  2   -  -             -             -    -
  3   -  -             -             -    -
  4   -  -             -             -    -
  5   -  -             -             -    -
  6   -  -             -             -    -
  7   -  -             -             -    -
  8   -  -             -             -    -
  9   -  -             -             -    -
 10   -  -             -             -    -
 11   -  -             -             -    -
 12   -  -             -             -    -

      **** End of Data ****

Restart Sch-ID:  Sub Sys:  File Name:
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Quit      Upd      PgUp  PgDn
  
```

If a scheduled job has file events defined for it the job will not start execution until a file open event has occurred for each of the files specified. Different file events can be defined per Schedule Id.

Next/Skip (N/S):

- **N** - This file event will only apply to the next run, there after the file event will automatically be removed.
- **S** - Ignore file event for next run, after the next run this field is automatically reset so that the file event is added for subsequent runs.



The file events can be updated at any stage by pressing **PF5**. If **PF3** is pressed and the file events have been changed after the last PF5 key press a window is displayed prompting the user if changes should be saved.

CRONUS01

JSP416 *** Cronus Consulting - DEV *** 15:08:42.5
JSM416 Maintain - EspAuto Job File Events 2023/07/19

Option: C User: CRONUS__ Name: DBBACKUP Type: SCL____
Description: End of Day Backup

No	ID	Sub System	File	O/C	N/S
1	1	PERM	db03	0	-
2					-
3					-
4					-
5					-
6					-
7					-
8					-
9					-
10					-
11					-
12					-

Job Schedule has changed

Save Changes: ☒ (Y/N)

**** End of Data ****

Restart Sch-ID: _____ Sub Sys: _____ File Name: _____

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---

Quit Upd PgUp PgDn



3.8 JS417 Maintain - EspAuto Job Concurrency

This function is used to maintain job concurrency.

Function Options:

- C** - Change Concurrency
- E** - View Concurrency

```

CRONUS01
*** Cronus Consulting - DEV ***
JSP417
JSM417 Maintain - EspAuto Job Concurrency
15:09:41.7
2023/07/19

Option: C User: CRONUS__ Name: FUSER__ Type: SCL__
Description: Daily FUSER Backup

No  ID  User  Name  Type  Description
1   1  CRONUS  DBBACKUP  SCL__  End of Day Backup
2
3
4
5
6
7
8
9
10
11
12

**** End of Data ****

Restart at Sch-ID:  User:  Name:  Type:
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
Quit      Upd      PgUp  PgDn
  
```

If a scheduled job has concurrent job(s) defined, the job will not start execution while the specified concurrent jobs have a status of submitted, executing or are in an error status. Different concurrent jobs can be defined per Schedule Id.

The concurrent jobs can be updated at any stage by pressing **PF5**. If **PF3** is pressed and the concurrent jobs have been changed after the last PF5 key press a window is displayed prompting the user if changes should be saved.



3.9 JS420 Maintain - EspAuto Job Triggers

This function is used to maintain triggers per scheduled job.

Function Options:

- C** - Change Triggers
- E** - View Triggers

CRONUS01

JSP420 *** Cronus Consulting - DEV *** 15:13:18.7
JSM420 Maintain - EspAuto Job Triggers 2023/07/19

Option: C User: CRONUS Name: DAILY Type: SCL ID: 1 PF1 - Select ID
Description: Daily Batch Run

No	User	Name	Type	Cond	Time	Susp	Delay	Sch-Time	Req	Cond	Rel	H
1	CRONUS	JOB1	SCL				10					
2	CRONUS	JOB2	SCL					2200				X
3	CRONUS	JOB3	SCL						Y			
4	CRONUS	JOB4	SCL			Y						
5	CRONUS	JOB5	SCL									Y
6												
7												
8												
9												
10												
11												
12												

**** End of Data ****

Restart at User: [redacted] Name: Type:

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---

Quit Upd Cond PgUp PgDn

Once the scheduled job has completed, all triggered jobs will be submitted after evaluation of any trigger conditions. Different triggered jobs can be defined per Schedule Id.

Optional Fields:

- **Cond** - The **Cond** and **Time** fields if entered will ensure that the job is not executed if the current system time does not comply with the condition / time specified. The time constraint is only evaluated once the job has no restrictions (Predecessors, File Events, etc.) prohibiting it from running. If the time constraint evaluates to false the jobs status is set to completed and it is removed as predecessor from all jobs awaiting its



completion The **Cond** field may contain: **LT** – Less than, **LE** – Less than or Equal or **NE** - Not Equal.

- **Time** - Time format is HHMM.
- **Suspend** - If suspend contains a value of **Yes**, then the job will not be triggered. Jobs triggered by the suspended job will not be triggered.
- **Delay** - Time delay before triggered job can start execution. This is computed by adding the number of minutes specified to the current system data/time. Maximum value allowed is 720 minutes (6 hours).
- **Sch-Time** - Scheduled time for triggered job – format is HHMM.
- **Req** - If the request field contains a value of **Yes**, the job will be triggered in **REQUEST** mode. If all prerequisites for a job triggered in **REQUEST** mode have been satisfied and the job is still in **REQUEST** mode, it will not be executed, however it will be removed from all jobs in the queue awaiting its completion and if any triggered jobs have been defined, they will be submitted.
- **Cond Rel** - If the conditional release field contains a value of **Yes**, the job will automatically be removed from the job queue if it still has outstanding requirements and all jobs with conditional release set to **No** have completed.
- **H** - Hold flag. Valid values are:
Y – Trigger job in hold status
N – Job not triggered in hold status
R – Trigger in hold status and remove hold status for subsequent runs.

The triggered jobs can be updated at any stage by pressing **PF5**. If **PF3** is pressed and the triggered jobs have been changed after the last PF5 key press a window is displayed prompting the user if changes should be saved.

Trigger Conditions:

Trigger conditions allow for additional control over when jobs should be triggered and at what time. The trigger condition screen also allows for the setup of user defined variables that are available throughout the scheduled run. User defined variable must be preceded by an "&". The trigger conditions screen can be accessed by pressing **PF6** and entering the Scheduled User, Name and Type fields in the popup window.

```
CRONUS01
```

```
Define Trigger Conditions
```

Scheduled Id: 1 User: CRONUS Name: JOB2 Type: SCL

Test	Keyword	Oper	Start Value	End Value	Day Diff	Action	Time	Delay
SET	&RUNDATE	EQ	TODAY					
IF	TODAY	EQ	HOLIDAY			NORUN		
IF	TODAY	EQ	1	SAT	1	SCHEDTIME	2000	
IF	TODAY	EQ	JAN	FEB				
AND	TOMORROW	EQ	SUN			DROPREQ	2100	
IF	TODAY	EQ	LAST	WORKDAY		DELAY		30

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---

Quit Ins Del

Valid Input values:

- **Test** - The **Test** column must contain one of the following values: **IF**, **ELSE**, **AND**, **OR**, **RES** and **ERES**, **SET** and **ESET**. **SET** and **ESET** are used to assign values to user defined variables. These variables are created at execution time.
- **Keyword** - Valid Keywords are: **TODAY**, **TOMORROW**, **YESTERDAY** and **SCANDATE**. **SCANDATE** contains the date the job entered the scheduled queue. Each of the other dates is determined according to the current system date. All dates are in format **YYYYMMDD**. In addition, user defined variables may also be specified. A user defined variable must be prefixed with a **'&'**.
- **Oper** - Valid operators are **EQ**, **NE**, **LE**, **LT**, **GT** and **GE**.
- **Start Value** -
 - SCANDATE:** Date that job entered the scheduled queue
 - WEEKEND:** Any Saturday or Sunday
 - WORKDAY:** Work days are defined on **JS402 Maintain - EspAuto Dates**
 - WEEKDAY:** Monday through Friday
 - MONTHSTART:** First day of month
 - MONTHEND:** Last day of Month
 - HOLIDAY:** Holidays defined on **JS402 Maintain - EspAuto**



		Dates
	Day of Week:	Day name in format Alpha 3 or 9. Ex. SUN or SUNDAY
	Month Name:	Month name in format Alpha 3 or 9. Ex. APR or APRIL
	Date:	Format YYYYMMDD
	Year:	Format YYYY
	Day:	Format DD
	FIRST:	May be used in conjunction with Day of Week , WORKDAY , WEEKDAY and WEEKWORKDAY in end value
	LAST:	May be used in conjunction with Day of Week , WORKDAY , WEEKDAY and WEEKWORKDAY in end value
	nn:	Where nn is a numeric value between 1 and 31. May be used in conjunction with Day , Day of Week , WORKDAY , WEEKDAY and WEEKWORKDAY in end value
• End Value	- WEEKWORKDAY:	Workdays are defined on JS402 Maintain - EspAuto Dates . Start value must be FIRST , LAST or n (where n corresponds to the workdays days defined on JS402)
	Day of Week:	Day name in format Alpha 3 or 9. Ex. SUN or SUNDAY . Start value must also be in Day of Week format
	Month Name:	Month name in format Alpha 3 or 9. Ex. APR or APRIL . Start value must also be in Month Name format
	Date:	Format YYYYMMDD
	Year:	Format YYYY . Start value must also be in YYYY format
	Day:	Format DD . Start value must also be in Day format
	nn:	Where nn is a numeric value between 1 and 31. Start value format must also be nn .
• Day Diff	-	Day differential is the number of days to add to the current system date. The day differential may only be specified if the action is: SCHEDTIME , LATESUB and DROPREQ .




• Action	-	NORUN:	Do not submit triggered job if condition evaluates to TRUE
		SCHEDTIME:	Time the triggered job will be scheduled to run. The Scheduled Time must be specified in the Time column
		DELAY:	The delay in minutes (max. 720 minutes) will be added to the current system date/time to determine when the triggered job will be scheduled to run. The delay value must be specified in the Time column
		LATESUB:	Send notification if job has not started execution at the time specified. The late submission time must be specified in the Time column. If a value is entered in the Delay column the number of minutes (max. 720 minutes) entered will be added to the current system date/time to set the late submission date/time
		DROPREQ:	Drop requirements if job has not started execution at the time specified. The drop requirements time must be specified in the Time column. The “drop requirements” only applies to predecessors and file events .
		SUSPEND:	Scheduled Job will not be executed, but predecessor and trigger actions will be executed
		REQUEST	Submit job in REQUEST mode. If all prerequisites for a job triggered in REQUEST mode have been satisfied and the job is still in REQUEST mode, it will not be executed, however it will be removed from all jobs in the queue awaiting its completion and if any triggered jobs have been defined, they will be submitted.
		HOLD:	Scheduled job will be submitted on hold
		IGNORE:	No action
• Time	-	Must be in HHMM format for actions: SCHEDTIME , LATESUB and DROPREQ .	
• Delay	-	Number of minutes to be added to current system date/time for actions: LATESUB and DELAY . Maximum allowable value is 720 .	



Parenthesis may be used to group AND/OR conditional logic. The left parenthesis may only be specified in the **Keyword** column, and the right parenthesis can be specified in the start and end value columns.

Function keys **PF5** and **PF6** may be used to **Insert/Delete** lines.

If the trigger conditions contain any syntax errors the following screen will be displayed providing the option to **resume editing** or to **abort changes**.

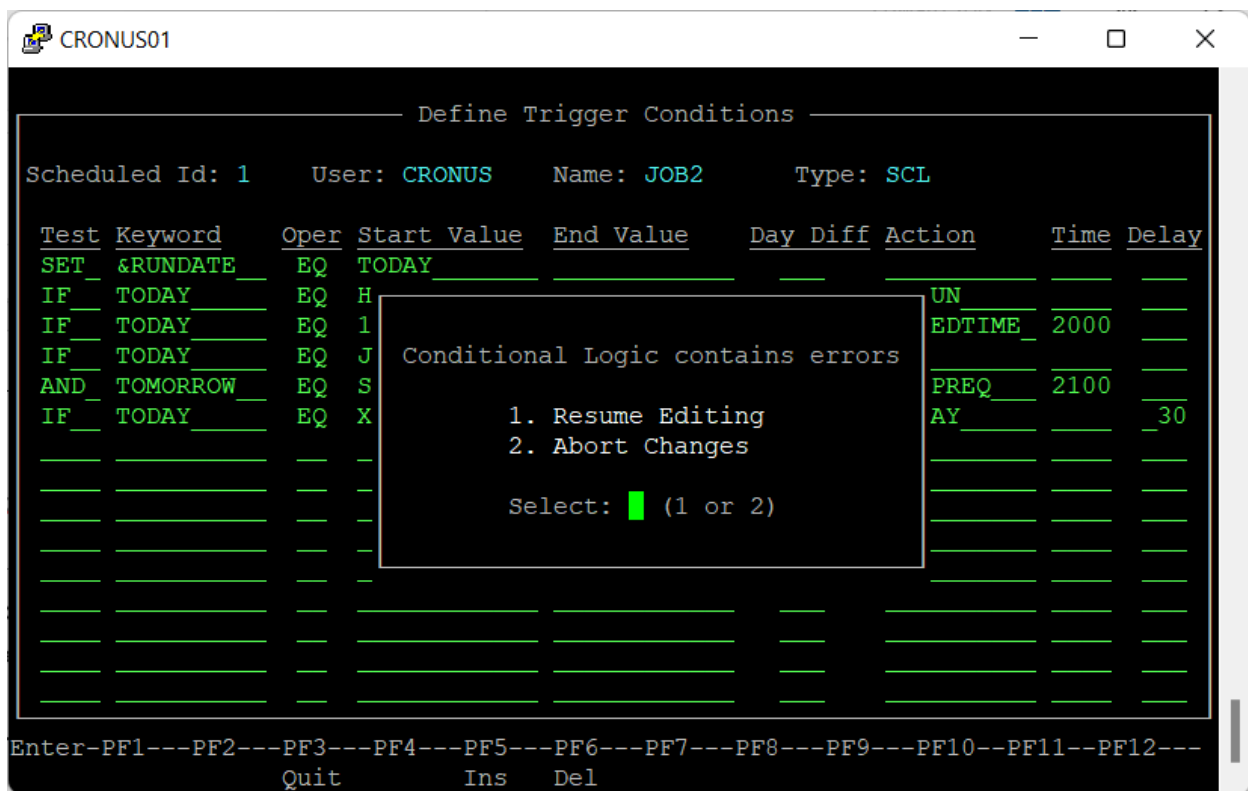

Variables defined using the SET and ESET are created at execution time.

Resources are defined using the RES and ERES command. The ERES test must be used in place of the ELSE when a resource needs to be defined within the ELSE section of an IF/ELSE statement.



3.10 JS421 Maintain - File Events per Sub System

This function is used to maintain file events per sub system. File events must be defined using this function before they can be specified on functions: **JS416 Maintain - EspAuto Job File Events** and **JS422 Maintain - File Event Triggers**.

Function Options:

- C** - Change File Events
- E** - View File Events
- S** - Start EspFmon
- T** - Terminate EspFmon

```

CRONUS01

JSP421          *** Cronus Consulting - DEV ***          15:15:40.7
JSM421          Maintain - File Events per Sub System    2023/07/19

Option: C Sub System: PERM_____ Sleep Time...: 10      Status: Running
                               Wait Time...: 3
                               No of Retries: 3

   Code File Name                                     Sub System
1 Src.: S DAILY.START                                TEMP
  Dest: O DAILY.START
2 Src.: S DB031.COMP                                  TEMP
  Dest: O DB031.COMP
3 Src.: -
  Dest: -
4 Src.: -
  Dest: -
5 Src.: -
  Dest: -
6 Src.: -
  Dest: -

          **** End of Data ****

Restart at File Name: 
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
          Exit      Upd      PgUp  PgDn  Link
  
```

Parameters:

- Sleep Time:** Number of seconds the file monitor sleeps after processing configuration file.
- Wait Time:** Number of seconds the file monitor sleeps during consecutive file size checks. If you occur instances where file events are processed while the file is still being transferred, the wait time should be increased.
- No of Retries:** Number of times to test that the file size is static.



Action Codes:**Source Files**

- **(S)**ingle file: A single file is expected. An asterisk '*' may be specified as the last character. If the file monitor detects more than one file with the same prefix it enters an error state.
- **(M)**ultiple files: One or more files expected. An asterisk '*' may be specified as the last character.

Destination Files

- **(N)**ew: Disposition of destination file is (N)ew. If the destination file exists, the file monitor enters an error state.
- **(M)**od Disposition of destination file is (M)od. Source files are appended to the destination file.
- **(O)**ld If the destination file exists it is overwritten with the source file. If multiple source files exist, the file monitor enters an error state.

File events can only be specified for previously defined sub systems that are setup using function **JS002 Maintain - EspBatch Codes** with Code Type: **SUBSYSTEM**.

The file events can be updated at any stage by pressing **PF5**. If **PF3** is pressed and the file events have been changed after the last PF5 key press a window is displayed prompting the user if changes should be saved. If the user selects to save the changes a new configuration file is generated to \$CRONUS/espmon/<Sub System>_<Environment Name>.CFG - e.g. PERM_DEV.CFG. The file monitor must be restarted before the new configuration file takes effect.

Dynamic variables defined using function **JS002 Maintain - EspBatch Codes** with **Code Type: SCLVAR** may be used as part of the work file name. A dynamic variable must be prefixed by a '&'. All dynamic variables are replaced on creation of the configuration file. Note that if the value of any dynamic variable used within a work file name is changed using function **JS002 Maintain - EspBatch Codes** then the effected configuration files must be manually updated using this function.

One or more files can be linked to a file event by positioning the cursor on a file event and pressing <PF9>. When the file event takes place, all linked files are also processed.



3.11 JS422 Maintain - File Event Triggers

This function is used to maintain file event triggers. The file event must be defined using function **JS421 Maintain - File Events per Sub System** before any trigger jobs can be specified.

Function Options:

- C** - Change Triggers
- E** - View Triggers

CRONUS01

JSP422 *** Cronus Consulting - DEV *** 15:33:12.6
JSM422 Maintain - File Event Triggers 2023/07/19

Option: C Sub System: PERM
File Name.: DB031.COMP

No	Sch-ID	User	Name	Type	Date	Time	O/C	Add	PRE	Submit	TRIG
1	1	CRONUS	ESPVfy	SCL				Y		Y	
2											
3											
4											
5											
6											
7											
8											
9											
10											
11											
12											

**** End of Data ****

Restart at Sch-ID: User: Name: Type:

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---

Quit Upd PgUp PgDn

Required Fields:

- **Add PRE** - Valid values are **Yes** and **No** – If “Y” is specified then the predecessors defined for this job will be added.
- **Submit TRIG** - Valid values are **Yes** and **No** – If “Y” is specified then the triggered jobs defined for this job will be submitted on completion.

The file events can be updated at any stage by pressing **PF5**. If **PF3** is pressed and the file events have been changed after the last PF5 key press a window is displayed prompting the user if changes should be saved.



3.12 JS425 View - Forecast Scheduled Jobs

The function displays a forecast of all jobs that have been defined using function **JS410 Maintain - EspAuto Jobs per Schedule ID**.

Function Options:

- D** - View Drill Down
- P** - View Predecessors
- T** - View Triggered Jobs

CRONUS01												
*** Cronus Consulting - DEV ***												
16:14:36.3												
JSP425	View - Forecast Scheduled Jobs											2023/07/19
JSM42502												
Sch Date	Time	User	Name	Type	ID	Mode	Lead Time	Exe	Trig	Steps	H	
20230718	1200	CRONUS	DAILY	SCL	1	SCAN	04:00	N	Y		N	
20230719	1200	CRONUS	DAILY	SCL	1	SCAN	04:00	N	Y		N	
20230720	1200	CRONUS	DAILY	SCL	1	SCAN	04:00	N	Y		N	
20230721	1200	CRONUS	DAILY	SCL	1	SCAN	04:00	N	Y		N	
20230722	0800	CRONUS	WEEKLY	SCL	1	SCAN	04:00	N			N	
20230723	0800	CRONUS	WEEKLY	SCL	1	SCAN	04:00	N			N	
20230724	1200	CRONUS	DAILY	SCL	1	SCAN	04:00	N	Y		N	
20230725	1200	CRONUS	DAILY	SCL	1	SCAN	04:00	N	Y		N	
20230726	1200	CRONUS	DAILY	SCL	1	SCAN	04:00	N	Y		N	
20230727	1200	CRONUS	DAILY	SCL	1	SCAN	04:00	N	Y		N	
20230728	1200	CRONUS	DAILY	SCL	1	SCAN	04:00	N	Y		N	
20230729	0800	CRONUS	WEEKLY	SCL	1	SCAN	04:00	N			N	
20230730	0800	CRONUS	WEEKLY	SCL	1	SCAN	04:00	N			N	
20230731	1200	CRONUS	DAILY	SCL	1	SCAN	04:00	N	Y		N	
** Start of Data **												
Process Id: 2414570												
Restart Date:		Time:		User:		Name:						
Filter Date:		Mode:		User:	CRONUS	Name:		ID:		H:		
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---												
Quit PgDn												

A forecast is displayed of all scheduled jobs. The display can be customized by entering values in the filter fields.

The Predecessor and Triggered Jobs options only display the predecessors / file events and triggered jobs that are directly linked to the scheduled job / id - where as the drill down option will display all the predecessors / file events and triggered jobs in the current chain (up to a maximum of 4000 entries).



```

CRONUS01
JSP425          *** Cronus Consulting - DEV ***          16:21:45.8
JSM42502        View          - Forecast Scheduled Jobs    2023/07/19

Year: 2023 Job Name: CRONUS.DAILY.SCL          ID: 001          Lvl: 50
Mode: SCAN Date....: 20230718          Show Predecessors / File Events: Y

  Cnt  FPT  Lvl  Sch User  Sch Name  Sch Type  ID  Trig User  Trig Name  Trig Type
  ---  ---  ---  ---  ---  ---  ---  ---  ---  ---
    1   F    1  /data/natd/wf/PERM/DB031.COMP
    2   T    1  CRONUS   JOB1     SCL      001  CRONUS    DAILY     SCL
    3   P    1  CRONUS   JOB1     SCL      001
    4   T    1  CRONUS   JOB2     SCL      001  CRONUS    DAILY     SCL
    5   P    1  CRONUS   JOB2     SCL      001
    6   T    1  CRONUS   JOB3     SCL      001  CRONUS    DAILY     SCL
    7   P    1  CRONUS   JOB3     SCL      001
    8   T    1  CRONUS   JOB4     SCL      001  CRONUS    DAILY     SCL
    9   T    2  CRONUS   JOB5     SCL      001  CRONUS    JOB4      SCL

          *** End of Data ***          Total.: 9
Restart at User: _____ Name: _____ Type: _____ Errors:

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
          Quit  Err                      PgDn

```

When using the drill down option, all trigger conditions specified on **JS420** will be evaluated, thus only predecessors and triggered jobs that are scheduled to run on the date specified will be displayed.

The level field at the top right of the screen allows the user to specify the amount of detail to be displayed, by specifying a level of **1**, only predecessors, file events and triggered jobs linked to the top-level job will be displayed. The Show Predecessors / File Events field can be set to **Yes** or **No**, if it contains a value of **No**, then the predecessors / file events will not be displayed.

The forecast function attempts to display jobs in the sequence that they will execute. If correct sequencing cannot be determined due to anticipated errors (normally as a result of jobs that have predecessors that do not form part of the defined schedule). These errors can be viewed by pressing PF4 – the number of errors is displayed at the bottom right of the screen.



3.13 JS426 Extract - Forecast Scheduled Jobs (CSV Format)

This function is used to extract a scheduled job including all its file events, predecessors and triggered jobs into CSV format. Only jobs that have been defined using function **JS410 Maintain - EspAuto Jobs per Schedule ID** can be extracted.

```

CRONUS01
JSP426          *** Cronus Consulting - DEV ***          16:27:01.0
JSM426      Extract  - Forecast Scheduled Jobs (CSV Format)  2023/07/19

Process ID.....: 2414570
Scheduled Date.....: 20230719
Scheduled User.....: CRONUS__
Scheduled Name.....: DAILY__
Scheduled Type.....: SCL__
Scheduled ID.....: 1__
Include Predecessors/File Events: Y__

Extract to file in CSV format

Sub System: TEMP__
File Name.: CRONUS.DAILY.SCL.1.CSV__

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
Quit
  
```

All trigger conditions specified on function **JS420** will be evaluated, thus only predecessors and triggered jobs that are scheduled to run on the date specified will be displayed.

The Include Predecessors/File Events field can be set to **Yes** or **No**, if it contains a value of No, then the predecessors / file events will not be extracted.



3.14 JS430 Submit - EspAuto Job (Demand)

The function is used to demand previously defined auto scheduled jobs.

Function Options:

S - Submit Job

```

CRONUS01
JSP430      *** Cronus Consulting - DEV ***      16:30:05.7
JSM430      Submit - EspAuto Job (Demand)      2023/07/19

  User      Name      Type      Description
  ---      -
  CRONUS    BACKUP    SCL      Daily Adabas Backup
  S CRONUS    DAILY    SCL      Daily Batch Run
  CRONUS    DBBACKUP SCL      End of Day Backup
  CRONUS    ESPVIFY SCL      Verify EspBatch Utils
  CRONUS    FUSER    SCL      Daily FUSER Backup
  CRONUS    JOB1     SCL      Job 1
  CRONUS    JOB2     SCL      Job 2
  CRONUS    JOB3     SCL      Job 3
  CRONUS    JOB4     SCL      Job 4
  CRONUS    JOB5     SCL      Job 5
  CRONUS    REQUEST SCL      User Requests
  CRONUS    WEEKLY   SCL      Weekly
  TDI       AFN1001D SCL
  TDI       AFN1002D SCL

      ** Start of Data **
Restart at User: _____ Name: _____ Type: _____

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
      Quit                                PgDn

```

After selecting a job for submission, the following window will be displayed requiring submission options.

Submission Options:

- Schedule ID - Schedule ID to be used for submission.
- Scheduled Date - Scheduled Date to be used for submission.
- Scheduled Time - Scheduled Time to be used for submission.
- Add Predecessors - Indicates whether predecessors and file events must be added.
- Submit Triggered Jobs - Indicates whether triggered jobs must be submitted.
- Submit on HOLD - Yes or No
- Trigger on HOLD - Yes or No – Defines whether triggered jobs are submitted in hold.



- Submit on HOLD (SCL) - If specified the hold indicator defined within the SCL will be overwritten.
- Confirm - Yes to confirm submission.

```

CRONUS01

JSP430          Demand Job          6:30:05.7
JSM430  Scheduled - User: CRONUS   Name: DAILY   Type: SCL   023/07/19
        SCL      - User: CRONUS   Name: DAILY   Type: SCL
        Desc: Daily Batch Run

  User
  CRONU
S CRONU  Run Environment.....: 31          Scheduled ID...: 1
  CRONU  Scheduled Date.....: 20230719      Scheduled Time: 16:30
  CRONU
  CRONU  Predecessors, File Events and Job Concurrency defined on
  CRONU  JS415, JS416 & JS417 with a Sched-ID 999 are always Added.
  CRONU
  CRONU  Add Predecessors.....: Y (Y/N)
  CRONU  Submit Triggered Jobs: Y (Y/N)
  CRONU  Submit on HOLD.....: Y (Y/N)
  CRONU  Trigger on HOLD.....: Y (Y/N)
  CRONU  Submit on HOLD (SCL)..: (Y/N) Override SCL Hold Indicator
  TDI    Confirm.....: Y (Y/N)
  TDI

      <PF5> - Predecessors  <PF6> - File Events

Restart

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
          Quit          Pred  File

```

Predecessors can be added by pressing **PF5**. Previously defined predecessors with a schedule id of 999 are always added.

File events can be added by pressing **PF6**. Previously defined file events with a schedule id of 999 are always added.

Concurrency defined with a schedule id of 999 will be added.

Note: If a SCL with the Name and Type specified on “**JS405 - Maintain - EspAuto Jobs**” exists in SCL User Library “**OVERRIDE**” then the SCL in User Library “**OVERRIDE**” will be submitted.



3.15 JS434 View - EspAuto Job Links

The function is used to list all scheduled job links (Scheduled, Predecessors, Triggers).

Function Options:

L - View EspAuto Job Links

```

CRONUS01
JSP434          *** Cronus Consulting - DEV ***          17:49:30.7
JSM434          View      - EspAuto Job Links           2023/07/14

  User      Name      Type      Links  Description
  L TDI      AFU9ALLD  SCL        4
  TDI      CLIPRPTO  SCL        2
  TDI      D6308235  SCL        2
  TDI      D6308236  SCL        2
  TDI      D630823D  SCL        2
  TDI      DAILYBK   SCL        3
  TDI      DRACT1D   SCL        2
  TDI      DRI6501D  SCL        2
  TDI      DRN2001D  SCL        2
  TDI      DRN2002D  SCL        2
  TDI      DRN2501D  SCL        3
  TDI      DRN9321D  SCL        2
  TDI      DRN9761D  SCL        2
  TDI      DRNRTM1D  SCL        1

          ** Start of Data **
Restart at User:      Name:      Type:
Filter on User.:      Name:      Type:
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
          Quit                      PgDn
  
```

After a job is selected a window is displayed that shows all links. In the example below, job **TDI.AFU9ALLD.SCL** is scheduled to run at **06H00** with Schedule ID **1** and at **14H00** with Schedule ID **7**. It also triggers job **TDI.AFU9201D.SCL** with both Schedule ID's **1** and **7**.

```

Scheduled Jobs Links
Scheduled Year: 2023 User: TDI      Name: AFU9ALLD Type: SCL

No  Description      ID  User      Name      Type
 1 Scheduled - Time: 0600      1
 2 Scheduled - Time: 1400      7
 3 Triggers           1 TDI      AFU9201D SCL
 4 Triggers           7 TDI      AFU9201D SCL
  
```




```

CRONUS01
JSP435          *** Cronus Consulting - DEV ***          21:30:40.0
Job History
Job No.: 20      SCH User: CRONUS   Name: ARCHIVE   Type: SCL   ID: 1
M Job No: 20      SCL User: CRONUS   Name: ARCHIVE   Type: SCL
Batch No: 28936
  Date    Time  Program  Description
20230719 20:41 JSN43001 Demanded by User ID: EY712
20230719 20:41 JSN430   Default Env: 31 Run Env: 31
20230719 20:41 JSP498   Submit as User ID: ESPBATCH
20230719 20:41 JSP498   Submitted - Batch No: 28936
20230719 20:41 JZN010   Executing - Batch No: 28936
20230719 20:59 JTERMA   Aborted - Batch No: 28936
20230719 20:59 JTERMN   Failure Notification:
20230719 20:59 JTERMN   - 2023-07-19 @ 20H59
20230719 20:59 JTERMN   - info@cronus.co.za

*** End of Data ***
Restart at Date:  Time:

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11--PF12---
Quit                                           PgDn

```

Option **I** displays the EspBatch job. Refer to the EspBatch manual for more information relating to options that can be performed on EspBatch Job Steps.

Option **P** displays the EspAuto job submission parameters.



3.17 JS436 View - EspAuto Job History by Start Date/Time

This function displays the history of auto scheduled jobs. Jobs are displayed in Start Date and Start Time sequence.

Function Options:

- I** - View EspBatch Submission Info
- L** - View EspAuto Job History Log
- P** - View Scheduled Job Submission Info

```

CRONUS01

JSP436          *** Cronus Consulting - DEV ***          11:49:08.8
JSM436      View      - EspAuto Job History by Start Date/Time  2022/09/19

  Str Date Time Sch Date Time Job No User   Name   Type   ID Mode Stat
  _ 20220919 1146 20220919 1146    60 CRONUS  ARCHIVE SCL    1 DMND CPL

*** End of Data ***                               Mast Job: _____
Restart at Start Date: [ ] Time: _____
Filter on Status: _ User: _____ Name: ARCHIVE Type: _____ ID: _____
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
                               Quit                               PgDn
  
```

After a job has been selected using option 'L' an audit trail of the job is displayed that consists of:

- The method that was used to auto schedule the Job including the User Id.
- Any predecessors that were added / removed (manually or by the system).
- Any file events that were added / removed (manually or by the system).
- Job concurrency.
- Any modifications to the submit Date / Time including the User Id.
- Start Date and Time
- Completion Date and Time
- If the job aborted, was restarted, etc.



- Job Notification

```

CRONUS01
JSP436          *** Cronus Consulting - DEV ***          11:49:08.8
                Job History
Job No.: 60      SCH User: CRONUS   Name: ARCHIVE   Type: SCL   ID: 1
M Job No: 60     SCL User: CRONUS   Name: ARCHIVE   Type: SCL
Batch No: 378
  Date   Time  Program  Description
20220919 11:46 JSN43001 Demanded by User ID: EY712
20220919 11:46 JSN430   Default Env: 31 Run Env: 31
20220919 11:46 JSP498   Submit as User ID: ESPBATCH
20220919 11:46 JSP498   Submitted - Batch No: 378
20220919 11:46 JZN010   Executing - Batch No: 378
20220919 11:47 JTERMA   Completed - Batch No: 378
20220919 11:47 JTERMN   Completion Notification:
20220919 11:47 JTERMN   - 2022-09-19 @ 11H47
20220919 11:47 JTERMN   - info@cronus.co.za

                *** End of Data ***
Restart at Date:  Time:

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
                Quit                                PgDn

```

Options **I** displays the EspBatch job. Refer to the EspBatch manual for more information relating to options that can be performed on EspBatch Job Steps.

Option **P** displays the EspAuto job submission parameters.



3.18 JS437 View - EspAuto Job Statistics

This function displays history of execution times per scheduled job.

```

CRONUS01
JSP437          *** Cronus Consulting - DEV ***          11:50:05.3
JSM437          View      - EspAuto Job Statistics        2022/09/19

SCL User: CRONUS__ SCL Name: ARCHIVE_ SCL Type: SCL_____

Description: Spool Archive and Cleanup

  Job No Batch No Submit Time and Date  Status  CC Total Time  Exec Time
    60      378 11.46.05 MON 19SEP2022 COMPLETED  0 00:01:02.6 00:00:58.3

*** End of Data ***
Restart at Date:  (YYYYMMDD) Time:  (HHMM)

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
              Quit                               PgDn

```

The display consists of the following information:

- Job No - Internal Job number generated in EspAuto
- Batch No - Internal Batch number generated in EspBatch
- Submit Time and Date - Submission Date/Time
- Status - Status of the job
- CC - Completion Code
- Total Time - Total elapsed from start to completion of job
- Exec Time - Total of execution time off all job steps



3.19 JS438 View - File Event Log

This function displays a log of all file events that have taken place. The log can be viewed in sub system/file name/date sequence or date/sub system/file name sequence. PF10 is used to toggle between date and file sequence.

```

CRONUS01
JSP438          *** Cronus Consulting - DEV ***          11:56:10.0
JSM438          Maintain - File Event Log                2022/09/19

  Sub System  File Name          S Date      Time
  ---
  PERM        DAILY.START        P 20220919  1100
  PERM        DAILY.START        P 20220916  1100
  PERM        DAILY.START        P 20220915  1100
  PERM        DAILY.START        P 20220914  1100
  PERM        DAILY.START        P 20220913  1100
  PERM        DAILY.START        P 20220912  1100

*** End of Data ***  Status Filter: _
Restart at Sub System:  File Name:
Date.....:           Time.....:
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
Quit                               PgDn                               Date

```

Display Information:

- Sub System - Sub System of source file as defined on **JS421 Maintain - File Events per Sub System**.
- File Name - File Name of source file as defined on **JS421 Maintain - File Events per Sub System**.
- (S)tatus - Status of file event.
 - I - Processing file.
 - P - Processing completed.
 - E - An error occurred while processing the file. When an error occurs file(s) are moved to the FMONERR sub system. When an error occurs, the file monitor goes into an error state and must be stopped and restarted before processing continues. Errors are caused by one of the



following:

1. File is specified as (S)ingle and file monitor detects multiple files. File name suffixed with an asterisk.
2. Source file sub system does not exist.
3. Destination sub system does not exist.
4. Disposition for destination file is specified as (N)ew, and destination file already exists.
5. Multiple source files exist, and destination disposition is not specified as (M)od.
6. File/directory permissions do not allow for the source file to be copied to its destination.

C - Completed.

R - File restored to source directory.

- Date Date that file event occurred.
- Time Time that file event occurred.



3.20 JS439 Delete - File Event History

This function is used to delete File Event History. A report is generated that contains a list of all File Event history that was deleted.

A screenshot of a terminal window titled "CRONUS01". The screen displays a menu for deleting file event history. At the top, it shows the user "JSP439" and "JSM439", the title "*** Cronus Consulting - DEV ***", and the date and time "11:57:47.8" and "2022/09/19". The main menu options are "Sub System.....", "WF Name.....", "File Event Date: (YYYYMMDD)", "File Event Time: (HHII)", and "Retention Days:.". At the bottom, there is a prompt "Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---" and a "Quit" option.

```
CRONUS01
JSP439      *** Cronus Consulting - DEV ***      11:57:47.8
JSM439      Delete    - File Event History      2022/09/19

Sub System.....: 
WF Name.....: 

File Event Date: (YYYYMMDD)
File Event Time: (HHII)
Retention Days.: 

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
Quit
```

The parameters determine which File Event history is deleted.

Either the File Event Date or Retention Days must be specified, the rest of the parameters are optional.

If the File Event Date/Time is specified all File Event History until the specified File Event Date/Time is deleted.



3.21 JS440 Maintain - EspAuto Job Queue

This function displays the auto scheduled job queue. On function selection a popup window is displayed providing the user with a choice of 4 sort orders. The selected sort order determines the sequence in which scheduled jobs are displayed.

Function Options:

- C** - Complete Scheduled Job (Status: **Scanned** - Predecessors and Triggers are Processed)
- D** - Delete Scheduled Job (Status: **Scanned** and **Error** - Predecessors and Triggers not Processed)
- F** - Force Complete Scheduled Job (Status: **Scanned** and **Error** – Option to process Predecessors and Triggers)
- H** - Update HOLD status
- I** - View EspBatch Job Steps
- L** - View EspAuto Job History Log
- M** - Change Mode (Request/Requestable)
- P** - View Scheduled Job Submission Info
- R** - View/Update Requirements
- S** - View Successors
- T** - View Triggered Jobs
- V** - View Comments
- X** - Update Job Execution



```

CRONUS01
JSP44001      *** Cronus Consulting - DEV ***      12:05:25.1
JSM440      Maintain Job Queue by Status, User, Name, Type      2022/09/19
EspAuto Status: Running

  User      Name      Step No  ID  Sch Date  Time  M  Job No  Sta  Req  Ex  Run  ID  H
  CRONUS    JOB1      1      1  20220919  1215  T   63  SCN   2  N   Y   Y
  CRONUS    JOB2      1      1  20220919  2200  T   64  SCN   2  N   Y   Y
  CRONUS    JOB3      1      1  20220919  1205  T   65  SCN   1  N   Y   Y
  CRONUS    JOB4      1      1  20220919  2300  T   66  SCN   4  N   Y   Y

*** End of Data ***
Restart at Status: [ ] User:      Name:      Type:      ID:
Filter on Status.: User:      Name:      Type:      ID:
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
Quit      Mast      PgDn      Exec      Error
  
```

- PF6** - Toggle field that are displayed.
- PF10** - Toggle display between all jobs and jobs that are currently executing.
- PF11** - Toggle display between all jobs and jobs that are currently aborted.

Job **JOB2** is currently in **REQUEST** mode, this is indicated by a **R** next to the Job Name.

Display Information:

- User - Scheduled User Library.
- Name - Scheduled Job Name.
- Type - Scheduled Job Type.
- Step No - Current step and total number of steps within the SCL being executed.
- ID - Schedule ID.
- Sch Date - Scheduled Date.
- Time - Scheduled Time.
- M - The method used to submit the Job (**D** – Demand, **T** – Trigger, **S** – Scan, **C** – Cycle & **F** – File Trigger).
- Job No - EspAuto job number.
- Sta - Job's Status (**SCN** – Scanned, **SUB** – Submitted, **EXE** – Executing, & **ERR** – Aborted).



-
- Req - The number of requirements preventing the job to start running.
 - Ex - Indicates whether the job is set to execute. If the value is set to **No**, the job will not execute, however all triggered jobs will be submitted, and it will be removed from all jobs awaiting its completion.
 - Run Id - The EspBatch Run Id – Only contains a value for submitted, executing and aborted jobs.
 - H - A value of **Yes** indicates that the job is currently on hold.
 - Mast Job No - The EspAuto job number if the initiating job.
 - Trig Job - the EspAuto job number of the job that triggered the job.



3.22 JS445 Report - Auto Scheduled Jobs

This function will produce a report of all completed auto scheduled jobs for the period specified.

The type option provides the ability to produce a report, extract or both:

R - Report
E - Extract
A - Report and Extract

```

CRONUS01

JSP445          *** Cronus Consulting - DEV ***          12:11:45.8
JSM445          Report - Auto Scheduled Jobs            2022/09/19

Type.....: A      (A=Extract & Report, E=Extract or R=Report)
Start Date....: 20220901 (YYYYMMDD)
Start Time....: 0      (HHMM) (Blank for all)
End Date.....: 20220919 (YYYYMMDD)
End Time.....: 2400   (HHMM)
Sub System....: TEMP
File Name.....: AUTO_SCHEDULED_BACKUPS.CSV

Filters
Scheduled User: 
Scheduled Name: BCK*
Scheduled Type: 

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
Quit
  
```

The parameters determine which jobs are contained within the report produced.

For types **A** (Extract & Report) and **E** (Extract) the Sub System and File Name must be supplied.



3.23 JS447 Delete - EspAuto History

This function is used to delete EspAuto History. A report is generated that contains a list of all EspAuto job history that was deleted.

A screenshot of a terminal window titled "CRONUS01". The window displays a menu for deleting EspAuto history. At the top, it shows "JSP447" and "JSM447" on the left, "*** Cronus Consulting - DEV ***" in the center, and the timestamp "12:32:05.9" and date "2022/09/19" on the right. Below this, the text "Delete - EspAuto History" is displayed. The main menu consists of several fields: "Scheduled User:", "Scheduled Name:", "Scheduled Type:", "Scheduled ID..:", "Scheduled Date:", "Scheduled Time:", and "Retention Days:". The "Retention Days" field is currently set to "90". Below the fields, a message states "Deletes jobs with a status of Completed and Deleted". At the bottom, there is a prompt "Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---" and a "Quit" option.

```
CRONUS01
JSP447      *** Cronus Consulting - DEV ***      12:32:05.9
JSM447      Delete - EspAuto History             2022/09/19

Scheduled User: _____
Scheduled Name: _____
Scheduled Type: _____
Scheduled ID..: _____

Scheduled Date: _____ (YYYYMMDD)
Scheduled Time: _____ (HHII)

Retention Days: 90

Deletes jobs with a status of Completed and Deleted

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
Quit
```

The parameters determine which EspAuto job history is deleted.

Either the Scheduled Date or Retention Days must be specified, the rest of the parameters are optional.

If the Scheduled Date/Time is specified all EspAuto Job History until the specified Scheduled Date/Time is deleted.



3.24 JS480 Extract - Schedule per Scheduled ID

This function is used to extract all relevant metadata for the specified Scheduled ID and Year. The extract will contain the following metadata:

- Base Calendars (JS400)
- EspAuto Jobs (JS405)
- EspAuto Jobs per Schedule ID (JS410)
- Predecessors (JS415)
- File Events (JS416)
- Job Concurrency (JS417)
- Triggered Jobs (JS420)
- File Event master definitions (JS421)
- File Event triggers (JS422)

A screenshot of a terminal window titled "CRONUS01". The window has a black background with green text. At the top, it shows the command "JSP480 *** Cronus Consulting - DEV ***" and "JSM480 Extract - Schedule per Scheduled ID". To the right, it displays the time "12:33:17.7", the date "2022/09/19", and the user "EY712". Below this, the terminal shows the following prompts and inputs: "Path.....: /opt/softwareag/cronus/schedule", "File Name.....: ", "Scheduled ID..: ", and "Scheduled Year: 2022". At the bottom, it shows a prompt "Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---" and the word "Quit".

```
CRONUS01
JSP480          *** Cronus Consulting - DEV ***          12:33:17.7
JSM480          Extract  - Schedule per Scheduled ID    2022/09/19
                                                         EY712

Path.....: /opt/softwareag/cronus/schedule

File Name.....: 

Scheduled ID..: 

Scheduled Year: 2022

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
Quit
```




3.25 JS481 Load - Schedule per Scheduled ID

The function is used to load the metadata extracted via function **JS480 Extract - Schedule per Scheduled ID**.

```

CRONUS01
Schedule ID must entered
JSP481      *** Cronus Consulting - DEV ***      12:34:42.1
JSM481      Load      - Schedule per Scheduled ID  2022/09/19
                                                    EY712

Path.....: /opt/softwareag/cronus/schedule

File Name.....: ESPAUTO.2022.1_____

Scheduled ID...: 1__

Scheduled Year.: 2023

Options.....: 1 1 - Delete metadata for Schedule ID prior to load
              2 - Check metadata for Schedule ID prior to load
              3 - Replace metadata for Schedule ID

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
Quit

```

Three options are provided for when loading the metadata:

1. Delete metadata for Schedule ID prior to load: This option will delete all existing metadata for the specified Scheduled ID and Year prior to loading the new metadata.
2. Check metadata for Schedule ID prior to load: This option will first verify that no metadata exists for the specified Scheduled ID and Year – If any metadata exists the load process will not take place.
3. Replace metadata for Schedule ID: This option will replace existing metadata entries with those contained on the load file.

Note that when copying schedules to a different year, the base calendars must be modified manually to ensure correct run dates.



3.26 JS482 Delete - Schedule per Scheduled ID

This function will delete all metadata for the specified Scheduled ID and Year.

The following metadata is not deleted:

- Base Calendars (JS400)
- EspAuto Jobs (JS405)

A screenshot of a terminal window titled "CRONUS01". The window has a black background with green text. At the top left, it shows "JSP482" and "JSM482". In the center, it displays "*** Cronus Consulting - DEV ***" and "Delete - Schedule per Scheduled ID". On the top right, it shows the time "12:39:47.5", the date "2022/09/19", and the user "EY712". Below this, it prompts for "Scheduled ID..:" with the number "1" entered, and "Scheduled Year: 2022". At the bottom, it lists function keys: "Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---" and "Quit".

```
CRONUS01
JSP482      *** Cronus Consulting - DEV ***      12:39:47.5
JSM482      Delete - Schedule per Scheduled ID    2022/09/19
                                                    EY712

Scheduled ID.: 1
Scheduled Year: 2022

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
Quit
```



3.27 JS490 Maintain - Support Groups

This function is used to maintain support groups. Support groups are used when notifying a user or group of users of the following events (Job Completed, Job Abended, Job Restarted, Job Overdue). Only support groups defined using this function can be used on function **JS492 Maintain - Scheduled Job Notification**.

Function Options:

- A** - Add Support Group
- C** - Change Support Group
- D** - Delete Support Group
- E** - View Support Group

A screenshot of a terminal window titled "CRONUS01". The screen displays the following text:
JSP490 *** Cronus Consulting - DEV *** 12:43:29.9
JSM490 Maintain - Support Groups 2022/09/19

Option: C Support Group: ESPAUTO_ Copy from Support Group: _____
Support Desc.: DEFAULT SUPPORT GROUP _____

E-Mail Addresses
info@cronus.co.za _____

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
Quit Upd

A maximum of 10 e-mail addresses can be specified per support group.

If the “**Copy from Support Group**” field is specified when adding a new support group with option “**A**”, a new support group will be created by making a copy of the support group specified in the **Copy from Support Group** field.



The current support group can be updated at any stage by pressing **PF5**. If **PF3** is pressed and the support group has been changed after the last **PF5** key press a window is displayed prompting the user if changes should be saved.

A screenshot of a terminal window titled "CRONUS01". The terminal displays a menu-driven interface for managing support groups. At the top, it shows "JSP490" and "JSM490" on the left, "*** Cronus Consulting - DEV ***" in the center, and the time "12:44:22.9" and date "2022/09/19" on the right. Below this, it says "Maintain - Support Groups". The main menu shows "Option: C Support Group: ESPAUTO_" and "Copy from Support Group: _____". Below that, it says "Support Desc.: Default Support Group_____". There is a section for "E-Mail Addresses" with "info@cronus.co.za" and several empty lines. A dialog box is overlaid on the screen with the text "Support Group has changed" and "Save Changes: Y (Y/N)". At the bottom, it says "Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---" and "Quit Upd".

```
CRONUS01
JSP490          *** Cronus Consulting - DEV ***          12:44:22.9
JSM490          Maintain - Support Groups                2022/09/19

Option: C Support Group: ESPAUTO_      Copy from Support Group: _____
Support Desc.: Default Support Group_____

E-Mail Addresses
info@cronus.co.za_____
_____
_____
_____
_____
_____
_____
_____
_____

Support Group has changed
Save Changes: Y (Y/N)

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
Quit      Upd
```



3.28 JS491 Maintain - Support Levels

This function is used to maintain support levels. Support levels are used to determine when the notification must be sent. The notification will be sent on the following day at the specified time, if notification should take place immediately then the Time and Day+ fields must be omitted. Only support levels defined using this function can be used on function **JS492 Maintain - Scheduled Job Notification**.

Function Options:

- A** - Add Support Level
- C** - Change Support Level
- D** - Delete Support Level
- E** - View Support Level

```

CRONUS01
JSP491          *** Cronus Consulting - DEV ***          12:46:02.0
JSM491          Maintain - Support Levels                2022/09/19

Option: C Support Level: 1          Copy from Support Level: __
Description..: CRITICAL

Notification    Time Day+  If notification must be sent immediately,
Holidays       00:00   1   Time and Day+ must contain zero values.

Monday         00:00    0
Tuesday        00:00    0
Wednesday      00:00    0
Thursday       00:00    0
Friday         00:00    0
Saturday       06:00    2
Sunday         06:00    1

Defined on function JS402

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
Quit      Upd

```

If the “**Copy from Support Level**” field is specified when adding a new support level with option “**A**”, a new support level will be created by making a copy of the support level specified in the **Copy from Support Level** field.



The current support level can be updated at any stage by pressing **PF5**. If **PF3** is pressed and the support level has been changed after the last **PF5** key press a window is displayed prompting the user if changes should be saved.

```

CRONUS01
JSP491          *** Cronus Consulting - DEV ***          12:46:02.0
JSM491          Maintain - Support Levels                2022/09/19

Option: C Support Level: _1          Copy from Support Level: __
Description..: CRITICAL

Notification
Holidays

Monday
Tuesday
Wednesday
Thursday
Friday      00:00      0
Saturday    06:00      2
Sunday      06:00      1

Defined on function JS402

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
Quit      Upd
  
```



3.29 JS492 Maintain - Scheduled Job Notification

This function is used to maintain scheduled job notification. Notification can be sent for scheduled jobs that abort, complete, are overdue or have been auto restarted.

Function Options:

- A** - Add Notification
- C** - Change Notification
- D** - Delete Notification
- E** - View Notification

```

CRONUS01
JSP492          *** Cronus Consulting - DEV ***          12:49:05.4
JSM492          Maintain - Scheduled Job Notification      2022/09/19

Option: C User: ESPAUTO_ Name: NOTIFY_ Type: SCL_ ID: 999
Copy from User: _____ Name: _____ Type: _____ ID: _____

Description.....: Default EspAuto notification

Support Group.....: ESPAUTO_ Default Support Group
Support Level - Abend...: _1 CRITICAL
                  - Restart..: _____
                  - Complete: _5 INFORMATIONAL
                  - Overdue..: _2 HIGH

E-Mail Addresses: support@cronus.co.za
                  _____
                  _____
                  _____
                  _____

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
                  Quit      Upd
  
```

If the support level is omitted for Abend, Restart, Complete or Overdue no notification will take place.



The job notification to be used is determined as follows:

1. Check if entry exists with scheduled jobs **User, Name, Type & Schedule ID**
2. Check if entry exists with scheduled jobs **User, Name, Type & Schedule ID=999**.
3. Check if entry exists with scheduled jobs **User, Name, Type=* & Schedule ID**.
4. Check if entry exists with scheduled jobs **User, Name, Type=* & Schedule ID=999**.
5. Check if entry exists with scheduled jobs **User=*, Name, Type & Schedule ID**.
6. Check if entry exists with scheduled jobs **User=*, Name, Type & Schedule ID=999**.
7. Check if entry exists with scheduled jobs **User=*, Name, Type=* & Schedule ID**.
8. Check if entry exists with scheduled jobs **User=*, Name, Type=* & Schedule ID=999**.
9. Check if entry exists with **User=ESPAUTO, Name=NOTIFY, Type=SCL** and **Schedule ID=999**.

If no match is found for the above-mentioned conditions 1 to 8 then the Scheduled Jobs Name is truncated character by character from right to left in an attempt to find a matching value specified in the Name field.

The notification will be sent to the e-mail addresses specified on the support group and e-mail addresses specified on this function.

If the “**Copy from User, Name, Type & ID**” fields are specified when adding a new scheduled job notification with option “**A**”, a new notification will be created by making a copy of the notification specified in the **Copy from User, Name, Type & ID** fields.



The current scheduled job notification can be updated at any stage by pressing **PF5**. If **PF3** is pressed and the notification has been changed after the last **PF5** key press a window is displayed prompting the user if changes should be saved.

A screenshot of a terminal window titled "CRONUS01". The window displays a menu for "Maintain - Scheduled Job Notification". The menu options are: Option: C, User: ESPAUTO, Name: NOTIFY, Type: SCL, ID: 999; Copy from User: (blank), Name: (blank), Type: (blank), ID: (blank); Description: (blank); Support Group: (blank); Support Level: - Abend..., - Restart., - Complete, - Overdue.; E-Mail Addresses: support@cronus.co.za. A dialog box is overlaid on the screen, asking "Notification has changed" and "Save Changes: Y (Y/N)". The bottom of the screen shows a list of function keys: Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---, with "Quit" and "Upd" below them.

```
CRONUS01
*** Cronus Consulting - DEV ***
JSP492      12:49:05.4
JSM492      2022/09/19
Maintain - Scheduled Job Notification

Option: C User: ESPAUTO_ Name: NOTIFY_ Type: SCL_ ID: 999
Copy from User: _____ Name: _____ Type: _____ ID: _____

Description.....ion
Support Group.....Notification has changed Group
Support Level - Abend...
                - Restart.
                - Complete
                - Overdue.
                Save Changes: Y (Y/N)

E-Mail Addresses: support@cronus.co.za
                _____
                _____
                _____
                _____

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
                Quit      Upd
```



3.30 JS493 Maintain - EspAuto Setup

This function is used to define global values that are used throughout EspAuto and should not be assigned to all users.

Function Options:

- C** - Change Setup
- E** - View Setup

```

CRONUS01

JSN493          *** Cronus Consulting - DEV ***          12:51:58.0
JSM493          Maintain - EspAuto Setup                2022/09/19

Option: C Status: Running      Audit Info: EY712      20220915 14:15:31.5

Last Job No.....: 66
Script Name.....: Autosched.natd.bsh
Simulate Schedule.....: N
Scan Ahead Time.....: 240 Minutes
Lead Time.....: 240 Minutes

Parameter Name Value Description
PREDMASTER      Y Only remove predecessors for Master Job No
REQABORT         Y Abort if job not loaded - Update mode
SUBESPAUTO       Y Restrict demand of EspAuto jobs via SCL
RESUBESPAUTO     Y Restrict resubmission of job steps from EspBatch
LEADTIMECHK      Y Validate Lead Time on add of Predecessors & File Events
INHERETPRED      Y Inheret Predecessors
NOTIFY-UE        N Invoke Notification User exit ESPUX003

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
                               Quit      Upd
  
```

Parameters:

- Audit Info: User Id, Date & Time that the EspAuto Setup was updated.
- Last Job No: Last job no used for job submission
- Script Name: Name of EspAuto startup script
- Simulate Schedule: Valid values are **Yes** and **No**. When set to **Yes**, EspAuto wil run in simulate mode, this provides the ability to validate the defined schedules without executing any batch jobs.
- Scan Ahead Time: Time in minutes used by Auto Scanner to determine which jobs must be loaded. In the screen shot above the scan ahead time is set to 240



-
- minutes – if the Auto Scanner runs at 06H00 then all jobs scheduled between 06H00 and 10H00 will be loaded into the **EspAuto Job Queue**
- **Lead Time:** Time in minutes used to determine whether predecessors and file events must be added for a given scheduled job. This can be overwritten on function **JS405 Maintain - EspAuto Jobs**.
 - **PREDMASTER:** Valid values are **Yes** and **No**. If yes is specified predecessors will only be removed from jobs that have the same Master Job number as the job that has completed.
 - **REQABORT:** Valid values are **Yes** and **No**. If yes is specified and an attempt is made to update a scheduled jobs mode via EspAuto API **JSP461** or **JSP471** and the scheduled job is not currently in the EspAuto job queue the SCL job step will abort.
 - **SUBESPAUTO:** Valid values are **Yes** and **No**. Restricts/allows EspAuto scheduled jobs to be requested from within an EspBatch Job step using API's **JSP460** or **JSP470** if the SCL is not running under the control of EspAuto.
 - **RESUBESPAUTO:** Valid values are **Yes** and **No**. Restricts/allows resubmission of abended jobs from EspBatch. If set to **Yes** abended batch jobs submitted via EspAuto cannot be restarted via EspBatch functions JS050*.
 - **LEADTIMECHK:** Valid values are **Yes** and **No**. If yes is specified, then lead time checking will take place when adding predecessors and file events.
 - **INHERETPRED:** Valid values are **Yes** and **No**. If set to **Yes** jobs will inherit predecessors from scheduled jobs that are bypassed due to conditional trigger logic defined on **JS420 Maintain – EspAuto Job Triggers**.
 - **NOTIFY:** Valid values are **Yes** and **No**. If yes is specified, then the EspAuto user exit **ESPUX003** is invoked on all job notification.

The current setup can be updated at any stage by pressing **PF5**. If **PF3** is pressed and the setup has been changed after the last **PF5** key press a window is displayed prompting the user if changes should be saved.


Optional parameters (Parameter syntax PARMNAME=VALUE):

- USER: Scheduled User library (Blank for all)
- NAME: Scheduled Name (Blank for all)
- TYPE: Scheduled Type (Blank for all)
- ID: Scheduled Id (Blank for all)
- TIME: All history until the specified date/time is deleted (**Format: HHII**)

```

CRONUS01
JSP300          *** Cronus Consulting - DEV ***          13:09:08.9
                Parameters

SCL User: CRONUS   SCL Name.: AUTODEL   SCL Type: SCL   V-- Library: ESPSOFT
Step No.: 1        Step Name: STEP0001   Program: JSP451

Control Card Format: @@CONTROL@@User Lib;Control Card
Setup Card Format... @@PROC@@SubSystem;Work File Name
                        @@PROC@@$LABEL

Value
1 NAME=DAILY
2 DAYS=90
3
4
5
6
7
8
9
10

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
                Quit  Ins      Next      PgDn  Card
  
```


Triggered jobs will be released according to the value of the **Submit Triggered Jobs** field on function **JS405**.

The screenshot shows a terminal window with a title bar containing a logo and the text 'CRONUS01'. The window has standard OS controls (minimize, maximize, close). The main content area has a black background with green text. At the top, it displays 'JSP300', '*** Cronus Consulting - DEV ***', and the time '13:15:18.4'. Below this is a section titled 'Parameters'. The parameters are listed as follows:

- SCL User: CRONUS
- SCL Name.: SUBAUTO
- SCL Type: SCL
- V-- Library: ESPSOFT
- Step No.: 1
- Step Name: STEP0001
- Program: JSP460

Below the parameters, there are two lines of text:

- Control Card Format: @@CONTROL@@User Lib;Control Card
- Setup Card Format...: @@PROC@@SubSystem;Work File Name @@PROC@@\$LABEL

Then, there is a list of values to be entered, numbered 1 through 10. The first value, 'CRONUS', is highlighted with a green box. The rest of the values are underlined:

- 1 CRONUS
- 2 ESPVIFY
- 3 SCL
- 4 1
- 5 HOLD=Y
- 6 ADD-PRED-FILE=N
- 7 SCHEDULED-DATE=&YYYYMMDD
- 8
- 9
- 10

At the bottom of the terminal window, there is a prompt 'Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---' and a status bar with the text 'Quit Ins Next PgDn Card'.

The value of **SUBESPAUTO** defined using function **JS493 Maintain - EspAuto Setup** determines whether EspAuto jobs can be demanded from within an SCL if the current job is not running under control of EspAuto.

- Value **Yes** - EspAuto jobs can be demanded using API **JSP460**
- Value **No** - EspAuto jobs may not be demanded using API **JSP460**



The REQUEST mode will be updated according to the value passed in the REQUEST mode parameter. A value of **REQUEST=Yes** will change the job mode to REQUEST and a value of **REQUEST=No** will remove the REQUEST mode status. Ex. to remove REQUEST mode from a job the value of the fourth parameter must be: REQUEST=N

```

CRONUS01

JSP300          *** Cronus Consulting - DEV ***          13:41:29.1
                Parameters

SCL User: CRONUS   SCL Name.: UPDAUTO   SCL Type: SCL   V-- Library: ESPSOFT
Step No.: 1       Step Name: STEP0001   Program: JSP461

Control Card Format: @@CONTROL@@User Lib;Control Card
Setup Card Format... @@PROC@@SubSystem;Work File Name
                  @@PROC@@$LABEL

Value
1 CRONUS
2 ESPVfy
3 SCL
4 REQUEST=N
5
6
7
8
9
10

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
                Quit  Ins      Next      PgDn  Card

```

If all prerequisites for a job in **REQUEST** mode have been satisfied and the job is still in **REQUEST** mode, it will not be executed, however it will be removed from all jobs in the queue awaiting its completion and if any triggered jobs have been defined, they will be submitted.

The value of **REQABORT** defined using function **JS493 Maintain - EspAuto Setup** determines whether the EspBatch job step will abort if the EspAuto scheduled job is not loaded when attempting to update the jobs mode.

- Value **Yes** - Abort EspBatch job step if EspAuto job is not loaded
- Value **No** - Complete EspBatch job step if EspAuto job is not loaded

HOLD:

If a scheduled job is placed on HOLD to job will not start execution until the HOLD is removed.



LATESUB-TIME:

This parameter allows you to update a jobs late submission time which will send notification if job has not started execution at the time specified. The late submission time must be specified in HHII format.

LATESUB-DELAY:

This parameter allows you to update a jobs late submission time which will send notification if job has not started execution at the time specified. The late submission delay must be specified in minutes (max. 720 minutes). The number of minutes specified will be added to the current system time to set the new late submission time.

COMPLETE:

The job status is changed to COMPLETED without executing the job, only jobs with a status of SCANNED will be completed, if the jobs status is not SCANNED no action will be performed. If a job is COMPLETED predecessors and triggers are processed.



The parameters must be comma separated within the specified work file.

Example work file layout:

```
CRONUS , JOB1 , SCL , 1 , ADD-PRED-FILE=Y , SCHEDULED-DATE=20071231 , SCHEDULED-TIME=2315  
CRONUS , JOB2 , SCL , 1 , HOLD=Y
```

The value of Code Type: **SCL** Code Value: **SUBESPAUTO** defined using function **JS493 Maintain - EspAuto Setup** determines whether EspAuto jobs can be demanded from within an SCL if the current job is not running under control of EspAuto.

- Value **Yes** - EspAuto jobs can be demanded using API **JSP470**
- Value **No** - EspAuto jobs may not be demanded using API **JSP470**



The REQUEST mode will be updated according to the value passed in the REQUEST mode parameter. A value of **REQUEST=Yes** will set change the job mode to REQUEST and a value of **REQUEST=No** will remove the REQUEST mode status. Ex. to remove REQUEST mode from a job the parameter must be specified as: REQUEST=N

```

CRONUS01
----- Work File Parameters -----
SCL User: CRONUS   SCL Name.: UPDAUTO   SCL Type: SCL   V--   Library: ESPSOFT
Step No.: 1       Step Name: STEP0001   WF No...: 01       Program: JSP471

Name.....: UPDATE.JOBS
Sub System.: TEMP
Disposition: O Complete: _ Abort: _ Permissions - Owner: _ Group: _ Other: _
Type.....: GDG.....: 0

Text
1
2
3
4
5
6
7
8
9
10

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF11---PF12---
Quit Ins PgDn Type

```

If all prerequisites for a job in **REQUEST** mode have been satisfied and the job is still in **REQUEST** mode, it will not be executed, however it will be removed from all jobs in the queue awaiting its completion and if any triggered jobs have been defined, they will be submitted.

The value of Code Type: **SCL** Code Value: **REQABORT** defined using function **JS493 Maintain - EspAuto Setup** determines whether the EspBatch job step will abort if the EspAuto scheduled job is not loaded when attempting to update the jobs mode.

- Value **Yes** - Abort EspBatch job step if EspAuto job is not loaded
- Value **No** - Complete EspBatch job step if EspAuto job is not loaded

HOLD:

If a scheduled job is placed on HOLD to job will not start execution until the HOLD is removed.



LATESUB-TIME:

This parameter allows you to update a jobs late submission time which will send notification if job has not started execution at the time specified. The late submission time must be specified in HHII format.

LATESUB-DELAY:

This parameter allows you to update a jobs late submission time which will send notification if job has not started execution at the time specified. The late submission delay must be specified in minutes (max. 720 minutes). The number of minutes specified will be added to the current system time to set the new late submission time.

COMPLETE:

The job status is changed to COMPLETED without executing the job, only jobs with a status of SCANNED will be completed, if the jobs status is not SCANNED no action will be performed. If a job is COMPLETED predecessors and triggers are processed.

The parameters must be comma separated within the specified work file.

Example work file layout:

CRONUS, JOB2, SCL, REQUEST=N

CRONUS, JOB3, SCL, HOLD=Y

The value of Code Type: **SCL** Code Value: **REQABORT** defined using function **JS493 Maintain - EspAuto Setup** determines whether the EspBatch job step will abort if the EspAuto scheduled job is not loaded when attempting to update the jobs mode.

- Value **Yes** - Abort EspBatch job step if EspAuto job is not loaded
- Value **No** - Complete EspBatch job step if EspAuto job is not loaded



5. ESPAUTO VARIABLES

EspAuto variables can be used within a SCL and are evaluated at submission time. Note that all variables must be preceded with an ampersand "&" sign. Variables defined using functions **JS410** & **JS420** can be also be referenced using the same syntax. Refer to the EspBatch manual **DYNAMIC VARIABLE SUBSTITUTION** for additional information.

EspAuto variables defined within an SCL are not expanded if the SCL is submitted outside of EspAuto.

Site specific variables can be created within user exit **ESPPARMU**. The provided user exit is a natural sub-program, thus allowing for creation of user defined variables writing natural code. When upgrading EspAuto - **ESPPARMU** must be replaced by the site specified version if used.

```

CRONUS01
JSP300          *** Cronus Consulting - DEV ***          15:08:12.6
                Parameters
SCL User: CRONUS   SCL Name.: AUTOVAR   SCL Type: SCL   V-- Library: ESPSOFT
Step No.: 1        Step Name: STEP1      Program: TESTAUTO

Control Card Format: @@CONTROL@@User Lib;Control Card
Setup Card Format... @@PROC@@SubSystem;Work File Name
                        @@PROC@@$LABEL

Value
1  &ESPJOBNO
2  &ESPSCHEDMM/&ESPSCHEDDD/&ESPSCHEDYY
3  &CRONUSBCK
4
5
6
7
8
9
10

Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
                Quit  Ins      Next      PgDn   Card

```

In the example above **ESPJOBNO**, **ESPSCHEDMM**, **ESPSCHEDDD** and **ESPSCHEDYY** are EspAuto product variables. **CRONUSBCK** is a variable that was set using function **JS420**.

**EspAuto variables:**

Function Name	Format Returned	Description
ESPMJOBNO	Numeric 13	EspAuto Master Job No
ESPJOBNO	Numeric 13	EspAuto Job No
ESPSCHEDUSER	Alphanumeric 8	Scheduled User Library
ESPSCHEDNAME	Alphanumeric 8	Scheduled Name
ESPSCHEDTYPE	Alphanumeric 8	Scheduled Type
ESPSCHEDID	Numeric 3	Scheduled ID
ESPSCLUSER	Alphanumeric 8	SCL User Library
ESPSCLNAME	Alphanumeric 8	SCL Name
ESPSCLTYPE	Alphanumeric 8	SCL Type
ESPSCHEDYYYY	YYYY	Scheduled Year
ESPSCHEDYY	YY	Scheduled Year
ESPSCHEDMM	MM	Scheduled Month
ESPSCHEDDD	DD	Scheduled Day
ESPSCHEDHH	HH	Scheduled Hour
ESPSCHEDMIN	MM	Scheduled Minutes
ESPSYSYYYYMMDD	CCYYMMD	System Date
ESPSYSYYYY	YYYY	System Year
ESPSYSYY	YY	System Year
ESPSYSMM	MM	System Month
ESPSYSDD	DD	System Day
ESPSYSHH	HH	System Hour
ESPSYSMIN	MM	System Minutes



6. AUTO SCANNER

The auto scanner provides the mechanism to automate job that are defined within EspAuto using function **JS410 Maintain - EspAuto Jobs per Schedule ID**. The Auto Scanner must be defined using the Unix/Linux **cron** daemon process or an alternate Unix/Linux scheduler. The scanning process should be setup in accordance with the scan ahead time defined using function **JS493 Maintain - EspAuto Setup** to ensure that all scheduled jobs are queued as per date/time definition. The run interval specified for the auto scanner should be less than the scan ahead time specified, or this will result in jobs not being scheduled.

Example crontab entry to execute Auto Scanner every 15 minutes:

```
0,15,30,45 * * * * /opt/softwareag/cronus/scripts/Autoscan.dev.bsh
```



7. USER EXITS

ESPUX003 – EspAuto notification:

This user exit provides the ability to call an external process as soon as notification specified using function **JS492 Maintain - Scheduled Job Notification** takes place.

Parameters that are available for the call to the external process are:

Parameter Name	Format	Description
#API-MSG-TYPE	Numeric 1	Type of message <ul style="list-style-type: none"> • 1 – Job Aborted • 2 – Job Completed • 3 – Job is Overdue • 4 – Job was Auto Restarted
#API-DESC	Alphanumeric 200	Description of the message
#API-JOB-NAME	Alphanumeric 100	Scheduled jobs User Library, Name and Type delimited by '.'. E.g. PROD.TESTJOB.SCL
#API-SCL-NAME	Alphanumeric 100	SCL's User Library, Name and Type delimited by '.'. E.g. PROD.TEST.SCL
#API-BAT-NO	Numeric 13	EspBatch batch no used for submission of the SCL
#API-RUN-ID	Numeric 13	Run Id of the EspBatch job step
#API-STEP-NAME	Alphanumeric 13	Step Name of the EspBatch job
#API-STEP-NO	Numeric 6	Step Number of the EspBatch job
#API-COMP-DATE	Numeric 8	Completion Date of the EspBatch job
#API-COMP-TIME	Alphanumeric 20	Completion Time of the EspBatch job
#API-ERR-DATE	Numeric 8	Error Date of the EspBatch job
#API-ERR-TIME	Alphanumeric 20	Error Time of the EspBatch job
#API-ERR-PROG	Alphanumeric 8	Program Name of the EspBatch job step that aborted
#API-ERR-LINE	Numeric 4	Error Line of the EspBatch job step that aborted
#API-ERR-NO	Numeric 4	Error No of the EspBatch job step that aborted



#API-GROUP	Alphanumeric 8	The Name of the support group as defined using function JS492
#API-SEVERITY	Numeric 2	The severity of the notification as defined using function JS492
#API-JOBNO	Packed 13	The EspAuto Job No

Site specific customisation applied to user exit **ESPUX003** should be replaced after an EspAuto upgrade.