

Setting Bookmarks

You can use bookmarks to mark single or multiple source-code lines you want to quickly identify and access.

This section provides instructions for setting and clearing bookmarks and navigating between bookmarks.


▶ To set bookmarks

1. Position the cursor anywhere in the source-code line you want to mark.
2. From the context menu, choose **Advanced > Toggle Bookmark**.

Or:

Press the CTRL+ALT+B toggle.

A square appears to the left of the specified source-code which indicates the bookmark set as shown in the following example for line 0050:

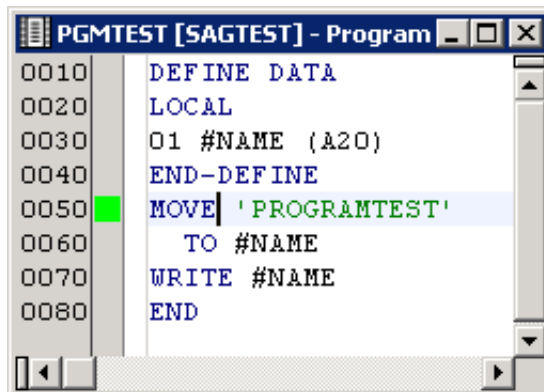

The screenshot shows a window titled "PGMTEST [SAGTEST] - Program". The code is as follows:

```
0010  DEFINE DATA
0020  LOCAL
0030  01 #NAME (A20)
0040  END-DEFINE
0050  MOVE 'PROGRAMTEST'
0060  TO #NAME
0070  WRITE #NAME
0080  END
```

A green square is positioned to the left of line 0050, indicating a bookmark. The line 0050 is highlighted in blue.

3. Repeat Steps 1 and 2 if you want to mark additional lines.

▶ To clear a single bookmark

1. Position the cursor anywhere in the source-code line you want to unmark.
2. From the context menu, choose **Advanced > Toggle Bookmark**.

Or:

Press the CTRL+ALT+B toggle.

The bookmark indicator disappears for the specified line.

▶ To clear all bookmarks

- From the context menu, choose **Advanced > Clear Bookmarks**.

Or:

Press CTRL+ALT+L.

All bookmark indicators disappear.

▶ **To go to the next bookmark**

- From the context menu, choose **Advanced > Next Bookmark**.

Or:

Press CTRL+ALT+N.

▶ **To go to the previous bookmark**

- From the context menu, choose **Advanced > Previous Bookmark**.

Or:

Press CTRL+ALT+P.