

# SKYPECALL

The SKYPECALL control allows you to start the Skype client with given contact data from your Application Designer pages.


## Important:

In order to use the SKYPECALL control you need to have a valid Skype account and the Skype client must be installed. For further information, see <http://www.skype.com/>.

The following topics are covered below:

- Example
  - Properties
- 

## Example

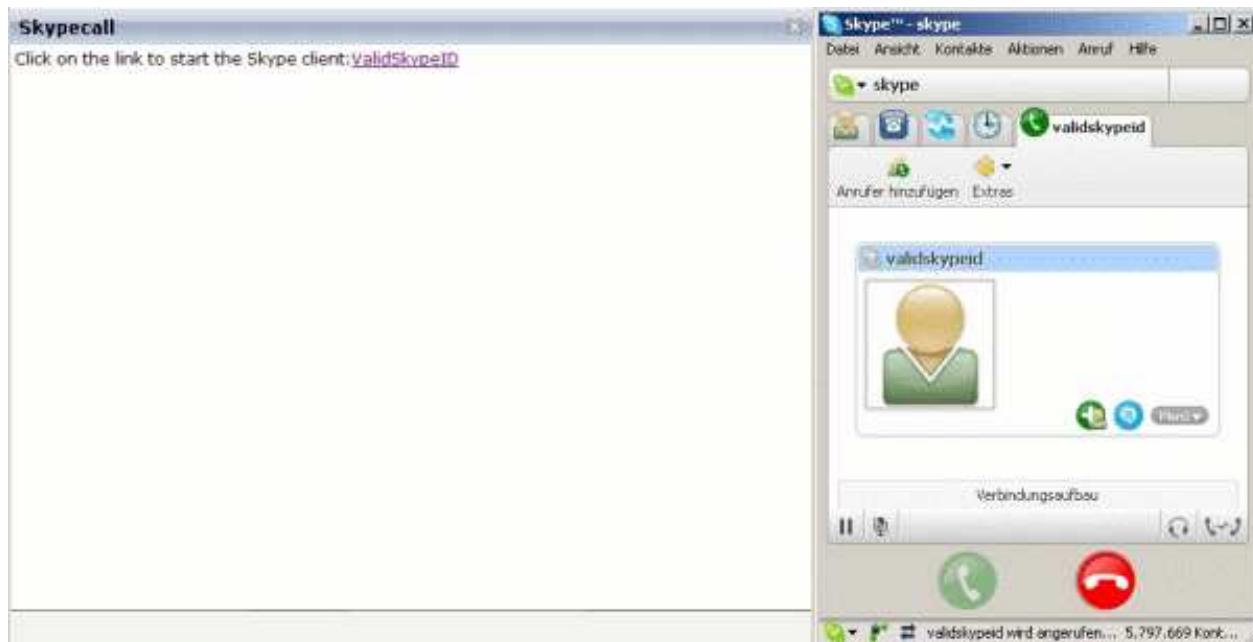

The XML layout definition is:

```
<pagebody>
  <itr>
    <label name="Click on the link to start the Skype client: " asplaintext="true"></label>
    <skypecall valueprop="skypecall"></skypecall>
  </itr>
</pagebody>
```

The Java code of the adapter is:

```
public class SkypetestAdapter extends Adapter
{
    // property >skypecall<
    String m_skypecall;
```

```
public String getSkypecall() { return m_skypecall; }
public void setSkypecall(String value) { m_skypecall = value; }

/** initialisation - called when creating this instance*/
public void init()
{
    // enter the Skype ID or a valid phone number
    m_skypecall="ValidSkypeID";
    // it is possible to pass parameters to the Skype client
    // using '?'. See the Skype API for details!
}
}
```

## Properties

Basic			
valueprop	<p>Adapter object that contains the phone number or the Skype ID of the person that should be called. It is also possible to set some parameters.</p> <p>For further information, see the Skype API.</p> <p>Note: The Skype client must be installed if you want to use this control.</p>	Obligatory	