

# **ApplinX 10.11.0.0 API**

## **Specification**

(c) Copyright 2021 Software AG. All rights reserved. Use is subject to license terms.

---


**Package**

# **com.sabratec.applinx.baseobject**

Contains classes and interfaces which are the core of the ABO API.

## com.sabratec.applinx.baseobject Class GXAbstractNaturalDataTransferRequest

java.lang.Object



### All Implemented Interfaces:

Cloneable, java.io.Externalizable

### Direct Known Subclasses:

[GXNaturalDataTransferUploadRequest](#), [GXNaturalDataTransferDownloadRequest](#)

public abstract class **GXAbstractNaturalDataTransferRequest**  
extends [GXAbstractRequest](#)

Common request for Natural Data Transfer messages.

## Constructor Summary

public	<a href="#">GXAbstractNaturalDataTransferRequest</a> ()
--------	---

## Method Summary

int	<a href="#">getFormatType</a> () Return the transfer data type.
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#), [readExternal](#), [setVariables](#), [writeExternal](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Methods inherited from interface java.io.Externalizable

[readExternal](#), [writeExternal](#)

## Constructors

### GXAbstractNaturalDataTransferRequest

public **GXAbstractNaturalDataTransferRequest**()

(continued on next page)

---

(continued from last page)

## Methods

### **getFormatType**

```
public int getFormatType()
```

Return the transfer data type.

---

### **readExternal**

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

### **writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```

---

## com.sabratec.applinx.baseobject Class GXAbstractNaturalDataTransferResponse

java.lang.Object

└-com.sabratec.applinx.baseobject.GXAbstractNaturalDataTransferResponse

### All Implemented Interfaces:

java.io.Serializable

### Direct Known Subclasses:

[GXNaturalDataTransferUploadResponse](#), [GXNaturalDataTransferDownloadResponse](#)

```
public abstract class GXAbstractNaturalDataTransferResponse
extends Object
implements java.io.Serializable
```

Response data message for Natural Data Transfer download/upload requests.

## Constructor Summary

public	<a href="#">GXAbstractNaturalDataTransferResponse()</a>
--------	---

## Method Summary

int	<a href="#">getNumProcessedRecords()</a> The number of records that were already processed.
boolean	<a href="#">isComplete()</a> Whether the transfer has been completed or not.
void	<a href="#">setComplete(boolean complete)</a> Set whether the Natural data transfer session has been completed or not.
void	<a href="#">setNumProcessedRecords(int numProcessedRecords)</a> Set the number of processed record.

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Constructors

### GXAbstractNaturalDataTransferResponse

```
public GXAbstractNaturalDataTransferResponse()
```

## Methods

(continued from last page)

**isComplete**

```
public boolean isComplete()
```

Whether the transfer has been completed or not.

---

**getNumProcessedRecords**

```
public int getNumProcessedRecords()
```

The number of records that were already processed.

---

**setNumProcessedRecords**

```
public void setNumProcessedRecords(int numProcessedRecords)
```

Set the number of processed record.

---

**setComplete**

```
public void setComplete(boolean complete)
```

Set whether the Natural data transfer session has been completed or not.

## com.sabratec.applinx.baseobject Class GXAbstractRequest

java.lang.Object

↳ com.sabratec.applinx.baseobject.GXAbstractRequest

### All Implemented Interfaces:

Cloneable, java.io.Externalizable

### Direct Known Subclasses:

[GXGetPrintsRequest](#), [GXSetVariablesRequest](#), [GXGetScreenRequest](#), [GXBinaryRequest](#),  
[GXBidiTranslatorRequest](#), [GXAbstractSetToHostRequest](#), [GXAbstractSessionConnectionRequest](#),  
[GXAbstractNaturalDataTransferRequest](#)

```
public abstract class GXAbstractRequest
extends Object
implements java.io.Externalizable, Cloneable
```

Common settings for all requests.

## Method Summary

void	<a href="#">addVariable</a> ( <a href="#">GXIVariable</a> var)
void	<a href="#">addVariable</a> (String varName, String varValue)
void	<a href="#">addVariableArray</a> (String varName, String[] varValues)
Object	<a href="#">clone</a> ()
boolean	<a href="#">equals</a> (Object obj)
Hashtable	<a href="#">getVariables</a> ()
int	<a href="#">hashCode</a> ()
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">setVariables</a> (Hashtable variables)
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Methods inherited from interface java.io.Externalizable

[readExternal](#), [writeExternal](#)

## Methods

### addVariable

```
public void addVariable(GXIVariable var)
```

**Parameters:**

var - a variable object

**See Also:**

[GXBaseObjectConstants](#)

---

### addVariable

```
public void addVariable(String varName,  
    String varValue)
```

**Parameters:**

varName - the variable name

varValue - the variable value

**See Also:**

[GXBaseObjectConstants](#)

---

### addVariableArray

```
public void addVariableArray(String varName,  
    String[] varValues)
```

**Parameters:**

varName - the variable name

varValues - a variable values array

---

### getVariables

```
public Hashtable getVariables()
```

**Returns:**

a variables Hashtable of: variable name(key) -> [GXIVariable](#)(value)

---

### setVariables

```
public void setVariables(Hashtable variables)
```

---



(continued from last page)

## **readExternal**

```
public void readExternal(java.io.ObjectInput in)
    throws java.io.IOException,
           ClassNotFoundException
```

---

## **writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)
    throws java.io.IOException
```

---

## **hashCode**

```
public int hashCode()
```

---

## **equals**

```
public boolean equals(Object obj)
```

---


## **clone**

```
public Object clone()
```

---

## com.sabratec.applinx.baseobject Class GXAbstractSessionConnectionRequest

java.lang.Object



### All Implemented Interfaces:

Cloneable, java.io.Externalizable

### Direct Known Subclasses:

[GXEndSessionRequest](#), [GXCreateSessionRequest](#), [GXAttachToSessionRequest](#)

```
public class GXAbstractSessionConnectionRequest
extends GXAbstractRequest
```

Abstract connection request to a specific session.

## Constructor Summary

public	<a href="#">GXAbstractSessionConnectionRequest()</a>
--------	--

## Method Summary

String	<a href="#">getApplicationName()</a>
String	<a href="#">getClientId()</a>
GXIApplicationServerContext	<a href="#">getServerContext()</a>
String	<a href="#">getServerURL()</a>
String	<a href="#">getSessionID()</a>
String	<a href="#">getSessionPassword()</a>
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">setApplicationName</a> (String applicationName)
void	<a href="#">setClientId</a> (String clientId) Set the client unique id to use.
void	<a href="#">setServerContext</a> (GXIApplicationServerContext serverContext) Sets the ApplinX server context for the session.
void	<a href="#">setServerURL</a> (String serverURL) Sets the URL of ApplinX Server to which the <a href="#">GXIClientBaseObject</a> will be connected.

void	<a href="#">setSessionID</a> (String sessionID)
void	<a href="#">setSessionPassword</a> (String sessionPassword)
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

#### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#), [readExternal](#), [setVariables](#), [writeExternal](#)

#### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

#### Methods inherited from interface java.io.Externalizable

[readExternal](#), [writeExternal](#)

## Constructors

### **GXAbstractSessionConnectionRequest**

```
public GXAbstractSessionConnectionRequest()
```

## Methods

### **getSessionID**

```
public String getSessionID()
```

**Returns:**

the session ID.

### **setSessionID**

```
public void setSessionID(String sessionID)
```

**Parameters:**

sessionID - the ID of the session to which the [GXIClientBaseObject](#) will be attached.

### **setApplicationName**

```
public void setApplicationName(String applicationName)
```

**Parameters:**

(continued from last page)

applicationName - the name of the application on ApplinX Server to which the session should be connected.

---

## getApplicationName

```
public String getApplicationName()
```

**Returns:**

the name of the ApplinX application.

---

## setSessionPassword

```
public void setSessionPassword(String sessionPassword)
```

**Parameters:**

sessionPassword - the session password to use for the connection. In [GXCreateSessionRequest](#), this password is optional. When choosing to set the password it must also be set in any [GXAttachToSessionRequest](#).

---

## getSessionPassword

```
public String getSessionPassword()
```

**Returns:**

the session password.

---

## setServerURL

```
public void setServerURL(String serverURL)
```

Sets the URL of ApplinX Server to which the [GXIClientBaseObject](#) will be connected.

**Parameters:**

serverURL - the URL of ApplinX server.

---

## getServerURL

```
public String getServerURL()
```

**Returns:**

the ApplinX Server URL.

---

## setServerContext

```
public void setServerContext(GXIAplicationServerContext serverContext)
```

Sets the ApplinX server context for the session. Used in "Local mode".

**Parameters:**

serverContext - the context to set.

---

---

(continued from last page)

## getServerContext

```
public GXIApplicationServerContext getServerContext()
```

**Returns:**

the server context used for the session.

---

## setClientId

```
public void setClientId(String clientId)
```

Set the client unique id to use. This option is for advanced users only.

**Parameters:**

clientId - the id of all this client's connections.

---

## getClientId

```
public String getClientId()
```

**Returns:**

the client unique id (all connections from same client will have same id).

---

## readExternal

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```


## writeExternal

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```

---

## com.sabratec.applinx.baseobject Class GXAbstractSetToHostRequest

java.lang.Object



### All Implemented Interfaces:

Cloneable, java.io.Externalizable

### Direct Known Subclasses:

[GXTableRequest](#), [GXSendKeysRequest](#), [GXPathRequest](#), [GXNavigateRequest](#)

public abstract class **GXAbstractSetToHostRequest**  
extends [GXAbstractRequest](#)

Abstract class for SendKeys and Execute Path requests.

Method Summary	
void	<a href="#">addInputField</a> ( <a href="#">GXIField</a> field, String fieldValue)
void	<a href="#">addInputField</a> ( <a href="#">GXInputField</a> field)
void	<a href="#">addInputField</a> ( <a href="#">GXPosition</a> position, String fieldValue)
void	<a href="#">addInputField</a> (String fieldName, <a href="#">GXPosition</a> position, String fieldValue)
void	<a href="#">addInputField</a> (String fieldName, int fieldIndex, String fieldValue)
void	<a href="#">addInputField</a> (String fieldName, String fieldValue)
void	<a href="#">addInputFields</a> ( <a href="#">GXInputField[]</a> fields)
void	<a href="#">changeInputField</a> ( <a href="#">GXInputField</a> field)
<a href="#">GXInputField[]</a>	<a href="#">getInputFields</a> ()
int	<a href="#">getSeqScreenNumber</a> () Get the sequence screen number which the send request should send against.
boolean	<a href="#">isWindowRelativePositioning</a> ()
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">removeInputField</a> ( <a href="#">GXInputField</a> field)

void	<a href="#">setSeqScreenNumber</a> (int seqScreenNumber) Defines the screen sequence number in which the send request should be send against If the sequence doesn't match the current screen sequence in the host, an exception is thrown during the send.
void	<a href="#">setWindowRelativePositioning</a> (boolean positionsIgnoreWindow)
String	<a href="#">toString</a> ()
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

#### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#), [readExternal](#), [setVariables](#), [writeExternal](#)

#### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

#### Methods inherited from interface java.io.Externalizable

[readExternal](#), [writeExternal](#)

## Methods

### getInputFields

```
public GXInputField[] getInputFields()
```

### addInputField

```
public void addInputField(GXInputField field)
```

### addInputField

```
public void addInputField(GXIField field,  
String fieldValue)
```

### addInputField

```
public void addInputField(String fieldName,  
String fieldValue)
```

(continued from last page)

---

## addInputField

```
public void addInputField(String fieldName,  
    int fieldIndex,  
    String fieldValue)
```

---

## addInputField

```
public void addInputField(String fieldName,  
    GXPosition position,  
    String fieldValue)
```

---

## addInputField

```
public void addInputField(GXPosition position,  
    String fieldValue)
```

---

## removeInputField

```
public void removeInputField(GXInputField field)
```

---

## changeInputField

```
public void changeInputField(GXInputField field)
```

---

## addInputFields

```
public void addInputFields(GXInputField\[\] fields)
```

---

## setWindowRelativePositioning

```
public void setWindowRelativePositioning(boolean positionsIgnoreWindow)
```

---

## isWindowRelativePositioning

```
public boolean isWindowRelativePositioning()
```

---

## readExternal

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
    ClassNotFoundException
```



---

(continued from last page)

---

## **writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)
    throws java.io.IOException
```

---

## **toString**

```
public String toString()
```

---

## **getSeqScreenNumber**

```
public int getSeqScreenNumber()
```

Get the sequence screen number which the send request should send against. If the sequence doesn't match the current screen sequence in the host, an exception is thrown during the send.

**Returns:**

screen sequence number

---

## **setSeqScreenNumber**

```
public void setSeqScreenNumber(int seqScreenNumber)
```

Defines the screen sequence number in which the send request should be send against If the sequence doesn't match the current screen sequence in the host, an exception is thrown during the send.

**Parameters:**

`seqScreenNumber` - a screen sequence number which the data should be send against

---

## com.sabratec.applinx.baseobject Class GXAbstractWaitCondition

java.lang.Object

└-com.sabratec.applinx.baseobject.GXAbstractWaitCondition

### All Implemented Interfaces:

[GXWaitCondition](#)

### Direct Known Subclasses:

[GXWaitHostQuiet](#), [GXAbstractWaitString](#), [GXAbstractWaitScreen](#), [GXAbstractWaitCursor](#)

public abstract class **GXAbstractWaitCondition**

extends Object

implements [GXWaitCondition](#)

Abstract class for all wait conditions.

## Method Summary

long	<a href="#">getFlicker()</a>
long	<a href="#">getTimeout()</a>
void	<a href="#">setFlicker(long flicker)</a>
void	<a href="#">setTimeout(long timeout)</a>

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Methods

### getTimeout

public long **getTimeout()**

### setTimeout

public void **setTimeout(long timeout)**

### getFlicker

public long **getFlicker()**

(continued from last page)


---

## **setFlicker**

```
public void setFlicker(long flicker)
```

## com.sabratec.applinx.baseobject Class GXAbstractWaitCursor

java.lang.Object



### All Implemented Interfaces:

[GXWaitCondition](#)

### Direct Known Subclasses:

[GXWaitWhileCursor](#), [GXWaitForCursor](#)

public abstract class **GXAbstractWaitCursor**  
extends [GXAbstractWaitCondition](#)

Abstract class for wait conditions involving the cursor.

## Method Summary

<a href="#">GXPosition</a>	<a href="#">getLowerRightPosition()</a>
<a href="#">GXPosition</a>	<a href="#">getUpperLeftPosition()</a>
void	<a href="#">setLowerRightPosition(<a href="#">GXPosition</a> lowerRight)</a>
void	<a href="#">setUpperLeftPosition(<a href="#">GXPosition</a> upperLeft)</a>

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractWaitCondition](#)

[getFlicker](#), [getTimeout](#), [setFlicker](#), [setTimeout](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Methods

### getUpperLeftPosition

public [GXPosition](#) [getUpperLeftPosition\(\)](#)

### getLowerRightPosition

public [GXPosition](#) [getLowerRightPosition\(\)](#)

---

## **setUpperLeftPosition**

```
public void setUpperLeftPosition(GXPosition upperLeft)
```


---

## **setLowerRightPosition**

```
public void setLowerRightPosition(GXPosition lowerRight)
```

## com.sabratec.applinx.baseobject Class GXAbstractWaitScreen

java.lang.Object



### All Implemented Interfaces:

[GXWaitCondition](#)

### Direct Known Subclasses:

[GXWaitWhileScreen](#), [GXWaitForScreen](#)

public abstract class **GXAbstractWaitScreen**  
extends [GXAbstractWaitCondition](#)

Abstract class for wait conditions involving a screen.

## Method Summary

String	<a href="#">getScreenName()</a>
void	<a href="#">setScreenName</a> (String screenName) Sets the screen name.

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractWaitCondition](#)

[getFlicker](#), [getTimeout](#), [setFlicker](#), [setTimeout](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Methods

### getScreenName

public String **getScreenName**()

#### Returns:

the screen name

### setScreenName

public void **setScreenName**(String screenName)

Sets the screen name.


#### Parameters:

(continued from last page)

screenName - the screen name to set

## com.sabratec.applinx.baseobject Class GXAbstractWaitString

java.lang.Object



### All Implemented Interfaces:

[GXWaitCondition](#)

### Direct Known Subclasses:

[GXWaitWhileString](#), [GXWaitForString](#)

public abstract class **GXAbstractWaitString**  
extends [GXAbstractWaitCondition](#)

Abstract class for wait conditions involving String on the host screen.

## Method Summary

<a href="#">GXPosition</a>	<a href="#">getLowerRightPosition()</a>
String	<a href="#">getString()</a>
<a href="#">GXPosition</a>	<a href="#">getUpperLeftPosition()</a>
boolean	<a href="#">isCaseSensitive()</a>
void	<a href="#">setIsCaseSensitive(boolean isSensitive)</a>
void	<a href="#">setLowerRightPosition(<a href="#">GXPosition</a> lowerRight)</a>
void	<a href="#">setString(String string)</a>
void	<a href="#">setUpperLeftPosition(<a href="#">GXPosition</a> upperLeft)</a>

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractWaitCondition](#)

[getFlicker](#), [getTimeout](#), [setFlicker](#), [setTimeout](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Methods



(continued from last page)

---

**getString**

```
public String getString()
```

---

**setString**

```
public void setString(String string)
```

---

**getUpperLeftPosition**

```
public GXPosition getUpperLeftPosition()
```

---

**setUpperLeftPosition**

```
public void setUpperLeftPosition(GXPosition upperLeft)
```

---

**getLowerRightPosition**

```
public GXPosition getLowerRightPosition()
```

---

**setLowerRightPosition**

```
public void setLowerRightPosition(GXPosition lowerRight)
```

---

**isCaseSensitive**

```
public boolean isCaseSensitive()
```

---


**setIsCaseSensitive**

```
public void setIsCaseSensitive(boolean isSensitive)
```

---

## com.sabratec.applinx.baseobject Class GXAttachToSessionRequest

java.lang.Object

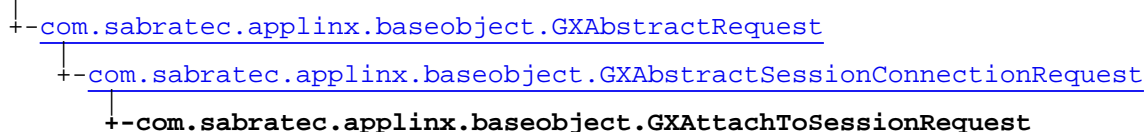

### All Implemented Interfaces:

Cloneable, java.io.Externalizable

public class **GXAttachToSessionRequest**  
extends [GXAbstractSessionConnectionRequest](#)

Settings for attach request.

## Constructor Summary

public	<a href="#">GXAttachToSessionRequest</a> ()
public	<a href="#">GXAttachToSessionRequest</a> (GXIAApplicationServerContext serverContext, String sessionID) Constructor
public	<a href="#">GXAttachToSessionRequest</a> (String serverURL, String sessionID, String sessionPassword) Constructor

## Method Summary

void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

### Methods inherited from class

[com.sabratec.applinx.baseobject.GXAbstractSessionConnectionRequest](#)

[getApplicationName](#), [getClientId](#), [getServerContext](#), [getServerURL](#), [getSessionID](#), [getSessionPassword](#), [readExternal](#), [setApplicationName](#), [setClientId](#), [setServerContext](#), [setServerURL](#), [setSessionID](#), [setSessionPassword](#), [writeExternal](#)

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#), [readExternal](#), [setVariables](#), [writeExternal](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Methods inherited from interface java.io.Externalizable

```
readExternal, writeExternal
```

## Constructors

### **GXAttachToSessionRequest**

```
public GXAttachToSessionRequest()
```

### **GXAttachToSessionRequest**

```
public GXAttachToSessionRequest(GXIApplicationServerContext serverContext,  
                                String sessionID)
```

Constructor

**Parameters:**

serverContext - ApplinX Server context.  
sessionID - ID of the session to attach to.

### **GXAttachToSessionRequest**

```
public GXAttachToSessionRequest(String serverURL,  
                                String sessionID,  
                                String sessionPassword)
```

Constructor

**Parameters:**

serverURL - the URL of ApplinX server.  
sessionID - ID to which the session will be attached.  
sessionPassword - password used to attach to the existing session on ApplinX server. Should be set ONLY if a password was set in the [GXCreateSessionRequest](#).

## Methods

### **readExternal**

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

### **writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```

## com.sabratec.applinx.baseobject Class GXBaseObjectConstants

java.lang.Object

└-com.sabratec.applinx.baseobject.GXBaseObjectConstants

public class **GXBaseObjectConstants**  
extends Object

This class holds all the constants of the base object.

### Field Summary

public static final	<a href="#">ANY_IDENTIFIED_SCREEN</a> This constant should be used when adding a wait condition which should wait for any identified screen Sample code: <pre>if (gx_session.getScreen().getName().equals("UNKNOWN")){     GXGetScreenRequest req = new GXGetScreenRequest();     req.addWaitCondition(new     GXWaitForScreen(GXBaseObjectConstants.ANY_IDENTIFIED_SCREEN,5000,0))     ; gx_session.getScreen(req); }</pre>
public static final	<a href="#">GX_FIELD_ADJUST_LEFT</a>
public static final	<a href="#">GX_FIELD_ADJUST_NONE</a>
public static final	<a href="#">GX_FIELD_ADJUST_RIGHT</a>
public static final	<a href="#">GX_FIELD_ADJUST_RIGHT_BLANK_FILL</a>
public static final	<a href="#">GX_FIELD_ADJUST_RIGHT_ZERO_FILL</a>
public static final	<a href="#">GX_FIELD_COLOR_AQUA</a> Value: 3
public static final	<a href="#">GX_FIELD_COLOR_BLACK</a> Value: 0
public static final	<a href="#">GX_FIELD_COLOR_BLUE</a> Value: 1
public static final	<a href="#">GX_FIELD_COLOR_BROWN</a> Value: 6
public static final	<a href="#">GX_FIELD_COLOR_GRAY</a> Value: 8
public static final	<a href="#">GX_FIELD_COLOR_GREEN</a> Value: 2

public static final	<a href="#">GX_FIELD_COLOR_LIGHT_AQUA</a> Value: <b>11</b>
public static final	<a href="#">GX_FIELD_COLOR_LIGHT_BLUE</a> Value: <b>9</b>
public static final	<a href="#">GX_FIELD_COLOR_LIGHT_GREEN</a> Value: <b>10</b>
public static final	<a href="#">GX_FIELD_COLOR_LIGHT_PURPLE</a> Value: <b>13</b>
public static final	<a href="#">GX_FIELD_COLOR_LIGHT_RED</a> Value: <b>12</b>
public static final	<a href="#">GX_FIELD_COLOR_LIGHT_WHITE</a> Value: <b>15</b>
public static final	<a href="#">GX_FIELD_COLOR_NONE</a> Value: <b>-1</b>
public static final	<a href="#">GX_FIELD_COLOR_PINK</a> Value: <b>5</b>
public static final	<a href="#">GX_FIELD_COLOR_RED</a> Value: <b>4</b>
public static final	<a href="#">GX_FIELD_COLOR_WHITE</a> Value: <b>7</b>
public static final	<a href="#">GX_FIELD_COLOR_YELLOW</a> Value: <b>14</b>
public static final	<a href="#">GX_FIELD_DATA_TYPE_ALPHA_ONLY</a>
public static final	<a href="#">GX_FIELD_DATA_TYPE_ALPHANUMERIC</a>
public static final	<a href="#">GX_FIELD_DATA_TYPE_DBCS_CAN_CREATE_SISO</a>
public static final	<a href="#">GX_FIELD_DATA_TYPE_DBCS_ONLY</a>
public static final	<a href="#">GX_FIELD_DATA_TYPE_DIGITS_ONLY</a>
public static final	<a href="#">GX_FIELD_DATA_TYPE_KATAKANA_SHIFT</a>
public static final	<a href="#">GX_FIELD_DATA_TYPE_NUMERIC</a>
public static final	<a href="#">GX_FIELD_DATA_TYPE_REVERSED</a>

public static final	<a href="#">GX_FIELD_DATA_TYPE_SIGNED_NUMERIC</a>
public static final	<a href="#">GX_VAR_APPLICATION_LANGUAGE</a> The language configured for the application used by the current session. Value: <b>com.sabratec.applinx.config.application_language</b>
public static final	<a href="#">GX_VAR_APPLY_TRANSFORMATIONS</a> Indicates if transformations should be applied to the next screen requested. Value: <b>com.sabratec.applinx.apply.transformations</b>
public static final	<a href="#">GX_VAR_AS400_KERBEROS_ENCODING</a> Value: <b>com.sabratec.applinx.as400.kerberosEncoding</b>
public static final	<a href="#">GX_VAR_AS400_KERBEROS_SERVICES_TICKET</a> Determines the name of the kerberos services ticket. Value: <b>com.sabratec.applinx.as400.kerberosServicesTicket</b>
public static final	<a href="#">GX_VAR_AS400_LIBRARY</a> Determines the name of the current AS400 Library. Value: <b>com.sabratec.applinx.as400.currentLibrary</b>
public static final	<a href="#">GX_VAR_AS400_MENU</a> Determines the name of the initial AS400 menu. Value: <b>com.sabratec.applinx.as400.initialMenu</b>
public static final	<a href="#">GX_VAR_AS400_PASSWORD</a> Determines the name of the current substitute password. Value: <b>com.sabratec.applinx.as400.substitutePassword</b>
public static final	<a href="#">GX_VAR_AS400_PROGRAM</a> Determines the name of the AS400 program to call. Value: <b>com.sabratec.applinx.as400.programToCall</b>
public static final	<a href="#">GX_VAR_AS400_STARTUP_RESPONSE</a> Value: <b>com.sabratec.applinx.as400.startupResponse</b>
public static final	<a href="#">GX_VAR_AS400_USERNAME</a> Determines the name of the user profile name. Value: <b>com.sabratec.applinx.as400.userProfileName</b>
public static final	<a href="#">GX_VAR_CUT_CONTENT_TO_MATCH_HOST_FIELD</a> Indicates whether or not to cut the content when it's size is bigger of than the host field
public static final	<a href="#">GX_VAR_DEVICE_NAME</a> The device name to be used in the current session. Value: <b>com.sabratec.applinx.emulation.device_name</b>
public static final	<a href="#">GX_VAR_DEVICE_TYPE</a> The device type to be used in the current session. Value: <b>com.sabratec.applinx.emulation.device_type</b>
public static final	<a href="#">GX_VAR_DISPLAY_HIDDEN_FIELDS</a> Indicates whether or not to retrieve the contents of hidden fields. Value: <b>com.sabratec.applinx.screen.content.displayHiddenFields</b>

public static final	<a href="#">GX_VAR_ENCODING_LOGICAL</a> Indicates that data should be converted from Visual to Logical. Value: <b>com.sabratec.applinx.screen.content.encoding.logical</b>
public static final	<a href="#">GX_VAR_FIELDS_WITH_SUGGESTED_NAMES</a> Value: <b>com.sabratec.applinx.fields.with.suggested.names</b>
public static final	<a href="#">GX_VAR_HEALTH_CHECK_CONNECTION</a> Define the connection as a healthcheck (currently supported only on Natural for Open System) In case the of Healthcheck connection you will get a status of the apxsrvd process, natapx and adabas db when specifying db id GX_VAR_HEALTH_CHECK_CONNECTION_DBID Possible values: true, false. Value: <b>com.softwareag.applinx.host.connection.healthcheck</b>
public static final	<a href="#">GX_VAR_HEALTH_CHECK_CONNECTION_DBID</a> Define the Ababas DB ID to check when doing GX_VAR_HEALTH_CHECK_CONNECTION Should not be defined if natural is not connected to Adabas. Value: <b>com.softwareag.applinx.host.connection.healthcheck.dbid</b>
public static final	<a href="#">GX_VAR_HOST_ADDRESS</a> The host IP address. Value: <b>com.sabratec.applinx.emulation.host_address</b>
public static final	<a href="#">GX_VAR_HOST_PORT</a> The host's port address. Value: <b>com.sabratec.applinx.emulation.host_port</b>
public static final	<a href="#">GX_VAR_HOST_WINDOW_ENABLED</a> Indicates that the host window should be ignored in the current screen. Value: <b>com.sabratec.applinx.screen.window.enabled</b>
public static final	<a href="#">GX_VAR_INCLUDE_HOST_FIELDS</a> Indicates whether to retrieve host fields as well as application fields or just application fields. Value: <b>com.sabratec.applinx.screen.content.hostFields</b>
public static final	<a href="#">GX_VAR_NATURAL_DATA_TRANSFER_DELIMITER</a> Relevant when downloading CSV files, determines the delimiter to be used. Value: <b>com.softwareag.applinx.ndt.delimiter</b>
public static final	<a href="#">GX_VAR_NATURAL_DATA_TRANSFER_HEADERS_USED</a> Determines whether to print the name of the field as the column header. Value: <b>com.softwareag.applinx.ndt.headers.used</b>
public static final	<a href="#">GX_VAR_NATURAL_DATA_TRANSFER_STREAM</a> Determines whether to stream the download file from the host through the server to the client or download the file as a whole. Value: <b>com.softwareag.applinx.ndt.stream</b>
public static final	<a href="#">GX_VAR_NATUX_OPTIONAL_CUSTOM_INFO</a> used to pass additional parameters to the apx.sh in the CUSTOM variable Value: <b>com.sabratec.applinx.natux.optional.custominfo</b>
public static final	<a href="#">GX_VAR_REMOVE_CHARACTER</a> Indicates that the character configured to be removed should be removed. Value: <b>com.sabratec.applinx.screen.content.remove_underline</b>

public static final	<a href="#">GX_VAR_REMOVE_CHARACTER_BOTH_SIDES</a> Indicates that the character configured to be removed should be removed from both sides of fields. Value: <b>com.sabratec.applinx.screen.content.remove_underline.sides</b>
public static final	<a href="#">GX_VAR_REPLAY_DELAY</a> Replay delay. Value: <b>com.sabratec.applinx.config.replay_delay</b>
public static final	<a href="#">GX_VAR_REPLAY_FILE</a> The replay file configured for the current session. Value: <b>com.sabratec.applinx.config.replay_file</b>
public static final	<a href="#">GX_VAR_RETURN_FIELDS</a> Indicates whether the fields should be returned Used with the ACTION_SESSION_GET_SCREEN request. Value: <b>com.softwareag.applinx.return.fields</b>
public static final	<a href="#">GX_VAR_RETURN_SCREEN_BUFFERS</a> Indicates which buffer types should be returned in the screen object. Value: <b>com.sabratec.applinx.screen.buffer</b>
public static final	<a href="#">GX_VAR_SCREEN_DIRECTION</a> The current screen direction of the application. Value: <b>com.sabratec.applinx.screen.direction</b>
public static final	<a href="#">GX_VAR_THROW_EXCEPTION_ON_INVALID_INPUT</a> Indicates whether or not to throw an exception if an invalid input was sent to a field Value: <b>com.sabratec.applinx.screen.content.invalidInputThrowsException</b>
public static final	<a href="#">GX_VAR_TRACE_FILE</a> The trace file configured for the current session. Value: <b>com.sabratec.applinx.config.trace_file</b>
public static final	<a href="#">GX_VAR_TRANSLATION_LANGUAGE</a> The translation language used by the current session. Value: <b>com.sabratec.applinx.localizer.translation_language</b>
public static final	<a href="#">GX_VAR_TRIM_FIELDS</a> Variable indicating which fields should be trimmed. Value: <b>com.sabratec.applinx.screen.content.trim.fields</b>
public static final	<a href="#">GX_VAR_TRIM_MODE</a> Variable indicating the trimming mode of fields. Value: <b>com.sabratec.applinx.screen.content.trim</b>
public static final	<a href="#">GX_VAR_UPPERCASE_INPUT</a> Flag to turn all data sent to the host to uppercase. Value: <b>com.sabratec.applinx.emulation.uppercase_input</b>
public static final	<a href="#">GX_VAR_VAL_BUFFERS_FIELD_ATTRIBUTES</a> Three field attribute buffers are returned: field attributes, extended field attributes and field color attributes. Value: <b>com.sabratec.applinx.screen.buffer.attributes</b>



public static final	<a href="#">GX_VAR_VAL_BUFFERS_NONE</a> No screen buffers are returned. Value: <b>com.sabratec.applinx.screen.buffers.none</b>
public static final	<a href="#">GX_VAR_VAL_BUFFERS_SCREEN_DATA</a> Screen data buffer (the fields' content) is returned. Value: <b>com.sabratec.applinx.screen.buffers.screen_data</b>
public static final	<a href="#">GX_VAR_VAL_REMOVE_CHARACTER_ALL</a> The character to be removed should be removed from all fields including input fields and labels. Value: <b>all</b>
public static final	<a href="#">GX_VAR_VAL_REMOVE_CHARACTER_BOTH_SIDES_ALL_FIELDS</a> Removes character from both sides of all fields. Value: <b>all</b>
public static final	<a href="#">GX_VAR_VAL_REMOVE_CHARACTER_BOTH_SIDES_NUMERIC_FIELDS_ONLY</a> Removes character from both sides of numeric fields only. Value: <b>numeric</b>
public static final	<a href="#">GX_VAR_VAL_REMOVE_CHARACTER_INPUT</a> The character to be removed should be removed only from input fields. Value: <b>input</b>
public static final	<a href="#">GX_VAR_VAL_REMOVE_CHARACTER_NONE</a> The character to be removed should not be removed. Value: <b>none</b>
public static final	<a href="#">GX_VAR_VAL_REPLAY_DELAY_NO_DELAY</a> Run replay as fast as possible. Value: <b>0</b>
public static final	<a href="#">GX_VAR_VAL_REPLAY_DELAY_SIMULATE_HOST</a> Run replay as recorded by host. Value: <b>-1</b>
public static final	<a href="#">GX_VAR_VAL_SCREEN_DIRECTION_LTR</a> Screen direction is left to right. Value: <b>LTR</b>
public static final	<a href="#">GX_VAR_VAL_SCREEN_DIRECTION_RTL</a> Screen direction is right to left. Value: <b>RTL</b>
public static final	<a href="#">GX_VAR_VAL_TRIM_FIELDS_ALL</a> Indicates that data of all fields should be trimmed. Value: <b>all</b>
public static final	<a href="#">GX_VAR_VAL_TRIM_FIELDS_INPUT_AND_BOTH</a> Indicates that data of input fields and application fields defined as "both" should be trimmed. Value: <b>input_both</b>
public static final	<a href="#">GX_VAR_VAL_TRIM_FIELDS_INPUT_ONLY</a> Indicates that data of input fields only should be trimmed. Value: <b>input_only</b>

public static final	<a href="#">GX_VAR_VAL_TRIM_FIELDS_NONE</a> Indicates that field data should not be trimmed. Value: <b>none</b>
public static final	<a href="#">GX_VAR_VAL_TRIM_MODE_BOTH_SIDES</a> Indicates trimming should be done on both sides. Value: <b>bothSides</b>
public static final	<a href="#">GX_VAR_VAL_TRIM_MODE_BY_FIELD_DIRECTION</a> Indicates trimming should be done according to field direction. Value: <b>fieldDirection</b>
public static final	<a href="#">GX_VAR_VAL_VT_SEND_CURSOR_ARROWS</a> Determines that the cursor should be set using the arrow keys. Value: <b>arrows</b>
public static final	<a href="#">GX_VAR_VAL_VT_SEND_CURSOR_NONE</a> Determines that the cursor should NOT be set to the host. Value: <b>none</b>
public static final	<a href="#">GX_VAR_VAL_VT_SEND_CURSOR_TAB</a> Determines that the cursor should be set using a tab key. Value: <b>tab_key</b>
public static final	<a href="#">GX_VAR_VT_AUTO_SKIP_WHEN_FIELD_IS_FULL</a> Flag that states whether or not the cursor will jump automatically from the current field to the next input field when the current input field is filled with content. Value: <b>com.sabratec.applinx.vt.blockmode.input_fields.auto_skip</b>
public static final	<a href="#">GX_VAR_VT_DYNAMIC_INPUT_CHECK</a> Flag that invokes the dynamic input check. Value: <b>com.sabratec.applinx.vt.blockmode.input_fields.dynamicCheck</b>
public static final	<a href="#">GX_VAR_VT_KEY_JUMP_BETWEEN_INPUT_FIELDS</a> The key ApplinX server should use in order to move between input fields in the host screen. Value: <b>com.sabratec.applinx.vt.blockmode.input_fields.jumpkey</b>
public static final	<a href="#">GX_VAR_VT_SEND_CURSOR</a> Determines the way the cursor should be set to a character mode host. Value: <b>com.sabratec.applinx.vt.blockmode.send_cursor</b>
public static final	<a href="#">GX_VAR_WORKING_FOLDER</a> The working folder for the current session. Value: <b>com.sabratec.applinx.folder.working_folder</b>
public static final	<a href="#">GX_WEB_APP_VERSION</a> Value: <b>com.softwareag.applinx.web.app.version</b>

## Constructor Summary

public	<a href="#">GXBaseObjectConstants</a> ( )
--------	---

### Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Fields

### **GX\_FIELD\_COLOR\_NONE**

```
public static final int GX_FIELD_COLOR_NONE
```

Constant value: -1

---

### **GX\_FIELD\_COLOR\_BLACK**

```
public static final int GX_FIELD_COLOR_BLACK
```

Constant value: 0

---

### **GX\_FIELD\_COLOR\_BLUE**

```
public static final int GX_FIELD_COLOR_BLUE
```

Constant value: 1

---

### **GX\_FIELD\_COLOR\_GREEN**

```
public static final int GX_FIELD_COLOR_GREEN
```

Constant value: 2

---

### **GX\_FIELD\_COLOR\_AQUA**

```
public static final int GX_FIELD_COLOR_AQUA
```

Constant value: 3

---

### **GX\_FIELD\_COLOR\_RED**

```
public static final int GX_FIELD_COLOR_RED
```

Constant value: 4

---

### **GX\_FIELD\_COLOR\_PINK**

```
public static final int GX_FIELD_COLOR_PINK
```

Constant value: 5

---

### **GX\_FIELD\_COLOR\_BROWN**

```
public static final int GX_FIELD_COLOR_BROWN
```

Constant value: 6

---

---

## **GX\_FIELD\_COLOR\_WHITE**

```
public static final int GX_FIELD_COLOR_WHITE
```

Constant value: 7

---

## **GX\_FIELD\_COLOR\_GRAY**

```
public static final int GX_FIELD_COLOR_GRAY
```

Constant value: 8

---

## **GX\_FIELD\_COLOR\_LIGHT\_BLUE**

```
public static final int GX_FIELD_COLOR_LIGHT_BLUE
```

Constant value: 9

---

## **GX\_FIELD\_COLOR\_LIGHT\_GREEN**

```
public static final int GX_FIELD_COLOR_LIGHT_GREEN
```

Constant value: 10

---

## **GX\_FIELD\_COLOR\_LIGHT\_AQUA**

```
public static final int GX_FIELD_COLOR_LIGHT_AQUA
```

Constant value: 11

---

## **GX\_FIELD\_COLOR\_LIGHT\_RED**

```
public static final int GX_FIELD_COLOR_LIGHT_RED
```

Constant value: 12

---

## **GX\_FIELD\_COLOR\_LIGHT\_PURPLE**

```
public static final int GX_FIELD_COLOR_LIGHT_PURPLE
```

Constant value: 13

---

## **GX\_FIELD\_COLOR\_YELLOW**

```
public static final int GX_FIELD_COLOR_YELLOW
```

Constant value: 14

---

(continued from last page)

---

## **GX\_FIELD\_COLOR\_LIGHT\_WHITE**

```
public static final int GX_FIELD_COLOR_LIGHT_WHITE
```

Constant value: 15

---

## **GX\_VAR\_DEVICE\_NAME**

```
public static final java.lang.String GX_VAR_DEVICE_NAME
```

The device name to be used in the current session.

Constant value: **com.sabratec.applinx.emulation.device\_name**

---

## **GX\_VAR\_DEVICE\_TYPE**

```
public static final java.lang.String GX_VAR_DEVICE_TYPE
```

The device type to be used in the current session.

Constant value: **com.sabratec.applinx.emulation.device\_type**

---

## **GX\_VAR\_HOST\_ADDRESS**

```
public static final java.lang.String GX_VAR_HOST_ADDRESS
```

The host IP address.

Constant value: **com.sabratec.applinx.emulation.host\_address**

---

## **GX\_VAR\_HOST\_PORT**

```
public static final java.lang.String GX_VAR_HOST_PORT
```

The host's port address.

Constant value: **com.sabratec.applinx.emulation.host\_port**

---

## **GX\_VAR\_UPPERCASE\_INPUT**

```
public static final java.lang.String GX_VAR_UPPERCASE_INPUT
```

Flag to turn all data sent to the host to uppercase. Possible values: true or false.

Constant value: **com.sabratec.applinx.emulation.uppercase\_input**

---

## **GX\_VAR\_VT\_SEND\_CURSOR**

```
public static final java.lang.String GX_VAR_VT_SEND_CURSOR
```

Determines the way the cursor should be set to a character mode host.

Constant value: **com.sabratec.applinx.vt.blockmode.send\_cursor**

**See Also:**

[GX\\_VAR\\_VAL\\_VT\\_SEND\\_CURSOR\\_TAB](#)

[GX\\_VAR\\_VAL\\_VT\\_SEND\\_CURSOR\\_ARROWS](#)

[GX\\_VAR\\_VAL\\_VT\\_SEND\\_CURSOR\\_NONE](#)

---

## **GX\_VAR\_VAL\_VT\_SEND\_CURSOR\_TAB**

```
public static final java.lang.String GX_VAR_VAL_VT_SEND_CURSOR_TAB
```

Determines that the cursor should be set using a tab key. Possible value of GX\_VAR\_VT\_SEND\_CURSOR.

Constant value: **tab\_key**

---

(continued from last page)

**See Also:**[GX\\_VAR\\_VT\\_SEND\\_CURSOR](#)[GX\\_VAR\\_VT\\_KEY\\_JUMP\\_BETWEEN\\_INPUT\\_FIELDS](#)

---

## **GX\_VAR\_VAL\_VT\_SEND\_CURSOR\_ARROWS**

```
public static final java.lang.String GX_VAR_VAL_VT_SEND_CURSOR_ARROWS
```

Determines that the cursor should be set using the arrow keys. Possible value of GX\_VAR\_VT\_SEND\_CURSOR.  
Constant value: **arrows**

**See Also:**[GX\\_VAR\\_VT\\_SEND\\_CURSOR](#)

---

## **GX\_VAR\_VAL\_VT\_SEND\_CURSOR\_NONE**

```
public static final java.lang.String GX_VAR_VAL_VT_SEND_CURSOR_NONE
```

Determines that the cursor should NOT be set to the host. Possible value of GX\_VAR\_VT\_SEND\_CURSOR.  
Constant value: **none**

**See Also:**[GX\\_VAR\\_VT\\_SEND\\_CURSOR](#)

---

## **GX\_VAR\_VT\_KEY\_JUMP\_BETWEEN\_INPUT\_FIELDS**

```
public static final java.lang.String GX_VAR_VT_KEY_JUMP_BETWEEN_INPUT_FIELDS
```

The key ApplinX server should use in order to move between input fields in the host screen. (Example value: "[tab]").  
Constant value: **com.sabratec.applinx.vt.blockmode.input\_fields.jumpkey**

---

## **GX\_VAR\_VT\_AUTO\_SKIP\_WHEN\_FIELD\_IS\_FULL**

```
public static final java.lang.String GX_VAR_VT_AUTO_SKIP_WHEN_FIELD_IS_FULL
```

Flag that states whether or not the cursor will jump automatically from the current field to the next input field when the current input field is filled with content. Possible values: true, false.  
Constant value: **com.sabratec.applinx.vt.blockmode.input\_fields.auto\_skip**

---

## **GX\_VAR\_VT\_DYNAMIC\_INPUT\_CHECK**

```
public static final java.lang.String GX_VAR_VT_DYNAMIC_INPUT_CHECK
```

Flag that invokes the dynamic input check. The dynamic input check sends the key used to move between input fields in order to determine in runtime where there are input fields on the host screen. Possible values: true, false.  
Constant value: **com.sabratec.applinx.vt.blockmode.input\_fields.dynamicCheck**

---

## **GX\_VAR\_APPLICATION\_LANGUAGE**

```
public static final java.lang.String GX_VAR_APPLICATION_LANGUAGE
```

The language configured for the application used by the current session.  
Constant value: **com.sabratec.applinx.config.application\_language**

---

## **GX\_VAR\_REPLAY\_FILE**

```
public static final java.lang.String GX_VAR_REPLAY_FILE
```

The replay file configured for the current session.

(continued from last page)

Constant value: **com.sabratec.applinx.config.replay\_file**

---

## **GX\_VAR\_REPLAY\_DELAY**

public static final java.lang.String **GX\_VAR\_REPLAY\_DELAY**Replay delay. Either a number as string, or [GX\\_VAR\\_VAL\\_REPLAY\\_DELAY\\_NO\\_DELAY](#) or [GX\\_VAR\\_VAL\\_REPLAY\\_DELAY\\_SIMULATE\\_HOST](#).Constant value: **com.sabratec.applinx.config.replay\_delay**

---

## **GX\_VAR\_VAL\_REPLAY\_DELAY\_NO\_DELAY**

public static final java.lang.String **GX\_VAR\_VAL\_REPLAY\_DELAY\_NO\_DELAY**

Run replay as fast as possible. Possible value of GX\_VAR\_REPLAY\_DELAY.

Constant value: **0****See Also:**[GX\\_VAR\\_REPLAY\\_DELAY](#)

---

## **GX\_VAR\_VAL\_REPLAY\_DELAY\_SIMULATE\_HOST**

public static final java.lang.String **GX\_VAR\_VAL\_REPLAY\_DELAY\_SIMULATE\_HOST**

Run replay as recorded by host. Possible value of GX\_VAR\_REPLAY\_DELAY.

Constant value: **-1****See Also:**[GX\\_VAR\\_REPLAY\\_DELAY](#)

---

## **GX\_VAR\_TRACE\_FILE**

public static final java.lang.String **GX\_VAR\_TRACE\_FILE**

The trace file configured for the current session.

Constant value: **com.sabratec.applinx.config.trace\_file**

---

## **GX\_VAR\_TRANSLATION\_LANGUAGE**

public static final java.lang.String **GX\_VAR\_TRANSLATION\_LANGUAGE**

The translation language used by the current session. These are the possible values: Afrikaans Albanian Arabic Basque Belarusian Bulgarian Catalan Chinese Croatian Czech Danish Dutch English Estonian Faeroese Farsi Finnish French German Greek Hebrew Hungarian Icelandic Indonesian Italian Japanese Korean Latvian Lithuanian Norwegian Polish Portuguese Romanian Russian Serbian Slovak Slovenian Spanish Swedish Thai Turkish Ukrainian Vietnamese

Constant value: **com.sabratec.applinx.localizer.translation\_language**

---

## **GX\_VAR\_WORKING\_FOLDER**

public static final java.lang.String **GX\_VAR\_WORKING\_FOLDER**

The working folder for the current session.

Constant value: **com.sabratec.applinx.folder.working\_folder**

---

## **GX\_VAR\_SCREEN\_DIRECTION**

public static final java.lang.String **GX\_VAR\_SCREEN\_DIRECTION**

The current screen direction of the application.

Constant value: **com.sabratec.applinx.screen.direction**

(continued from last page)

**See Also:**[GX\\_VAR\\_VAL\\_SCREEN\\_DIRECTION\\_RTL](#)[GX\\_VAR\\_VAL\\_SCREEN\\_DIRECTION\\_LTR](#)

---

## **GX\_VAR\_VAL\_SCREEN\_DIRECTION\_RTL**

```
public static final java.lang.String GX_VAR_VAL_SCREEN_DIRECTION_RTL
```

Screen direction is right to left. Possible value of GX\_VAR\_SCREEN\_DIRECTION.  
Constant value: **RTL**

**See Also:**[GX\\_VAR\\_SCREEN\\_DIRECTION](#)

---

## **GX\_VAR\_VAL\_SCREEN\_DIRECTION\_LTR**

```
public static final java.lang.String GX_VAR_VAL_SCREEN_DIRECTION_LTR
```

Screen direction is left to right. Possible value of GX\_VAR\_SCREEN\_DIRECTION.  
Constant value: **LTR**

**See Also:**[GX\\_VAR\\_SCREEN\\_DIRECTION](#)

---

## **GX\_VAR\_RETURN\_SCREEN\_BUFFERS**

```
public static final java.lang.String GX_VAR_RETURN_SCREEN_BUFFERS
```

Indicates which buffer types should be returned in the screen object.  
Constant value: **com.sabratec.applinx.screen.bufferers**

**See Also:**[GX\\_VAR\\_VAL\\_BUFFERS\\_NONE](#)[GX\\_VAR\\_VAL\\_BUFFERS\\_SCREEN\\_DATA](#)[GX\\_VAR\\_VAL\\_BUFFERS\\_FIELD\\_ATTRIBUTES](#)

---

## **GX\_VAR\_VAL\_BUFFERS\_NONE**

```
public static final java.lang.String GX_VAR_VAL_BUFFERS_NONE
```

No screen buffers are returned. Possible value of GX\_VAR\_RETURN\_SCREEN\_BUFFERS.  
Constant value: **com.sabratec.applinx.screen.bufferers.none**

**See Also:**[GX\\_VAR\\_RETURN\\_SCREEN\\_BUFFERS](#)

---

## **GX\_VAR\_VAL\_BUFFERS\_SCREEN\_DATA**

```
public static final java.lang.String GX_VAR_VAL_BUFFERS_SCREEN_DATA
```

Screen data buffer (the fields' content) is returned. Possible value of GX\_VAR\_RETURN\_SCREEN\_BUFFERS.  
Constant value: **com.sabratec.applinx.screen.bufferers.screen\_data**

**See Also:**[GX\\_VAR\\_RETURN\\_SCREEN\\_BUFFERS](#)



(continued from last page)

---

## GX\_VAR\_VAL\_BUFFERS\_FIELD\_ATTRIBUTES

```
public static final java.lang.String GX_VAR_VAL_BUFFERS_FIELD_ATTRIBUTES
```

Three field attribute buffers are returned: field attributes, extended field attributes and field color attributes. Possible value of GX\_VAR\_RETURN\_SCREEN\_BUFFERS.

Constant value: **com.sabratec.applinx.screen.buffer.attributes**

**See Also:**

[GX\\_VAR\\_RETURN\\_SCREEN\\_BUFFERS](#)

---

## GX\_VAR\_REMOVE\_CHARACTER

```
public static final java.lang.String GX_VAR_REMOVE_CHARACTER
```

Indicates that the character configured to be removed should be removed.

Constant value: **com.sabratec.applinx.screen.content.remove\_underline**

**See Also:**

[GX\\_VAR\\_VAL\\_REMOVE\\_CHARACTER\\_ALL](#)

[GX\\_VAR\\_VAL\\_REMOVE\\_CHARACTER\\_INPUT](#)

[GX\\_VAR\\_VAL\\_REMOVE\\_CHARACTER\\_NONE](#)

---

## GX\_VAR\_VAL\_REMOVE\_CHARACTER\_ALL

```
public static final java.lang.String GX_VAR_VAL_REMOVE_CHARACTER_ALL
```

The character to be removed should be removed from all fields including input fields and labels. Possible value of GX\_VAR\_REMOVE\_CHARACTER.

Constant value: **all**

**See Also:**

[GX\\_VAR\\_REMOVE\\_CHARACTER](#)

---

## GX\_VAR\_VAL\_REMOVE\_CHARACTER\_INPUT

```
public static final java.lang.String GX_VAR_VAL_REMOVE_CHARACTER_INPUT
```

The character to be removed should be removed only from input fields. Possible value of GX\_VAR\_REMOVE\_CHARACTER.

Constant value: **input**

**See Also:**

[GX\\_VAR\\_REMOVE\\_CHARACTER](#)

---

## GX\_VAR\_VAL\_REMOVE\_CHARACTER\_NONE

```
public static final java.lang.String GX_VAR_VAL_REMOVE_CHARACTER_NONE
```

The character to be removed should not be removed. Possible value of GX\_VAR\_REMOVE\_CHARACTER.

Constant value: **none**

**See Also:**

[GX\\_VAR\\_REMOVE\\_CHARACTER](#)

---

## GX\_VAR\_REMOVE\_CHARACTER\_BOTH\_SIDES

```
public static final java.lang.String GX_VAR_REMOVE_CHARACTER_BOTH_SIDES
```

Indicates that the character configured to be removed should be removed from both sides of fields.

---

(continued from last page)

Constant value: **com.sabratec.applinx.screen.content.remove\_underline.sides**

**See Also:**

[GX\\_VAR\\_REMOVE\\_CHARACTER\\_BOTH\\_SIDES](#)

[GX\\_VAR\\_VAL\\_REMOVE\\_CHARACTER\\_BOTH\\_SIDES\\_ALL\\_FIELDS](#)

---

## **GX\_VAR\_VAL\_REMOVE\_CHARACTER\_BOTH\_SIDES\_NUMERIC\_FIELDS\_ONLY**

```
public static final java.lang.String  
GX_VAR_VAL_REMOVE_CHARACTER_BOTH_SIDES_NUMERIC_FIELDS_ONLY
```

Removes character from both sides of numeric fields only. Possible value of `GX_VAR_REMOVE_CHARACTER_BOTH_SIDES`.  
Constant value: **numeric**

**See Also:**

[GX\\_VAR\\_REMOVE\\_CHARACTER\\_BOTH\\_SIDES](#)

---

## **GX\_VAR\_VAL\_REMOVE\_CHARACTER\_BOTH\_SIDES\_ALL\_FIELDS**

```
public static final java.lang.String GX_VAR_VAL_REMOVE_CHARACTER_BOTH_SIDES_ALL_FIELDS
```

Removes character from both sides of all fields. Possible value of `GX_VAR_REMOVE_CHARACTER_BOTH_SIDES`.  
Constant value: **all**

**See Also:**

[GX\\_VAR\\_REMOVE\\_CHARACTER\\_BOTH\\_SIDES](#)

---

## **GX\_VAR\_ENCODING\_LOGICAL**

```
public static final java.lang.String GX_VAR_ENCODING_LOGICAL
```

Indicates that data should be converted from Visual to Logical. Used by right to left languages (such as Hebrew). Possible values: true, false.  
Constant value: **com.sabratec.applinx.screen.content.encoding.logical**

---

## **GX\_VAR\_TRIM\_FIELDS**

```
public static final java.lang.String GX_VAR_TRIM_FIELDS
```

Variable indicating which fields should be trimmed. It is useful when displaying the fields' data.  
Constant value: **com.sabratec.applinx.screen.content.trim.fields**

**See Also:**

[GX\\_VAR\\_VAL\\_TRIM\\_FIELDS\\_ALL](#)

[GX\\_VAR\\_VAL\\_TRIM\\_FIELDS\\_NONE](#)

[GX\\_VAR\\_VAL\\_TRIM\\_FIELDS\\_INPUT\\_ONLY](#)

[GX\\_VAR\\_VAL\\_TRIM\\_FIELDS\\_INPUT\\_AND\\_BOTH](#)

---

## **GX\_VAR\_VAL\_TRIM\_FIELDS\_INPUT\_ONLY**

```
public static final java.lang.String GX_VAR_VAL_TRIM_FIELDS_INPUT_ONLY
```

Indicates that data of input fields only should be trimmed. Possible value of `GX_VAR_TRIM_FIELDS`.  
Constant value: **input\_only**

**See Also:**

[GX\\_VAR\\_TRIM\\_FIELDS](#)

---

## GX\_VAR\_VAL\_TRIM\_FIELDS\_INPUT\_AND\_BOTH

```
public static final java.lang.String GX_VAR_VAL_TRIM_FIELDS_INPUT_AND_BOTH
```

Indicates that data of input fields and application fields defined as "both" should be trimmed. Possible value of GX\_VAR\_TRIM\_FIELDS.

Constant value: **input\_both**

**See Also:**

[GX\\_VAR\\_TRIM\\_FIELDS](#)

---

## GX\_VAR\_VAL\_TRIM\_FIELDS\_NONE

```
public static final java.lang.String GX_VAR_VAL_TRIM_FIELDS_NONE
```

Indicates that field data should not be trimmed. Possible value of GX\_VAR\_TRIM\_FIELDS.

Constant value: **none**

**See Also:**

[GX\\_VAR\\_TRIM\\_FIELDS](#)

---

## GX\_VAR\_VAL\_TRIM\_FIELDS\_ALL

```
public static final java.lang.String GX_VAR_VAL_TRIM_FIELDS_ALL
```

Indicates that data of all fields should be trimmed. Possible value of GX\_VAR\_TRIM\_FIELDS.

Constant value: **all**

**See Also:**

[GX\\_VAR\\_TRIM\\_FIELDS](#)

---

## GX\_VAR\_TRIM\_MODE

```
public static final java.lang.String GX_VAR_TRIM_MODE
```

Variable indicating the trimming mode of fields.

Constant value: **com.sabratec.applinx.screen.content.trim**

**See Also:**

[GX\\_VAR\\_VAL\\_TRIM\\_MODE\\_BOTH\\_SIDES](#)

[GX\\_VAR\\_VAL\\_TRIM\\_MODE\\_BY\\_FIELD\\_DIRECTION](#)

---

## GX\_VAR\_VAL\_TRIM\_MODE\_BOTH\_SIDES

```
public static final java.lang.String GX_VAR_VAL_TRIM_MODE_BOTH_SIDES
```

Indicates trimming should be done on both sides.

Constant value: **bothSides**

---

## GX\_VAR\_VAL\_TRIM\_MODE\_BY\_FIELD\_DIRECTION

```
public static final java.lang.String GX_VAR_VAL_TRIM_MODE_BY_FIELD_DIRECTION
```

Indicates trimming should be done according to field direction.

Constant value: **fieldDirection**

---

(continued from last page)

---

## **GX\_VAR\_INCLUDE\_HOST\_FIELDS**

```
public static final java.lang.String GX_VAR_INCLUDE_HOST_FIELDS
```

Indicates whether to retrieve host fields as well as application fields or just application fields.  
Constant value: **com.sabratec.applinx.screen.content.hostFields**

---

## **GX\_VAR\_DISPLAY\_HIDDEN\_FIELDS**

```
public static final java.lang.String GX_VAR_DISPLAY_HIDDEN_FIELDS
```

Indicates whether or not to retrieve the contents of hidden fields.  
Constant value: **com.sabratec.applinx.screen.content.displayHiddenFields**

---

## **GX\_VAR\_THROW\_EXCEPTION\_ON\_INVALID\_INPUT**

```
public static final java.lang.String GX_VAR_THROW_EXCEPTION_ON_INVALID_INPUT
```

Indicates whether or not to throw an exception if an invalid input was sent to a field  
Constant value: **com.sabratec.applinx.screen.content.invalidInputThrowsException**

---

## **GX\_VAR\_CUT\_CONTENT\_TO\_MATCH\_HOST\_FIELD**

```
public static final java.lang.Object GX_VAR_CUT_CONTENT_TO_MATCH_HOST_FIELD
```

Indicates whether or not to cut the content when it's size is bigger of than the host field

---

## **GX\_VAR\_HOST\_WINDOW\_ENABLED**

```
public static final java.lang.String GX_VAR_HOST_WINDOW_ENABLED
```

Indicates that the host window should be ignored in the current screen. This parameter affects retrieving the content of the screen (all the positions of the fields are absolute), but it does not affect the identification of the screen. Possible values: true, false.  
Constant value: **com.sabratec.applinx.screen.window.enabled**

---

## **GX\_VAR\_FIELDS\_WITH\_SUGGESTED\_NAMES**

```
public static final java.lang.String GX_VAR_FIELDS_WITH_SUGGESTED_NAMES
```

Constant value: **com.sabratec.applinx.fields.with.suggested.names**

---

## **GX\_VAR\_APPLY\_TRANSFORMATIONS**

```
public static final java.lang.String GX_VAR_APPLY_TRANSFORMATIONS
```

Indicates if transformations should be applied to the next screen requested. Used with the ACTION\_SESSION\_GET\_SCREEN request. Possible values: true, false.  
Constant value: **com.sabratec.applinx.apply.transformations**

---

## **GX\_VAR\_RETURN\_FIELDS**

```
public static final java.lang.String GX_VAR_RETURN_FIELDS
```

Indicates whether the fields should be returned Used with the ACTION\_SESSION\_GET\_SCREEN request. Possible values: true, false.  
Constant value: **com.softwareag.applinx.return.fields**

---

(continued from last page)

---

## **GX\_VAR\_NATURAL\_DATA\_TRANSFER\_DELIMITER**

```
public static final java.lang.String GX_VAR_NATURAL_DATA_TRANSFER_DELIMITER
```

Relevant when downloading CSV files, determines the delimiter to be used. By default "," is used.  
Constant value: **com.softwareag.applinx.ndt.delimiter**

---

## **GX\_VAR\_NATURAL\_DATA\_TRANSFER\_HEADERS\_USED**

```
public static final java.lang.String GX_VAR_NATURAL_DATA_TRANSFER_HEADERS_USED
```

Determines whether to print the name of the field as the column header. Possible values: true, false. By default: false.  
Constant value: **com.softwareag.applinx.ndt.headers.used**

---

## **GX\_VAR\_HEALTH\_CHECK\_CONNECTION**

```
public static final java.lang.String GX_VAR_HEALTH_CHECK_CONNECTION
```

Define the connection as a healthcheck (currently supported only on Natural for Open System) In case the of Healthcheck connection you will get a status of the apxsrvd process, natapx and adabas db when specifying db id  
GX\_VAR\_HEALTH\_CHECK\_CONNECTION\_DBID Possible values: true, false. By default: false.  
Constant value: **com.softwareag.applinx.host.connection.healthcheck**

---

## **GX\_VAR\_HEALTH\_CHECK\_CONNECTION\_DBID**

```
public static final java.lang.String GX_VAR_HEALTH_CHECK_CONNECTION_DBID
```

Define the Ababas DB ID to check when doing GX\_VAR\_HEALTH\_CHECK\_CONNECTION Should not be defined if natural is not connected to Adabas. Possible values: int value that define the dbid.  
Constant value: **com.softwareag.applinx.host.connection.healthcheck.dbid**

---

## **GX\_VAR\_NATURAL\_DATA\_TRANSFER\_STREAM**

```
public static final java.lang.String GX_VAR_NATURAL_DATA_TRANSFER_STREAM
```

Determines whether to stream the download file from the host through the server to the client or download the file as a whole.  
Constant value: **com.softwareag.applinx.ndt.stream**

---

## **GX\_VAR\_AS400\_USERNAME**

```
public static final java.lang.String GX_VAR_AS400_USERNAME
```

Determines the name of the user profile name. By default null  
Constant value: **com.sabratec.applinx.as400.userProfileName**

---

## **GX\_VAR\_AS400\_PASSWORD**

```
public static final java.lang.String GX_VAR_AS400_PASSWORD
```

Determines the name of the current substitute password. By default null  
Constant value: **com.sabratec.applinx.as400.substitutePassword**

---

## **GX\_VAR\_AS400\_LIBRARY**

```
public static final java.lang.String GX_VAR_AS400_LIBRARY
```

Determines the name of the current AS400 Library. By default null  
Constant value: **com.sabratec.applinx.as400.currentLibrary**

---

## **GX\_VAR\_AS400\_MENU**

```
public static final java.lang.String GX_VAR_AS400_MENU
```

Determines the name of the initial AS400 menu. By default null  
Constant value: **com.sabratec.applinx.as400.initialMenu**

---

## **GX\_VAR\_AS400\_PROGRAM**

```
public static final java.lang.String GX_VAR_AS400_PROGRAM
```

Determines the name of the AS400 program to call. By default null  
Constant value: **com.sabratec.applinx.as400.programToCall**

---

## **GX\_VAR\_AS400\_KERBEROS\_SERVICES\_TICKET**

```
public static final java.lang.String GX_VAR_AS400_KERBEROS_SERVICES_TICKET
```

Determines the name of the kerberos services ticket. By default null  
Constant value: **com.sabratec.applinx.as400.kerberosServicesTicket**

---

## **GX\_VAR\_AS400\_KERBEROS\_ENCODING**

```
public static final java.lang.String GX_VAR_AS400_KERBEROS_ENCODING
```

Constant value: **com.sabratec.applinx.as400.kerberosEncoding**

---

## **GX\_VAR\_AS400\_STARTUP\_RESPONSE**

```
public static final java.lang.String GX_VAR_AS400_STARTUP_RESPONSE
```

Constant value: **com.sabratec.applinx.as400.startupResponse**

---

## **GX\_VAR\_NATUX\_OPTIONAL\_CUSTOM\_INFO**

```
public static final java.lang.String GX_VAR_NATUX_OPTIONAL_CUSTOM_INFO
```

used to pass additional parameters to the apx.sh in the CUSTOM variable  
Constant value: **com.sabratec.applinx.natux.optional.custominfo**

---

## **GX\_FIELD\_DATA\_TYPE\_ALPHANUMERIC**

```
public static final int GX_FIELD_DATA_TYPE_ALPHANUMERIC
```

---

## **GX\_FIELD\_DATA\_TYPE\_NUMERIC**

```
public static final int GX_FIELD_DATA_TYPE_NUMERIC
```

---

## **GX\_FIELD\_DATA\_TYPE\_ALPHA\_ONLY**

```
public static final int GX_FIELD_DATA_TYPE_ALPHA_ONLY
```

---

(continued from last page)

---

### **GX\_FIELD\_DATA\_TYPE\_DIGITS\_ONLY**

```
public static final int GX_FIELD_DATA_TYPE_DIGITS_ONLY
```

---

### **GX\_FIELD\_DATA\_TYPE\_SIGNED\_NUMERIC**

```
public static final int GX_FIELD_DATA_TYPE_SIGNED_NUMERIC
```

---

### **GX\_FIELD\_DATA\_TYPE\_KATAKANA\_SHIFT**

```
public static final int GX_FIELD_DATA_TYPE_KATAKANA_SHIFT
```

---

### **GX\_FIELD\_DATA\_TYPE\_DBCS\_ONLY**

```
public static final int GX_FIELD_DATA_TYPE_DBCS_ONLY
```

---

### **GX\_FIELD\_DATA\_TYPE\_DBCS\_CAN\_CREATE\_SISO**

```
public static final int GX_FIELD_DATA_TYPE_DBCS_CAN_CREATE_SISO
```

---

### **GX\_FIELD\_DATA\_TYPE\_REVERSED**

```
public static final int GX_FIELD_DATA_TYPE_REVERSED
```

---

### **GX\_FIELD\_ADJUST\_NONE**

```
public static final int GX_FIELD_ADJUST_NONE
```

---

### **GX\_FIELD\_ADJUST\_RIGHT\_ZERO\_FILL**

```
public static final int GX_FIELD_ADJUST_RIGHT_ZERO_FILL
```

---

### **GX\_FIELD\_ADJUST\_RIGHT\_BLANK\_FILL**

```
public static final int GX_FIELD_ADJUST_RIGHT_BLANK_FILL
```

---

(continued from last page)

---

## **GX\_FIELD\_ADJUST\_RIGHT**

```
public static final int GX_FIELD_ADJUST_RIGHT
```

---

## **GX\_FIELD\_ADJUST\_LEFT**

```
public static final int GX_FIELD_ADJUST_LEFT
```

---

## **ANY\_IDENTIFIED\_SCREEN**

```
public static final java.lang.String ANY_IDENTIFIED_SCREEN
```

This constant should be used when adding a wait condition which should wait for any identified screen

Sample code:

```
if (gx_session.getScreen().getName().equals("UNKNOWN")){  
    GXGetScreenRequest req = new GXGetScreenRequest();  
    req.addWaitCondition(new  
GXWaitForScreen(GXBaseObjectConstants.ANY_IDENTIFIED_SCREEN, 5000, 0));  
    gx_session.getScreen(req);  
}
```

---

## **GX\_WEB\_APP\_VERSION**

```
public static final java.lang.String GX_WEB_APP_VERSION
```

Constant value: **com.softwareag.applinx.web.app.version**

## Constructors


### **GXBaseObjectConstants**

```
public GXBaseObjectConstants()
```



## com.sabratec.applinx.baseobject Class GXBidiTranslatorRequest

java.lang.Object



### All Implemented Interfaces:

Cloneable, java.io.Externalizable

public class **GXBidiTranslatorRequest**  
extends [GXAbstractRequest](#)

### Constructor Summary

public	<a href="#">GXBidiTranslatorRequest</a> ()
public	<a href="#">GXBidiTranslatorRequest</a> (Vector contents, boolean isRTL)

### Method Summary

Vector	<a href="#">getContents</a> ()
boolean	<a href="#">isRTL</a> ()
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">setContents</a> (Vector contents)
void	<a href="#">setRTL</a> (boolean isRTL)
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#), [readExternal](#), [setVariables](#), [writeExternal](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Methods inherited from interface java.io.Externalizable

[readExternal](#), [writeExternal](#)

(continued from last page)

## Constructors

### GXBidiTranslatorRequest

```
public GXBidiTranslatorRequest()
```

---

### GXBidiTranslatorRequest

```
public GXBidiTranslatorRequest(Vector contents,  
                               boolean isRTL)
```

## Methods

### getContents

```
public Vector getContents()
```

---

### setContents

```
public void setContents(Vector contents)
```

---

### isRTL

```
public boolean isRTL()
```

---

### setRTL

```
public void setRTL(boolean isRTL)
```

---

### readExternal

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

---

### writeExternal

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```

## com.sabratec.applinx.baseobject Class GXBidiTranslatorResponse

java.lang.Object

└-com.sabratec.applinx.baseobject.GXBidiTranslatorResponse

### All Implemented Interfaces:

java.io.Externalizable

```
public class GXBidiTranslatorResponse
extends Object
implements java.io.Externalizable
```

## Constructor Summary

public	<a href="#">GXBidiTranslatorResponse()</a>
public	<a href="#">GXBidiTranslatorResponse</a> (Map glossary)

## Method Summary

Map	<a href="#">getGlossary()</a>
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">setGlossary</a> (Map glossary)
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Methods inherited from interface java.io.Externalizable

readExternal, writeExternal

## Constructors

### GXBidiTranslatorResponse

```
public GXBidiTranslatorResponse()
```

(continued from last page)

## GXBidiTranslatorResponse

```
public GXBidiTranslatorResponse(Map glossary)
```

### Methods

#### getGlossary

```
public Map getGlossary()
```

#### setGlossary

```
public void setGlossary(Map glossary)
```

#### readExternal


```
public void readExternal(java.io.ObjectInput in)
    throws java.io.IOException,
           ClassNotFoundException
```

#### writeExternal

```
public void writeExternal(java.io.ObjectOutput out)
    throws java.io.IOException
```

## com.sabratec.applinx.baseobject Class GXBinaryRequest

java.lang.Object



### All Implemented Interfaces:

Cloneable, java.io.Externalizable

public class **GXBinaryRequest**  
extends [GXAbstractRequest](#)

## Constructor Summary

public	<a href="#">GXBinaryRequest</a> ()
public	<a href="#">GXBinaryRequest</a> (byte[] data)

## Method Summary

byte[]	<a href="#">getData</a> ()
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">setData</a> (byte[] data)
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#), [readExternal](#), [setVariables](#), [writeExternal](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Methods inherited from interface java.io.Externalizable

[readExternal](#), [writeExternal](#)

## Constructors

### GXBinaryRequest

public **GXBinaryRequest**()

(continued from last page)

---

## GXBinaryRequest

```
public GXBinaryRequest(byte[] data)
```

## Methods

### getData

```
public byte[] getData()
```

---

### setData

```
public void setData(byte[] data)
```

---

### writeExternal

```
public void writeExternal(java.io.ObjectOutput out)
    throws java.io.IOException
```

---

### readExternal

```
public void readExternal(java.io.ObjectInput in)
    throws java.io.IOException,
           ClassNotFoundException
```

## com.sabratec.applinx.baseobject Class GXBinaryResponse

java.lang.Object

└-com.sabratec.applinx.baseobject.GXBinaryResponse

### All Implemented Interfaces:

java.io.Serializable

```
public class GXBinaryResponse
extends Object
implements java.io.Serializable
```

## Constructor Summary

public	<a href="#">GXBinaryResponse</a> (byte[] data)
--------	--

## Method Summary

byte[]	<a href="#">getData</a> ()
void	<a href="#">setData</a> (byte[] data)

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Constructors

### GXBinaryResponse

```
public GXBinaryResponse(byte[] data)
```

## Methods

### getData

```
public byte[] getData()
```

### setData

```
public void setData(byte[] data)
```

## com.sabratec.applinx.baseobject Class GXClientApplicationConfig

java.lang.Object

└-com.sabratec.applinx.baseobject.GXClientApplicationConfig

### All Implemented Interfaces:

java.io.Serializable

```
public class GXClientApplicationConfig
extends Object
implements java.io.Serializable
```

Data structure that contains the application configuration retrieved from the server.

### See Also:

[GXIReadOnlyBaseObject.getApplicationConfig\(\)](#)

## Constructor Summary

public	<a href="#">GXClientApplicationConfig()</a>
public	<a href="#">GXClientApplicationConfig</a> (String applicationName, String hostDeviceType, String hostAddress, int language, boolean trimFields, boolean naturalDataTransferSupported, String gctFileName, int nonActivityTimeout, String deviceName, String keyboardMappingXML, String hostCategory) Create a new client application configuration instance.

## Method Summary

String	<a href="#">getApplicationName()</a>
String	<a href="#">getHostAddress()</a>
String	<a href="#">getHostCategory()</a>
String	<a href="#">getHostDeviceName()</a>
String	<a href="#">getHostDeviceType()</a>
String	<a href="#">getKeyboardMappingXML()</a>
int	<a href="#">getLanguage()</a>
int	<a href="#">getNonAtivityTimeOut()</a>
boolean	<a href="#">isNaturalDataTransferSupported()</a>
boolean	<a href="#">isTrimFields()</a>



**Methods inherited from class** `java.lang.Object``equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait`

## Constructors

### **GXClientApplicationConfig**

```
public GXClientApplicationConfig()
```

### **GXClientApplicationConfig**

```
public GXClientApplicationConfig(String applicationName,  
                                String hostDeviceType,  
                                String hostAddress,  
                                int language,  
                                boolean trimFields,  
                                boolean naturalDataTransferSupported,  
                                String gctFileName,  
                                int nonActivityTimeout,  
                                String deviceName,  
                                String keyboardMappingXML,  
                                String hostCategory)
```

Create a new client application configuration instance.

**Parameters:**

`hostCategory`

## Methods

### **getApplicationName**

```
public String getApplicationName()
```

**Returns:**

the application name

### **getHostDeviceType**

```
public String getHostDeviceType()
```

**Returns:**

the host's device type

### **getHostDeviceName**

```
public String getHostDeviceName()
```

**Returns:**

(continued from last page)

the host's device name

---

## getHostAddress

```
public String getHostAddress()
```

**Returns:**

the host's address

---

## getLanguage

```
public int getLanguage()
```

**Returns:**

the application language

---

## isTrimFields

```
public boolean isTrimFields()
```

**Returns:**

whether the configuration is defined to trim fields.

---

## isNaturalDataTransferSupported

```
public boolean isNaturalDataTransferSupported()
```

**Returns:**

whether the host supports Natural Data Transfer.

---

## getNonAtivityTimeOut

```
public int getNonAtivityTimeOut()
```

**Returns:**

the Non Ativity Time Out (milisecends)

---

## getKeyboardMappingXML

```
public String getKeyboardMappingXML()
```

---

## getHostCategory

```
public String getHostCategory()
```

## com.sabratec.applinx.baseobject Class GXClientBaseObjectFactory

java.lang.Object

└-com.sabratec.applinx.baseobject.GXClientBaseObjectFactory

All Implemented Interfaces:

[GXIBaseObjectFetcher](#)

public class **GXClientBaseObjectFactory**  
extends Object  
implements [GXIBaseObjectFetcher](#)

### Constructor Summary

public	<a href="#">GXClientBaseObjectFactory()</a>
--------	---

### Method Summary

void	<a href="#">closeSession</a> ( <a href="#">GXIClientBaseObject</a> baseObject)
<a href="#">GXIClientBaseObject</a>	<a href="#">createBaseObject</a> ( <a href="#">GXCreateSessionRequest</a> connectRequest)
<a href="#">GXIClientBaseObject</a>	<a href="#">createBaseObject</a> ( <a href="#">GXCreateSessionRequest</a> connectRequest, long timeoutInMS)
static void	<a href="#">detachSession</a> ( <a href="#">GXIReadOnlyBaseObject</a> baseObject)
static void	<a href="#">endSession</a> ( <a href="#">GXEndSessionRequest</a> endSessionRequest)
static void	<a href="#">endSession</a> ( <a href="#">GXIClientBaseObject</a> baseObject)
<a href="#">GXIReadOnlyBaseObject</a>	<a href="#">fetch</a> ( <a href="#">GXAttachToSessionRequest</a> attachRequest)
static <a href="#">GXIClientBaseObject</a>	<a href="#">getBaseObject</a> ( <a href="#">GXAttachToSessionRequest</a> attachRequest)
static <a href="#">GXIClientBaseObject</a>	<a href="#">getBaseObject</a> ( <a href="#">GXCreateSessionRequest</a> connectRequest)
static <a href="#">GXIClientBaseObject</a>	<a href="#">getBaseObject</a> ( <a href="#">GXCreateSessionRequest</a> connectRequest, long timeoutInMS)
static <a href="#">GXIReadOnlyBaseObject</a>	<a href="#">getReadOnlyBaseObject</a> ( <a href="#">GXAttachToSessionRequest</a> attachRequest) PLEASE PAY ATTENTION!!! This method invokes also via reflection mechanism in class: GXTagRenderer

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

Methods inherited from interface [com.sabratec.applinx.baseobject.GXIBaseObjectFetcher](#)

[closeSession](#), [createBaseObject](#), [createBaseObject](#), [fetch](#)

## Constructors

### **GXClientBaseObjectFactory**

```
public GXClientBaseObjectFactory()
```

## Methods

### **createBaseObject**

```
public GXIClientBaseObject createBaseObject(GXCreateSessionRequest connectRequest)
    throws GXConnectionException,
           GXGeneralException
```

### **createBaseObject**

```
public GXIClientBaseObject createBaseObject(GXCreateSessionRequest connectRequest,
                                             long timeoutInMS)
    throws GXGeneralException
```

### **getBaseObject**

```
public static GXIClientBaseObject getBaseObject(GXCreateSessionRequest connectRequest)
    throws GXConnectionException,
           GXGeneralException
```

### **getBaseObject**

```
public static GXIClientBaseObject getBaseObject(GXCreateSessionRequest connectRequest,
                                             long timeoutInMS)
    throws GXConnectionException,
           GXGeneralException,
           InterruptedException,
           ExecutionException,
           TimeoutException
```

### **getBaseObject**

```
public static GXIClientBaseObject getBaseObject(GXAttachToSessionRequest
attachRequest)
    throws GXConnectionException,
           GXGeneralException
```

---

## getReadOnlyBaseObject

```
public static GXReadOnlyBaseObject getReadOnlyBaseObject(GXAttachToSessionRequest
attachRequest)
    throws GXConnectionException,
           GXGeneralException
```

PLEASE PAY ATTENTION!!! This method invokes also via reflection mechanism in class: GXTagRenderer

---

## detachSession

```
public static void detachSession(GXReadOnlyBaseObject baseObject)
    throws GXGeneralException,
           GXConnectionException
```

---

## closeSession

```
public void closeSession(GXIClientBaseObject baseObject)
    throws GXConnectionException,
           GXGeneralException
```

---

## endSession

```
public static void endSession(GXIClientBaseObject baseObject)
    throws GXGeneralException,
           GXConnectionException
```

---

## endSession

```
public static void endSession(GXEndSessionRequest endSessionRequest)
    throws GXGeneralException,
           GXConnectionException
```

---

## fetch

```
public GXReadOnlyBaseObject fetch(GXAttachToSessionRequest attachRequest)
```

## com.sabratec.applinx.baseobject Class GXConnectionException

```

java.lang.Object
  |
  +- GXExceptionWithErrorCode
      |
      +- com.sabratec.applinx.baseobject.GXGeneralException
          |
          +- com.sabratec.applinx.baseobject.GXConnectionException

```

```

public class GXConnectionException
extends GXGeneralException

```

Exception indicating that a connection problems occurred between the client and ApplinX server or between ApplinX server and the host.

### Constructor Summary

public	<a href="#">GXConnectionException</a> (String message, Throwable e, int errorCode)
--------	--

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Constructors

#### **GXConnectionException**


```

public GXConnectionException(String message,
                             Throwable e,
                             int errorCode)

```

## com.sabratec.applinx.baseobject Class GXCreateSessionRequest

java.lang.Object

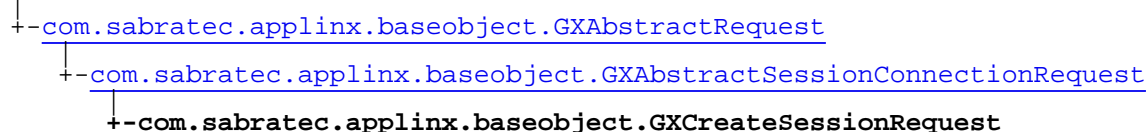

### All Implemented Interfaces:

Cloneable, java.io.Externalizable

### Direct Known Subclasses:

[GXActivatePrinterRequest](#)

```
public class GXCreateSessionRequest
extends GXAbstractSessionConnectionRequest
```

This class holds all the parameters needed for the getBaseObject() method of GXClientBaseObjectFactory.

## Constructor Summary

public	<a href="#">GXCreateSessionRequest()</a>
public	<a href="#">GXCreateSessionRequest</a> (GXIApplicationServerContext serverContext, String applicationName) Constructor for local connection to ApplinX Server.
public	<a href="#">GXCreateSessionRequest</a> (String serverURL, String applicationName, String sessionID, String password, String sessionDescription, String hostSessionId, String hostSessionPassword) Constructor for all parameters besides host service.
public	<a href="#">GXCreateSessionRequest</a> (String serverURL, String applicationName, String sessionID, String password, String sessionDescription, String hostService) Constructor for all parameters.

## Method Summary

String	<a href="#">getConnectionPool()</a>
String	<a href="#">getHostNewPassword()</a>
String	<a href="#">getHostPassword()</a>
String	<a href="#">getHostService()</a> <b>Deprecated.</b> @see <a href="#">getConnectionPool()</a>
String	<a href="#">getHostUserName()</a>
String	<a href="#">getSessionDescription()</a>

boolean	<a href="#">isFailOnWarning()</a>
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">setConnectionPool</a> (String pool) /** Set the session to use a predefined connection pool.
void	<a href="#">setFailOnWarning</a> (boolean failOnWarning) Set whether to throw an exception as for error on connection warnings.
void	<a href="#">setHostNewPassword</a> (String pwd) Sets a password that will be used to replace the current host password.
void	<a href="#">setHostPassword</a> (String pwd) Sets a password that will be used to connect to the host.
void	<a href="#">setHostUserName</a> (String id) Sets a user ID that will be used to connect to the host.
void	<a href="#">setSessionDescription</a> (String description) Set the session description.
void	<a href="#">setUseHostService</a> (String serviceName) <b>Deprecated.</b> @see <a href="#">setConnectionPool(String)</a>
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

**Methods inherited from class**[com.sabratec.applinx.baseobject.GXAbstractSessionConnectionRequest](#)

[getApplicationName](#), [getClientId](#), [getServerContext](#), [getServerURL](#), [getSessionID](#),  
[getSessionPassword](#), [readExternal](#), [setApplicationName](#), [setClientId](#), [setServerContext](#),  
[setServerURL](#), [setSessionID](#), [setSessionPassword](#), [writeExternal](#)

**Methods inherited from class** [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#),  
[readExternal](#), [setVariables](#), [writeExternal](#)

**Methods inherited from class** java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

**Methods inherited from interface** java.io.Externalizable

[readExternal](#), [writeExternal](#)

## Constructors

### GXCreateSessionRequest

```
public GXCreateSessionRequest()
```



---

## GXCreateSessionRequest

```
public GXCreateSessionRequest(GXIApplicationServerContext serverContext,
                             String applicationName)
```

Constructor for local connection to ApplinX Server.

### Parameters:

serverContext - context of ApplinX server.  
 applicationName - name of a valid application in ApplinX server (at the given URL).

---

## GXCreateSessionRequest

```
public GXCreateSessionRequest(String serverURL,
                              String applicationName,
                              String sessionID,
                              String password,
                              String sessionDescription,
                              String hostSessionId,
                              String hostSessionPassword)
```

Constructor for all parameters besides host service.

### Parameters:

serverURL - URL of ApplinX server.  
 applicationName - name of a valid application in ApplinX server (at the given URL).  
 sessionID - ID for the session that will be created on ApplinX server.  
 password - password for the connection between the base object and ApplinX server.  
 sessionDescription - description string for the session. It will appear in the sessions list in the Administrator.  
 hostSessionId - host connection username. Relevant for SSH or Natural UNIX hosts.  
 hostSessionPassword - host connection password. Relevant for SSH or Natural UNIX hosts.

---

## GXCreateSessionRequest

```
public GXCreateSessionRequest(String serverURL,
                              String applicationName,
                              String sessionID,
                              String password,
                              String sessionDescription,
                              String hostService)
```

Constructor for all parameters.

### Parameters:

serverURL - URL of ApplinX server.  
 applicationName - name of a valid application in ApplinX server (at the given URL).  
 sessionID - ID for the session that will be created on ApplinX server.  
 password - password for the connection between the base object and ApplinX server.  
 sessionDescription - description string for the session. It will appear in the sessions list in the Administrator.  
 hostService - connect to a connection from a pool of a host service.

---

## Methods

### setSessionDescription

```
public void setSessionDescription(String description)
```

Set the session description.

---

---

(continued from last page)

**Parameters:**

description - the description of this session

---

**getSessionDescription**

```
public String getSessionDescription()
```

**Returns:**

The session description.

---

**setUseHostService**

```
public void setUseHostService(String serviceName)
```

**Deprecated.** @see [setConnectionPool\(String\)](#)

Set the session to use a predefined host service.

**Parameters:**

serviceName - the host service to use

---

**setConnectionPool**

```
public void setConnectionPool(String pool)
```

/\*\* Set the session to use a predefined connection pool.

**Parameters:**

pool - the connection pool to use

---

**getHostService**

```
public String getHostService()
```

**Deprecated.** @see [getConnectionPool\(\)](#)

**Returns:**

the configured host service of this session. null if no service was defined.

---

**getConnectionPool**

```
public String getConnectionPool()
```

**Returns:**

the configured host service of this session. null if no service was defined.

---

**getHostUserName**

```
public String getHostUserName()
```

**Returns:**

---

(continued from last page)

The user ID configured for the connection to the host that will be created by this request.

**See Also:**

[setHostUserName\(String\)](#)

---

## getHostPassword

```
public String getHostPassword()
```

**Returns:**

The password configured for the connection to the host that will be created by this request.

**See Also:**

[setHostUserName\(String\)](#)

---

## getHostNewPassword

```
public String getHostNewPassword()
```

**Returns:**

The password configured for the to replace the current host password.

**See Also:**

[setHostNewPassword\(String\)](#)

---

## setHostUserName

```
public void setHostUserName(String id)
```

Sets a user ID that will be used to connect to the host. Setting host user ID and host user password is relevant only for hosts with SSH or host of type **Natural UNIX**.

**Parameters:**

id - The user ID for the connection.

---

## setHostPassword

```
public void setHostPassword(String pwd)
```

Sets a password that will be used to connect to the host.

**Parameters:**

pwd - The password for the connection

**See Also:**

[setHostUserName\(String\)](#)

---

## setHostNewPassword

```
public void setHostNewPassword(String pwd)
```

Sets a password that will be used to replace the current host password.

**Parameters:**

pwd - The new password

---

---

(continued from last page)

**See Also:**

[setHostUserName\(String\)](#)

---

**isFailOnWarning**

```
public boolean isFailOnWarning()
```

**Returns:**

Whether to throw an exception in case of warnings, as in errors.

---

**setFailOnWarning**

```
public void setFailOnWarning(boolean failOnWarning)
```

Set whether to throw an exception as for error on connection warnings. For example: if the password is about to expire in a few days.  
By default false.

---

**readExternal**

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

**writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```

---

## com.sabratec.applinx.baseobject Class GXCreateSessionResponse

java.lang.Object

└─com.sabratec.applinx.baseobject.GXCreateSessionResponse

### All Implemented Interfaces:

java.io.Serializable

```
public class GXCreateSessionResponse
extends Object
implements java.io.Serializable
```

Response data message for the connect request

### See Also:

ACTION\_SESSION\_CONNECT

## Constructor Summary

public	<a href="#">GXCreateSessionResponse</a> (String userId) Create a new create session response message.
--------	--

## Method Summary

String	<a href="#">getUserId</a> () Return the actual ID of the user.
--------	---

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Constructors

### GXCreateSessionResponse

```
public GXCreateSessionResponse(String userId)
```

Create a new create session response message.

#### Parameters:

userId - the actual ID of the connected user.

## Methods

### getUserId

```
public String getUserId()
```

Return the actual ID of the user.

## com.sabratec.applinx.baseobject Class GXCursor

java.lang.Object

└─com.sabratec.applinx.baseobject.GXCursor

### All Implemented Interfaces:

java.io.Serializable

```
public class GXCursor
extends Object
implements java.io.Serializable
```

This class represents the cursor position to be set to the host screen. The cursor is set according to the field it is in.

### Constructor Summary

public	<a href="#">GXCursor()</a>
public	<a href="#">GXCursor(GXPosition pos)</a> Sets the cursor at the specified position.
public	<a href="#">GXCursor(String fieldName)</a> Sets the cursor to the specified appfield.
public	<a href="#">GXCursor(String fieldName, int index)</a> Sets the cursor to the specified appfield in the specified index.

### Method Summary

int	<a href="#">getFieldIndex()</a>
String	<a href="#">getFieldName()</a>
<a href="#">GXPosition</a>	<a href="#">getPosition()</a>
void	<a href="#">setFieldIndex(int index)</a>
void	<a href="#">setFieldName(String fieldName)</a>
void	<a href="#">setPosition(GXPosition pos)</a>
String	<a href="#">toString()</a>

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

(continued from last page)

## Constructors

### GXCursor

```
public GXCursor()
```

---

### GXCursor

```
public GXCursor(GXPosition pos)
```

Sets the cursor at the specified position. If the field is an input field, the cursor will be set at the end of the text in it.

**Parameters:**

pos - the position where the cursor should be set.

---

### GXCursor

```
public GXCursor(String fieldName)
```

Sets the cursor to the specified appfield. If the field is a label, the cursor will be set at the start position of the field. If the field is an input, the cursor will be set at the end of the text in the field. If the field is a multiple appfield, the cursor will be set to the first index of the appfield.

**Parameters:**

fieldName - the name of the appfield in which the cursor should be set.

---

### GXCursor

```
public GXCursor(String fieldName,  
                int index)
```

Sets the cursor to the specified appfield in the specified index. If the field is a label, the cursor will be set at the start position of the field. If the field is an input, the cursor will be set at the end of the text in the field.

**Parameters:**

fieldName - the name of the appfield in which the cursor should be set.

index - The index of the multiple appfield in which the cursor should be set.

## Methods

### setPosition

```
public void setPosition(GXPosition pos)
```

**Parameters:**

pos - the position to which to set the cursor position.

**See Also:**

[GXCursor\(GXPosition\)](#)

---

### getPosition

```
public GXPosition getPosition()
```

---

(continued from last page)

**Returns:**

the position set for the cursor.

---

**setFieldName**

```
public void setFieldName(String fieldName)
```

**Parameters:**

fieldName - the name of the appfield in which the cursor should be set.

**See Also:**

[GXCursor\(String\)](#)

---

**getFieldName**

```
public String getFieldName()
```

**Returns:**

the field name set for the cursor.

---

**setFieldIndex**

```
public void setFieldIndex(int index)
```

**Parameters:**

index - the index of the multiple appfield in which the cursor should be set.

**See Also:**

[GXCursor\(String, int\)](#)

---

**getFieldIndex**

```
public int getFieldIndex()
```

**Returns:**

the multiple appfield index set for the cursor.

---

**toString**

```
public String toString()
```



## com.sabratec.applinx.baseobject Interface GXDebuggableRequest

All Known Implementing Classes:

[GXTableRequest](#), [GXPathRequest](#), [GXNavigateRequest](#)

---

public interface **GXDebuggableRequest**

Generic interface for requests that perform an action that can be debugged.

---

### Method Summary

abstract boolean	<a href="#">isDebugMode()</a>
abstract void	<a href="#">setDebugMode()</a> Sets the request to be executed in debug mode.

---

### Methods

#### setDebugMode

public abstract void **setDebugMode()**

Sets the request to be executed in debug mode.

---

#### isDebugMode


public abstract boolean **isDebugMode()**

**Returns:**

the status of the debug mode flag.

## com.sabratec.applinx.baseobject Class GXEndSessionRequest

java.lang.Object

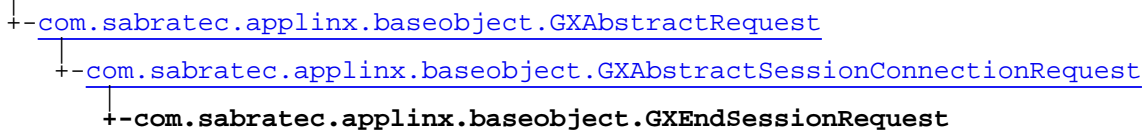

### All Implemented Interfaces:

Cloneable, java.io.Externalizable

public class **GXEndSessionRequest**  
extends [GXAbstractSessionConnectionRequest](#)

Settings for disconnect request.

### Constructor Summary

public	<a href="#">GXEndSessionRequest()</a>
public	<a href="#">GXEndSessionRequest</a> (GXIAApplicationServerContext serverContext)

### Method Summary

void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

#### Methods inherited from class

[com.sabratec.applinx.baseobject.GXAbstractSessionConnectionRequest](#)

[getApplicationName](#), [getClientId](#), [getServerContext](#), [getServerURL](#), [getSessionID](#), [getSessionPassword](#), [readExternal](#), [setApplicationName](#), [setClientId](#), [setServerContext](#), [setServerURL](#), [setSessionID](#), [setSessionPassword](#), [writeExternal](#)

#### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#), [readExternal](#), [setVariables](#), [writeExternal](#)

#### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

#### Methods inherited from interface java.io.Externalizable

[readExternal](#), [writeExternal](#)

(continued from last page)

## Constructors

### **GXEndSessionRequest**

```
public GXEndSessionRequest()
```

---

### **GXEndSessionRequest**

```
public GXEndSessionRequest(GXIApplicationServerContext serverContext)
```

**Parameters:**

serverContext - the server context to disconnect from.

## Methods

### **readExternal**

```
public void readExternal(java.io.ObjectInput in)
    throws java.io.IOException,
           ClassNotFoundException
```

---

### **writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)
    throws java.io.IOException
```

## com.sabratec.applinx.baseobject Class GXField

java.lang.Object

└-com.sabratec.applinx.baseobject.GXField

### All Implemented Interfaces:

java.io.Serializable, [GXIField](#)

public class **GXField**  
 extends Object  
 implements [GXIField](#), java.io.Serializable

This class represents one field on the host screen. This field can be a host field or an application field, or an instance within a multiple appfield.

### Field Summary

public static final	<a href="#">FIELD_TYPE_APPFIELD</a> Value: 0
public static final	<a href="#">FIELD_TYPE_HOSTFIELD</a> Value: 1

### Fields inherited from interface [com.sabratec.applinx.baseobject.GXIField](#)

[TYPE\\_APPFIELD](#), [TYPE\\_HOSTFIELD](#), [TYPE\\_HOSTKEY\\_FIELD](#), [TYPE\\_MULTIPLE\\_APPFIELD](#)

### Constructor Summary

public	<a href="#">GXField()</a>
--------	---------------------------

### Method Summary

boolean	<a href="#">equals</a> (Object obj)
int	<a href="#">getBGColor</a> ()
String	<a href="#">getContent</a> ()
int	<a href="#">getDataType</a> ()
int	<a href="#">getFGColor</a> ()
int	<a href="#">getIndex</a> ()
String	<a href="#">getInputMask</a> ()

int	<a href="#">getLength()</a>
String	<a href="#">getName()</a>
<a href="#">GXPosition</a>	<a href="#">getPosition()</a>
String	<a href="#">getScreenName()</a>
int	<a href="#">getScreenSequenceNumber()</a>
String	<a href="#">getVisualContent()</a>
boolean	<a href="#">isAppField()</a>
boolean	<a href="#">isAutoCursorJump()</a>
boolean	<a href="#">isAutoEnter()</a>
boolean	<a href="#">isBlinking()</a>
boolean	<a href="#">isHighIntensified()</a>
boolean	<a href="#">isHostKeyField()</a>
boolean	<a href="#">isMultiple()</a>
boolean	<a href="#">isProtected()</a>
boolean	<a href="#">isReversedVideo()</a>
boolean	<a href="#">isUnderlined()</a>
boolean	<a href="#">isVisible()</a>

**Methods inherited from class** `java.lang.Object`

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

**Methods inherited from interface** `com.sabratec.applinx.baseobject.GXIField`

[getBGColor](#), [getContent](#), [getDataType](#), [getFGColor](#), [getIndex](#), [getInputMask](#), [getLength](#), [getName](#), [getPosition](#), [getScreenName](#), [getScreenSequenceNumber](#), [getVisualContent](#), [isAppField](#), [isAutoCursorJump](#), [isAutoEnter](#), [isBlinking](#), [isHighIntensified](#), [isMultiple](#), [isProtected](#), [isReversedVideo](#), [isUnderlined](#), [isVisible](#)

**Methods inherited from interface** `com.sabratec.applinx.baseobject.table.GXICellable`

[getContent](#)

(continued from last page)

## Fields

### **FIELD\_TYPE\_APPFIELD**

```
public static final int FIELD_TYPE_APPFIELD
```

Constant value: 0

### **FIELD\_TYPE\_HOSTFIELD**

```
public static final int FIELD_TYPE_HOSTFIELD
```

Constant value: 1

## Constructors

### **GXField**

```
public GXField()
```

## Methods

### **getScreenName**

```
public String getScreenName()
```

### **getScreenSequenceNumber**

```
public int getScreenSequenceNumber()
```

### **getName**

```
public String getName()
```

### **getIndex**

```
public int getIndex()
```

### **getPosition**

```
public GXPosition getPosition()
```

(continued from last page)

---

**getLength**

```
public int getLength()
```

---

**getContent**

```
public String getContent()
```

---

**isProtected**

```
public boolean isProtected()
```

---

**isVisible**

```
public boolean isVisible()
```

---

**isHighIntensified**

```
public boolean isHighIntensified()
```

---

**isAutoEnter**

```
public boolean isAutoEnter()
```

---

**getBGColor**

```
public int getBGColor()
```

---

**getFGColor**

```
public int getFGColor()
```

---

**isAutoCursorJump**

```
public boolean isAutoCursorJump()
```

---

**isAppField**

```
public boolean isAppField()
```

---

(continued from last page)

---

### **isHostKeyField**

```
public boolean isHostKeyField()
```

---

### **isMultiple**

```
public boolean isMultiple()
```

---

### **isBlinking**

```
public boolean isBlinking()
```

---

### **getDataType**

```
public int getDataType()
```

---

### **getInputMask**

```
public String getInputMask()
```

---

### **equals**

```
public boolean equals(Object obj)
```

---

### **getVisualContent**

```
public String getVisualContent()
```

---

### **isUnderlined**

```
public boolean isUnderlined()
```

---

### **isReversedVideo**

```
public boolean isReversedVideo()
```

---



## com.sabratec.applinx.baseobject Class GXFieldCollection

java.lang.Object

↳ com.sabratec.applinx.baseobject.GXFieldCollection

### All Implemented Interfaces:

java.io.Serializable, [GXIFieldCollection](#)

public class **GXFieldCollection**  
 extends Object  
 implements [GXIFieldCollection](#), java.io.Serializable

This class is a collection of fields. It analyzes the fields array and allows retrieval of fields according to name, multiple index, etc.

### Constructor Summary

public	<a href="#">GXFieldCollection</a> (GXIField[] fields)
public	<a href="#">GXFieldCollection</a> (Vector fields)

### Method Summary

boolean	<a href="#">equals</a> (Object obj)
<a href="#">GXIFieldCollection</a>	<a href="#">getAppFields</a> ()
<a href="#">GXIField</a>	<a href="#">getFieldAt</a> (int index)
<a href="#">GXIField</a>	<a href="#">getFieldByPosition</a> (GXPosition position)
int	<a href="#">getFieldCount</a> ()
<a href="#">GXIField</a>	<a href="#">getFieldInstance</a> (String name, int fieldIndex)
<a href="#">GXIField[]</a>	<a href="#">getFields</a> ()
<a href="#">GXIFieldCollection</a>	<a href="#">getFields</a> (String name)
<a href="#">GXIField</a>	<a href="#">getFirstFieldInstance</a> (String name)
<a href="#">GXIField</a>	<a href="#">getLastFieldInstance</a> (String name)

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Methods inherited from interface [com.sabratec.applinx.baseobject.GXIFieldCollection](#)

---

[getAppFields](#), [getFieldAt](#), [getFieldByPosition](#), [getFieldCount](#), [getFieldInstance](#),  
[getFields](#), [getFields](#), [getFirstFieldInstance](#), [getLastFieldInstance](#)

---

## Constructors

### **GXFieldCollection**

```
public GXFieldCollection(GXIField\[\] fields)
```

---

### **GXFieldCollection**

```
public GXFieldCollection(Vector fields)
```

---

## Methods

### **getFields**

```
public GXIField\[\] getFields()
```

---

### **getFieldAt**

```
public GXIField getFieldAt(int index)
```

---

### **getFieldCount**

```
public int getFieldCount()
```

---

### **getFields**

```
public GXIFieldCollection getFields(String name)
```

---

### **getAppFields**

```
public GXIFieldCollection getAppFields()
```

**Returns:**

all appfields in current collection.

---

---

(continued from last page)

## getFirstFieldInstance

```
public GXIField getFirstFieldInstance(String name)
```

**Returns:**

first instance for this appfield in current collection.

---

## getLastFieldInstance

```
public GXIField getLastFieldInstance(String name)
```

**Returns:**

last instance for this appfield in current collection.

---

## getFieldInstance

```
public GXIField getFieldInstance(String name,  
int fieldIndex)
```

**Returns:**

the instance at the given index of this appfield.

---

## getFieldByPosition

```
public GXIField getFieldByPosition(GXPosition position)
```

**Returns:**

hostfield/appfield by position.

---

## equals

```
public boolean equals(Object obj)
```

## com.sabratec.applinx.baseobject Class GXGeneralException

java.lang.Object

└-GXExceptionWithErrorCode

└-com.sabratec.applinx.baseobject.GXGeneralException

**Direct Known Subclasses:**

[GXColumnNotFoundException](#), [GXPathException](#), [GXNavigateException](#), [GXNaturalDataTransferException](#), [GXConnectionException](#)

```
public class GXGeneralException
extends GXExceptionWithErrorCode
```

Exception indicating general error.

### Constructor Summary

public	<a href="#">GXGeneralException</a> (String message, Throwable e, int errorCode)
--------	---

**Methods inherited from class** java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait


### Constructors

#### GXGeneralException

```
public GXGeneralException(String message,
                          Throwable e,
                          int errorCode)
```

## com.sabratec.applinx.baseobject Class GXGetScreenRequest

java.lang.Object



### All Implemented Interfaces:

Cloneable, java.io.Externalizable

public class **GXGetScreenRequest**  
extends [GXAbstractRequest](#)

Settings for the getScreen request.

### Constructor Summary

public	<a href="#">GXGetScreenRequest()</a>
--------	--------------------------------------

### Method Summary

void	<a href="#">addWaitCondition(<a href="#">GXWaitCondition</a> waitCondition)</a> Adds a wait condition to the getScreen request.
<a href="#">GXWaitCondition[]</a>	<a href="#">getWaitCodings()</a>
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#), [readExternal](#), [setVariables](#), [writeExternal](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Methods inherited from interface java.io.Externalizable

[readExternal](#), [writeExternal](#)

### Constructors

#### GXGetScreenRequest

public **GXGetScreenRequest**()

(continued from last page)

## Methods

### addWaitCondition

```
public void addWaitCondition(GXWaitCondition waitCondition)
```

Adds a wait condition to the getScreen request. The wait conditions will be executed with a logical AND between them according to the order they were added to the request. Each type of wait condition has its own class, which implements GXWaitCondition.

**Parameters:**

waitCondition - the wait condition to add to the request.

### getWaitCodings

```
public GXWaitCondition\[\] getWaitCodings()
```

### readExternal

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

### writeExternal

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```

## com.sabratec.applinx.baseobject Interface GXIBaseObjectFetcher

All Known Implementing Classes:  
[GXClientBaseObjectFactory](#)

public interface **GXIBaseObjectFetcher**

### Method Summary

abstract void	<a href="#">closeSession</a> ( <a href="#">GXIClientBaseObject</a> baseObject)
abstract <a href="#">GXIClientBaseObject</a>	<a href="#">createBaseObject</a> ( <a href="#">GXCreateSessionRequest</a> connectRequest)
abstract <a href="#">GXIClientBaseObject</a>	<a href="#">createBaseObject</a> ( <a href="#">GXCreateSessionRequest</a> connectRequest, long timeoutInMS)
abstract <a href="#">GXIReadOnlyBaseObject</a>	<a href="#">fetch</a> ( <a href="#">GXAttachToSessionRequest</a> request)

### Methods

#### fetch

public abstract [GXIReadOnlyBaseObject](#) **fetch**([GXAttachToSessionRequest](#) request)

#### closeSession

public abstract void **closeSession**([GXIClientBaseObject](#) baseObject)  
throws [GXConnectionException](#),  
[GXGeneralException](#)

#### createBaseObject

public abstract [GXIClientBaseObject](#) **createBaseObject**([GXCreateSessionRequest](#) connectRequest)  
throws [GXConnectionException](#),  
[GXGeneralException](#)

#### createBaseObject

public abstract [GXIClientBaseObject](#) **createBaseObject**([GXCreateSessionRequest](#) connectRequest,  
long timeoutInMS)  
throws [GXGeneralException](#)

(continued from last page)



## com.sabratec.applinx.baseobject Interface GXIClientBaseObject

All Superinterfaces:

[GXIReadOnlyBaseObject](#)

All Subinterfaces:

[GXINaturalDataTransferClientBaseObject](#)

public interface **GXIClientBaseObject**  
extends [GXIReadOnlyBaseObject](#)

This object represents a live session against the ApplinX server and the host. The different methods in the base object session connect to ApplinX server, execute an action on the host and return a response.

Method Summary	
abstract <a href="#">GXPathResponse</a>	<a href="#">executePath</a> ( <a href="#">GXPathRequest</a> request) Executes a path on the host, and returns the response of the path (screens, variables).
abstract <a href="#">GXPathResponse</a>	<a href="#">executePath</a> (String pathName) Executes a path on the host, and returns the response of the path (screens, variables).
abstract GXIProcedureResponse	<a href="#">executeProcedure</a> (GXIExtendedProcedureRequest request) Use this method to execute Procedure Clients generated in the current ApplinX version
abstract GXIProcedureResponse	<a href="#">executeProcedure</a> (GXIProcedureRequest request) <b>Deprecated.</b> <i>Execute the Procedure client with the <code>GXIClientBaseObject.executeProcedure(GXIProcedureRequest, String, String)</code> method, or with the <code>GXIClientBaseObject.executeProcedure(GXIExtendedProcedureRequest)</code> method.</i>
abstract GXIProcedureResponse	<a href="#">executeProcedure</a> (GXIProcedureRequest request, String serviceName, String methodName) Use this method in order to execute Procedure Clients generated in ApplinX version 5.x, 8.0 and 8.1
abstract <a href="#">GXBook[]</a>	<a href="#">getPrints</a> () Gets prints data represented as GXBook(s) print model <a href="#">GXBook</a>
abstract <a href="#">GXITable</a>	<a href="#">getTable</a> () <b>Deprecated.</b> <i>Replaced with <code>GXIClientBaseObject.getScreen().getTable()</code> which returns a table associated with the current screen</i>
abstract <a href="#">GXITable</a>	<a href="#">getTable</a> ( <a href="#">GXTableRequest</a> request) <b>Deprecated.</b> <i>Replaced with <code>GXIClientBaseObject.executeProcedure</code> which returns structured data. Refer to the documentation for further details.</i>
abstract <a href="#">GXITable</a>	<a href="#">getTable</a> (String tableName) <b>Deprecated.</b> <i>Replaced with <code>GXIClientBaseObject.executeProcedure</code> which returns structured data.</i>
abstract void	<a href="#">navigateTo</a> ( <a href="#">GXNavigateRequest</a> request) Navigates from the current screen to the destination screen using a given map.

abstract void	<a href="#">refreshScreen()</a> Refreshes the current local screen that <code>getScreen()</code> returns with contents from the host.
abstract void	<a href="#">sendKeys(GXSendKeysRequest request)</a> A request that sets input fields, cursor position and sends a key to the host.
abstract void	<a href="#">sendKeys(String key)</a> A request that sends a key to the host.

#### Methods inherited from interface [com.sabratec.applinx.baseobject.GXIReadOnlyBaseObject](#)

[getApplicationConfig](#), [getScreen](#), [getScreen](#), [getSeqScreenNumber](#), [getSessionID](#), [isReadOnly](#)

## Methods

### sendKeys

```
public abstract void sendKeys(GXSendKeysRequest request)
    throws GXConnectionException,
           GXGeneralException
```

A request that sets input fields, cursor position and sends a key to the host. If not host key is specified [enter] is sent to the host.

#### Parameters:

request - the `sendKeys` request.

#### Throws:

[GXConnectionException](#) - When connection problems occurred between the client and ApplinX server or the ApplinX server and the host.  
[GXGeneralException](#) - Other errors.

### sendKeys

```
public abstract void sendKeys(String key)
    throws GXConnectionException,
           GXGeneralException
```

A request that sends a key to the host.

#### Parameters:

key - the host key to send.

#### Throws:

[GXConnectionException](#) - When connection problems occurred between the client and ApplinX server or the ApplinX server and the host.  
[GXGeneralException](#) - Other errors.

### executePath

```
public abstract GXPathResponse executePath(GXPathRequest request)
    throws GXConnectionException,
           GXPathException,
           GXGeneralException
```

Executes a path on the host, and returns the response of the path (screens, variables).

(continued from last page)

**Parameters:**

request - the path request.

**Returns:**

the path's response.

**Throws:**[GXConnectionException](#) - When connection problems occurred between the client and ApplinX server or the ApplinX server and the host.[GXPathException](#) - Errors in path execution.[GXGeneralException](#) - Other errors.

---

**executePath**

```
public abstract GXPathResponse executePath(String pathName)
    throws GXConnectionException,
           GXPathException,
           GXGeneralException
```

Executes a path on the host, and returns the response of the path (screens, variables).

**Parameters:**

pathName - the name of the path to be executed.

**Returns:**

the path's response.

**Throws:**[GXConnectionException](#) - When connection problems occurred between the client and ApplinX server or the ApplinX server and the host.[GXPathException](#) - Errors in path execution.[GXGeneralException](#) - Other errors.

---

**executeProcedure**

```
public abstract GXIPecedureResponse executeProcedure(GXIPecedureRequest request,
    String serviceName,
    String methodName)
    throws GXConnectionException,
           GXGeneralException
```

Use this method in order to execute Procedure Clients generated in ApplinX version 5.x, 8.0 and 8.1

**Parameters:**

request - the request object of the method. The class is a generated class of procedure client, e.g: &lt;ProcedureName&gt;Request

**Returns:**

the response object. The class is a generated class of procedure client, e.g: &lt;ProcedureName&gt;Response

**Throws:**[GXConnectionException](#)[GXGeneralException](#)

---

**executeProcedure**

```
public abstract GXIPecedureResponse executeProcedure(GXIPecedureRequest request)
    throws GXConnectionException,
           GXGeneralException
```

(continued from last page)

**Deprecated.** *Execute the Procedure client with the**GXIClientBaseObject.executeProcedure(GXIProcedureRequest, String, String) method, or with the GXIClientBaseObject.executeProcedure(GXIExtendedProcedureRequest) method.***Parameters:**

request - the request object of the method. The class is a generated class of procedure client, e.g: <ProcedureName>Request

**Returns:**

the response object. The class is a generated class of procedure client, e.g: <ProcedureName>Response

**Throws:**

[GXConnectionException](#)  
[GXGeneralException](#)

---

## executeProcedure

```
public abstract GXIProcedureResponse executeProcedure(GXIExtendedProcedureRequest request)
    throws GXConnectionException,
           GXGeneralException
```

Use this method to execute Procedure Clients generated in the current ApplinX version

**Parameters:**

request - the request object of the method. The class is a generated class of procedure client, e.g: <ProcedureName>Request

**Returns:**

the response object. The class is a generated class of procedure client, e.g: <ProcedureName>Response

**Throws:**

[GXConnectionException](#)  
[GXGeneralException](#)

---

## getTable

```
public abstract GXITable getTable(GXTableRequest request)
    throws GXConnectionException,
           GXGeneralException
```

**Deprecated.** *Replaced with GXIClientBaseObject.executeProcedure which returns structured data. Refer to the documentation for further details.*

This method retrieves a table from ApplinX server according to the GXTableRequest.

**Parameters:**

request - the table request.

**Returns:**

the table.

**Throws:**

[GXConnectionException](#) - When connection problems occurred between the client and ApplinX server or the ApplinX server and the host.  
[GXGeneralException](#) - Other errors.

(continued from last page)

## getTable

```
public abstract GXITable getTable(String tableName)  
    throws GXConnectionException,  
           GXGeneralException
```

**Deprecated.** Replaced with `GXIClientBaseObject.executeProcedure` which returns structured data.

This method retrieves the path or screen associated table of the specified name from the ApplinX server.

**Parameters:**

tableName - the table's name as defined in the ApplinX repository.

**Returns:**

the table.

**Throws:**

[GXConnectionException](#) - When connection problems occurred between the client and ApplinX server or the ApplinX server and the host.  
[GXGeneralException](#) - Other errors.

---

## getTable

```
public abstract GXITable getTable()  
    throws GXConnectionException,  
           GXGeneralException
```

**Deprecated.** Replaced with `GXIClientBaseObject.getScreen().getTable()` which returns a table associated with the current screen

This method retrieves a table for the current host screen, if such is defined, including its full details. This is assuming the screen contains only one table in it. If more than one table exists for the screen, no table is returned.

**Returns:**

the screen's table.

**Throws:**

[GXConnectionException](#) - When connection problems occurred between the client and ApplinX server or the ApplinX server and the host.  
[GXGeneralException](#) - Other errors.

---

## navigateTo

```
public abstract void navigateTo(GXNavigateRequest request)  
    throws GXConnectionException,  
           GXNavigateException,  
           GXGeneralException
```

Navigates from the current screen to the destination screen using a given map.

**Parameters:**

request - the navigation request.

**Throws:**

[GXConnectionException](#) - When connection problems occurred between the client and ApplinX server or the ApplinX server and the host.  
[GXNavigateException](#) - Errors in navigation process.  
[GXGeneralException](#) - Other errors.

(continued from last page)

## refreshScreen

```
public abstract void refreshScreen()  
    throws GXConnectionException,  
           GXGeneralException
```

Refreshes the current local screen that `getScreen()` returns with contents from the host.

**Throws:**

[GXConnectionException](#) - When connection problems occurred between the client and ApplinX server or the ApplinX server and the host.  
[GXGeneralException](#) - Other errors.

**See Also:**

[GXIReadOnlyBaseObject.getScreen\(\)](#)

---

## getPrints

```
public abstract GXBook\[\] getPrints()  
    throws GXConnectionException,  
           GXGeneralException
```

Gets prints data represented as GXBook(s) print model [GXBook](#)

**Returns:****Throws:**

[GXConnectionException](#)  
[GXGeneralException](#)

# com.sabratec.applinx.baseobject Interface GXIField

All Superinterfaces:

[GXICellable](#)

All Known Implementing Classes:

[GXFieldTableCell](#), [GXField](#)

```
public interface GXIField
extends GXICellable
```

This class represents one field in the host screen. When there are multiple application fields, it represents one index of the multiple application field.

Note: The field object is a snapshot of a field as it was taken from a host screen. You cannot set properties to the field. In order to set content to fields on the host screen, use the session object and the request objects.

## Field Summary

public static final	<a href="#">TYPE_APPFIELD</a> Value: 1
public static final	<a href="#">TYPE_HOSTFIELD</a> Value: 0
public static final	<a href="#">TYPE_HOSTKEY_FIELD</a> Value: 3
public static final	<a href="#">TYPE_MULTIPLE_APPFIELD</a> Value: 2

## Method Summary

abstract int	<a href="#">getBGColor()</a>
abstract String	<a href="#">getContent()</a>
abstract int	<a href="#">getDataType()</a>
abstract int	<a href="#">getFGColor()</a>
abstract int	<a href="#">getIndex()</a>
abstract String	<a href="#">getInputMask()</a>
abstract int	<a href="#">getLength()</a>

abstract String	<a href="#">getName()</a>
abstract <a href="#">GXPosition</a>	<a href="#">getPosition()</a>
abstract String	<a href="#">getScreenName()</a>
abstract int	<a href="#">getScreenSequenceNumber()</a>
abstract String	<a href="#">getVisualContent()</a>
abstract boolean	<a href="#">isAppField()</a>
abstract boolean	<a href="#">isAutoCursorJump()</a>
abstract boolean	<a href="#">isAutoEnter()</a>
abstract boolean	<a href="#">isBlinking()</a>
abstract boolean	<a href="#">isHighIntensified()</a>
abstract boolean	<a href="#">isMultiple()</a>
abstract boolean	<a href="#">isProtected()</a>
abstract boolean	<a href="#">isReversedVideo()</a>
abstract boolean	<a href="#">isUnderlined()</a>
abstract boolean	<a href="#">isVisible()</a>

Methods inherited from interface [com.sabratec.applinx.baseobject.table.GXICellable](#)

[getContent](#)

## Fields

### TYPE\_HOSTFIELD

```
public static final int TYPE_HOSTFIELD
```

Constant value: 0

### TYPE\_APPFIELD

```
public static final int TYPE_APPFIELD
```

Constant value: 1



---

## TYPE\_MULTIPLE\_APPFIELD

```
public static final int TYPE_MULTIPLE_APPFIELD
```

Constant value: 2

---

## TYPE\_HOSTKEY\_FIELD

```
public static final int TYPE_HOSTKEY_FIELD
```

Constant value: 3

## Methods

### getScreenName

```
public abstract String getScreenName()
```

**Returns:**

the name (ID) of the screen, from which this field was taken.

---

### getScreenSequenceNumber

```
public abstract int getScreenSequenceNumber()
```

**Returns:**

the sequential number of the screen, from which this field was taken.

---

### getName

```
public abstract String getName()
```

**Returns:**

Returns the name of the field (for application fields). If the field is a host field, it returns null.

---

### getIndex

```
public abstract int getIndex()
```

**Returns:**

the index of the field instance (if it is part of a multiple application field).

---

### getPosition

```
public abstract GXPosition getPosition()
```

---

(continued from last page)

**Returns:**

the position of the field in the host screen.

---

**getLength**

```
public abstract int getLength()
```

**Returns:**

the length of the field.

---

**getContent**

```
public abstract String getContent()
```

**Returns:**

the content of the field (as it was taken from the host screen).

---

**isProtected**

```
public abstract boolean isProtected()
```

**Returns:**

whether this field is a protected field.

---

**isVisible**

```
public abstract boolean isVisible()
```

**Returns:**

whether this field is visible on the host screen.

---

**isHighIntensified**

```
public abstract boolean isHighIntensified()
```

**Returns:**

whether this field is an intensified field.

---

**isAutoEnter**

```
public abstract boolean isAutoEnter()
```

**Returns:**

whether this field is an auto enter field (once the field content completely fills the field, it is sent to the host screen).

---

---

## getBGColor

```
public abstract int getBGColor()
```

**Returns:**

the background color of this field.

---

## getFGColor

```
public abstract int getFGColor()
```

**Returns:**

the foreground color of this field.

---

## isAutoCursorJump

```
public abstract boolean isAutoCursorJump()
```

**Returns:**

whether this field is an auto cursor jump field. This means that the cursor should jump automatically to the next field when this field is completely filled with content.

---

## isAppField

```
public abstract boolean isAppField()
```

**Returns:**

whether this field is an application field.

---

## isMultiple

```
public abstract boolean isMultiple()
```

**Returns:**

whether this field is part of a multiple application field.

---

## isBlinking

```
public abstract boolean isBlinking()
```

**Returns:**

whether this field is blinking.

---

---

(continued from last page)

## getDataType

```
public abstract int getDataType()
```

**Returns:**

the field's data type

**See Also:**

[GXBaseObjectConstants](#) for valid data types

---

## getInputMask

```
public abstract String getInputMask()
```

**Returns:**

the field's input mask. Valid only for unprotected application fields.

---

## getVisualContent

```
public abstract String getVisualContent()
```

**Returns:**

the field's content in its visual form, without a conversion to logical.

---

## isUnderlined

```
public abstract boolean isUnderlined()
```

**Returns:**

whether this field is underlined.

---

## isReversedVideo

```
public abstract boolean isReversedVideo()
```

**Returns:**

whether this field is reversed video.

---

## com.sabratec.applinx.baseobject Interface GXIFieldCollection

All Known Implementing Classes:  
[GXIFieldCollection](#)

public interface **GXIFieldCollection**

This class represents a collection of fields as they were gathered from a screen or many screens. It should be used to perform queries on the fields.

### Method Summary

abstract <a href="#">GXIFieldCollection</a>	<a href="#">getAppFields()</a>
abstract <a href="#">GXIField</a>	<a href="#">getFieldAt(int index)</a>
abstract <a href="#">GXIField</a>	<a href="#">getFieldByPosition(<a href="#">GXPosition</a> position)</a>
abstract int	<a href="#">getFieldCount()</a>
abstract <a href="#">GXIField</a>	<a href="#">getFieldInstance(String name, int fieldIndex)</a>
abstract <a href="#">GXIField[]</a>	<a href="#">getFields()</a>
abstract <a href="#">GXIFieldCollection</a>	<a href="#">getFields(String name)</a>
abstract <a href="#">GXIField</a>	<a href="#">getFirstFieldInstance(String name)</a>
abstract <a href="#">GXIField</a>	<a href="#">getLastFieldInstance(String name)</a>

### Methods

#### getFieldCount

public abstract int **getFieldCount()**

**Returns:**

the number of fields in the collection.

#### getFieldAt

public abstract [GXIField](#) **getFieldAt(int index)**

---

(continued from last page)

**Parameters:**

index - the index of the field in the collection.

**Returns:**

the field at the given index from the collection.

---

## getFields

```
public abstract GXIField\[\] getFields()
```

**Returns:**

the field array on which the collection was constructed.

---

## getAppFields

```
public abstract GXIFieldCollection getAppFields()
```

**Returns:**

all the application fields in the current collection.

---

## getFieldByPosition

```
public abstract GXIField getFieldByPosition(GXPosition position)
```

**Parameters:**

position - the position of the first character of the field.

**Returns:**

the field that starts at the given position. This method should be used when the field collection is from one screen. If the collection collects more than one screen, the positions may collide.

---

## getFieldInstance

```
public abstract GXIField getFieldInstance(String name,  
int fieldIndex)
```

**Parameters:**

name - multiple application field name  
fieldIndex - index within the multiple application field.

**Returns:**

the instance of the field at the given index.

---

## getFirstFieldInstance

```
public abstract GXIField getFirstFieldInstance(String name)
```

**Parameters:**

name - the name of an application field in the collection

---

---

(continued from last page)

**Returns:**

the first instance of this application field that was added to the collection.

---

**getLastFieldInstance**

```
public abstract GXIField getLastFieldInstance(String name)
```

**Parameters:**

name - application field name

**Returns:**

the last instance (currently available in the collection) of the given application field.

---

**getFields**

```
public abstract GXIFieldCollection getFields(String name)
```

**Parameters:**

name - name of an application field

**Returns:**

a collection holding all the instances of the application field.

---

## com.sabratec.applinx.baseobject Interface GXIHostKey

---

public interface **GXIHostKey**

---

### Method Summary

abstract String	<a href="#">getAction()</a>
abstract String	<a href="#">getCaption()</a>
abstract <a href="#">GXPosition</a>	<a href="#">getDisplayPosition()</a>
abstract String	<a href="#">getDisplayText()</a>

---

### Methods

#### **getCaption**

public abstract String **getCaption()**

---

#### **getAction**

public abstract String **getAction()**

---

#### **getDisplayText**

public abstract String **getDisplayText()**

---

#### **getDisplayPosition**

public abstract [GXPosition](#) **getDisplayPosition()**

---



## com.sabratec.applinx.baseobject Interface GXINaturalDataTransferClientBaseObject

All Superinterfaces:

[GXIClientBaseObject](#), [GXIReadOnlyBaseObject](#)

public interface **GXINaturalDataTransferClientBaseObject**  
extends [GXIClientBaseObject](#)

This object is an extension of the [GXIClientBaseObject](#) that provides the option to perform Natural Data Transfer (NDT) actions.

### Method Summary

abstract void	<a href="#">confirmCommand()</a> Confirm the execution of a Natural Data Transfer command.
abstract <a href="#">GXINaturalDataTransferDownloadResponse</a>	<a href="#">continueDownload()</a> Continues the download process.
abstract <a href="#">GXINaturalDataTransferUploadResponse</a>	<a href="#">continueUpload()</a> Continues the process of uploading a file.
abstract void	<a href="#">rejectTransfer()</a> Sends an indication to the host that a transfer process should be rejected.
abstract <a href="#">GXINaturalDataTransferDownloadResponse</a>	<a href="#">startDownload(<a href="#">GXINaturalDataTransferDownloadRequest</a> request)</a> Starts the download process.
abstract <a href="#">GXINaturalDataTransferUploadResponse</a>	<a href="#">startUpload(<a href="#">GXINaturalDataTransferUploadRequest</a> request)</a> Starts the process of uploading a file.

### Methods inherited from interface [com.sabratec.applinx.baseobject.GXIClientBaseObject](#)

[executePath](#), [executePath](#), [executeProcedure](#), [executeProcedure](#), [executeProcedure](#), [getPrints](#), [getTable](#), [getTable](#), [getTable](#), [navigateTo](#), [refreshScreen](#), [sendKeys](#), [sendKeys](#)

### Methods inherited from interface [com.sabratec.applinx.baseobject.GXIReadOnlyBaseObject](#)

[getApplicationConfig](#), [getScreen](#), [getScreen](#), [getSeqScreenNumber](#), [getSessionID](#), [isReadOnly](#)

### Methods

(continued from last page)

## startDownload

```
public abstract GXINaturalDataTransferDownloadResponse  
startDownload(GXINaturalDataTransferDownloadRequest request)  
    throws GXConnectionException,  
           GXINaturalDataTransferException,  
           GXGeneralException
```

Starts the download process. The server will download a file from the host, and will return it when it has been fully downloaded.

Note that this method may return before the download is completed.

### Parameters:

fileType - Type of downloaded file. Supported types:

- `FORMAT_TYPE_TXT`
- `FORMAT_TYPE_CSV`

### Throws:

[GXINaturalDataTransferException](#) - when there was a problem with the data transfer

[GXConnectionException](#) - When connection problems occur between the client and ApplinX server or the ApplinX server and the host.

[GXGeneralException](#) - when there is a general problem

---

## continueDownload

```
public abstract GXINaturalDataTransferDownloadResponse continueDownload()  
    throws GXConnectionException,  
           GXINaturalDataTransferException,  
           GXGeneralException
```

Continues the download process. The server will continue a previous download from the host, and will return the download data only if the download process was completed. This method may be called only after calling `startDownload()`.

Note that this method may return before the download is completed.

### Throws:

[GXINaturalDataTransferException](#) - if there is a problem with the data transfer

[GXConnectionException](#) - When connection problems occur between the client and ApplinX server or the ApplinX server and the host.

[GXGeneralException](#) - if there is a general problem

---

## startUpload

```
public abstract GXINaturalDataTransferUploadResponse  
startUpload(GXINaturalDataTransferUploadRequest request)  
    throws GXConnectionException,  
           GXINaturalDataTransferException,  
           GXGeneralException
```

Starts the process of uploading a file. The server will upload a file to the host.

Note that this method may return before the upload is completed.

### Parameters:

request - the upload request details

### Throws:

[GXINaturalDataTransferException](#) - if there is a problem with the data transfer

[GXConnectionException](#) - When connection problems occur between the client and ApplinX server or the ApplinX server and the host.

[GXGeneralException](#) - if there is a general problem

---

## continueUpload

```
public abstract GXNaturalDataTransferUploadResponse continueUpload()  
    throws GXConnectionException,  
           GXNaturalDataTransferException,  
           GXGeneralException
```

Continues the process of uploading a file. The server will upload a previously given file to the host. This method may be called only after calling `startUpload(InputStream)`.

Note that this method may return before the upload is completed.

### Throws:

[GXNaturalDataTransferException](#) - if there is a problem with the data transfer

[GXConnectionException](#) - When connection problems occur between the client and ApplinX server or the ApplinX server and the host.

[GXGeneralException](#) - if there is a general problem

---

## rejectTransfer

```
public abstract void rejectTransfer()  
    throws GXConnectionException,  
           GXNaturalDataTransferException,  
           GXGeneralException
```

Sends an indication to the host that a transfer process should be rejected. It applies for both upload, download and a command.

### Throws:

[GXNaturalDataTransferException](#) - if there is a problem with the data transfer

[GXConnectionException](#) - When connection problems occur between the client and ApplinX server or the ApplinX server and the host.

[GXGeneralException](#) - if there is a general problem

---

## confirmCommand

```
public abstract void confirmCommand()  
    throws GXConnectionException,  
           GXNaturalDataTransferException,  
           GXGeneralException
```

Confirm the execution of a Natural Data Transfer command.

When the command is an asynchronous command, the confirmation should be sent after the command execution started successfully.

When the command is a synchronous command, the confirmation should be sent only after the command execution finished successfully.

### Throws:

[GXNaturalDataTransferException](#) - if there is a problem with the data transfer

[GXConnectionException](#) - When connection problems occur between the client and ApplinX server or the ApplinX server and the host.

[GXGeneralException](#) - if there is a general problem

## com.sabratec.applinx.baseobject Interface GXINaturalDataTransferScreen

All Superinterfaces:

[GXIScreen](#)

public interface **GXINaturalDataTransferScreen**

extends [GXIScreen](#)

Interface for a screen that contain Natural Data Transfer (NDT) information.

### Method Summary

abstract String	<a href="#">getDataTransferCommand()</a>
abstract String	<a href="#">getDataTransferFilename()</a>
abstract int	<a href="#">getDataTransferState()</a> Returns the state of the Natural Data Transfer screen.
abstract String	<a href="#">getDataTransferWorkfileCode()</a>
abstract boolean	<a href="#">isDataTransferCommandSynchronous()</a>

### Methods inherited from interface [com.sabratec.applinx.baseobject.GXIScreen](#)

[getBuffers](#), [getBuffers](#), [getColumns](#), [getCursorPosition](#), [getFieldByCursorPosition](#), [getFieldContent](#), [getFieldContent](#), [getFieldInstance](#), [getFields](#), [getFields](#), [getFields](#), [getFields](#), [getFolderPath](#), [getHostKeys](#), [getName](#), [getRows](#), [getScreenGroupNames](#), [getSeqNumber](#), [getTable](#), [getTables](#), [getWindow](#), [getWindowLowerRight](#), [getWindows](#), [getWindowUpperLeft](#), [hasAlarm](#), [isDirectionRTL](#), [isDisplayChanged](#), [isLocked](#), [isMemberOf](#), [isTabbingRTL](#), [isTypingRTL](#), [isWindow](#)

### Methods

#### **getDataTransferState**

public abstract int **getDataTransferState()**

Returns the state of the Natural Data Transfer screen.

**Returns:**

---

(continued from last page)

type of the Natural Data Transfer screen. If this is a normal screen, STATE\_NOT\_NDT\_SCREEN will be returned.

Can be one of the following:

- STATE\_UNKNOWN
- STATE\_NOT\_NDT\_SCREEN
- STATE\_DOWNLOAD\_BEGINNING
- STATE\_DOWNLOAD\_IN\_PROCESS
- STATE\_UPLOAD\_BEGINNING
- STATE\_UPLOAD\_IN\_PROCESS
- STATE\_COMMAND
- STATE\_ERROR

---

## getDataTransferFilename

```
public abstract String getDataTransferFilename()
```

### Returns:

the file name suggested by the host. null if the host did not suggest one (most common case).

---

## getDataTransferWorkfileCode

```
public abstract String getDataTransferWorkfileCode()
```

### Returns:

the workfile code, which is the unique file identifier on the host.

---

## getDataTransferCommand

```
public abstract String getDataTransferCommand()
```

### Returns:

the command that was sent to the client thru Natural Data Transfer

---

## isDataTransferCommandSynchronous

```
public abstract boolean isDataTransferCommandSynchronous()
```

### Returns:

Whether the Natural Data Transfer command is synchronous. If the command is synchronous the client should reply only after performing the command. If the command is asynchronous, the client should reply right after validating it.

## com.sabratec.applinx.baseobject Class GXInnerClientBaseObjectFactory

java.lang.Object

└-com.sabratec.applinx.baseobject.GXInnerClientBaseObjectFactory

public class **GXInnerClientBaseObjectFactory**  
extends Object

General factory to create connected / attached base objects, detach and disconnect them from ApplinX server.

There are three acceptable protocols, which dictate different communication modes between the base object and the server.

- ApplinX - Used to communicate with the server over a socket.
- Local (direct) - Used to communicate with an in-process server. All base objects communicate with a single server object. Currently used when the server is loaded as a servlet.

**This class was created for internal use, please don't use it directly , use [GXClientBaseObjectFactory](#) instead**

### Constructor Summary

public	<a href="#">GXInnerClientBaseObjectFactory()</a>
--------	--

### Method Summary

static void	<a href="#">detachSession(GXReadOnlyBaseObject baseObject)</a> Detaches the given base object from ApplinX server.
static void	<a href="#">endSession(GXEndSessionRequest endSessionRequest)</a> Ends a session on ApplinX server according to the given end session request.
static void	<a href="#">endSession(GXIClientBaseObject baseObject)</a> Ends the session of the given base object.
static <a href="#">GXIClientBaseObject</a>	<a href="#">getBaseObject(GXAttachToSessionRequest attachRequest)</a> Creates a base object, and attaches it to an existing session on ApplinX server.
static <a href="#">GXIClientBaseObject</a>	<a href="#">getBaseObject(GXCreateSessionRequest connectRequest)</a> Creates a base object, and connects it to ApplinX server and the host.
static <a href="#">GXReadOnlyBaseObject</a>	<a href="#">getReadOnlyBaseObject(GXAttachToSessionRequest attachRequest)</a> Creates a read-only base object, and attaches it to an existing session on ApplinX server.

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Constructors

#### **GXInnerClientBaseObjectFactory**

public **GXInnerClientBaseObjectFactory()**

## Methods

### getBaseObject

```
public static GXIClientBaseObject getBaseObject(GXCreateSessionRequest connectRequest)  
    throws GXConnectionException,  
           GXGeneralException
```

Creates a base object, and connects it to ApplinX server and the host.

**Parameters:**

connectRequest - the connection parameters.

**Returns:**

connected base object.

**Throws:**

[GXConnectionException](#) - when the connection to the host / ApplinX server was not successful.

[GXGeneralException](#) - other exception thrown in the process.

### getBaseObject

```
public static GXIClientBaseObject getBaseObject(GXAttachToSessionRequest  
attachRequest)  
    throws GXConnectionException,  
           GXGeneralException
```

Creates a base object, and attaches it to an existing session on ApplinX server. There could be only one attached BaseObject to the same session at a time. This method is meaningless when using localserver:// protocol.

**Parameters:**

attachRequest - the connection parameters.

**Returns:**

attached base object.

**Throws:**

[GXConnectionException](#) - when the connection to the host / ApplinX server was not successful.

[GXGeneralException](#) - other exception thrown in the process.

### getReadOnlyBaseObject

```
public static GXIRedOnlyBaseObject getReadOnlyBaseObject(GXAttachToSessionRequest  
attachRequest)  
    throws GXConnectionException,  
           GXGeneralException
```

Creates a read-only base object, and attaches it to an existing session on ApplinX server. There could be several read-only BaseObject attached to the server at the same time. This method is meaningless when using localserver:// protocol.

**Parameters:**

attachRequest - the connection parameters.

**Returns:**

attached base object.

**Throws:**

[GXConnectionException](#) - when the connection to ApplinX server was not successful.

---

(continued from last page)

[GXGeneralException](#) - other exception thrown in the process.

---

## detachSession

```
public static void detachSession(GXReadOnlyBaseObject baseObject)
    throws GXGeneralException,
           GXConnectionException
```

Detaches the given base object from ApplinX server. This method is meaningless when using localserver:// protocol.

---

## endSession

```
public static void endSession(GXIClientBaseObject baseObject)
    throws GXGeneralException,
           GXConnectionException
```

Ends the session of the given base object.

### Parameters:

baseObject - the session object.

### Throws:

[GXConnectionException](#) - when the connection to the host / ApplinX server was not successful.

[GXGeneralException](#) - other exception thrown in the process.

---

## endSession

```
public static void endSession(GXEndSessionRequest endSessionRequest)
    throws GXGeneralException,
           GXConnectionException
```

Ends a session on ApplinX server according to the given end session request.

### Parameters:

endSessionRequest - the session parameters.

### Throws:

[GXConnectionException](#) - when the connection to the host / ApplinX server was not successful.

[GXGeneralException](#) - other exception thrown in the process.

---



## com.sabratec.applinx.baseobject Class GXInputField

java.lang.Object

└-com.sabratec.applinx.baseobject.GXInputField

### All Implemented Interfaces:

java.io.Serializable

```
public class GXInputField
extends Object
implements java.io.Serializable
```

This class represents an input field whose data will be sent to the host. The field can be determined by position (for host field), by name (for application field) or by name and index (for an instance of a multiple application field). The GXInputField instance should be added to a request object of type GXSendKeysRequest or GXPathRequest.

### Constructor Summary

public	<a href="#">GXInputField()</a>
public	<a href="#">GXInputField(String name, String value)</a>
public	<a href="#">GXInputField(GXPosition pos, String value)</a>
public	<a href="#">GXInputField(String name, int index, String value)</a>

### Method Summary

boolean	<a href="#">equals(Object inputField)</a>
int	<a href="#">getIndex()</a>
String	<a href="#">getName()</a>
<a href="#">GXPosition</a>	<a href="#">getPosition()</a>
String	<a href="#">getValue()</a>
boolean	<a href="#">isAppField()</a>
void	<a href="#">setIndex(int index)</a>
void	<a href="#">setName(String name)</a> Sets the name of the field to update.
void	<a href="#">setPosition(GXPosition position)</a> Sets the position of the field to update.

void	<a href="#">setValue</a> (String value)
String	<a href="#">toString</a> ()

**Methods inherited from class** java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Constructors

### GXInputField

```
public GXInputField()
```

### GXInputField

```
public GXInputField(String name,  
                    String value)
```

### GXInputField

```
public GXInputField(GXPosition pos,  
                    String value)
```

### GXInputField

```
public GXInputField(String name,  
                    int index,  
                    String value)
```

## Methods

### getPosition

```
public GXPosition getPosition()
```

### setPosition

```
public void setPosition(GXPosition position)
```

Sets the position of the field to update.

**Parameters:**

`position` - position of the field to set.

## getName

```
public String getName()
```

**Returns:**

the name that was set to this field.

---

## setName

```
public void setName(String name)
```

Sets the name of the field to update.

**Parameters:**

name - the name of the application field to set.

---

## isAppField

```
public boolean isAppField()
```

---

## getIndex

```
public int getIndex()
```

**Returns:**

the multiple index set for the input field.

---

## setIndex

```
public void setIndex(int index)
```

**Parameters:**

index - index of an instance of a multiple application field to set. The name of the field must be set using setName().

---

## getValue

```
public String getValue()
```

**Returns:**

the value set for the input field.

---

## setValue

```
public void setValue(String value)
```

---

(continued from last page)

**Parameters:**

value - the value to set to this field on the host.

---

**equals**

```
public boolean equals(Object inputField)
```

---

**toString**

```
public String toString()
```

## com.sabratec.applinx.baseobject Interface GXIReadOnlyBaseObject

All Subinterfaces:

[GXIClientBaseObject](#), [GXINaturalDataTransferClientBaseObject](#)

public interface **GXIReadOnlyBaseObject**

This object represents a live session against the ApplinX server and the host, in Read-Only mode, i.e. only monitoring the session is permitted.

See Also:

[GXIClientBaseObject](#)

### Method Summary

abstract <a href="#">GXIClientApplicationConfiguration</a>	<a href="#">getApplicationConfig()</a> Returns the current application configuration.
abstract <a href="#">GXIScreen</a>	<a href="#">getScreen()</a> Returns the current screen from the host.
abstract <a href="#">GXIScreen</a>	<a href="#">getScreen(GXGetScreenRequest request)</a> Returns the current screen from the host.
abstract int	<a href="#">getSeqScreenNumber()</a> returns the sequential number of the host screen in the server (counted since the session started).
abstract String	<a href="#">getSessionID()</a>
abstract boolean	<a href="#">isReadOnly()</a> Return whether this client has a write access, or only a read-only access.

### Methods

#### getScreen

```
public abstract GXIScreen getScreen(GXGetScreenRequest request)
    throws GXConnectionException,
           GXGeneralException
```

Returns the current screen from the host. May also execute wait conditions before retrieving it. If it is called without a request object and if no other request was sent to the host since the last time getScreen was called, it returns a local copy of the last retrieved screen.

**Parameters:**

request - the getScreen request.

**Returns:**

the current screen from the host.

**Throws:**

[GXConnectionException](#) - When connection problems occurred between the client and ApplinX server or the ApplinX server and the host.

(continued from last page)

[GXGeneralException](#) - Other errors.**See Also:**[getScreen\(\)](#)

---

## getScreen

```
public abstract GXIScreen getScreen()  
    throws GXConnectionException,  
           GXGeneralException
```

Returns the current screen from the host. May also execute wait conditions before retrieving it. When called without a request object and if no other request was sent to the host since the last time `getScreen` was called, it returns a local copy of the last retrieved screen.

**Returns:**

a local copy of the last retrieved screen.

**Throws:**

[GXConnectionException](#) - When connection problems occurred between the client and ApplinX server or the ApplinX server and the host.  
[GXGeneralException](#) - Other errors.

---

## getSeqScreenNumber

```
public abstract int getSeqScreenNumber()  
    throws GXConnectionException,  
           GXGeneralException
```

returns the sequential number of the host screen in the server (counted since the session started).

**Returns:**

the sequential screen number.

**Throws:**

[GXConnectionException](#) - When connection problems occurred between the client and ApplinX server or the ApplinX server and the host.  
[GXGeneralException](#) - Other errors.

---

## getSessionID

```
public abstract String getSessionID()
```

**Returns:**

the ID of the session on ApplinX Server.

---

## getApplicationConfig

```
public abstract GXClientApplicationConfig getApplicationConfig()  
    throws GXConnectionException,  
           GXGeneralException
```

Returns the current application configuration. The first time this method is called, a request will be sent to the server to retrieve the information. Sequential calls to this method will return the same configuration (additional requests will not be sent to the server).

Note that when the application configuration is changed on the server, the way to retrieve the updated information is to create a new `BaseObject` and call this method again.

**Throws:**

(continued from last page)

[GXConnectionException](#) - When connection problems occurred between the client and ApplinX server or the ApplinX server and the host.

[GXGeneralException](#) - Other errors.

---

## **isReadOnly**

```
public abstract boolean isReadOnly()
```

Return whether this client has a write access, or only a read-only access.

## com.sabratec.applinx.baseobject Interface GXIReplayerClientBaseObject

public interface **GXIReplayerClientBaseObject**

### Method Summary

abstract GXReplayerInfo	<a href="#">getReplayerInfo()</a>
abstract GXReplayerStatus	<a href="#">getReplayerStatus()</a>
abstract GXReplayerSendData	<a href="#">getReplayScreenData()</a>
abstract void	<a href="#">setReplayScreen</a> (GXSetReplayScreen request)

### Methods

#### setReplayScreen

```
public abstract void setReplayScreen(GXSetReplayScreen request)
    throws GXConnectionException,
           GXGeneralException
```

#### getReplayerStatus

```
public abstract GXReplayerStatus getReplayerStatus()
    throws GXConnectionException,
           GXGeneralException
```

#### getReplayerInfo

```
public abstract GXReplayerInfo getReplayerInfo()
    throws GXConnectionException,
           GXGeneralException
```

#### getReplayScreenData

```
public abstract GXReplayerSendData getReplayScreenData()
    throws GXConnectionException,
           GXGeneralException
```



## com.sabratec.applinx.baseobject Interface GXIScreen

All Subinterfaces:

[GXIScreenWithPrintData](#), [GXINaturalDataTransferScreen](#)

public interface **GXIScreen**  
extends java.io.Serializable

Interface for objects representing a screen entity that wraps an emulation screen. This class represents one instance of a host screen. It is a snapshot of a screen as it was received from the host. You cannot set contents to it. Setting contents to the host is done through the session object (using requests).

### Method Summary

abstract <a href="#">GXScreenBuffers</a>	<a href="#">getBuffers()</a> <b>Deprecated.</b> use <a href="#">getBuffers(boolean)</a> instead.
abstract <a href="#">GXScreenBuffers</a>	<a href="#">getBuffers</a> (boolean onlyWindowBuffer) Returns the buffers from the current screen.
abstract int	<a href="#">getColumns()</a>
abstract <a href="#">GXPosition</a>	<a href="#">getCursorPosition()</a>
abstract <a href="#">GXIField</a>	<a href="#">getFieldByCursorPosition()</a> Gets the field which the cursor position is located at
abstract String	<a href="#">getFieldContent</a> (String fieldName)
abstract String	<a href="#">getFieldContent</a> (String fieldName, int fieldIndex)
abstract <a href="#">GXIField</a>	<a href="#">getFieldInstance</a> (String fieldName, int fieldIndex)
abstract <a href="#">GXIFieldCollection</a>	<a href="#">getFields()</a>
abstract <a href="#">GXIFieldCollection</a>	<a href="#">getFields</a> ( <a href="#">GXIFieldCollectionQuery</a> query)
abstract <a href="#">GXIFieldCollection</a>	<a href="#">getFields</a> ( <a href="#">GXIScreenCollectionFieldsQuery</a> query) <b>Deprecated.</b> this method is deprecated and is replaced by <a href="#">getFields(GXIFieldCollectionQuery query)</a>
abstract <a href="#">GXIFieldCollection</a>	<a href="#">getFields</a> (String fieldName)
abstract String	<a href="#">getFolderPath()</a>
abstract <a href="#">GXIScreenKey[]</a>	<a href="#">getHostKeys()</a> Gets the host keys associated with this screen.
abstract String	<a href="#">getName()</a>

abstract int	<a href="#">getRows()</a>
abstract String[]	<a href="#">getScreenGroupNames()</a>
abstract int	<a href="#">getSeqNumber()</a>
abstract <a href="#">GXITable</a>	<a href="#">getTable()</a> <b>Deprecated.</b> <i>As of release 8.2.2 HF3, replaced by <a href="#">getTables()</a></i>
abstract <a href="#">GXITable[]</a>	<a href="#">getTables()</a> Gets the tables associated with this screen.
abstract <a href="#">GXWindow</a>	<a href="#">getWindow()</a> Gets the window associated with this screen.
abstract <a href="#">GXPosition</a>	<a href="#">getWindowLowerRight()</a> <b>Deprecated.</b> <i>use @see GXIScreen#getWindow(), @see GXWindow#getBounds()</i>
abstract <a href="#">GXWindow[]</a>	<a href="#">getWindows()</a> Gets an array of the windows associated with this screen, or null if none exist.
abstract <a href="#">GXPosition</a>	<a href="#">getWindowUpperLeft()</a> <b>Deprecated.</b> <i>use @see GXIScreen#getWindow(), @see GXWindow#getBounds()</i>
abstract boolean	<a href="#">hasAlarm()</a>
abstract boolean	<a href="#">isDirectionRTL()</a>
abstract boolean	<a href="#">isDisplayChanged()</a>
abstract boolean	<a href="#">isLocked()</a>
abstract boolean	<a href="#">isMemberOf(String screenGroupName)</a> Checks whether the current screen belongs to the specified screen group.
abstract boolean	<a href="#">isTabbingRTL()</a>
abstract boolean	<a href="#">isTypingRTL()</a>
abstract boolean	<a href="#">isWindow()</a>

## Methods

### getName

```
public abstract String getName()
```

**Returns:**

the name (ID) of the screen as it was identified by ApplinX.

## getScreenGroupNames

```
public abstract String[] getScreenGroupNames()
```

**Returns:**

a name array of the screens screen groups.

---

## isWindow

```
public abstract boolean isWindow()
```

**Returns:**

whether the current screen was identified by ApplinX as a host window.

---

## getWindowUpperLeft

```
public abstract GXPosition getWindowUpperLeft()
```

**Deprecated.** *use @see GXIScreen#getWindow(), @see GXIWindow#getBounds()*

**Returns:**

the upper left coordinate of the identified host window.

---

## getWindowLowerRight

```
public abstract GXPosition getWindowLowerRight()
```

**Deprecated.** *use @see GXIScreen#getWindow(), @see GXIWindow#getBounds()*

**Returns:**

the lower right coordinate of the identified host window.

---

## getSeqNumber

```
public abstract int getSeqNumber()
```

**Returns:**

the sequential number of the screen (since the session started).

---

## isDisplayChanged

```
public abstract boolean isDisplayChanged()
```

**Returns:**

whether the current screen reflects display changes that were received from the host since the last time ApplinX Server sent content.

---

---

## getCursorPosition

```
public abstract GXPosition getCursorPosition()
```

**Returns:**

the position of the cursor on the screen.

---

## getFolderPath

```
public abstract String getFolderPath()
```

**Returns:**

the screen ID's folder path.

---

## getRows

```
public abstract int getRows()
```

**Returns:**

the number of rows in the current screen. If the current screen is a host window the number of rows is the height of the window.

---

## getColumns

```
public abstract int getColumns()
```

**Returns:**

the number of columns in the current screen. If the current screen is a host window, the number of columns is the width of the window.

---

## getBuffers

```
public abstract GXScreenBuffers getBuffers(boolean onlyWindowBuffer)
```

Returns the buffers from the current screen. Buffers will be returned only if the variable [GXBaseObjectConstants.GX\\_VAR\\_RETURN\\_SCREEN\\_BUFFERS](#) was set in the [GXGetScreenRequest](#) to [GXBaseObjectConstants.GX\\_VAR\\_VAL\\_BUFFERS\\_SCREEN\\_DATA](#). By default buffers will not be available.

**Parameters:**

onlyWindowBuffer - when there is a window, only returns the window buffer and not the entire screen buffer.

**Returns:**

the screen buffers object.

---

## getBuffers

```
public abstract GXScreenBuffers getBuffers()
```

**Deprecated.** use [getBuffers\(boolean\)](#) instead.

Backward compatibility. Equivalent to `getBuffers(true)`.

---

---

(continued from last page)

**Returns:**

the screen buffers object.

---

**isDirectionRTL**

```
public abstract boolean isDirectionRTL()
```

**Returns:**

whether the direction of the current screen is RTL.

---

**isTabbingRTL**

```
public abstract boolean isTabbingRTL()
```

**Returns:**

whether the tabbing direction of the current screen is RTL.

---

**isTypingRTL**

```
public abstract boolean isTypingRTL()
```

---

**isLocked**

```
public abstract boolean isLocked()
```

**Returns:**

whether the system was locked upon the creation of the screen or not. In normal situations, the system is NOT locked upon screen creation.

**See Also:**

[for more details on this feature.](#)

---

**hasAlarm**

```
public abstract boolean hasAlarm()
```

**Returns:**

whether the screen should sound an alarm

---

**getFields**

```
public abstract GXIFieldCollection getFields()
```

**Returns:**

---

(continued from last page)

a field collection holding application fields in the screen. To collect both the host fields and the application fields set the [GXBaseObjectConstants.GX\\_VAR\\_INCLUDE\\_HOST\\_FIELDS](#) variable in the [GXGetScreenRequest](#) to "true".

---

## getFields

```
public abstract GXIFieldCollection getFields(GXIScreenCollectionFieldsQuery query)
```

**Deprecated.** *this method is deprecated and is replaced by `getFields(GXIFieldCollectionQuery query)`*

### Parameters:

query - a query that creates GXIFieldCollection from GXIScreenCollection

### Returns:

the collection returned by the query

---

## getFields

```
public abstract GXIFieldCollection getFields(GXIFieldCollectionQuery query)
```

### Parameters:

query - a query that creates GXIFieldCollection from a field collection query

### Returns:

the collection returned by the query

---

## getFields

```
public abstract GXIFieldCollection getFields(String fieldName)
```

### Parameters:

fieldName - name of an application field

### Returns:

a collection holding all the instances of the application field.

---

## getFieldInstance

```
public abstract GXIField getFieldInstance(String fieldName,  
int fieldIndex)
```

### Parameters:

fieldName - multiple application field name  
fieldIndex - index within the multiple application field.

### Returns:

the instance of the field at the given index.

---

(continued from last page)

---

## getFieldContent

```
public abstract String getFieldContent(String fieldName,  
    int fieldIndex)
```

**Parameters:**

fieldName - a name of an application field.  
fieldIndex - an index of a multiple application field.

**Returns:**

the content of the given instance of the application field.

---

## getFieldContent

```
public abstract String getFieldContent(String fieldName)
```

**Parameters:**

fieldName - a name of an application field.

**Returns:**

the content of the first instance of the application field.

---

## isMemberOf

```
public abstract boolean isMemberOf(String screenGroupName)
```

Checks whether the current screen belongs to the specified screen group.

The specified screen group name may contain a full name including folder path, or the screen group name only.

The function is not case sensitive.

**Parameters:**

screenGroupName - the screen group name

**Returns:**

whether the current screen is a member of the specified screen group.

---

## getWindow

```
public abstract GXIScreen getWindow()
```

Gets the window associated with this screen.

---

## getTable

```
public abstract GXIScreen getTable()
```

**Deprecated.** As of release 8.2.2 HF3, replaced by [getTables\(\)](#)

Gets the table associated with this screen.

---

## getTables

```
public abstract GXIScreen[] getTables()
```

---

---

(continued from last page)

Gets the tables associated with this screen.

---

## **getWindows**

```
public abstract GXIScreen\[\] getWindows()
```

Gets an array of the windows associated with this screen, or null if none exist.

The windows in this array are sorted according to the order of arrival from the host. The last element in the array is the last window received.

---

## **getHostKeys**

```
public abstract GXIScreen\[\] getHostKeys()
```

Gets the host keys associated with this screen.

---

## **getFieldByCursorPosition**

```
public abstract GXIScreen getFieldByCursorPosition()
```

Gets the field which the cursor position is located at

**Returns:**

the field which the cursor position is located at



## com.sabratec.applinx.baseobject Interface GXIScreenCollection

public interface **GXIScreenCollection**

This class represents a collection of screens. It is returned from a path response, and can also be created by you from an array of screens.

### Method Summary

abstract <a href="#">GXIFieldCollection</a>	<a href="#">getFields</a> ( <a href="#">GXIScreenCollectionFieldsQuery</a> query)
abstract <a href="#">GXIFieldCollection</a>	<a href="#">getFields</a> (String fieldName) The method returns from all the screens in this collection all the fields that have the specified name.
abstract <a href="#">GXIScreen</a>	<a href="#">getScreenAt</a> (int index)
abstract int	<a href="#">getScreenCount</a> ()
abstract <a href="#">GXIScreenCollection</a>	<a href="#">getScreens</a> (String screenName)

### Methods

#### getScreenCount

public abstract int **getScreenCount**()

**Returns:**

the number of screens in the collection.

#### getScreenAt

public abstract [GXIScreen](#) **getScreenAt**(int index)

**Parameters:**

index - the index of the screen in the screens collection.

**Returns:**

the screen at the given index.

#### getFields

public abstract [GXIFieldCollection](#) **getFields**([GXIScreenCollectionFieldsQuery](#) query)

(continued from last page)

**Parameters:**

query - the query for filtering the collection's data.

**Returns:**

the fields gathered by the given query, returned in the form of a field collection.

---

## getFields

```
public abstract GXIFieldCollection getFields(String fieldName)
```

The method returns from all the screens in this collection all the fields that have the specified name. When the field is a multiple application field, each instance of the application field will be returned as a field in the collection.

**Parameters:**

fieldName - the name of the application field to return.

**Returns:**

all the instances of the given field name from ALL the screens in the collection.

---

## getScreens

```
public abstract GXIScreenCollection getScreens(String screenName)
```

**Parameters:**

screenName - the name of the screen to return.

**Returns:**

a collection constructed from all the instances of the given screen name in the current collection.

## com.sabratec.applinx.baseobject Interface GXIScreenWithPrintData

All Superinterfaces:

[GXIScreen](#)

public interface **GXIScreenWithPrintData**

extends [GXIScreen](#)

Extension for the [GXIScreen](#) class that adds printing data buffer to the screen. Used by some unisys hosts.

### Method Summary

abstract byte[]	<a href="#">getPrintData()</a>
-----------------	--------------------------------

Methods inherited from interface [com.sabratec.applinx.baseobject.GXIScreen](#)

[getBuffers](#), [getBuffers](#), [getColumns](#), [getCursorPosition](#), [getFieldByCursorPosition](#), [getFieldContent](#), [getFieldContent](#), [getFieldInstance](#), [getFields](#), [getFields](#), [getFields](#), [getFields](#), [getFolderPath](#), [getHostKeys](#), [getName](#), [getRows](#), [getScreenGroupNames](#), [getSeqNumber](#), [getTable](#), [getTables](#), [getWindow](#), [getWindowLowerRight](#), [getWindows](#), [getWindowUpperLeft](#), [hasAlarm](#), [isDirectionRTL](#), [isDisplayChanged](#), [isLocked](#), [isMemberOf](#), [isTabbingRTL](#), [isTypingRTL](#), [isWindow](#)

### Methods

#### **getPrintData**

public abstract byte[] **getPrintData()**

**Returns:**

the print data associated with this screen.

## com.sabratec.applinx.baseobject Interface GXIVariable

All Known Implementing Classes:

[GXVariableArray](#), [GXVariable](#)

```
public interface GXIVariable
extends java.io.Serializable
```

This interface represents a variable, and allows setting it to a session request. It is implemented by [GXVariable](#), for single value variables, and by [GXVariableArray](#) for multiple values. The common methods in this interface are the variable's name methods.

### Field Summary

public static final	<a href="#">NULL</a> This constant can be used to override a variable with a null value. Value: -
public static final	<a href="#">OVERRIDE</a> this const is used to override the recorder configuration Value: -1
public static final	<a href="#">UNKNOWN</a> this const is used to decide if the connection pool use gct or not Value: -UNKNOWN

### Method Summary

abstract String	<a href="#">getName()</a>
abstract void	<a href="#">setName(String name)</a>

### Fields

#### NULL

```
public static final java.lang.String NULL
```

This constant can be used to override a variable with a null value.

For example: request.addVariable(GXBaseObjectConstants.GX\_VAR\_REPLAY\_FILE, GXIVariable.NULL) will define that the session will not use the predefined replay file.

Constant value: -

#### OVERRIDE

```
public static final java.lang.String OVERRIDE
```

this const is used to override the recorder configuration

Constant value: -1

---

(continued from last page)

## UNKNOWN

```
public static final java.lang.String UNKNOWN
```

this const is used to decide if the connection pool use gct or not  
Constant value: **-UNKNOWN**

## Methods

### getName

```
public abstract String getName()
```

**Returns:**

The name of the variable or variable array.

---

### setName

```
public abstract void setName(String name)
```

**Parameters:**

name - The name of the variable or variable array.

## com.sabratec.applinx.baseobject Interface GXIWaitCondition

All Known Implementing Classes:  
[GXAbstractWaitCondition](#)

---

```
public interface GXIWaitCondition
extends java.io.Serializable
```

Interface for all wait conditions.

---

---

## com.sabratec.applinx.baseobject Interface GXIWindow

public interface **GXIWindow**

This class represents a window.

### Method Summary

abstract GXRectangle	<a href="#">getBounds()</a>
abstract String	<a href="#">getTitle()</a>
abstract boolean	<a href="#">isBoundsIncludeBorder()</a>

### Methods

#### getTitle

```
public abstract String getTitle()
```

**Returns:**

the window title

#### getBounds

```
public abstract GXRectangle getBounds()
```

**Returns:**

the window boundaries

#### isBoundsIncludeBorder

```
public abstract boolean isBoundsIncludeBorder()
```


**Returns:**

whether the boundaries returned by the [getBounds\(\)](#) method include a border

## com.sabratec.applinx.baseobject

# Class GXNaturalDataTransferDownloadRequest

java.lang.Object

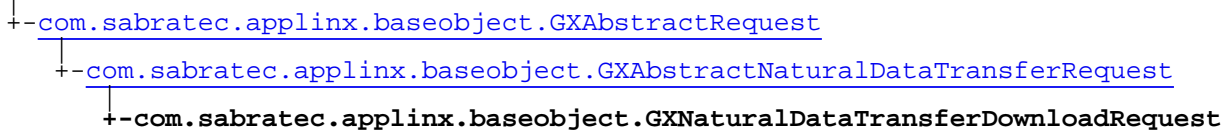

### All Implemented Interfaces:

Cloneable, java.io.Externalizable

public class **GXNaturalDataTransferDownloadRequest**  
 extends [GXAbstractNaturalDataTransferRequest](#)

Setting request for Natural Data Transfer download messages.

## Constructor Summary

public	<a href="#">GXNaturalDataTransferDownloadRequest()</a>
public	<a href="#">GXNaturalDataTransferDownloadRequest(int type)</a>

## Method Summary

void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

### Methods inherited from class

[com.sabratec.applinx.baseobject.GXAbstractNaturalDataTransferRequest](#)

[getFormatType](#), [readExternal](#), [writeExternal](#)

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#), [readExternal](#), [setVariables](#), [writeExternal](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Methods inherited from interface java.io.Externalizable

[readExternal](#), [writeExternal](#)

## Constructors



(continued from last page)

---

## GXNaturalDataTransferDownloadRequest

```
public GXNaturalDataTransferDownloadRequest()
```

---

## GXNaturalDataTransferDownloadRequest

```
public GXNaturalDataTransferDownloadRequest(int type)
```

## Methods

### readExternal

```
public void readExternal(java.io.ObjectInput in)
    throws java.io.IOException,
           ClassNotFoundException
```


---

### writeExternal

```
public void writeExternal(java.io.ObjectOutput out)
    throws java.io.IOException
```

## com.sabratec.applinx.baseobject Class GXNaturalDataTransferDownloadResponse

java.lang.Object



### All Implemented Interfaces:

java.io.Serializable

public class **GXNaturalDataTransferDownloadResponse**  
extends [GXAbstractNaturalDataTransferResponse](#)

Response data message for [GXNaturalDataTransferDownloadRequest](#)

### See Also:

ACTION\_NATURAL\_DATA\_DOWNLOAD

## Constructor Summary

public	<a href="#">GXNaturalDataTransferDownloadResponse()</a>
--------	---

## Method Summary

byte[]	<a href="#">getData()</a> The actual download data.
boolean	<a href="#">isFirstChunk()</a> flag for marking the first chunk of the stream, due to override the existing file (if any)
void	<a href="#">setData(byte[] data)</a> Set the data included in this response.
void	<a href="#">setFirstChunk(boolean firstChunk)</a> flag for marking the first chunk of the stream, due to override the existing file (if any)

### Methods inherited from class

[com.sabratec.applinx.baseobject.GXAbstractNaturalDataTransferResponse](#)

[getNumProcessedRecords](#), [isComplete](#), [setComplete](#), [setNumProcessedRecords](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXNaturalDataTransferDownloadResponse

public **GXNaturalDataTransferDownloadResponse()**

## Methods

### **getData**

```
public byte[] getData()
```

The actual download data. null as long as the download was not completed.

---

### **setData**

```
public void setData(byte[] data)
```

Set the data included in this response. This method is for internal use.

**Parameters:**

data - the downloaded data

---

### **isFirstChunk**

```
public boolean isFirstChunk()
```

flag for marking the first chunk of the stream, due to override the existing file (if any)

**Returns:**

---

### **setFirstChunk**

```
public void setFirstChunk(boolean firstChunk)
```

flag for marking the first chunk of the stream, due to override the existing file (if any)

**Parameters:**

firstChunk

---

## com.sabratec.applinx.baseobject Class GXNaturalDataTransferException

```
java.lang.Object
  |
  +-GXExceptionWithErrorCode
    |
    +-com.sabratec.applinx.baseobject.GXGeneralException
      |
      +-com.sabratec.applinx.baseobject.GXNaturalDataTransferException
```

```
public class GXNaturalDataTransferException
extends GXGeneralException
```

Exception indicating that there was a problem with a Natural data transfer transaction.

### Constructor Summary

public	<a href="#">GXNaturalDataTransferException</a> (String message, Throwable e, int errorCode)
--------	---

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait


### Constructors

#### **GXNaturalDataTransferException**

```
public GXNaturalDataTransferException(String message,
                                     Throwable e,
                                     int errorCode)
```

## com.sabratec.applinx.baseobject Class GXNaturalDataTransferUploadRequest

java.lang.Object

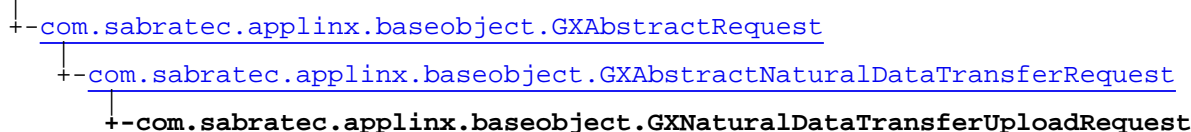

### All Implemented Interfaces:

Cloneable, java.io.Externalizable

public class **GXNaturalDataTransferUploadRequest**  
extends [GXAbstractNaturalDataTransferRequest](#)

Setting request for Natural Data Transfer upload messages.

### Constructor Summary

public	<a href="#">GXNaturalDataTransferUploadRequest()</a>
public	<a href="#">GXNaturalDataTransferUploadRequest(int type, byte[] data)</a>

### Method Summary

byte[]	<a href="#">getData()</a> Returns the data to upload.
void	<a href="#">readExternal(java.io.ObjectInput in)</a>
void	<a href="#">writeExternal(java.io.ObjectOutput out)</a>

#### Methods inherited from class

[com.sabratec.applinx.baseobject.GXAbstractNaturalDataTransferRequest](#)

[getFormatType](#), [readExternal](#), [writeExternal](#)

#### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#), [readExternal](#), [setVariables](#), [writeExternal](#)

#### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

#### Methods inherited from interface java.io.Externalizable

[readExternal](#), [writeExternal](#)

(continued from last page)

## Constructors

### **GXNaturalDataTransferUploadRequest**

```
public GXNaturalDataTransferUploadRequest()
```

---

### **GXNaturalDataTransferUploadRequest**

```
public GXNaturalDataTransferUploadRequest(int type,  
                                           byte[] data)
```

**Parameters:**

data - the data to upload

**See Also:**

`com.sabratec.applinx.baseobject.GXAbstractNaturalDataTransferRequest(int)`

## Methods

### **getData**

```
public byte[] getData()
```

Returns the data to upload.

---

### **readExternal**

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

---


### **writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```

## com.sabratec.applinx.baseobject

# Class GXNaturalDataTransferUploadResponse

java.lang.Object



### All Implemented Interfaces:

java.io.Serializable

```

public class GXNaturalDataTransferUploadResponse
extends GXAbstractNaturalDataTransferResponse
  
```

Response data message for [GXNaturalDataTransferUploadRequest](#)

### See Also:

ACTION\_NATURAL\_DATA\_UPLOAD

## Constructor Summary

public	<a href="#">GXNaturalDataTransferUploadResponse()</a>
--------	---

### Methods inherited from class

[com.sabratec.applinx.baseobject.GXAbstractNaturalDataTransferResponse](#)

[getNumProcessedRecords](#), [isComplete](#), [setComplete](#), [setNumProcessedRecords](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXNaturalDataTransferUploadResponse

```
public GXNaturalDataTransferUploadResponse()
```

## com.sabratec.applinx.baseobject Class GXNavigateException

```
java.lang.Object
  |
  +--GXExceptionWithErrorCode
      |
      +--com.sabratec.applinx.baseobject.GXGeneralException
          |
          +--com.sabratec.applinx.baseobject.GXNavigateException
```

```
public class GXNavigateException
extends GXGeneralException
```

Exception indicating an error occurred in a navigation process.

### Constructor Summary

public	<a href="#">GXNavigateException</a> (String message, Throwable e, int errorCode)
--------	--

### Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

### Constructors


#### **GXNavigateException**

```
public GXNavigateException(String message,
                           Throwable e,
                           int errorCode)
```



## com.sabratec.applinx.baseobject Class GXNavigateRequest

java.lang.Object



### All Implemented Interfaces:

[GXDebuggableRequest](#), Cloneable, java.io.Externalizable

public class **GXNavigateRequest**

extends [GXAbstractSetToHostRequest](#)

implements java.io.Externalizable, Cloneable, [GXDebuggableRequest](#)

Settings for map type paths execution request.

### Constructor Summary

public	<a href="#">GXNavigateRequest</a> ()
public	<a href="#">GXNavigateRequest</a> (String destinationScreenName) Sets the destination screen for the navigation process.
public	<a href="#">GXNavigateRequest</a> (String destinationScreenName, String mapName) <b>Deprecated.</b> Application map are defined globally for each application. Map name will be ignored

### Method Summary

String	<a href="#">getDestinationScreenName</a> ()
String	<a href="#">getMapName</a> () <b>Deprecated.</b> Application map are defined globally for each application. Map name will be ignored
boolean	<a href="#">isDebugMode</a> ()
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">setDebugMode</a> () Sets the path to be executed in debug mode.
void	<a href="#">setDestinationScreenName</a> (String destScreen)
void	<a href="#">setMapName</a> (String mapName) <b>Deprecated.</b> Application map are defined globally for each application. Map name will be ignored
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

**Methods inherited from class** [com.sabratec.applinx.baseobject.GXAbstractSetToHostRequest](#)

[addInputField](#), [addInputField](#), [addInputField](#), [addInputField](#), [addInputField](#),  
[addInputField](#), [addInputFields](#), [changeInputField](#), [getInputFields](#), [getSeqScreenNumber](#),  
[isWindowRelativePositioning](#), [readExternal](#), [removeInputField](#), [setSeqScreenNumber](#),  
[setWindowRelativePositioning](#), [toString](#), [writeExternal](#)

**Methods inherited from class** [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#),  
[readExternal](#), [setVariables](#), [writeExternal](#)

**Methods inherited from class** java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

**Methods inherited from interface** java.io.Externalizable

[readExternal](#), [writeExternal](#)

**Methods inherited from interface** [com.sabratec.applinx.baseobject.GXDebuggableRequest](#)

[isDebugMode](#), [setDebugMode](#)

## Constructors

### GXNavigateRequest

```
public GXNavigateRequest()
```

### GXNavigateRequest

```
public GXNavigateRequest(String destinationScreenName)
```

Sets the destination screen for the navigation process.

**Parameters:**

destinationScreenName - the name of the destination screen.

### GXNavigateRequest

```
public GXNavigateRequest(String destinationScreenName,  
String mapName)
```

**Deprecated.** Application map are defined globally for each application. Map name will be ignored

Sets the destination screen and the map name for the navigation process.

**Parameters:**

destinationScreenName - the name of the destination screen.

mapName - the name of the map.

## Methods

(continued from last page)

---

## getDestinationScreenName

```
public String getDestinationScreenName()
```

**Returns:**

the path's destination screen name

---

## setDestinationScreenName

```
public void setDestinationScreenName(String destScreen)
```

**Parameters:**

destScreen - the path's destination screen name to set

---

## setMapName

```
public void setMapName(String mapName)
```

**Deprecated.** *Application map are defined globally for each application. Map name will be ignored*

Sets the name of the map path to navigate with.

**Parameters:**

mapName - the name of the map

---

## getMapName

```
public String getMapName()
```

**Deprecated.** *Application map are defined globally for each application. Map name will be ignored*

**Returns:**

the map path name to navigate with

---

## setDebugMode

```
public void setDebugMode()
```

Sets the path to be executed in debug mode.

---

## isDebugMode

```
public boolean isDebugMode()
```

**Returns:**

the status of the debug mode flag

---

(continued from last page)

**readExternal**

```
public void readExternal(java.io.ObjectInput in)
    throws java.io.IOException,
           ClassNotFoundException
```

---

**writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)
    throws java.io.IOException
```

## com.sabratec.applinx.baseobject Class GXPathException

```

java.lang.Object
  |
  +-GXPathExceptionWithErrorCode
     |
     +-com.sabratec.applinx.baseobject.GXGeneralException
        |
        +-com.sabratec.applinx.baseobject.GXPathException
  
```

```

public class GXPathException
extends GXGeneralException
  
```

Exception indicating an error occurred in a path process.

### Constructor Summary

public	<a href="#">GXPathException</a> (String message, Throwable e, int errorCode)
--------	--

### Method Summary

<a href="#">GXPathResponse</a>	<a href="#">getPathResponse</a> () Returns the path response.
--------------------------------	--

Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Constructors

#### GXPathException

```

public GXPathException(String message,
                       Throwable e,
                       int errorCode)
  
```

### Methods

#### getPathResponse

```

public GXPathResponse getPathResponse()
  
```


Returns the path response. All screens that were gathered during path execution (until the error occurred) may be retrieved from the path response.

**Returns:**

the path's response object.

## com.sabratec.applinx.baseobject Class GXPathRequest

java.lang.Object



### All Implemented Interfaces:

[GXDebuggableRequest](#), Cloneable, java.io.Externalizable

public class **GXPathRequest**  
 extends [GXAbstractSetToHostRequest](#)  
 implements java.io.Externalizable, Cloneable, [GXDebuggableRequest](#)

Settings for path execution request.

### Constructor Summary

public	<a href="#">GXPathRequest</a> ()
public	<a href="#">GXPathRequest</a> (String pathName)
public	<a href="#">GXPathRequest</a> (String pathName, boolean isDebugMode)

### Method Summary

String	<a href="#">getPathName</a> ()
boolean	<a href="#">isDebugMode</a> ()
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">setDebugMode</a> () Sets the path to be executed in debug mode.
void	<a href="#">setPathName</a> (String pathName) Sets the name of the path that will be executed.
String	<a href="#">toString</a> ()
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractSetToHostRequest](#)

[addInputField](#), [addInputField](#), [addInputField](#), [addInputField](#), [addInputField](#),  
[addInputField](#), [addInputFields](#), [changeInputField](#), [getInputFields](#), [getSeqScreenNumber](#),  
[isWindowRelativePositioning](#), [readExternal](#), [removeInputField](#), [setSeqScreenNumber](#),  
[setWindowRelativePositioning](#), [toString](#), [writeExternal](#)

**Methods inherited from class** [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#), [readExternal](#), [setVariables](#), [writeExternal](#)

**Methods inherited from class** java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

**Methods inherited from interface** java.io.Externalizable

[readExternal](#), [writeExternal](#)

**Methods inherited from interface** [com.sabratec.applinx.baseobject.GXDebuggableRequest](#)

[isDebugMode](#), [setDebugMode](#)

## Constructors

### **GPXPathRequest**

```
public GPXPathRequest()
```

### **GPXPathRequest**

```
public GPXPathRequest(String pathName)
```

**Parameters:**

pathName - name of the path to execute.

### **GPXPathRequest**

```
public GPXPathRequest(String pathName,  
                      boolean isDebugMode)
```

**Parameters:**

pathName - name of the path to execute.

isDebugMode - flag to execute the path in debug mode. In this mode, a very detailed log of the path execution process is returned.

## Methods

### **getPathName**

```
public String getPathName()
```

**Returns:**

the path name set to the request.

## setPathName

```
public void setPathName(String pathName)
```

Sets the name of the path that will be executed.

**Parameters:**

pathName - the name of the path.

---

## setDebugMode

```
public void setDebugMode()
```

Sets the path to be executed in debug mode.

---

## isDebugMode

```
public boolean isDebugMode()
```

**Returns:**

the status of the debug mode flag.

---

## readExternal

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

---

## writeExternal

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```

---

## toString

```
public String toString()
```

---



## com.sabratec.applinx.baseobject Class GXPathResponse

java.lang.Object

└─com.sabratec.applinx.baseobject.GXPathResponse

### All Implemented Interfaces:

java.io.Externalizable

```
public class GXPathResponse
extends Object
implements java.io.Externalizable
```

This class is returned from GXIBaseObject.executePath() method. It contains all the contents of the response of the path.

### Constructor Summary

public	<a href="#">GXPathResponse(GXIScreen[] screens, GXVariables variables)</a> Create a new path response
public	<a href="#">GXPathResponse()</a>

### Method Summary

boolean	<a href="#">equals</a> (Object obj)
String	<a href="#">getPathExecutionLog</a> ()
<a href="#">GXIScreenCollection</a>	<a href="#">getScreens</a> ()
String	<a href="#">getVariable</a> (String varName)
String[]	<a href="#">getVariableArray</a> (String varName)
String	<a href="#">getVariableAt</a> (String varName, int index)
int	<a href="#">getVariableCount</a> (String varName)
String[]	<a href="#">getVariableNames</a> ()
boolean	<a href="#">isVariableArray</a> (String varName)
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">setPathExecutionLog</a> (String pathExecutionLog) Set the execution log of the path.
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

**Methods inherited from class** `java.lang.Object``equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait`**Methods inherited from interface** `java.io.Externalizable``readExternal, writeExternal`

## Constructors

### **GPXPathResponse**

```
public GPXPathResponse(GXIScreen[] screens,  
                      GXVariables variables)
```

Create a new path response

**Parameters:**

`screens` - the path collected screens  
`variables` - the path returned variables

### **GPXPathResponse**

```
public GPXPathResponse()
```

## Methods

### **getScreens**

```
public GXIScreenCollection getScreens()
```

**Returns:**

the screen collection that was gathered during path execution.

### **getVariable**

```
public String getVariable(String varName)
```

**Parameters:**

`varName` - the name of the variable.

**Returns:**

the value of the variable as was set during path execution.

### **isVariableArray**

```
public boolean isVariableArray(String varName)
```

---

(continued from last page)

**Parameters:**

varName - the name of the variable.

**Returns:**

true if there is a variable array with the input name in the response.

---

**getVariableNames**

```
public String[] getVariableNames()
```

**Returns:**

an array of the names of all the variables in the response.

---

**getVariableArray**

```
public String[] getVariableArray(String varName)
```

**Parameters:**

varName - the name of the variable array.

**Returns:**

an array of values set to the variable during path execution.

---

**getVariableAt**

```
public String getVariableAt(String varName,  
    int index)
```

**Parameters:**

varName - the name of the variable array.

index - the index in the array.

**Returns:**

one of the values from a variable array, according to index.

---

**getVariableCount**

```
public int getVariableCount(String varName)
```

**Parameters:**

varName - the name of the variable array.

**Returns:**

the size of a variable array. If no such array exists, -1 is returned. If the variable is not an array, 1 is returned.

---

**getPathExecutionLog**

```
public String getPathExecutionLog()
```

---

---

(continued from last page)

**Returns:**

the execution log of the path. might be null.

---

**setPathExecutionLog**

```
public void setPathExecutionLog(String pathExecutionLog)
```

Set the execution log of the path. This method is for internal use.

**Parameters:**

pathExecutionLog - the log to set

---

**equals**

```
public boolean equals(Object obj)
```

---

**writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```

---

**readExternal**

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

---

## com.sabratec.applinx.baseobject Class GXScreenBuffers

java.lang.Object

└─com.sabratec.applinx.baseobject.GXScreenBuffers

### All Implemented Interfaces:

java.io.Serializable

```
public class GXScreenBuffers
extends Object
implements java.io.Serializable
```

This class wraps the buffers that are returned from the host for a screen.

### Constructor Summary

public	<a href="#">GXScreenBuffers()</a>
public	<a href="#">GXScreenBuffers</a> (String text, byte[] attributes, byte[] eab, byte[] eabColor)

### Method Summary

boolean	<a href="#">equals</a> (Object obj)
byte[]	<a href="#">getEABBuffer</a> ()
byte[]	<a href="#">getEABColor</a> ()
byte[]	<a href="#">getFieldAttributeBuffer</a> ()
String	<a href="#">getScreenBuffer</a> ()

### Methods inherited from class java.lang.Object

`equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait`

### Constructors

#### GXScreenBuffers

```
public GXScreenBuffers()
```

(continued from last page)

## GXScreenBuffers

```
public GXScreenBuffers(String text,  
                        byte[] attributes,  
                        byte[] eab,  
                        byte[] eabColor)
```

## Methods

### getScreenBuffer

```
public String getScreenBuffer()
```

**Returns:**

the buffer that holds the content of fields in the host screen.

### getFieldAttributeBuffer

```
public byte[] getFieldAttributeBuffer()
```

**Returns:**

the buffer that holds the attributes of fields in the host screen.

### getEABBuffer

```
public byte[] getEABBuffer()
```

**Returns:**

the buffer that holds the extended field attributes for fields in the host screen.

### getEABColor

```
public byte[] getEABColor()
```

**Returns:**


the buffer that holds the colors of fields in the host screen.

### equals

```
public boolean equals(Object obj)
```

## com.sabratec.applinx.baseobject Class GXSendKeysRequest

java.lang.Object

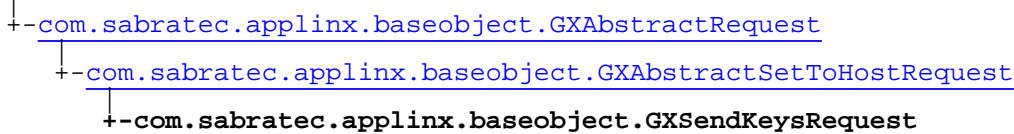

### All Implemented Interfaces:

Cloneable, java.io.Externalizable

public class **GXSendKeysRequest**  
extends [GXAbstractSetToHostRequest](#)

Settings for send keys request. If no key is specified [enter] is the default key.

### Constructor Summary

public	<a href="#">GXSendKeysRequest()</a>
public	<a href="#">GXSendKeysRequest(String keys)</a>
public	<a href="#">GXSendKeysRequest(String keys, <a href="#">GXIScreen</a> screen)</a>

### Method Summary

Object	<a href="#">clone()</a>
<a href="#">GXCursor</a>	<a href="#">getCursor()</a>
String	<a href="#">getKeys()</a>
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">setCursor</a> ( <a href="#">GXCursor</a> cursor) Sets the cursor position for the request.
void	<a href="#">setKeys</a> (String keys) Sets the key sequence that will be set to the host.
String	<a href="#">toString()</a>
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractSetToHostRequest](#)

[addInputField](#), [addInputField](#), [addInputField](#), [addInputField](#), [addInputField](#),  
[addInputField](#), [addInputFields](#), [changeInputField](#), [getInputFields](#), [getSeqScreenNumber](#),  
[isWindowRelativePositioning](#), [readExternal](#), [removeInputField](#), [setSeqScreenNumber](#),  
[setWindowRelativePositioning](#), [toString](#), [writeExternal](#)

**Methods inherited from class** [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#),  
[readExternal](#), [setVariables](#), [writeExternal](#)

**Methods inherited from class** [java.lang.Object](#)

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

**Methods inherited from interface** [java.io.Externalizable](#)

[readExternal](#), [writeExternal](#)

## Constructors

### GXSendKeysRequest

```
public GXSendKeysRequest()
```

### GXSendKeysRequest

```
public GXSendKeysRequest(String keys)
```

**Parameters:**

keys - the key (or sequence of keys and data) to send.

### GXSendKeysRequest

```
public GXSendKeysRequest(String keys,  
                           GXIScreen screen)
```

**Parameters:**

keys - the key (or sequence of keys and data) to send.

screen - a screen in which the request is initialized from. Set the sequence number and window state from the screen

## Methods

### getKeys

```
public String getKeys()
```

**Returns:**



---

(continued from last page)

the key (or sequence of keys and data) set to be sent to the host.

---

## setKeys

```
public void setKeys(String keys)
```

Sets the key sequence that will be set to the host.

**Parameters:**

keys - the key (or sequence of keys and data) to send.

---

## setCursor

```
public void setCursor(GXCursor cursor)
```

Sets the cursor position for the request.

**Parameters:**

cursor - the cursor position to be sent to the host.

---

## getCursor

```
public GXCursor getCursor()
```

**Returns:**

the cursor position set in the request.

---

## readExternal

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

---

## writeExternal

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```

---

## toString

```
public String toString()
```

---

## clone

```
public Object clone()
```

---

## com.sabratec.applinx.baseobject Class GXSessionStatusResponse

java.lang.Object

└-com.sabratec.applinx.baseobject.GXSessionStatusResponse

### All Implemented Interfaces:

java.io.Serializable

```
public class GXSessionStatusResponse
extends Object
implements java.io.Serializable
```

Response data message for the get status request.

### Constructor Summary

public	<a href="#">GXSessionStatusResponse</a> (int seqScreenNumber) Create a new session status response message.
--------	--

### Method Summary

int	<a href="#">getSeqScreenNumber</a> () Returns the current session sequential screen number.
-----	--

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Constructors

### GXSessionStatusResponse

```
public GXSessionStatusResponse(int seqScreenNumber)
```

Create a new session status response message.

#### Parameters:

seqScreenNumber - the current session sequential screen number.

## Methods


### getSeqScreenNumber

```
public int getSeqScreenNumber()
```

Returns the current session sequential screen number.

## com.sabratec.applinx.baseobject Class GXSetVariablesRequest

java.lang.Object



### All Implemented Interfaces:

Cloneable, java.io.Externalizable

public class **GXSetVariablesRequest**  
extends [GXAbstractRequest](#)

Set Variables Request.

### Constructor Summary

public	<a href="#">GXSetVariablesRequest()</a>
--------	---

### Method Summary

void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#), [readExternal](#), [setVariables](#), [writeExternal](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Methods inherited from interface java.io.Externalizable

[readExternal](#), [writeExternal](#)

### Constructors

#### **GXSetVariablesRequest**

public **GXSetVariablesRequest**()

### Methods

(continued from last page)

**readExternal**

```
public void readExternal(java.io.ObjectInput in)
    throws java.io.IOException,
           ClassNotFoundException
```


---

**writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)
    throws java.io.IOException
```

## com.sabratec.applinx.baseobject Class GXTableRequest

java.lang.Object



### All Implemented Interfaces:

[GXDebuggableRequest](#), Cloneable, java.io.Externalizable

public class **GXTableRequest**

extends [GXAbstractSetToHostRequest](#)

implements java.io.Externalizable, Cloneable, [GXDebuggableRequest](#)

Settings for get table execution request.

### Constructor Summary

public	<a href="#">GXTableRequest</a> () Constructs a new Table Request for a table associated with the current host screen.
public	<a href="#">GXTableRequest</a> (String tableName)
public	<a href="#">GXTableRequest</a> (String tableName, boolean isFullDetails, boolean isDebugMode)

### Method Summary

String	<a href="#">getTable</a> ()
boolean	<a href="#">isDebugMode</a> ()
boolean	<a href="#">isFullDetails</a> ()
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">setDebugMode</a> () Sets the path, that is executed to retrieve the table, to be executed in debug mode.
void	<a href="#">setFullDetails</a> (boolean isFullDetails)
void	<a href="#">setTableName</a> (String tableName)
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractSetToHostRequest](#)

[addInputField](#), [addInputField](#), [addInputField](#), [addInputField](#), [addInputField](#),  
[addInputField](#), [addInputFields](#), [changeInputField](#), [getInputFields](#), [getSeqScreenNumber](#),  
[isWindowRelativePositioning](#), [readExternal](#), [removeInputField](#), [setSeqScreenNumber](#),  
[setWindowRelativePositioning](#), [toString](#), [writeExternal](#)

#### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#),  
[readExternal](#), [setVariables](#), [writeExternal](#)

#### Methods inherited from class [java.lang.Object](#)

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

#### Methods inherited from interface [java.io.Externalizable](#)

[readExternal](#), [writeExternal](#)

#### Methods inherited from interface [com.sabratec.applinx.baseobject.GXDebuggableRequest](#)

[isDebugMode](#), [setDebugMode](#)

## Constructors

### GXTableRequest

```
public GXTableRequest()
```

Constructs a new Table Request for a table associated with the current host screen.

### GXTableRequest

```
public GXTableRequest(String tableName)
```

#### Parameters:

`tableName` - name of table to create.

### GXTableRequest

```
public GXTableRequest(String tableName,  
                      boolean isFullDetails,  
                      boolean isDebugMode)
```

#### Parameters:

`tableName` - name of table to create.

`isFullDetails` - whether to return all the host field properties of the table cells (colors, attributes, etc.). Otherwise, only cells' contents are returned. By default this parameter is true.

`isDebugMode` - flag to execute the table's path in debug mode (relevant only for a path table). In this mode, a very detailed log of the path execution process is written to the log.

## Methods

---

(continued from last page)

## getTableName

```
public String getTableName()
```

**Returns:**

the table name

---

## setTableName

```
public void setTableName(String tableName)
```

**Parameters:**

tableName - the table name

---

## setDebugMode

```
public void setDebugMode()
```

Sets the path, that is executed to retrieve the table, to be executed in debug mode.

---

## isDebugMode

```
public boolean isDebugMode()
```

**Returns:**

the status of the debug mode flag.

---

## isFullDetails

```
public boolean isFullDetails()
```

**Returns:**

whether the table should be returned with field attributes

---

## setFullDetails

```
public void setFullDetails(boolean isFullDetails)
```

**Parameters:**

isFullDetails - whether the table should be returned with field attributes

---

## readExternal

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

## **writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```



## com.sabratec.applinx.baseobject Class GXVariable

```

java.lang.Object
  |
  +-GXKeyValue
     |
     +-com.sabratec.applinx.baseobject.GXVariable
  
```

All Implemented Interfaces:  
[GXIVariable](#)

public class **GXVariable**  
extends [GXKeyValue](#)  
implements [GXIVariable](#)

This class represents a single variable to be set to a session request. The variables that can be set include application parameters, screen properties and path variables.

All the constants for the names of the variables can be found in [GXBaseObjectConstants](#).

**Fields inherited from interface** [com.sabratec.applinx.baseobject.GXIVariable](#)

[NULL](#), [OVERRIDE](#), [UNKNOWN](#)

### Constructor Summary

public	<a href="#">GXVariable</a> () empty ctor - to be used only by serialization
public	<a href="#">GXVariable</a> (String name)
public	<a href="#">GXVariable</a> (String name, String value)

### Method Summary

Object	<a href="#">clone</a> ()
boolean	<a href="#">equals</a> (Object obj)
int	<a href="#">hashCode</a> ()
boolean	<a href="#">isVariable</a> (String varName)

**Methods inherited from class** [java.lang.Object](#)

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

**Methods inherited from interface** [com.sabratec.applinx.baseobject.GXIVariable](#)

[getName](#), [setName](#)

## Constructors

### **GXVariable**

```
public GXVariable()
```

empty ctor - to be used only by serialization

---

### **GXVariable**

```
public GXVariable(String name)
```

**Parameters:**

name - the name of the variable to set.

---

### **GXVariable**

```
public GXVariable(String name,  
                  String value)
```

**Parameters:**

name - the name of the application field to set.

value - value to set to the variable.

---

## Methods

### **isVariable**

```
public boolean isVariable(String varName)
```

---

### **hashCode**

```
public int hashCode()
```

---

### **equals**

```
public boolean equals(Object obj)
```

---

### **clone**

```
public Object clone()
```

---

## com.sabratec.applinx.baseobject Class GXVariableArray

java.lang.Object

└-com.sabratec.applinx.baseobject.GXVariableArray

All Implemented Interfaces:

[GXIVariable](#)

```
public class GXVariableArray
extends Object
implements GXIVariable
```

This class represents a variable with multiple values to be set to a session request. Variables that can be set are path variables.

Fields inherited from interface [com.sabratec.applinx.baseobject.GXIVariable](#)

[NULL](#), [OVERRIDE](#), [UNKNOWN](#)

### Constructor Summary

public	<a href="#">GXVariableArray</a> (String name, String[] values)
--------	--

### Method Summary

String	<a href="#">getName</a> ()
--------	----------------------------

String[]	<a href="#">getValues</a> ()
----------	------------------------------

void	<a href="#">setName</a> (String name)
------	---------------------------------------

void	<a href="#">setValues</a> (String[] values)
------	---

Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

Methods inherited from interface [com.sabratec.applinx.baseobject.GXIVariable](#)

[getName](#), [setName](#)

### Constructors

#### GXVariableArray

```
public GXVariableArray(String name,
String[] values)
```

---

(continued from last page)

**Parameters:**

name - the name of the variable to set.  
values - array of String values to set to the variable.

## Methods

**getName**

```
public String getName()
```

**See Also:**

[GXIVariable.getName\(\)](#)

---

**setName**

```
public void setName(String name)
```

**See Also:**

[GXIVariable.setName\(String\)](#)

---

**setValues**

```
public void setValues(String[] values)
```

**Parameters:**

values - the values to set in the variable array

---

**getValues**

```
public String[] getValues()
```

**Returns:**

the variable array values

## com.sabratec.applinx.baseobject Class GXWaitForCursor

```

java.lang.Object
  |
  +- com.sabratec.applinx.baseobject.GXAbstractWaitCondition
      |
      +- com.sabratec.applinx.baseobject.GXAbstractWaitCursor
          |
          +- com.sabratec.applinx.baseobject.GXWaitForCursor
  
```

### All Implemented Interfaces:

[GXWaitCondition](#)

```

public class GXWaitForCursor
extends GXAbstractWaitCursor
  
```

Wait condition that instructs the ApplinX server to wait for the cursor to reach a specified location.

## Constructor Summary

public	<a href="#">GXWaitForCursor</a> ( <a href="#">GXPosition</a> cursorAt, long timeout, long flicker) Sets a wait condition that instructs the ApplinX server to wait for the cursor to reach the specified position.
public	<a href="#">GXWaitForCursor</a> ( <a href="#">GXPosition</a> upperLeft, <a href="#">GXPosition</a> lowerRight, long timeout, long flicker) Sets a wait condition that instructs the ApplinX server to wait for the cursor to reach a position within the specified rectangle.

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractWaitCursor](#)

[getLowerRightPosition](#), [getUpperLeftPosition](#), [setLowerRightPosition](#), [setUpperLeftPosition](#)

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractWaitCondition](#)

[getFlicker](#), [getTimeout](#), [setFlicker](#), [setTimeout](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXWaitForCursor

```

public GXWaitForCursor(GXPosition cursorAt,
                       long timeout,
                       long flicker)
  
```

Sets a wait condition that instructs the ApplinX server to wait for the cursor to reach the specified position.

#### Parameters:

cursorAt - Position where the cursor should be.

(continued from last page)

`timeout` - Expiration time of the wait condition.

`flicker` - Time to wait after the wait condition was met.

---

## **GXWaitForCursor**

```
public GXWaitForCursor(GXPosition upperLeft,  
                       GXPosition lowerRight,  
                       long timeout,  
                       long flicker)
```

Sets a wait condition that instructs the ApplinX server to wait for the cursor to reach a position within the specified rectangle.

### **Parameters:**

`upperLeft` - Upper left position of the rectangle where the cursor should be.

`lowerRight` - Lower right position of the rectangle where the cursor should be.

`timeout` - Expiration time of the wait condition.

`flicker` - Time to wait after the wait condition was met.

## com.sabratec.applinx.baseobject Class GXWaitForScreen

```

java.lang.Object
  |
  +- com.sabratec.applinx.baseobject.GXAbstractWaitCondition
      |
      +- com.sabratec.applinx.baseobject.GXAbstractWaitScreen
          |
          +- com.sabratec.applinx.baseobject.GXWaitForScreen
  
```

### All Implemented Interfaces:

[GXWaitCondition](#)

```

public class GXWaitForScreen
extends GXAbstractWaitScreen
  
```

Wait condition that instructs the ApplinX server to wait for a specific screen.

## Constructor Summary

public	<a href="#">GXWaitForScreen</a> (String screenName, long timeout, long flicker) Sets a wait condition that instructs ApplinX server to wait until the screen from the host is identified as the screen with the given name (ID).
--------	---

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractWaitScreen](#)

[getScreenName](#), [setScreenName](#)

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractWaitCondition](#)

[getFlicker](#), [getTimeout](#), [setFlicker](#), [setTimeout](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXWaitForScreen

```

public GXWaitForScreen(String screenName,
                       long timeout,
                       long flicker)
  
```


Sets a wait condition that instructs ApplinX server to wait until the screen from the host is identified as the screen with the given name (ID).

#### Parameters:

- screenName - Name of the expected screen.
- timeout - Expiration time of the wait condition.
- flicker - Time to wait after the wait condition was met.

## com.sabratec.applinx.baseobject Class GXWaitForString

java.lang.Object

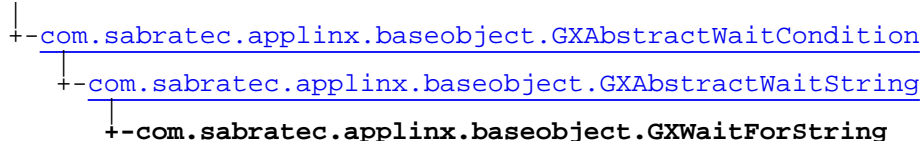

All Implemented Interfaces:

[GXWaitCondition](#)

```
public class GXWaitForString
extends GXAbstractWaitString
```

Wait condition that instructs the ApplinX server to wait for a specific string in a specific location on the screen.

### Constructor Summary

public	<a href="#">GXWaitForString</a> (String string, boolean isCaseSensitive, <a href="#">GXPosition</a> stringAt, long timeout, long flicker) Sets a wait condition that instructs ApplinX server to wait until the given string appears at the given position.
public	<a href="#">GXWaitForString</a> (String string, boolean isCaseSensitive, <a href="#">GXPosition</a> upperLeft, <a href="#">GXPosition</a> lowerRight, long timeout, long flicker) Sets a wait condition that instructs ApplinX server to wait until the given string appears in the rectangle specified by upper left and lower right positions.

#### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractWaitString](#)

[getLowerRightPosition](#), [getString](#), [getUpperLeftPosition](#), [isCaseSensitive](#), [setIsCaseSensitive](#), [setLowerRightPosition](#), [setString](#), [setUpperLeftPosition](#)

#### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractWaitCondition](#)

[getFlicker](#), [getTimeout](#), [setFlicker](#), [setTimeout](#)

#### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Constructors

#### **GXWaitForString**

```
public GXwaitForString(String string,
                       boolean isCaseSensitive,
                       GXPosition stringAt,
                       long timeout,
                       long flicker)
```

Sets a wait condition that instructs ApplinX server to wait until the given string appears at the given position.



---

(continued from last page)

**Parameters:**

`string` - The expected string.  
`isCaseSensitive` - Whether the condition is case sensitive  
`stringAt` - Position where the string should appear.  
`timeout` - Expiration time of the wait condition.  
`flicker` - Time to wait after the wait condition was met.

---

## GXWaitForString

```
public GXWaitForString(String string,  
                       boolean isCaseSensitive,  
                       GXPosition upperLeft,  
                       GXPosition lowerRight,  
                       long timeout,  
                       long flicker)
```


Sets a wait condition that instructs ApplinX server to wait until the given string appears in the rectangle specified by upper left and lower right positions.

**Parameters:**

`string` - The expected string.  
`isCaseSensitive` - Whether the condition is case sensitive  
`upperLeft` - Upper left position of the rectangle where the string should appear.  
`lowerRight` - Lower right position of the rectangle where the string should appear.  
`timeout` - Expiration time of the wait condition.  
`flicker` - Time to wait after the wait condition was met.

## com.sabratec.applinx.baseobject Class GXWaitHostQuiet

java.lang.Object



### All Implemented Interfaces:

[GXWaitCondition](#)

public class **GXWaitHostQuiet**  
extends [GXAbstractWaitCondition](#)

Wait condition that instructs the ApplinX server to wait a specified time before returning a host screen.

## Constructor Summary

public	<a href="#">GXWaitHostQuiet</a> (long timeout, long flicker) Sets a wait condition that instructs the ApplinX server to wait the specified time before returning the host screen.
public	<a href="#">GXWaitHostQuiet</a> (long timeout, long flicker, boolean waitForSystemUnlock)

## Method Summary

boolean	<a href="#">isWaitForSystemUnlock</a> () Determine Whether to wait for keyboard unlock or not (also called "set-ctrl-n"), default is true.
---------	---

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractWaitCondition](#)

[getFlicker](#), [getTimeout](#), [setFlicker](#), [setTimeout](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXWaitHostQuiet

```
public GXWaitHostQuiet(long timeout,
                       long flicker)
```

Sets a wait condition that instructs the ApplinX server to wait the specified time before returning the host screen. This condition is less recommended because it will always wait the specified time before returning the host screen even if the screen has arrived fully before the expiration time.

#### Parameters:

- timeout - Expiration time of the wait condition.
- flicker - Time to wait after the wait condition was met.

---

## GXWaitHostQuiet

```
public GXWaitHostQuiet(long timeout,  
                       long flicker,  
                       boolean waitForSystemUnlock)
```

### Parameters:

`timeout` - Expiration time of the wait condition.

`flicker` - Time to wait after the wait condition was met.

`waitForSystemUnlock` - Whether to wait for keyboard unlock or not (also called "set-ctrl-n"), default is `true`.

### See Also:

[GXWaitHostQuiet\(long, long\)](#)

## Methods

### isWaitForSystemUnlock

```
public boolean isWaitForSystemUnlock()
```

Determine Whether to wait for keyboard unlock or not (also called "set-ctrl-n"), default is `true`.

## com.sabratec.applinx.baseobject Class GXWaitWhileCursor

```

java.lang.Object
  |
  +- com.sabratec.applinx.baseobject.GXAbstractWaitCondition
      |
      +- com.sabratec.applinx.baseobject.GXAbstractWaitCursor
          |
          +- com.sabratec.applinx.baseobject.GXWaitWhileCursor
  
```

### All Implemented Interfaces:

[GXWaitCondition](#)

```

public class GXWaitWhileCursor
extends GXAbstractWaitCursor
  
```

Wait condition that instructs the ApplinX server to wait as long as the cursor is in a specified location.

### Constructor Summary

public	<a href="#">GXWaitWhileCursor</a> ( <a href="#">GXPosition</a> cursorAt, long timeout, long flicker) Sets a wait condition that instructs ApplinX server to wait while the cursor is at the specified position.
public	<a href="#">GXWaitWhileCursor</a> ( <a href="#">GXPosition</a> upperLeft, <a href="#">GXPosition</a> lowerRight, long timeout, long flicker) Sets a wait condition that instructs ApplinX Server to wait while the cursor is in the rectangle specified by upper left and lower right positions.

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractWaitCursor](#)

[getLowerRightPosition](#), [getUpperLeftPosition](#), [setLowerRightPosition](#), [setUpperLeftPosition](#)

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractWaitCondition](#)

[getFlicker](#), [getTimeout](#), [setFlicker](#), [setTimeout](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXWaitWhileCursor

```

public GXWaitWhileCursor(GXPosition cursorAt,
                        long timeout,
                        long flicker)
  
```

Sets a wait condition that instructs ApplinX server to wait while the cursor is at the specified position.

#### Parameters:

cursorAt - Position where the cursor should be.

(continued from last page)

`timeout` - Expiration time of the wait condition.

`flicker` - Time to wait after the wait condition was met.

---

## **GXWaitWhileCursor**

```
public GXWaitWhileCursor(GXPosition upperLeft,  
                        GXPosition lowerRight,  
                        long timeout,  
                        long flicker)
```

Sets a wait condition that instructs ApplinX Server to wait while the cursor is in the rectangle specified by upper left and lower right positions.

### **Parameters:**

`upperLeft` - Upper left position of the rectangle where the cursor should be.


`lowerRight` - Lower right position of the rectangle where the cursor should be.

`timeout` - Expiration time of the wait condition.

`flicker` - Time to wait after the wait condition was met.

## com.sabratec.applinx.baseobject Class GXWaitWhileScreen

java.lang.Object



All Implemented Interfaces:

[GXWaitCondition](#)

```
public class GXWaitWhileScreen
extends GXAbstractWaitScreen
```

Wait condition that instructs the ApplinX server to wait until the screen is different from a specific screen.

### Constructor Summary

public	<a href="#">GXWaitWhileScreen</a> (String screenName, long timeout, long flicker) Sets a wait condition that instructs ApplinX server to wait while the screen from the host is identified as the screen with the given name (ID).
--------	---

Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractWaitScreen](#)

[getScreenName](#), [setScreenName](#)

Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractWaitCondition](#)

[getFlicker](#), [getTimeout](#), [setFlicker](#), [setTimeout](#)

Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Constructors

#### GXWaitWhileScreen

```
public GXWaitWhileScreen(String screenName,
                        long timeout,
                        long flicker)
```

Sets a wait condition that instructs ApplinX server to wait while the screen from the host is identified as the screen with the given name (ID).

**Parameters:**

- screenName - Name of the screen.
- timeout - Expiration time of the wait condition.
- flicker - Time to wait after the wait condition was met.

## com.sabratec.applinx.baseobject Class GXWaitWhileString

```

java.lang.Object
  |
  +- com.sabratec.applinx.baseobject.GXAbstractWaitCondition
      |
      +- com.sabratec.applinx.baseobject.GXAbstractWaitString
          |
          +- com.sabratec.applinx.baseobject.GXWaitWhileString
  
```

### All Implemented Interfaces:

[GXWaitCondition](#)

```

public class GXWaitWhileString
extends GXAbstractWaitString
  
```

Wait condition that instructs the ApplinX server to wait as long as a specific string in a specific location on the screen is present.

## Constructor Summary

public	<a href="#">GXWaitWhileString</a> (String string, boolean isCaseSensitive, <a href="#">GXPosition</a> stringAt, long timeout, long flicker) Sets a wait condition that instructs ApplinX server to wait while the given string appears at the given position.
public	<a href="#">GXWaitWhileString</a> (String string, boolean isCaseSensitive, <a href="#">GXPosition</a> upperLeft, <a href="#">GXPosition</a> lowerRight, long timeout, long flicker) Sets a wait condition that instructs ApplinX server to wait while the given string appears in the rectangle specified by upper left and lower right positions.

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractWaitString](#)

[getLowerRightPosition](#), [getString](#), [getUpperLeftPosition](#), [isCaseSensitive](#), [setIsCaseSensitive](#), [setLowerRightPosition](#), [setString](#), [setUpperLeftPosition](#)

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractWaitCondition](#)

[getFlicker](#), [getTimeout](#), [setFlicker](#), [setTimeout](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXWaitWhileString

```

public GXwaitWhileString(String string,
    boolean isCaseSensitive,
    GXPosition stringAt,
    long timeout,
    long flicker)
  
```

Sets a wait condition that instructs ApplinX server to wait while the given string appears at the given position.

---

(continued from last page)

**Parameters:**

`string` - The expected string.  
`isCaseSensitive` - Whether the condition is case sensitive  
`stringAt` - Position where the string should appear.  
`timeout` - Expiration time of the wait condition.  
`flicker` - Time to wait after the wait condition was met.

---

## **GXWaitWhileString**

```
public GXWaitWhileString(String string,  
                        boolean isCaseSensitive,  
                        GXPosition upperLeft,  
                        GXPosition lowerRight,  
                        long timeout,  
                        long flicker)
```

Sets a wait condition that instructs ApplinX server to wait while the given string appears in the rectangle specified by upper left and lower right positions.

**Parameters:**

`string` - The expected string.  
`isCaseSensitive` - Whether the condition is case sensitive  
`upperLeft` - Upper left position of the rectangle where the string should appear.  
`lowerRight` - Lower right position of the rectangle where the string should appear.  
`timeout` - Expiration time of the wait condition.  
`flicker` - Time to wait after the wait condition was met.




---

Package

**com.sabratec.applinx.baseobject.print**

## com.sabratec.applinx.baseobject.print Class GXActivatePrinterRequest

java.lang.Object

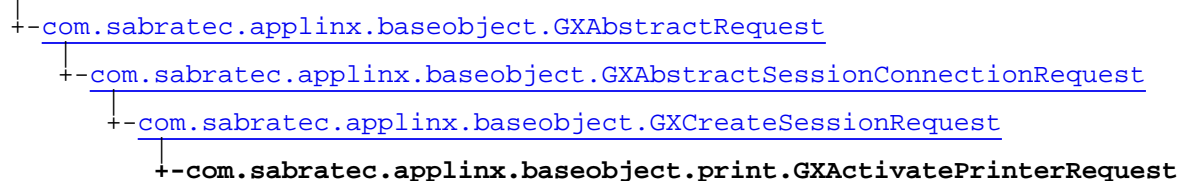

### All Implemented Interfaces:

Cloneable, java.io.Externalizable

public class **GXActivatePrinterRequest**  
extends [GXCreateSessionRequest](#)

Connection request to a activate printer session. Extends [GXCreateSessionRequest](#)

## Constructor Summary

public	<a href="#">GXActivatePrinterRequest</a> ()
public	<a href="#">GXActivatePrinterRequest</a> (GXParameters params) { @link com.sabratec.applinx.common.runtime.printer.GXParameters

## Method Summary

GXParameters	<a href="#">getPrinterParameters</a> () Gets print parameters { @link com.sabratec.applinx.common.runtime.printer.GXParameters
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

### Methods inherited from class [com.sabratec.applinx.baseobject.GXCreateSessionRequest](#)

[getConnectionPool](#), [getHostNewPassword](#), [getHostPassword](#), [getHostService](#),  
[getHostUserName](#), [getSessionDescription](#), [isFailOnWarning](#), [readExternal](#),  
[setConnectionPool](#), [setFailOnWarning](#), [setHostNewPassword](#), [setHostPassword](#),  
[setHostUserName](#), [setSessionDescription](#), [setUseHostService](#), [writeExternal](#)

### Methods inherited from class

[com.sabratec.applinx.baseobject.GXAbstractSessionConnectionRequest](#)

[getApplicationName](#), [getClientId](#), [getServerContext](#), [getServerURL](#), [getSessionID](#),  
[getSessionPassword](#), [readExternal](#), [setApplicationName](#), [setClientId](#), [setServerContext](#),  
[setServerURL](#), [setSessionID](#), [setSessionPassword](#), [writeExternal](#)

### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#),  
[readExternal](#), [setVariables](#), [writeExternal](#)

**Methods inherited from class** `java.lang.Object``equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait`**Methods inherited from interface** `java.io.Externalizable``readExternal, writeExternal`

## Constructors

### **GXActivatePrinterRequest**

```
public GXActivatePrinterRequest()
```

### **GXActivatePrinterRequest**

```
public GXActivatePrinterRequest(GXParameters params)
```

{ @link com.sabratec.applinx.common.runtime.printer.GXParameters

## Methods

### **getPrinterParameters**

```
public GXParameters getPrinterParameters()
```

Gets print parameters { @link com.sabratec.applinx.common.runtime.printer.GXParameters

**Returns:**

### **readExternal**

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

**See Also:**

`java.io.Externalizable#readExternal(ObjectInput)`

### **writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```

**See Also:**

`java.io.Externalizable#writeExternal(ObjectOutput)`

## com.sabratec.applinx.baseobject.print Class GXBook

```
java.lang.Object
  |
  +-com.sabratec.applinx.baseobject.print.GXBook
```

### All Implemented Interfaces:

```
java.io.Externalizable
```

```
public class GXBook
  extends Object
  implements java.io.Externalizable
```

This class provides a representation of a document.

### Constructor Summary

public	<a href="#">GXBook()</a>
--------	--------------------------

### Method Summary

void	<a href="#">append</a> ( <a href="#">GXPlainPage</a> page) Appends a single page to the end of this Book.
int	<a href="#">getNumberOfPages</a> () Returns the number of pages in this Book.
<a href="#">GXPlainPage</a>	<a href="#">getPage</a> (int i) Returns the page of the book specified by page index
<a href="#">GXPlainPage[]</a>	<a href="#">getPages</a> () Returns the pages of the book.
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

#### Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

#### Methods inherited from interface java.io.Externalizable

`readExternal`, `writeExternal`

### Constructors

#### **GXBook**

```
public GXBook()
```

(continued from last page)

## Methods

### append

```
public void append(GXPlainPage page)
```

Appends a single page to the end of this Book.

**Parameters:**

page

---

### getPages

```
public GXPlainPage[] getPages()
```

Returns the pages of the book.

**Returns:**

---

### getPage

```
public GXPlainPage getPage(int i)
```

Returns the page of the book specified by page index

**Parameters:**

i

**Returns:**

---

### getNumberOfPages

```
public int getNumberOfPages()
```

Returns the number of pages in this Book.

**Returns:**

---

### readExternal

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

**See Also:**

`java.io.Externalizable#readExternal(ObjectInput)`

---

### writeExternal

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```


(continued from last page)

**See Also:**

`java.io.Externalizable#writeExternal(ObjectOutput)`

## com.sabratec.applinx.baseobject.print Class GXGetPrintsRequest

java.lang.Object



### All Implemented Interfaces:

Cloneable, java.io.Externalizable

public class **GXGetPrintsRequest**  
extends [GXAbstractRequest](#)

Settings for the get prints request.

### Constructor Summary

public	<a href="#">GXGetPrintsRequest()</a> Create prints request with acknowledge true, that means the response data correspondent to previous request should be acknowledged, removed from server and does not send again m_acknowledge
public	<a href="#">GXGetPrintsRequest(boolean acknowledge)</a> Create prints request with m_acknowledge The acknowledge correspondent to previous request In case that acknowledge is true data removed from server and does not send again otherwise data from response will contains data from current and previous request.

### Method Summary

boolean	<a href="#">hasAcknowledge()</a> Shown if the response data of the previous request should be acknowledged.
void	<a href="#">readExternal(java.io.ObjectInput in)</a>
void	<a href="#">setAcknowledge(boolean acknowledge)</a> Sets acknowledge for response data of the previous request m_acknowledge
void	<a href="#">writeExternal(java.io.ObjectOutput out)</a>

#### Methods inherited from class [com.sabratec.applinx.baseobject.GXAbstractRequest](#)

[addVariable](#), [addVariable](#), [addVariableArray](#), [clone](#), [equals](#), [getVariables](#), [hashCode](#), [readExternal](#), [setVariables](#), [writeExternal](#)

#### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

#### Methods inherited from interface java.io.Externalizable

[readExternal](#), [writeExternal](#)

## Constructors

### GXGetPrintsRequest

```
public GXGetPrintsRequest()
```

Create prints request with acknowledge true, that means the response data correspondent to previous request should be acknowledged, removed from server and does not send again `m_acknowledge`

### GXGetPrintsRequest

```
public GXGetPrintsRequest(boolean acknowledge)
```

Create prints request with `m_acknowledge` The acknowledge correspondent to previous request In case that acknowledge is true data removed from server and does not send again otherwise data from response will contains data from current and previous request.

**Parameters:**

acknowledge

## Methods

### hasAcknowledge

```
public boolean hasAcknowledge()
```

Shown if the response data of the previous request should be acknowledged. `m_acknowledge`

**Returns:**

### setAcknowledge

```
public void setAcknowledge(boolean acknowledge)
```

Sets acknowledge for response data of the previous request `m_acknowledge`

**Parameters:**

acknowledge

### readExternal

```
public void readExternal(java.io.ObjectInput in)
    throws java.io.IOException,
           ClassNotFoundException
```

**See Also:**

`java.io.Externalizable#readExternal(ObjectInput)`

### writeExternal

```
public void writeExternal(java.io.ObjectOutput out)
    throws java.io.IOException
```



(continued from last page)

**See Also:**

`java.io.Externalizable#writeExternal(ObjectOutput)`

## com.sabratec.applinx.baseobject.print Class GXHTMLPrintBookBuilder

java.lang.Object

└-com.sabratec.applinx.baseobject.print.GXHTMLPrintBookBuilder

public class **GXHTMLPrintBookBuilder**  
extends Object

This class allows to transform the GXBook print model to HTML document presentation

### Constructor Summary

public	<a href="#">GXHTMLPrintBookBuilder()</a>
--------	--

### Method Summary

String	<a href="#">build(GXBook book)</a> Creates html document correspondent to GXBook object
String	<a href="#">build(GXBook book, int from, int to)</a> Creates html document correspondent to pages of the book for a given range
String	<a href="#">toCSS(GXTextSegmentState tss)</a> This method allows to transform the GXTextSegmentState to the CSS

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Constructors

### GXHTMLPrintBookBuilder

public **GXHTMLPrintBookBuilder()**

## Methods

### toCSS

public String **toCSS**([GXTextSegmentState](#) tss)

This method allows to transform the GXTextSegmentState to the CSS

#### Parameters:

tss

#### Returns:

## build

```
public String build(GXBook book)
```

Creates html document correspondent to GXBook object

**Parameters:**

book

**Returns:**

**See Also:**

[GXBook](#)

---

## build

```
public String build(GXBook book,  
                    int from,  
                    int to)
```

Creates html document correspondent to pages of the book for a given range

**Parameters:**

book

from

to

**Returns:**

## com.sabratec.applinx.baseobject.print Class GXPlainPage

java.lang.Object

└─com.sabratec.applinx.baseobject.print.GXPlainPage

### All Implemented Interfaces:

java.io.Externalizable

```
public class GXPlainPage
extends Object
implements java.io.Externalizable
```

This class provides a representation of a signal page form book [GXBook](#)

## Constructor Summary

public	<a href="#">GXPlainPage()</a> Creates GXPlainPage object.
--------	--

## Method Summary

void	<a href="#">append(GXTextSegment segment)</a> Adds segment to the end of this page.
<a href="#">GXPlainPage</a>	<a href="#">bidiMatcher()</a> Bidi text processing on page
<a href="#">GXTextSegment</a>	<a href="#">getSegment(int i)</a> Gets segment by specified index m_segments
<a href="#">GXTextSegment[]</a>	<a href="#">getSegments()</a> Gets segments array m_segments
void	<a href="#">readExternal(java.io.ObjectInput in)</a>
void	<a href="#">writeExternal(java.io.ObjectOutput out)</a>

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Methods inherited from interface java.io.Externalizable

readExternal, writeExternal

## Constructors

(continued from last page)

## GXPlainPage

```
public GXPlainPage()
```

Creates GXPlainPage object.

## Methods

### append

```
public void append(GXTextSegment segment)
```

Adds segment to the end of this page.

### getSegment

```
public GXTextSegment getSegment(int i)
```

Gets segment by specified index m\_segments

### getSegments

```
public GXTextSegment[] getSegments()
```

Gets segments array m\_segments

### bidMatcher

```
public GXPlainPage bidMatcher()
```

Bidi text processing on page

**Returns:**

### readExternal

```
public void readExternal(java.io.ObjectInput in)
    throws java.io.IOException,
           ClassNotFoundException
```

**See Also:**

java.io.Externalizable#readExternal(ObjectInput)

### writeExternal

```
public void writeExternal(java.io.ObjectOutput out)
    throws java.io.IOException
```

**See Also:**

java.io.Externalizable#writeExternal(ObjectOutput)

## com.sabratec.applinx.baseobject.print Class GXPoint

```

java.lang.Object
  |-- java.awt.geom.Point2D
      |-- java.awt.Point
          |-- com.sabratec.applinx.baseobject.print.GXPoint

```

### All Implemented Interfaces:

Comparable, Cloneable, java.io.Serializable

```

public class GXPoint
extends java.awt.Point
implements java.io.Serializable, Cloneable, Comparable

```

A point representing a location in (x,y) coordinate space, specified in integer precision. Extends the java.awt.Point Implements the self comparable mechanism.

### Fields inherited from class java.awt.Point

x, y

### Constructor Summary

public	<a href="#">GXPoint</a> (java.awt.Point p) Constructs and initializes a point with the same location as the specified Point object.
public	<a href="#">GXPoint</a> (int x, int y) Constructs and initializes a point at the specified (x,y) location in the coordinate space.

### Method Summary

int	<a href="#">compareTo</a> (Object o) Compare mechanism based on comparing the coordinate from up to down (y), from left to right (x)
String	<a href="#">toString</a> () Returns a string representation of this point and its location in the (x,y) coordinate space.

### Methods inherited from class java.awt.Point

equals, getLocation, getX, getY, move, setLocation, setLocation, setLocation, toString, translate

### Methods inherited from class java.awt.geom.Point2D

clone, distance, distance, distance, distanceSq, distanceSq, distanceSq, equals, getX, getY, hashCode, setLocation, setLocation

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

**Methods inherited from interface** `java.lang.Comparable``compareTo`

## Constructors

### **GXPoint**

```
public GXPoint(java.awt.Point p)
```

Constructs and initializes a point with the same location as the specified Point object.

**Parameters:**

p

### **GXPoint**

```
public GXPoint(int x,  
               int y)
```

Constructs and initializes a point at the specified (x,y) location in the coordinate space.

**Parameters:**

x

y

## Methods

### **compareTo**

```
public int compareTo(Object o)
```

Compare mechanism based on comparing the coordinate from up to down (y), from left to right (x)

### **toString**

```
public String toString()
```

Returns a string representation of this point and its location in the (x,y) coordinate space.

## com.sabratec.applinx.baseobject.print Class GXTextSegment

java.lang.Object

↳ com.sabratec.applinx.baseobject.print.GXTextSegment

### All Implemented Interfaces:

java.io.Externalizable

```
public class GXTextSegment
extends Object
implements java.io.Externalizable
```

Represents segment of text, intended for print

### Constructor Summary

public	<a href="#">GXTextSegment()</a> Creates TextSegment object.
public	<a href="#">GXTextSegment(GXTextSegmentState segmentState, java.awt.Point point)</a> Creates TextSegment object by specified state and coordinate

### Method Summary

void	<a href="#">addSegmentText(java.awt.Point point, String text)</a> Adds text to segment with specified point
<a href="#">GXTextSegment</a>	<a href="#">bidiMatcher()</a> Bidi processing of the segment text
int	<a href="#">getFirstRow()</a> Gets first row of the segment m_segmentText
int	<a href="#">getLastRow()</a> Gets last row of the segment m_segmentText
Map	<a href="#">getSegmentCoords()</a> Gets segment coordinates as map where key - start text coordinate value - end text coordinate m_segmentFromTo
<a href="#">GXTextSegmentState</a>	<a href="#">getSegmentState()</a> Gets color of the text m_segmentState
Map	<a href="#">getSegmentText()</a> Gets text of segment as map where: key - text's coordinate value text, presented as StringBuffer m_segmentText
void	<a href="#">readExternal(java.io.ObjectInput in)</a>
void	<a href="#">setSegmentState(GXTextSegmentState segmentState)</a> Sets color of the text m_segmentState



void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)
------	--

**Methods inherited from class** java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

**Methods inherited from interface** java.io.Externalizable

readExternal, writeExternal

## Constructors

### **GXTextSegment**

```
public GXTextSegment()
```

Creates TextSegment object.

### **GXTextSegment**

```
public GXTextSegment(GXTextSegmentState segmentState,  
                    java.awt.Point point)
```

Creates TextSegment object by specified state and coordinate

**Parameters:**

segmentState

point

## Methods

### **getSegmentState**

```
public GXTextSegmentState getSegmentState()
```

Gets color of the text m\_segmentState

### **setSegmentState**

```
public void setSegmentState(GXTextSegmentState segmentState)
```

Sets color of the text m\_segmentState

### **addSegmentText**

```
public void addSegmentText(java.awt.Point point,  
                          String text)
```

Adds text to segment with specified point

**Parameters:**

point

text

---

(continued from last page)

## getSegmentText

```
public Map getSegmentText()
```

Gets text of segment as map where: key - text's coordinate value text, presented as StringBuffer m\_segmentText

**Returns:**

---

## getSegmentCoords

```
public Map getSegmentCoords()
```

Gets segment coordinates as map where key - start text coordinate value - end text coordinate m\_segmentFromTo

**Returns:**

---

## bidMatcher

```
public GXTextSegment bidMatcher()
```

Bidi processing of the segment text

**Returns:**

---

## getFirstRow

```
public int getFirstRow()
```

Gets first row of the segment m\_segmentText

**Returns:**

---

## getLastRow

```
public int getLastRow()
```

Gets last row of the segment m\_segmentText

**Returns:**

---

## readExternal

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

**See Also:**

`java.io.Externalizable#readExternal(ObjectInput)`

---

(continued from last page)

## **writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```

### **See Also:**

`java.io.Externalizable#writeExternal(ObjectOutput)`

## com.sabratec.applinx.baseobject.print Class GXTextSegmentState

java.lang.Object

└-com.sabratec.applinx.baseobject.print.GXTextSegmentState

### All Implemented Interfaces:

java.io.Externalizable

```
public class GXTextSegmentState
extends Object
implements java.io.Externalizable
```

Represents a text state of a segment

### Constructor Summary

public	<a href="#">GXTextSegmentState()</a> Creates text segment state object.
public	<a href="#">GXTextSegmentState(java.awt.Font font, java.awt.Color color, Boolean underlined)</a> Creates text segment state object with specified font, color and underlined property.

### Method Summary

boolean	<a href="#">equals(Object obj)</a>
java.awt.Color	<a href="#">getColor()</a> Gets color of the text m_color
java.awt.Font	<a href="#">getFont()</a> Gets font of the text m_font
int	<a href="#">hashCode()</a>
Boolean	<a href="#">isUnderlined()</a> Gets underline property of the text m_underlined
void	<a href="#">readExternal(java.io.ObjectInput in)</a>
void	<a href="#">setColor(java.awt.Color color)</a> Sets color of the text m_color
void	<a href="#">setFont(java.awt.Font font)</a> Sets font of the text m_font
void	<a href="#">setUnderlined(Boolean underlined)</a> Sets underline property of the text m_underlined
String	<a href="#">toString()</a>

void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)
------	--

**Methods inherited from class** java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

**Methods inherited from interface** java.io.Externalizable

readExternal, writeExternal

## Constructors

### **GXTextSegmentState**

```
public GXTextSegmentState()
```

Creates text segment state object.

### **GXTextSegmentState**

```
public GXTextSegmentState(java.awt.Font font,  
                           java.awt.Color color,  
                           Boolean underlined)
```

Creates text segment state object with specified font, color and underlined property.

## Methods

### **getColor**

```
public java.awt.Color getColor()
```

Gets color of the text `m_color`

### **setColor**

```
public void setColor(java.awt.Color color)
```

Sets color of the text `m_color`

### **getFont**

```
public java.awt.Font getFont()
```

Gets font of the text `m_font`

**Returns:**

### **setFont**

```
public void setFont(java.awt.Font font)
```

Sets font of the text `m_font`

(continued from last page)

**Parameters:**

font

---

**isUnderlined**

```
public Boolean isUnderlined()
```

Gets underline property of the text `m_underlined`

**Returns:**

---

**setUnderlined**

```
public void setUnderlined(Boolean underlined)
```

Sets underline property of the text `m_underlined`

**Parameters:**

underlined

---

**hashCode**

```
public int hashCode()
```

---

**equals**

```
public boolean equals(Object obj)
```

---

**toString**

```
public String toString()
```

---

**readExternal**

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

**See Also:**

```
java.io.Externalizable#readExternal(ObjectInput)
```

---

**writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```

**See Also:**

```
java.io.Externalizable#writeExternal(ObjectOutput)
```

---

**Package**

# **com.sabratec.applinx.baseobject.query**

Contains classes and interfaces for executing data queries on screens and fields.

## com.sabratec.applinx.baseobject.query Class GXAbstractFieldMatchQuery

java.lang.Object

└-com.sabratec.applinx.baseobject.query.GXAbstractFieldMatchQuery

All Implemented Interfaces:

[GXIScreenCollectionFieldsQuery](#)

public abstract class **GXAbstractFieldMatchQuery**  
extends Object  
implements [GXIScreenCollectionFieldsQuery](#)

Description: This abstract query collects all the instances of fields that meet the abstract criteria from the first screen **only**

### Constructor Summary

public	<a href="#">GXAbstractFieldMatchQuery()</a>
--------	---

### Method Summary

abstract boolean	<a href="#">getFieldMatchQuery</a> ( <a href="#">GXIField</a> field)
<a href="#">GXIFieldCollection</a>	<a href="#">getFields</a> ( <a href="#">GXIScreenCollection</a> screenCollection)

#### Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

#### Methods inherited from interface

[com.sabratec.applinx.baseobject.query.GXIScreenCollectionFieldsQuery](#)

[getFields](#)

## Constructors

### GXAbstractFieldMatchQuery

public **GXAbstractFieldMatchQuery**()

## Methods

### getFieldMatchQuery

public abstract boolean **getFieldMatchQuery**([GXIField](#) field)



## **getFields**

```
public GXIFieldCollection getFields(GXIScreenCollection screenCollection)
```

## com.sabratec.applinx.baseobject.query Class GXFieldCollectionQueryAppField

java.lang.Object

└-com.sabratec.applinx.baseobject.query.GXFieldCollectionQueryAppField

All Implemented Interfaces:

[GXFieldCollectionQuery](#)

public class **GXFieldCollectionQueryAppField**  
extends Object  
implements [GXFieldCollectionQuery](#)

### Constructor Summary

public	<a href="#">GXFieldCollectionQueryAppField</a> (String name, int index) Constructor
public	<a href="#">GXFieldCollectionQueryAppField</a> (String name) Constructor

### Method Summary

boolean	<a href="#">getFieldMatchQuery</a> ( <a href="#">GXField</a> field) GXField uses full name
---------	---

Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

Methods inherited from interface [com.sabratec.applinx.baseobject.query.GXFieldCollectionQuery](#)

[getFieldMatchQuery](#)

### Constructors

#### GXFieldCollectionQueryAppField

```
public GXFieldCollectionQueryAppField(String name,
                                     int index)
```

Constructor

**Parameters:**

name - the full or short name of the application field  
index - the instance of a multiple application field

#### GXFieldCollectionQueryAppField

```
public GXFieldCollectionQueryAppField(String name)
```

---

(continued from last page)

Constructor

**Parameters:**

name - the full or short name of the application field

## Methods

### **getFieldMatchQuery**

```
public boolean getFieldMatchQuery(GXIField field)
```

GXIField uses full name

## com.sabratec.applinx.baseobject.query Class GXFieldCollectionQueryProtected

java.lang.Object

└-com.sabratec.applinx.baseobject.query.GXFieldCollectionQueryProtected

All Implemented Interfaces:

[GXFieldCollectionQuery](#)

```
public class GXFieldCollectionQueryProtected
extends Object
implements GXFieldCollectionQuery
```

### Constructor Summary

public	<a href="#">GXFieldCollectionQueryProtected</a> (boolean isProtected) Constructor
--------	--

### Method Summary

boolean	<a href="#">getFieldMatchQuery</a> ( <a href="#">GXIField</a> field)
---------	--

Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

Methods inherited from interface [com.sabratec.applinx.baseobject.query.GXFieldCollectionQuery](#)

[getFieldMatchQuery](#)

### Constructors

#### GXFieldCollectionQueryProtected

```
public GXFieldCollectionQueryProtected(boolean isProtected)
```

Constructor

### Methods

#### getFieldMatchQuery

```
public boolean getFieldMatchQuery(GXIField field)
```

## com.sabratec.applinx.baseobject.query Interface GXIFieldCollectionQuery

All Known Implementing Classes:

[GXIFieldCollectionQueryProtected](#), [GXIFieldCollectionQueryAppField](#)

```
public interface GXIFieldCollectionQuery
```

### Method Summary

abstract boolean	<a href="#">getFieldMatchQuery</a> ( <a href="#">GXIField</a> field)
------------------	--

### Methods

#### **getFieldMatchQuery**

```
public abstract boolean getFieldMatchQuery(GXIField field)
```

## com.sabratec.applinx.baseobject.query Interface GXIScreenCollectionFieldsQuery

All Known Implementing Classes:

[GXScreenCollectionFieldNameQuery](#), [GXAbstractFieldMatchQuery](#)

---

public interface **GXIScreenCollectionFieldsQuery**

This is the interface for all queries that are performed on GXIScreenCollection, and return GXIFieldCollection.

---

### Method Summary

abstract <a href="#">GXIFieldCollection</a>	<a href="#">getFields</a> ( <a href="#">GXIScreenCollection</a> screenCollection)
--	---

---

### Methods

#### getFields

public abstract [GXIFieldCollection](#) **getFields**([GXIScreenCollection](#) screenCollection)

## com.sabratec.applinx.baseobject.query Class GXScreenCollectionFieldNameQuery

java.lang.Object

└-com.sabratec.applinx.baseobject.query.GXScreenCollectionFieldNameQuery

All Implemented Interfaces:

[GXIScreenCollectionFieldsQuery](#)

public class **GXScreenCollectionFieldNameQuery**  
extends Object  
implements [GXIScreenCollectionFieldsQuery](#)

Description: This query collects all the instances of fields that have the name given to it in the constructor. If the field is a multiple appfield in one screen, all its instances will be collected.

### Constructor Summary

public	<a href="#">GXScreenCollectionFieldNameQuery</a> (String fieldName)
--------	---

### Method Summary

<a href="#">GXIFieldCollection</a>	<a href="#">getFields</a> ( <a href="#">GXIScreenCollection</a> screenCollection)
------------------------------------	---

Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

Methods inherited from interface

[com.sabratec.applinx.baseobject.query.GXIScreenCollectionFieldsQuery](#)

[getFields](#)

### Constructors

#### GXScreenCollectionFieldNameQuery

public **GXScreenCollectionFieldNameQuery**(String fieldName)

### Methods

#### getFields

public [GXIFieldCollection](#) **getFields**([GXIScreenCollection](#) screenCollection)

---

**Package**

# **com.sabratec.applinx.baseobject.table**

Contains classes and interfaces for retrieving and manipulating ApplinX Tables.



## com.sabratec.applinx.baseobject.table Class GXAbstractTable

java.lang.Object

└-com.sabratec.applinx.baseobject.table.GXAbstractTable

### All Implemented Interfaces:

java.io.Externalizable, [GXITable](#)

### Direct Known Subclasses:

[GXPartialRowsTable](#), [GXMultipleRecordsTable](#), [GXMasterTable](#), [GXDefaultTable](#)

public abstract class **GXAbstractTable**  
 extends Object  
 implements [GXITable](#), java.io.Externalizable

## Constructor Summary

public	<a href="#">GXAbstractTable</a> (String name)
public	<a href="#">GXAbstractTable</a> ()
public	<a href="#">GXAbstractTable</a> (String name, String[] columnsNames)
public	<a href="#">GXAbstractTable</a> (String name, <a href="#">GXIScreenCollection</a> screens) Creates a new table with all the multiple application fields in all the screens in the screen collection as the table's columns.
public	<a href="#">GXAbstractTable</a> (String name, <a href="#">GXIScreen</a> screen) Creates a new table with all the multiple application fields in the screen as the table's columns.

## Method Summary

void	<a href="#">addColumn</a> ( <a href="#">GXITableColumn</a> column)
void	<a href="#">addColumn</a> (String column)
void	<a href="#">addColumnns</a> (String[] columns)
void	<a href="#">createTable</a> ( <a href="#">GXIScreen</a> screen)
void	<a href="#">createTable</a> ( <a href="#">GXIScreenCollection</a> screenCollection, GXVariables variables)
boolean	<a href="#">equals</a> (Object obj)
<a href="#">GXITableColumnCollection</a>	<a href="#">getColumns</a> ()

GXRectangle	<a href="#">getCornersCoordinates()</a>
GXRectangle	<a href="#">getHeaderCoordinates()</a>
String	<a href="#">getName()</a>
<a href="#">GXTableRow</a>	<a href="#">getNewRow()</a>
<a href="#">GXTableColumn[]</a>	<a href="#">getPrimaryKey()</a>
<a href="#">GXTableRowCollection</a>	<a href="#">getRows()</a>
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">removeColumn</a> (int columnIndex)
void	<a href="#">removeColumn</a> (String columnName)
void	<a href="#">setCornersCoordinates</a> (GXRectangle corners)
void	<a href="#">setHeaderCoordinates</a> (GXRectangle header)
void	<a href="#">setName</a> (String name)
void	<a href="#">setPrimaryKey</a> ( <a href="#">GXTableColumn</a> primaryKey)
void	<a href="#">setPrimaryKey</a> ( <a href="#">GXTableColumn[]</a> primaryKey)
void	<a href="#">sort</a> (int[] columnIndices, boolean[] isAscending)
void	<a href="#">sort</a> (int columnIndex, boolean isAscending)
void	<a href="#">sort</a> (String[] columnNames, boolean[] isAscending)
void	<a href="#">sort</a> (String columnName, boolean isAscending)
String	<a href="#">toString()</a>
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

**Methods inherited from class** java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

**Methods inherited from interface** [com.sabratec.applinx.baseobject.table.GXITable](#)

[addColumn](#), [addColumn](#), [addColumn](#), [addColumn](#), [addColumn](#), [createTable](#), [createTable](#), [createTable](#), [getColumn](#), [getColumn](#), [getName](#), [getNewRow](#), [getPrimaryKey](#), [getRows](#), [removeColumn](#), [removeColumn](#), [setPrimaryKey](#), [setPrimaryKey](#), [sort](#), [sort](#), [sort](#), [sort](#)

**Methods inherited from interface** `java.io.Externalizable``readExternal, writeExternal`

## Constructors

### **GXAbstractTable**

```
public GXAbstractTable(String name)
```

### **GXAbstractTable**

```
public GXAbstractTable()
```

### **GXAbstractTable**

```
public GXAbstractTable(String name,  
                        String[] columnsNames)
```

### **GXAbstractTable**

```
public GXAbstractTable(String name,  
                        GXIScreenCollection screens)
```

Creates a new table with all the multiple application fields in all the screens in the screen collection as the table's columns.

### **GXAbstractTable**

```
public GXAbstractTable(String name,  
                        GXIScreen screen)
```

Creates a new table with all the multiple application fields in the screen as the table's columns.

## Methods

### **createTable**

```
public void createTable(GXIScreen screen)  
    throws GXColumnNotFoundException
```

### **createTable**

```
public void createTable(GXIScreenCollection screenCollection,  
                        GXVariables variables)  
    throws GXColumnNotFoundException
```

**removeColumn**

```
public void removeColumn(int columnIndex)
```

---

**removeColumn**

```
public void removeColumn(String columnName)
```

---

**sort**

```
public void sort(String[] columnNames,  
                boolean[] isAscending)
```

---

**sort**

```
public void sort(String columnName,  
                boolean isAscending)
```

---

**sort**

```
public void sort(int[] columnIndices,  
                boolean[] isAscending)
```

---

**sort**

```
public void sort(int columnIndex,  
                boolean isAscending)
```

---

**getName**

```
public String getName()
```

---

**setName**

```
public void setName(String name)
```

---

**getColumns**

```
public GXITableColumnCollection getColumns()
```

---

**addColumn**

```
public void addColumn(GXITableColumn column)
```

---

**addColumn**

```
public void addColumn(String column)
```

---

**addColumnns**

```
public void addColumnns(String[] columns)
```

---

**getRows**

```
public GXITableRowCollection getRows()
```

---

**getNewRow**

```
public GXITableRow getNewRow()
```

---

**getPrimaryKey**

```
public GXITableColumn\[\] getPrimaryKey()
```

---

**setPrimaryKey**

```
public void setPrimaryKey(GXITableColumn\[\] primaryKey)
```

---

**setPrimaryKey**

```
public void setPrimaryKey(GXITableColumn primaryKey)
```

---

**setCornersCoordinates**

```
public void setCornersCoordinates(GXRectangle corners)
```

---

**setHeaderCoordinates**

```
public void setHeaderCoordinates(GXRectangle header)
```

---

---

(continued from last page)

---

---

## **getCornersCoordinates**

```
public GXRectangle getCornersCoordinates()
```

---

---

## **getHeaderCoordinates**

```
public GXRectangle getHeaderCoordinates()
```

---

---

## **equals**

```
public boolean equals(Object obj)
```

---

---

## **writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```

---

---

## **readExternal**

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

---

---

## **toString**

```
public String toString()
```

---

## com.sabratec.applinx.baseobject.table Class GXCellable

java.lang.Object

└-com.sabratec.applinx.baseobject.table.GXCellable

All Implemented Interfaces:

[GXICellable](#)

public class **GXCellable**  
extends Object  
implements [GXICellable](#)

### Constructor Summary

public	<a href="#">GXCellable</a> (String content)
--------	---

### Method Summary

boolean	<a href="#">equals</a> (Object obj)
String	<a href="#">getContent</a> ()

Methods inherited from class java.lang.Object

`equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait`

Methods inherited from interface [com.sabratec.applinx.baseobject.table.GXICellable](#)

[getContent](#)

### Constructors

#### **GXCellable**

public **GXCellable**(String content)

### Methods

#### **getContent**

public String **getContent**()

(continued from last page)

## **equals**

```
public boolean equals(Object obj)
```



## com.sabratec.applinx.baseobject.table Class GXColumnNotFoundExpection

```

java.lang.Object
  |
  +-GXExceptionWithErrorCode
    |
    +-com.sabratec.applinx.baseobject.GXGeneralException
      |
      +-com.sabratec.applinx.baseobject.table.GXColumnNotFoundExpection

```

```

public class GXColumnNotFoundExpection
extends GXGeneralException

```

### Constructor Summary

public	<a href="#">GXColumnNotFoundExpection</a> (String columnName)
--------	---

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Constructors

#### **GXColumnNotFoundExpection**

```
public GXColumnNotFoundExpection(String columnName)
```

## com.sabratec.applinx.baseobject.table Class GXColumnsComparator

java.lang.Object

└-com.sabratec.applinx.baseobject.table.GXColumnsComparator

public class **GXColumnsComparator**  
extends Object

### Constructor Summary

public	<a href="#">GXColumnsComparator(GXITableColumn[] columns, boolean isCaseSensitive, boolean[] isAscending)</a>
--------	---

### Method Summary

int	<a href="#">compare</a> (Object a, Object b)
-----	--

Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Constructors

#### **GXColumnsComparator**

```
public GXColumnsComparator(GXITableColumn\[\] columns,
                           boolean isCaseSensitive,
                           boolean[] isAscending)
```

**Parameters:**

columns - the table columns. Should be sorted according to the desired sorting order.


### Methods

#### **compare**

```
public int compare(Object a,
                   Object b)
```

## com.sabratec.applinx.baseobject.table Class GXDefaultTable

java.lang.Object



### All Implemented Interfaces:

java.io.Externalizable, [GXITable](#)

public class **GXDefaultTable**  
extends [GXAbstractTable](#)

This table should be used in the following cases: - A table based on one host screen. - A table with vertical scrolling only (one host screen being scrolled) - A table with vertical and horizontal scrolling, but with the same records in each instance of scrolling over the screens.

### Constructor Summary

public	<a href="#">GXDefaultTable</a> ()
public	<a href="#">GXDefaultTable</a> (String name)
public	<a href="#">GXDefaultTable</a> (String name, String[] columnsNames)
public	<a href="#">GXDefaultTable</a> (String name, <a href="#">GXIScreenCollection</a> screens) Creates a new table with all the multiple application fields in all the screens in the screen collection as the table's columns.
public	<a href="#">GXDefaultTable</a> (String name, <a href="#">GXIScreen</a> screen) Creates a new table with all the multiple application fields in the screen as the table's columns.

### Method Summary

void	<a href="#">createTable</a> ( <a href="#">GXIScreenCollection</a> screens)
------	--

#### Methods inherited from class [com.sabratec.applinx.baseobject.table.GXAbstractTable](#)

[addColumn](#), [addColumn](#), [addColumnns](#), [createTable](#), [createTable](#), [equals](#), [getColumns](#), [getCornersCoordinates](#), [getHeaderCoordinates](#), [getName](#), [getNewRow](#), [getPrimaryKey](#), [getRows](#), [readExternal](#), [removeColumn](#), [removeColumn](#), [setCornersCoordinates](#), [setHeaderCoordinates](#), [setName](#), [setPrimaryKey](#), [setPrimaryKey](#), [sort](#), [sort](#), [sort](#), [sort](#), [toString](#), [writeExternal](#)

#### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

#### Methods inherited from interface [com.sabratec.applinx.baseobject.table.GXITable](#)

[addColumn](#), [addColumn](#), [addColumnns](#), [createTable](#), [createTable](#), [createTable](#), [getColumns](#), [getName](#), [getNewRow](#), [getPrimaryKey](#), [getRows](#), [removeColumn](#), [removeColumn](#), [setPrimaryKey](#), [setPrimaryKey](#), [sort](#), [sort](#), [sort](#), [sort](#)

Methods inherited from interface `java.io.Externalizable`

`readExternal`, `writeExternal`

## Constructors

### **GXDefaultTable**

```
public GXDefaultTable()
```

### **GXDefaultTable**

```
public GXDefaultTable(String name)
```

### **GXDefaultTable**

```
public GXDefaultTable(String name,  
                      String[] columnsNames)
```

### **GXDefaultTable**

```
public GXDefaultTable(String name,  
                      GXIScreenCollection screens)
```

Creates a new table with all the multiple application fields in all the screens in the screen collection as the table's columns.

### **GXDefaultTable**

```
public GXDefaultTable(String name,  
                      GXIScreen screen)
```

Creates a new table with all the multiple application fields in the screen as the table's columns.


## Methods

### **createTable**

```
public void createTable(GXIScreenCollection screens)  
    throws GXColumnNotFoundException
```

## com.sabratec.applinx.baseobject.table Class GXFieldTableCell

java.lang.Object



### All Implemented Interfaces:

[GXIField](#), java.io.Serializable, [GXITableCell](#)

public class **GXFieldTableCell**  
 extends [GXTableCell](#)  
 implements [GXITableCell](#), java.io.Serializable, [GXIField](#)

Host field based cell.

A table cell based on a host application field. All the properties of a host field are available (colors, attributes, etc.).

**Fields inherited from interface** [com.sabratec.applinx.baseobject.GXIField](#)

[TYPE\\_APPFIELD](#), [TYPE\\_HOSTFIELD](#), [TYPE\\_HOSTKEY\\_FIELD](#), [TYPE\\_MULTIPLE\\_APPFIELD](#)

## Constructor Summary

public	<a href="#">GXFieldTableCell</a> ( <a href="#">GXIField</a> hostField)
--------	--

## Method Summary

int	<a href="#">getBGColor</a> ()
-----	-------------------------------

int	<a href="#">getDataType</a> ()
-----	--------------------------------

int	<a href="#">getFGColor</a> ()
-----	-------------------------------

int	<a href="#">getIndex</a> ()
-----	-----------------------------

String	<a href="#">getInputMask</a> ()
--------	---------------------------------

int	<a href="#">getLength</a> ()
-----	------------------------------

String	<a href="#">getName</a> ()
--------	----------------------------

<a href="#">GXPosition</a>	<a href="#">getPosition</a> ()
----------------------------	--------------------------------

String	<a href="#">getScreenName</a> ()
--------	----------------------------------

int	<a href="#">getScreenSequenceNumber</a> ()
-----	--

String	<a href="#">getVisualContent()</a>
boolean	<a href="#">isAppField()</a>
boolean	<a href="#">isAutoCursorJump()</a>
boolean	<a href="#">isAutoEnter()</a>
boolean	<a href="#">isBlinking()</a>
boolean	<a href="#">isHighIntensified()</a>
boolean	<a href="#">isMultiple()</a>
boolean	<a href="#">isProtected()</a>
boolean	<a href="#">isReversedVideo()</a>
boolean	<a href="#">isUnderlined()</a>
boolean	<a href="#">isVisible()</a>
String	<a href="#">toString()</a>

**Methods inherited from class [com.sabratec.applinx.baseobject.table.GXTableCell](#)**

[equals](#), [getContent](#), [setContent](#)

**Methods inherited from class [java.lang.Object](#)**

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

**Methods inherited from interface [com.sabratec.applinx.baseobject.table.GXITableCell](#)**

[getContent](#), [setContent](#)

**Methods inherited from interface [com.sabratec.applinx.baseobject.GXIField](#)**

[getBGColor](#), [getContent](#), [getDataType](#), [getFGColor](#), [getIndex](#), [getInputMask](#), [getLength](#), [getName](#), [getPosition](#), [getScreenName](#), [getScreenSequenceNumber](#), [getVisualContent](#), [isAppField](#), [isAutoCursorJump](#), [isAutoEnter](#), [isBlinking](#), [isHighIntensified](#), [isMultiple](#), [isProtected](#), [isReversedVideo](#), [isUnderlined](#), [isVisible](#)

**Methods inherited from interface [com.sabratec.applinx.baseobject.table.GXICellable](#)**

[getContent](#)

## Constructors

(continued from last page)

## GXFieldTableCell

```
public GXFieldTableCell(GXIField hostField)
```

### Methods

#### getName

```
public String getName()
```

#### getIndex

```
public int getIndex()
```

#### getScreenName

```
public String getScreenName()
```

#### isMultiple

```
public boolean isMultiple()
```

#### getScreenSequenceNumber

```
public int getScreenSequenceNumber()
```

#### getPosition

```
public GXPosition getPosition()
```

#### getLength

```
public int getLength()
```

#### isProtected

```
public boolean isProtected()
```

(continued from last page)

---

**isVisible**

```
public boolean isVisible()
```

---

**isHighIntensified**

```
public boolean isHighIntensified()
```

---

**isAutoEnter**

```
public boolean isAutoEnter()
```

---

**isAutoCursorJump**

```
public boolean isAutoCursorJump()
```

---

**isBlinking**

```
public boolean isBlinking()
```

---

**getFGColor**

```
public int getFGColor()
```

---

**getBGColor**

```
public int getBGColor()
```

---

**getDataType**

```
public int getDataType()
```

---

**getInputMask**

```
public String getInputMask()
```

---

**getVisualContent**

```
public String getVisualContent()
```

---



(continued from last page)

---

## **isAppField**

```
public boolean isAppField()
```

---

## **isUnderlined**

```
public boolean isUnderlined()
```

---

## **toString**

```
public String toString()
```

---

## **isReversedVideo**

```
public boolean isReversedVideo()
```

---

## com.sabratec.applinx.baseobject.table Class GXHostTableUtils

java.lang.Object

└-com.sabratec.applinx.baseobject.table.GXHostTableUtils

public class **GXHostTableUtils**  
extends Object

Title: GXHostTableUtils

Description: contains table utility functions, used mainly for display.

### Constructor Summary

public	<a href="#">GXHostTableUtils()</a>
--------	------------------------------------

### Method Summary

static <a href="#">GXPosition</a>	<a href="#">getDefinedLowerRightCorner</a> ( <a href="#">GXITable</a> table)
static <a href="#">GXPosition</a>	<a href="#">getDefinedUpperLeftCorner</a> ( <a href="#">GXITable</a> table)
static int	<a href="#">getFirstAppfieldColumnIndex</a> ( <a href="#">GXITable</a> table)
static <a href="#">GXPosition</a>	<a href="#">getHeaderLowerRight</a> ( <a href="#">GXITable</a> table)
static <a href="#">GXPosition</a>	<a href="#">getHeaderUpperLeft</a> ( <a href="#">GXITable</a> table)
static int	<a href="#">getLastAppfieldColumnIndex</a> ( <a href="#">GXITable</a> table)
static <a href="#">GXPosition</a>	<a href="#">getLowerRightCorner</a> ( <a href="#">GXITable</a> table)
static <a href="#">GXPosition</a>	<a href="#">getUpperLeftCorner</a> ( <a href="#">GXITable</a> table)
static boolean	<a href="#">isColumnAppfieldColumn</a> ( <a href="#">GXITable</a> table, int column)
static boolean	<a href="#">isPositionInTable</a> ( <a href="#">GXITable</a> table, int row, int col)

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Constructors

(continued from last page)

## GXHostTableUtils

```
public GXHostTableUtils()
```

## Methods

### getHeaderUpperLeft

```
public static GXPosition getHeaderUpperLeft(GXITable table)
```

**Parameters:**

table - the table.

**Returns:**

the table header's upper left corner, as defined in the Table entity in ApplinX Composer.

### getHeaderLowerRight

```
public static GXPosition getHeaderLowerRight(GXITable table)
```

**Parameters:**

table - the table.

**Returns:**

the table header's lower right corner, as defined in the Table entity in ApplinX Composer.

### getDefinedUpperLeftCorner

```
public static GXPosition getDefinedUpperLeftCorner(GXITable table)
```

**Parameters:**

table - the table.

**Returns:**

the upper left corner of the table area, as defined in the Table entity in ApplinX Composer. May be different than the actual data corner, because of filters.

**See Also:**

[getHeaderUpperLeft\(GXITable\)](#)

### getDefinedLowerRightCorner

```
public static GXPosition getDefinedLowerRightCorner(GXITable table)
```

**Parameters:**

table - the table.

**Returns:**

---

(continued from last page)

the lower right corner of the table area, as defined in the Table entity in ApplinX Composer. May be different than the actual data corner, because of filters.

**See Also:**

[getLowerRightCorner\(GXITable\)](#)

---

## isPositionInTable

```
public static boolean isPositionInTable(GXITable table,  
    int row,  
    int col)
```

**Parameters:**

table - the table.  
row - should range between 0 to rowCount - 1.  
col - should range between 0 to columnCount - 1.

**Returns:**

whether the position in the specified row / column coordinates is inside the specified table, in its defined area (the actual area can be smaller in case of filters).

---

## getUpperLeftCorner

```
public static GXPosition getUpperLeftCorner(GXITable table)
```

**Parameters:**

table - the table.

**Returns:**

the actual upper left corner of the table.

**See Also:**

[getDefinedUpperLeftCorner\(GXITable\)](#)

---

## isColumnAppfieldColumn

```
public static boolean isColumnAppfieldColumn(GXITable table,  
    int column)
```

**Parameters:**

table - the table.  
column - column's index, should range between 0 to columnCount - 1.

**Returns:**

whether the column at the specified index is of type Application Field.

---

## getLowerRightCorner

```
public static GXPosition getLowerRightCorner(GXITable table)
```

**Parameters:**

table - the table.

---

---

(continued from last page)

**Returns:**

the actual lower right corner of the table.

**See Also:**

[getDefinedLowerRightCorner\(GXITable\)](#)

---

## getFirstAppfieldColumnIndex

```
public static int getFirstAppfieldColumnIndex(GXITable table)
```

**Parameters:**

table - the table.

**Returns:**

the index of the first table column which is of type Application Field, -1 if no such column is found.

---

## getLastAppfieldColumnIndex

```
public static int getLastAppfieldColumnIndex(GXITable table)
```

**Parameters:**

table - the table.

**Returns:**

the index of the last table column which is of type Application Field, -1 if no such column is found.

# com.sabratec.applinx.baseobject.table Interface GXICellable

All Subinterfaces:

[GXIField](#)

All Known Implementing Classes:

[GXCellable](#)

---

public interface **GXICellable**

Description: This interface represents a cell in a host table.

---

## Method Summary

abstract String	<a href="#">getContent()</a>
-----------------	------------------------------

---

## Methods

### **getContent**

public abstract String **getContent()**

**Returns:**

the content of the cell.

---

## com.sabratec.applinx.baseobject.table Interface GXIColumnIdentifier

---

public interface **GXIColumnIdentifier**

Used by GXAddFieldToPreviousRowFilter, in order to determine if a row contains a field to be copied to a previous row.

---

### Method Summary

abstract String	<a href="#">getColumnName()</a>
abstract boolean	<a href="#">isCell(GXITableRow row)</a>

---

### Methods

#### **isCell**

public abstract boolean **isCell**([GXITableRow](#) row)

---

#### **getColumnName**

public abstract String **getColumnName**()

---

## com.sabratec.applinx.baseobject.table Interface GXIMasterRowIdentifier

---

public interface **GXIMasterRowIdentifier**

---

### Method Summary

abstract boolean	<a href="#">isMasterRow</a> ( <a href="#">GXITableRow</a> row)
------------------	--

---

### Methods

#### **isMasterRow**

public abstract boolean **isMasterRow**([GXITableRow](#) row)



## com.sabratec.applinx.baseobject.table Interface GXIRowsFilter

All Known Implementing Classes:

[GXNonEmptyRowsFilter](#), [GXNonDuplicateRowsFilter](#), [GXAddFieldToPreviousRowFilter](#)

```
public interface GXIRowsFilter
extends java.io.Serializable
```

Row filtering object.

This class represents a filter for excluding table rows, based on certain conditions. Currently, when defining a table entity in ApplinX Composer, two types of filters can be defined: filtering empty rows and filtering duplicate rows. Using this interface, custom filters can be added to the table's RowCollection.

**See Also:**

### Method Summary

abstract <a href="#">GXITableRowCollection</a>	<a href="#">filter</a> ( <a href="#">GXITableRowCollection</a> rows) Used to filter an existing row collection.
abstract boolean	<a href="#">isPrimaryKeyValid</a> (String primaryKey, <a href="#">GXITableRowCollection</a> rowsSoFar) This method is used, by ApplinX Server, when building a table.
abstract boolean	<a href="#">isRowValid</a> ( <a href="#">GXITableRow</a> row, <a href="#">GXITableRowCollection</a> rowsSoFar) This method is used, by ApplinX Server, when building a table, to decide whether to add a row to the table.

### Methods

#### filter

```
public abstract GXITableRowCollection filter(GXITableRowCollection rows)
```

Used to filter an existing row collection.

**Parameters:**

rows - the rows to filter.

**Returns:**

the rows after filtering.

#### isRowValid

```
public abstract boolean isRowValid(GXITableRow row,
GXITableRowCollection rowsSoFar)
```

This method is used, by ApplinX Server, when building a table, to decide whether to add a row to the table. Can also be used by filter(), for each row.

**Parameters:**

---

(continued from last page)

`row` - the row to check

`rowsSoFar` - the rows added to the table so far, for conditions that depend on previous rows (for example - duplicate rows).

**Returns:**

whether the row is valid or not.

**See Also:**

[filter\(GXITableRowCollection\)](#)

---

## isPrimaryKeyValid

```
public abstract boolean isPrimaryKeyValid(String primaryKey,  
    GXITableRowCollection rowsSoFar)
```

This method is used, by ApplinX Server, when building a table. Before starting to build a row, an initial check validates the primary key. If it isn't valid, the row is skipped.

**Parameters:**

`primaryKey` - the row's primary key.

`rowsSoFar` - the rows added to the table so far, for conditions that depend on previous rows (for example - duplicate rows).

**Returns:**

whether the row's primary key is valid or not.

## com.sabratec.applinx.baseobject.table Interface GXITable

All Known Implementing Classes:

[GXAbstractTable](#)

public interface **GXITable**  
extends java.io.Serializable

General table entity.

The external table interface.

### Method Summary

abstract void	<a href="#">addColumn(<a href="#">GXITableColumn</a> column)</a> Adds a column at the end of the table.
abstract void	<a href="#">addColumn(String columnName)</a> Creates a new table column of the specified name and adds it at the end of the table.
abstract void	<a href="#">addColumnns(String[] columnNames)</a> Creates new table columns of the specified names and adds them at the end of the table, according to their order in the names array.
abstract void	<a href="#">createTable(<a href="#">GXIScreen</a> screen)</a>
abstract void	<a href="#">createTable(<a href="#">GXIScreenCollection</a> screenCollection)</a>
abstract void	<a href="#">createTable(<a href="#">GXIScreenCollection</a> screenCollection, GXVariables variables)</a> Creates a table based on Base Object screens and variables and on the table's columns schema.
abstract <a href="#">GXITableColumnCollection</a>	<a href="#">getColumns()</a>
abstract String	<a href="#">getName()</a>
abstract <a href="#">GXITableRow</a>	<a href="#">getNewRow()</a> Used to programmatically add a new row to the table.
abstract <a href="#">GXITableColumn[]</a>	<a href="#">getPrimaryKey()</a> The table's primary key is based on one or more columns.
abstract <a href="#">GXITableRowCollection</a>	<a href="#">getRows()</a>
abstract void	<a href="#">removeColumn(int columnIndex)</a> Removes the column at the specified index.
abstract void	<a href="#">removeColumn(String columnName)</a> Removes the column of the specified name.

abstract void	<a href="#">setPrimaryKey(<a href="#">GXITableColumn</a> primaryKey)</a> Sets one table column as the primary key.
abstract void	<a href="#">setPrimaryKey(<a href="#">GXITableColumn[]</a> primaryKey)</a> Sets the columns that compose the table's primary key.
abstract void	<a href="#">sort(int[] columnIndices, boolean[] isAscending)</a> Sorts table rows according to specified columns indices.
abstract void	<a href="#">sort(int columnIndex, boolean isAscending)</a> Sorts table rows according to specified column index.
abstract void	<a href="#">sort(String[] columnNames, boolean[] isAscending)</a> Sorts table rows according to specified column names.
abstract void	<a href="#">sort(String columnName, boolean isAscending)</a> Sorts table rows according to specified column name.

## Methods

### getName

```
public abstract String getName()
```

**Returns:**

table's name, defined in the table entity definition.

### getColumns

```
public abstract GXITableColumnCollection getColumns()
```

**Returns:**

table's defined columns.

### addColumn

```
public abstract void addColumn(GXITableColumn column)
```

Adds a column at the end of the table.

**Parameters:**

column - the column to add.

### addColumn

```
public abstract void addColumn(String columnName)
```

Creates a new table column of the specified name and adds it at the end of the table.

**Parameters:**

columnName - name of the column to create and add.

---

## addColumnns

```
public abstract void addColumnns(String[] columnNames)
```

Creates new table columns of the specified names and adds them at the end of the table, according to their order in the names array.

**Parameters:**

columnNames - names of the column to create and add.

---

## removeColumn

```
public abstract void removeColumn(int columnIndex)
```

Removes the column at the specified index.

**Parameters:**

columnIndex - column index to remove, should range between 0 to columnCount - 1.

---

## removeColumn

```
public abstract void removeColumn(String columnName)
```

Removes the column of the specified name.

**Parameters:**

columnName - column name to remove.

---

## getRows

```
public abstract GXITableRowCollection getRows()
```

**Returns:**

table's data rows.

---

## getNewRow

```
public abstract GXITableRow getNewRow()
```

Used to programmatically add a new row to the table. Done by getting a new row, filling in its cells and then adding it to the table.

**Returns:**

a new empty row, containing the table's defined columns.

---

## getPrimaryKey

```
public abstract GXITableColumn\[\] getPrimaryKey()
```

The table's primary key is based on one or more columns. The key should yield a unique record. If two records have the same key, one is chosen arbitrarily when searching a row according to the primary key. If no primary key column is specified, the default key is the screen index + row index (in the host screen).

**Returns:**

table's columns that compose the primary key definition.

---

---

## setPrimaryKey

```
public abstract void setPrimaryKey(GXITableColumn\[\] primaryKey)
```

Sets the columns that compose the table's primary key.

**Parameters:**

primaryKey - the columns that compose the primary key.

**See Also:**

[getPrimaryKey\(\)](#)

---

## setPrimaryKey

```
public abstract void setPrimaryKey(GXITableColumn primaryKey)
```

Sets one table column as the primary key.

**Parameters:**

primaryKey - the table column to serve as the primary key.

**See Also:**

[getPrimaryKey\(\)](#)

---

## createTable

```
public abstract void createTable(GXIScreenCollection screenCollection,  
    GXVariables variables)  
throws GXColumnNotFoundException
```

Creates a table based on Base Object screens and variables and on the table's columns schema.

**Parameters:**

screenCollection - a collection of screen(s).  
variables - path variables.

**Throws:**

[GXColumnNotFoundException](#) - when the field or variable associated to the column is not found in the input.

---

## createTable

```
public abstract void createTable(GXIScreenCollection screenCollection)  
throws GXColumnNotFoundException
```

**See Also:**

[createTable\(GXIScreenCollection, GXVariables\)](#)

---

## createTable

```
public abstract void createTable(GXIScreen screen)  
throws GXColumnNotFoundException
```

**See Also:**

[createTable\(GXIScreenCollection, GXVariables\)](#)

---

---

## sort

```
public abstract void sort(String[] columnNames,  
    boolean[] isAscending)
```

Sorts table rows according to specified column names. Sort priority is determined by the order of the columns in the names array.

### Parameters:

columnNames - sorting columns.

isAscending - whether they should be sorted in ascending or descending order. Note: the sort is case-sensitive.

---

## sort

```
public abstract void sort(String columnName,  
    boolean isAscending)
```

Sorts table rows according to specified column name.

### Parameters:

columnName - sorting column.

isAscending - whether they should be sorted in ascending or descending order. Note: the sort is case-sensitive.

---

## sort

```
public abstract void sort(int[] columnIndices,  
    boolean[] isAscending)
```

Sorts table rows according to specified columns indices. Sort priority is determined by the order of columns in the names array.

### Parameters:

columnIndices - sorting columns.

isAscending - whether they should be sorted in ascending or descending order. Note: the sort is case-sensitive.

---

## sort

```
public abstract void sort(int columnIndex,  
    boolean isAscending)
```

Sorts table rows according to specified column index.

### Parameters:

columnIndex - sorting column.

isAscending - whether they should be sorted in ascending or descending order. Note: the sort is case-sensitive.

---

# com.sabratec.applinx.baseobject.table Interface GXITableCell

All Known Implementing Classes:

[GXTableCell](#)

---

public interface **GXITableCell**

Basic table cell.

a basic cell in a table.

**See Also:**

[GXFieldTableCell](#), [GXVariableTableCell](#)

---

## Method Summary

abstract String	<a href="#">getContent()</a>
abstract void	<a href="#">setContent(String content)</a> Sets the content of the cell.

---

## Methods

### getContent

public abstract String **getContent()**

**Returns:**

cell's content.

---

### setContent

public abstract void **setContent(String content)**

Sets the content of the cell. Note this method only affects the cell (the contents are not sent to the host).

**Parameters:**

`content` - new cell's content.



## com.sabratec.applinx.baseobject.table Interface GXITableColumn

All Known Implementing Classes:

[GXTableColumn](#)

public interface **GXITableColumn**

Table column.

Represents a column definition in the table.

### Field Summary

public static final	<a href="#">GX_TABLE_COLUMN_DATA_TYPE_ALPHANUMERIC</a> Value: <b>0</b>
public static final	<a href="#">GX_TABLE_COLUMN_DATA_TYPE_NUMERIC</a> Value: <b>1</b>
public static final	<a href="#">GX_TABLE_COLUMN_TYPE_APPFIELD</a>
public static final	<a href="#">GX_TABLE_COLUMN_TYPE_OTHER</a>
public static final	<a href="#">GX_TABLE_COLUMN_TYPE_VARIABLE</a>

### Method Summary

abstract String	<a href="#">getAppFieldFullName()</a>
abstract String	<a href="#">getAppFieldName()</a>
abstract String	<a href="#">getCaption()</a>
abstract int	<a href="#">getCopyCount()</a>
abstract int	<a href="#">getDataType()</a>
abstract String	<a href="#">getName()</a>
abstract String[]	<a href="#">getScreenNames()</a> Used for horizontal scrolling, for tables spanning over more than one identified host screen.
abstract int	<a href="#">getType()</a> Returns the type of the column's mapped object.
abstract String	<a href="#">getVariableName()</a>

abstract boolean	<a href="#">isMasterRow()</a>
abstract boolean	<a href="#">isToCopy()</a>
abstract void	<a href="#">setAppFieldName(String name)</a> Sets the name of the application field that is to be associated with this column.
abstract void	<a href="#">setCaption(String caption)</a> Sets the column's caption.
abstract void	<a href="#">setCopyCount(int copyCount)</a>
abstract void	<a href="#">setDataType(int dataType)</a> sets the table's data type.
abstract void	<a href="#">setIsMasterRow(boolean isMasterRow)</a>
abstract void	<a href="#">setIsToCopy(boolean isToCopy)</a>
abstract void	<a href="#">setName(String name)</a> Sets the name of the column.
abstract void	<a href="#">setScreenNames(String[] names)</a>
abstract void	<a href="#">setVariableName(String name)</a> Sets the name of the variable that is to be associated with this column.

## Fields

### **GX\_TABLE\_COLUMN\_DATA\_TYPE\_ALPHANUMERIC**

```
public static final int GX_TABLE_COLUMN_DATA_TYPE_ALPHANUMERIC
```

Constant value: 0

### **GX\_TABLE\_COLUMN\_DATA\_TYPE\_NUMERIC**

```
public static final int GX_TABLE_COLUMN_DATA_TYPE_NUMERIC
```

Constant value: 1

### **GX\_TABLE\_COLUMN\_TYPE\_APPFIELD**

```
public static final int GX_TABLE_COLUMN_TYPE_APPFIELD
```

### **GX\_TABLE\_COLUMN\_TYPE\_VARIABLE**

```
public static final int GX_TABLE_COLUMN_TYPE_VARIABLE
```

---

## GX\_TABLE\_COLUMN\_TYPE\_OTHER

```
public static final int GX_TABLE_COLUMN_TYPE_OTHER
```

## Methods

### getDataType

```
public abstract int getDataType()
```

**Returns:**

the column's data type, as defined in the data type constants.

---

### setDataType

```
public abstract void setDataType(int dataType)
```

sets the table's data type.

**Parameters:**

dataType - table's data type, should be one of the defined types.

---

### getType

```
public abstract int getType()
```

Returns the type of the column's mapped object. Current possible types are application field and variable array, as defined in the column type constants.

**Returns:**

the type of the column's mapped object.

---

### getName

```
public abstract String getName()
```

**Returns:**

column's name.

---

### setName

```
public abstract void setName(String name)
```

Sets the name of the column. A column name should be unique, setting a column's name to a name that already exists will override the existing column.

**Parameters:**

name - new column's name.

---

(continued from last page)

## getAppFieldName

```
public abstract String getAppFieldName()
```

**Returns:**

the name of the application field associated with this column, when this column is an application field column, otherwise null.

---

## getAppFieldFullName

```
public abstract String getAppFieldFullName()
```

**Returns:**

the full name of the application field associated with this column, when this column is an application field column, otherwise null.

---

## setAppFieldName

```
public abstract void setAppFieldName(String name)
```

Sets the name of the application field that is to be associated with this column. Setting the name also makes the column's type be Application Field based.

**Parameters:**

name - the application field's full name (including the folder structure).

---

## getVariableName

```
public abstract String getVariableName()
```

**Returns:**

the name of the variable associated with this column, when this column is a variable column, otherwise null.

---

## setVariableName

```
public abstract void setVariableName(String name)
```

Sets the name of the variable that is to be associated with this column. Setting the name also makes the column's type Variable based.

**Parameters:**

name - the variable's name.

---

## getCaption

```
public abstract String getCaption()
```

**Returns:**

the column's caption.

---

(continued from last page)

---

## setCaption

```
public abstract void setCaption(String caption)
```

Sets the column's caption.

**Parameters:**

caption - the new caption.

---

## getScreenNames

```
public abstract String[] getScreenNames()
```

Used for horizontal scrolling, for tables spanning over more than one identified host screen. Multiple screen names are used if the same application field is mapped in more than one screen, but should be collected for the table only from some of the screens.

**Returns:**

the full names of the screens.

---

## setScreenNames

```
public abstract void setScreenNames(String[] names)
```

**Parameters:**

names - full screen names (including folder structure).

**See Also:**

[getScreenNames\(\)](#)

---

## setIsMasterRow

```
public abstract void setIsMasterRow(boolean isMasterRow)
```

---

## isMasterRow

```
public abstract boolean isMasterRow()
```

---

## setIsToCopy

```
public abstract void setIsToCopy(boolean isToCopy)
```

---

## isToCopy

```
public abstract boolean isToCopy()
```

---

(continued from last page)

## **setCopyCount**

```
public abstract void setCopyCount(int copyCount)
```

---

## **getCopyCount**

```
public abstract int getCopyCount()
```

## com.sabratec.applinx.baseobject.table Interface GXITableColumnCollection

All Known Implementing Classes:  
[GXITableColumnCollection](#)

public interface **GXITableColumnCollection**

Table's column schema.

Represents the defined columns schema of this table. The collection is composed of GXITableColumn.

### Method Summary

abstract void	<a href="#">addColumn</a> ( <a href="#">GXITableColumn</a> column) Adds a new column to the schema.
abstract <a href="#">GXITableColumn</a>	<a href="#">getColumn</a> (int columnIndex)
abstract <a href="#">GXITableColumn</a>	<a href="#">getColumn</a> (String columnName)
abstract int	<a href="#">getColumnCount</a> ()
abstract <a href="#">GXITableColumn[]</a>	<a href="#">getColumns</a> ()
abstract void	<a href="#">removeColumn</a> (int columnIndex) Removes a column from the column's schema only, and not the actual column's data.
abstract void	<a href="#">removeColumn</a> (String columnName) Removes a column from the column's schema only, and not the actual column's data.

### Methods

#### getColumns

public abstract [GXITableColumn\[\]](#) **getColumns**()

**Returns:**

the column's collection as an array.

#### getColumnCount

public abstract int **getColumnCount**()

**Returns:**

the number of columns defined for this table.

## getColumn

```
public abstract GXITableColumn getColumn(int columnIndex)
```

**Parameters:**

columnIndex - the index of the column to retrieve. Should range between 0 and columnCount.

**Returns:**

the table's column at the specified index.

**See Also:**

[getColumnCount\(\)](#)

---

## getColumn

```
public abstract GXITableColumn getColumn(String columnName)
```

**Parameters:**

columnName - the name of the column to retrieve.

**Returns:**

the table's column of the specified name.

---

## addColumn

```
public abstract void addColumn(GXITableColumn column)
```

Adds a new column to the schema. The new column will be added at the end of the column's list.

**Parameters:**

column - the new column to add.

---

## removeColumn

```
public abstract void removeColumn(int columnIndex)
```

Removes a column from the column's schema only, and not the actual column's data. To remove columns and their data, use `GXITable.removeColumn`

**Parameters:**

columnIndex - the index of the column to remove. Should range between 0 and columnCount.

**See Also:**

[GXITable.removeColumn\(int\)](#)  
[getColumnCount\(\)](#)

---

## removeColumn

```
public abstract void removeColumn(String columnName)
```

Removes a column from the column's schema only, and not the actual column's data. To remove columns and their data, use `GXITable.removeColumn`

**Parameters:**



(continued from last page)

columnName - the name of the column to remove.

**See Also:**

[GXITable.removeColumn\(String\)](#)

## com.sabratec.applinx.baseobject.table Interface GXITableRow

All Known Implementing Classes:

[GXITableRow](#)

public interface **GXITableRow**

Table row.

Represents a data row in the table. Each row consists of GXITableCell. The cells structure in the row is determined according to the column schema.

Method Summary	
abstract <a href="#">GXITableCell</a>	<a href="#">getItem</a> (int columnIndex)
abstract <a href="#">GXITableCell</a>	<a href="#">getItem</a> (String columnName)
abstract String	<a href="#">getItemContent</a> (int columnIndex)
abstract String	<a href="#">getItemContent</a> (String columnName)
abstract <a href="#">GXITableCell[]</a>	<a href="#">getItems</a> ()
abstract String[]	<a href="#">getItemsContents</a> ()
abstract String	<a href="#">getPrimaryKey</a> ()
abstract void	<a href="#">removeItem</a> (int columnIndex) Removes the cell at the specified column index.
abstract void	<a href="#">removeItem</a> (String columnName) Removes the cell of the specified column name.
abstract void	<a href="#">setItem</a> (int columnIndex, <a href="#">GXITableCell</a> item) Sets a table cell at specified column index, and replaces the previous cell (if such existed).
abstract void	<a href="#">setItem</a> (String columnName, <a href="#">GXITableCell</a> item) Sets a table cell of the specified column name, and replaces the previous cell (if such existed).
abstract void	<a href="#">setItemContent</a> (int columnIndex, String content) Sets the content of the cell in the specified column's index.
abstract void	<a href="#">setItemContent</a> (String columnName, String content) Sets the content of the cell of the specified column's name.

## Methods

(continued from last page)

---

## getItems

```
public abstract GXITableCell\[\] getItems()
```

**Returns:**

the row's cells as an array.

---

## getItemsContents

```
public abstract String[] getItemsContents()
```

**Returns:**

the contents of the row's cells.

---

## getItem

```
public abstract GXITableCell getItem(int columnIndex)
```

**Parameters:**

columnIndex - should range between 0 to columnCount - 1.

**Returns:**

the cell at the specified column index.

---

## getItem

```
public abstract GXITableCell getItem(String columnName)
```

**Parameters:**

columnName - column's name.

**Returns:**

the cell of the specified column name.

---

## setItem

```
public abstract void setItem(int columnIndex,  
    GXITableCell item)
```

Sets a table cell at specified column index, and replaces the previous cell (if such existed).

**Parameters:**

columnIndex - the column's index. Should range between 0 to columnCount - 1.  
item - the new cell.

---

## setItem

```
public abstract void setItem(String columnName,  
    GXITableCell item)
```

---

(continued from last page)

Sets a table cell of the specified column name, and replaces the previous cell (if such existed).

**Parameters:**

columnName - column's name.  
item - the new cell.

---

## getItemContent

```
public abstract String getItemContent(int columnIndex)
```

**Parameters:**

columnIndex - the column's index. Should range between 0 to columnCount - 1.

**Returns:**

the content of the cell at the specified column's index.

---

## getItemContent

```
public abstract String getItemContent(String columnName)
```

**Parameters:**

columnName - column's name.

**Returns:**

the content of the cell at the specified column's name.

---

## setItemContent

```
public abstract void setItemContent(int columnIndex,  
String content)
```

Sets the content of the cell in the specified column's index.

**Parameters:**

columnIndex - the column's index. Should range between 0 to columnCount - 1.  
content - the new cell's content.

---

## setItemContent

```
public abstract void setItemContent(String columnName,  
String content)
```

Sets the content of the cell of the specified column's name.

**Parameters:**

columnName - column's name.  
content - the new cell's content.

---

## getPrimaryKey

```
public abstract String getPrimaryKey()
```

**Returns:**

---

---

(continued from last page)

the value of the primary key for this row.

**See Also:**

[GXITable.getPrimaryKey\(\)](#)

---

## **removeItem**

```
public abstract void removeItem(int columnIndex)
```

Removes the cell at the specified column index. The cell value becomes null.

**Parameters:**

`columnIndex` - the column's index. Should range between 0 to `columnCount` - 1.

---

## **removeItem**

```
public abstract void removeItem(String columnName)
```

Removes the cell of the specified column name. The cell value becomes null.

**Parameters:**

`columnName` - column's name.

---

## com.sabratec.applinx.baseobject.table Interface GXITableRowCollection

All Known Implementing Classes:

[GXITableRowCollection](#)

public interface **GXITableRowCollection**

Table's rows' data.

Represents the table's rows' data. The collection is composed of GXITableRow objects. Can be used to directly access a row or a cell, and to filter rows.

Method Summary	
abstract void	<a href="#">addFilter</a> ( <a href="#">GXIRowsFilter</a> filter) Adds a new filter to the table.
abstract void	<a href="#">addRow</a> ( <a href="#">GXITableRow</a> row) Adds a new row as the last row in the table.
abstract <a href="#">GXITableRowCollection</a>	<a href="#">filterRows</a> () Filters the table's rows according to the filters added to the table.
abstract <a href="#">GXIRowsFilter</a> []	<a href="#">getFilters</a> ()
abstract <a href="#">GXITableCell</a>	<a href="#">getItem</a> (int rowIndex, int columnIndex)
abstract <a href="#">GXITableCell</a>	<a href="#">getItem</a> (int rowIndex, String columnName)
abstract String	<a href="#">getItemContent</a> (int rowIndex, int columnIndex)
abstract String	<a href="#">getItemContent</a> (int rowIndex, String columnName)
abstract <a href="#">GXITableRow</a>	<a href="#">getRow</a> (int rowIndex)
abstract <a href="#">GXITableRow</a>	<a href="#">getRowByKey</a> (String primaryKey) Finds a row according to the specified primary key.
abstract <a href="#">GXITableRow</a>	<a href="#">getRowByKey</a> (String[] primaryKey) Finds a row with the specified primary key values.
abstract int	<a href="#">getRowCount</a> ()
abstract <a href="#">GXITableRow</a> []	<a href="#">getRows</a> ()
abstract void	<a href="#">removeFilter</a> ( <a href="#">GXIRowsFilter</a> filter) Removes the specified filter.
abstract void	<a href="#">removeRow</a> ( <a href="#">GXITableRow</a> row) removes the specified row.

---

abstract void	<a href="#">removeRow</a> (int rowIndex) Removes the row at the specified index.
abstract void	<a href="#">setItemContent</a> (int rowIndex, int columnIndex, String content) Sets the contents of the cell at the specified row / column coordinates.
abstract void	<a href="#">setItemContent</a> (int rowIndex, String columnName, String content) Sets the contents of the cell at the specified row / column coordinates.
abstract void	<a href="#">sort</a> (GXAbstractSorter sorter, GXIComparator comparator) Sorts the row's data using the specified sorter and comparator.

---

## Methods

### getRows

```
public abstract GXITableRow\[\] getRows()
```

**Returns:**

the rows' data as an array.

---

### getRowCount

```
public abstract int getRowCount()
```

**Returns:**

the number of the table's rows.

---

### getRow

```
public abstract GXITableRow getRow(int rowIndex)
```

**Parameters:**

rowIndex - the row's index. Should range between 0 to rowCount - 1.

**Returns:**

the row at the specified index.

**See Also:**

[getRowCount\(\)](#)

---

### addRow

```
public abstract void addRow(GXITableRow row)
```

Adds a new row as the last row in the table.

**Parameters:**

row - the row to add.

---

## removeRow

```
public abstract void removeRow(int rowIndex)
```

Removes the row at the specified index.

**Parameters:**

rowIndex - row index to be removed. Should range between 0 to rowCount - 1.

---

## removeRow

```
public abstract void removeRow(GXITableRow row)
```

removes the specified row.

**Parameters:**

row - the row to remove.

---

## addFilter

```
public abstract void addFilter(GXIRowsFilter filter)
```

Adds a new filter to the table.

**Parameters:**

filter - the filter to be added.

**See Also:**

[GXIRowsFilter](#)

[filterRows\(\)](#)

---

## getFilters

```
public abstract GXIRowsFilter\[\] getFilters()
```

**Returns:**

table's associated filters.

---

## removeFilter

```
public abstract void removeFilter(GXIRowsFilter filter)
```

Removes the specified filter.

**Parameters:**

filter - the filter to remove.

---

## filterRows

```
public abstract GXITableRowCollection filterRows()
```

Filters the table's rows according to the filters added to the table.

**Returns:**

the filtered rows.

---



---

(continued from last page)

**See Also:**

[GXIRowsFilter.filter\(GXITableRowCollection\)](#)  
[addFilter\(GXIRowsFilter\)](#)

---

**getItem**

```
public abstract GXITableCell getItem(int rowIndex,  
int columnIndex)
```

**Parameters:**

rowIndex - should range between 0 - rowCount - 1.  
columnIndex - should range between 0 - columnsCount - 1.

**Returns:**

the cell at the specified row / column coordinates.

---

**getItem**

```
public abstract GXITableCell getItem(int rowIndex,  
String columnName)
```

**Parameters:**

rowIndex - should range between 0 - rowCount - 1.  
columnName - the name of the column.

**Returns:**

the cell at the specified row / column coordinates.

---

**getItemContent**

```
public abstract String getItemContent(int rowIndex,  
int columnIndex)
```

**Parameters:**

rowIndex - should range between 0 - rowCount - 1.  
columnIndex - should range between 0 - columnsCount - 1.

**Returns:**

the content of the cell at the specified row / column coordinates.

---

**getItemContent**

```
public abstract String getItemContent(int rowIndex,  
String columnName)
```

**Parameters:**

rowIndex - should range between 0 - rowCount - 1.  
columnName - the name of the column.

**Returns:**

(continued from last page)

the content of the cell at the specified row / column coordinates.

---

## setItemContent

```
public abstract void setItemContent(int rowIndex,  
    int columnIndex,  
    String content)
```

Sets the contents of the cell at the specified row / column coordinates.

### Parameters:

rowIndex - should range between 0 - rowCount - 1.  
columnIndex - should range between 0 - columnsCount - 1.  
content - the cell's new content.

### See Also:

[GXITableCell.setContent\(String\)](#)

---

## setItemContent

```
public abstract void setItemContent(int rowIndex,  
    String columnName,  
    String content)
```

Sets the contents of the cell at the specified row / column coordinates.

### Parameters:

rowIndex - should range between 0 - rowCount - 1.  
columnName - the name of the column.  
content - the cell's new content.

### See Also:

[GXITableCell.setContent\(String\)](#)

---

## getRowByKey

```
public abstract GXITableRow getRowByKey(String[] primaryKey)
```

Finds a row with the specified primary key values. Should be used for tables with a combination of several columns as a primary key.

### Parameters:

primaryKey - the values of the primary key's columns.

### Returns:

the found row. Returns null when a row with the specified values as the primary key was not found.

Example: If the primary key was defined to be the columns "first name" and "last name", the primaryKey parameter should hold the String array "John", "Doe".

### See Also:

[GXITable.getPrimaryKey\(\)](#)

---

## getRowByKey

```
public abstract GXITableRow getRowByKey(String primaryKey)
```

Finds a row according to the specified primary key.

### Parameters:

---

(continued from last page)

`primaryKey` - the requested primary key.

**Returns:**

the found row. Null when a row was not found.

**See Also:**

[GXITable.getPrimaryKey\(\)](#)

---

## sort

```
public abstract void sort(GXAbstractSorter sorter,  
    GXIComparator comparator)
```

Sorts the row's data using the specified sorter and comparator. It is recommended to use the sort methods in GXITable and not this method directly.

**Parameters:**

`sorter` - the sorter.

`comparator` - the comparator used for sorting.

**See Also:**

[GXITable.sort\(int\[\], boolean\[\]\)](#)


[GXITable.sort\(int, boolean\)](#)

[GXITable.sort\(String, boolean\)](#)

[GXITable.sort\(String\[\], boolean\[\]\)](#)

## com.sabratec.applinx.baseobject.table Class GXMasterTable

java.lang.Object



### All Implemented Interfaces:

java.io.Externalizable, [GXITable](#)

public class **GXMasterTable**  
extends [GXAbstractTable](#)

This table represents a host table that its width is more than one host screen, (horizontal scrolling), and not all records appear in all of the host screens. In this table, it is necessary to specify the screen name for each table column, and the Master Screen: the screen containing all of the records. In addition, the primary key must appear in every screen.

### Constructor Summary

public	<a href="#">GXMasterTable</a> (String name, String[] screenNames, String masterScreenName)
public	<a href="#">GXMasterTable</a> (String name)

### Method Summary

void	<a href="#">createTable</a> ( <a href="#">GXIScreenCollection</a> screens)
boolean	<a href="#">equals</a> (Object obj)
String	<a href="#">getMasterScreenName</a> ()
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

### Methods inherited from class [com.sabratec.applinx.baseobject.table.GXAbstractTable](#)

[addColumn](#), [addColumn](#), [addColumns](#), [createTable](#), [createTable](#), [equals](#), [getColumns](#), [getCornersCoordinates](#), [getHeaderCoordinates](#), [getName](#), [getNewRow](#), [getPrimaryKey](#), [getRows](#), [readExternal](#), [removeColumn](#), [removeColumn](#), [setCornersCoordinates](#), [setHeaderCoordinates](#), [setName](#), [setPrimaryKey](#), [setPrimaryKey](#), [sort](#), [sort](#), [sort](#), [sort](#), [toString](#), [writeExternal](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Methods inherited from interface [com.sabratec.applinx.baseobject.table.GXITable](#)

[addColumn](#), [addColumn](#), [addColumnns](#), [createTable](#), [createTable](#), [createTable](#), [getColumns](#), [getName](#), [getNewRow](#), [getPrimarykey](#), [getRows](#), [removeColumn](#), [removeColumn](#), [setPrimarykey](#), [setPrimarykey](#), [sort](#), [sort](#), [sort](#), [sort](#)

Methods inherited from interface `java.io.Externalizable`

`readExternal`, `writeExternal`

## Constructors

### **GXMasterTable**

```
public GXMasterTable(String name,
                     String[] screenNames,
                     String masterScreenName)
```

### **GXMasterTable**

```
public GXMasterTable(String name)
```

## Methods

### **createTable**

```
public void createTable(GXIScreenCollection screens)
    throws GXColumnNotFoundException
```

### **getMasterScreenName**

```
public String getMasterScreenName()
```

### **equals**

```
public boolean equals(Object obj)
```

### **writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)
    throws java.io.IOException
```

(continued from last page)

**readExternal**

```
public void readExternal(java.io.ObjectInput in)
    throws java.io.IOException,
           ClassNotFoundException
```

## com.sabratec.applinx.baseobject.table Class GXMultipleRecordsTable

java.lang.Object



### All Implemented Interfaces:

java.io.Externalizable, [GXITable](#)

```
public class GXMultipleRecordsTable
extends GXAbstractTable
```

This table represents a host table with "conditional" application fields, or more than one columns schema: A row with schema 1 (master row) appears, and afterwards all of its "child" rows with schema 2, until another row of schema 1 appears. In this table, the fields from the master row are copied to its child rows.

### Constructor Summary

public	<a href="#">GXMultipleRecordsTable</a> (String name, <a href="#">GXIMasterRowIdentifier</a> identifier)
--------	---

### Method Summary

void	<a href="#">addColumn</a> ( <a href="#">GXITableColumn</a> column)
void	<a href="#">createTable</a> ( <a href="#">GXIScreenCollection</a> screens)
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">setShowFirstRowsWithoutMaster</a> (boolean show)
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

### Methods inherited from class [com.sabratec.applinx.baseobject.table.GXAbstractTable](#)

[addColumn](#), [addColumn](#), [addColumnns](#), [createTable](#), [createTable](#), [equals](#), [getColumns](#), [getCornersCoordinates](#), [getHeaderCoordinates](#), [getName](#), [getNewRow](#), [getPrimaryKey](#), [getRows](#), [readExternal](#), [removeColumn](#), [removeColumn](#), [setCornersCoordinates](#), [setHeaderCoordinates](#), [setName](#), [setPrimaryKey](#), [setPrimaryKey](#), [sort](#), [sort](#), [sort](#), [sort](#), [toString](#), [writeExternal](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Methods inherited from interface [com.sabratec.applinx.baseobject.table.GXITable](#)

[addColumn](#), [addColumn](#), [addColumnns](#), [createTable](#), [createTable](#), [createTable](#), [getColumns](#), [getName](#), [getNewRow](#), [getPrimaryKey](#), [getRows](#), [removeColumn](#), [removeColumn](#), [setPrimaryKey](#), [setPrimaryKey](#), [sort](#), [sort](#), [sort](#), [sort](#)

**Methods inherited from interface** `java.io.Externalizable``readExternal, writeExternal`

## Constructors

### **GXMultipleRecordsTable**

```
public GXMultipleRecordsTable(String name,  
                               GXIMasterRowIdentifier idetifier)
```

## Methods

### **addColumn**

```
public void addColumn(GXITableColumn column)
```

### **setShowFirstRowsWithoutMaster**

```
public void setShowFirstRowsWithoutMaster(boolean show)
```

### **createTable**

```
public void createTable(GXIScreenCollection screens)  
    throws GXColumnNotFoundException
```

### **writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```


### **readExternal**

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```



## com.sabratec.applinx.baseobject.table Class GXPartialRowsTable

java.lang.Object



### All Implemented Interfaces:

java.io.Externalizable, [GXITable](#)

public class **GXPartialRowsTable**  
extends [GXAbstractTable](#)

This table represents a host table that its width is more than one host screen, (horizontal scrolling), and not all records appear in all of the host screens. In this table, it is necessary to specify the screen name for each table column, and the Master Screen: the screen containing all of the records. In addition, the primary key must appear in every screen.

### Constructor Summary

public	<a href="#">GXPartialRowsTable</a> (String name, String[] screenNames, String masterScreenName)
--------	---

### Method Summary

void	<a href="#">addColumn</a> ( <a href="#">GXITableColumn</a> column)
void	<a href="#">createTable</a> ( <a href="#">GXIScreenCollection</a> screens)
String	<a href="#">getMasterScreenName</a> ()
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

### Methods inherited from class [com.sabratec.applinx.baseobject.table.GXAbstractTable](#)

[addColumn](#), [addColumn](#), [addColumns](#), [createTable](#), [createTable](#), [equals](#), [getColumns](#), [getCornersCoordinates](#), [getHeaderCoordinates](#), [getName](#), [getNewRow](#), [getPrimaryKey](#), [getRows](#), [readExternal](#), [removeColumn](#), [removeColumn](#), [setCornersCoordinates](#), [setHeaderCoordinates](#), [setName](#), [setPrimaryKey](#), [setPrimaryKey](#), [sort](#), [sort](#), [sort](#), [sort](#), [toString](#), [writeExternal](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Methods inherited from interface [com.sabratec.applinx.baseobject.table.GXITable](#)

[addColumn](#), [addColumn](#), [addColumns](#), [createTable](#), [createTable](#), [createTable](#), [getColumns](#), [getName](#), [getNewRow](#), [getPrimaryKey](#), [getRows](#), [removeColumn](#), [removeColumn](#), [setPrimaryKey](#), [setPrimaryKey](#), [sort](#), [sort](#), [sort](#), [sort](#)

**Methods inherited from interface** `java.io.Externalizable``readExternal, writeExternal`

## Constructors

### **GXPartialRowsTable**

```
public GXPartialRowsTable(String name,  
                          String[] screenNames,  
                          String masterScreenName)
```

## Methods

### **createTable**

```
public void createTable(GXIScreenCollection screens)  
    throws GXColumnNotFoundException
```

### **addColumn**

```
public void addColumn(GXITableColumn column)
```

### **getMasterScreenName**

```
public String getMasterScreenName()
```

### **writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```

### **readExternal**

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

## com.sabratec.applinx.baseobject.table Class GXScreenNameUndefinedException

java.lang.Object

└-GXGeneralRuntimeException

└-com.sabratec.applinx.baseobject.table.GXScreenNameUndefinedException

public class **GXScreenNameUndefinedException**  
extends GXGeneralRuntimeException

### Constructor Summary

public	<a href="#">GXScreenNameUndefinedException</a> (String columnName)
--------	--

Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Constructors

#### **GXScreenNameUndefinedException**

public **GXScreenNameUndefinedException**(String columnName)

## com.sabratec.applinx.baseobject.table Class GXTableCell

java.lang.Object

└─com.sabratec.applinx.baseobject.table.GXTableCell

### All Implemented Interfaces:

java.io.Serializable, [GXITableCell](#)

### Direct Known Subclasses:

[GXVariableTableCell](#), [GXFieldTableCell](#)

```
public class GXTableCell
extends Object
implements GXITableCell, java.io.Serializable
```

## Constructor Summary

public	<a href="#">GXTableCell</a> ( <a href="#">GXICellable</a> cellable)
--------	---

## Method Summary

boolean	<a href="#">equals</a> (Object obj)
String	<a href="#">getContent</a> ()
void	<a href="#">setContent</a> (String content)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Methods inherited from interface [com.sabratec.applinx.baseobject.table.GXITableCell](#)

[getContent](#), [setContent](#)

## Constructors

### GXTableCell

```
public GXTableCell(GXICellable cellable)
```

## Methods

(continued from last page)

## **getContent**

```
public String getContent()
```

---

## **setContent**

```
public void setContent(String content)
```

---

## **equals**

```
public boolean equals(Object obj)
```

## com.sabratec.applinx.baseobject.table Class GXTableColumn

java.lang.Object

↳ com.sabratec.applinx.baseobject.table.GXTableColumn

### All Implemented Interfaces:

java.io.Serializable, [GXITableColumn](#)

public class **GXTableColumn**  
 extends Object  
 implements [GXITableColumn](#), java.io.Serializable

### Fields inherited from interface [com.sabratec.applinx.baseobject.table.GXITableColumn](#)

[GX\\_TABLE\\_COLUMN\\_DATA\\_TYPE\\_ALPHANUMERIC](#), [GX\\_TABLE\\_COLUMN\\_DATA\\_TYPE\\_NUMERIC](#),  
[GX\\_TABLE\\_COLUMN\\_TYPE\\_APPFIELD](#), [GX\\_TABLE\\_COLUMN\\_TYPE\\_OTHER](#), [GX\\_TABLE\\_COLUMN\\_TYPE\\_VARIABLE](#)

### Constructor Summary

public	<a href="#">GXTableColumn</a> (String name, String appFieldName, String[] screenNames, String caption, int dataType)
public	<a href="#">GXTableColumn</a> (String name)
public	<a href="#">GXTableColumn</a> (String name, String[] screenNames)
public	<a href="#">GXTableColumn</a> (String name, String caption, int dataType)
public	<a href="#">GXTableColumn</a> (String name, String variableName, String caption, int dataType)

### Method Summary

boolean	<a href="#">equals</a> (Object obj)
String	<a href="#">getAppFieldFullName</a> ()
String	<a href="#">getAppFieldName</a> ()
String	<a href="#">getCaption</a> ()
int	<a href="#">getCopyCount</a> ()
int	<a href="#">getDataType</a> ()
String	<a href="#">getName</a> ()

String[]	<a href="#">getScreenNames()</a>
int	<a href="#">getType()</a>
String	<a href="#">getVariableName()</a>
boolean	<a href="#">isMasterRow()</a>
boolean	<a href="#">isToCopy()</a>
void	<a href="#">setAppFieldFullName(String appFieldName)</a>
void	<a href="#">setAppFieldName(String appFieldName)</a>
void	<a href="#">setCaption(String caption)</a>
void	<a href="#">setCopyCount(int copyCount)</a>
void	<a href="#">setDataType(int dataType)</a>
void	<a href="#">setIsMasterRow(boolean isMasterRow)</a>
void	<a href="#">setIsToCopy(boolean isToCopy)</a>
void	<a href="#">setName(String name)</a>
void	<a href="#">setScreenNames(String[] names)</a>
void	<a href="#">setVariableName(String name)</a>
String	<a href="#">toString()</a>

#### Methods inherited from class `java.lang.Object`

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

#### Methods inherited from interface [com.sabratec.applinx.baseobject.table.GXITableColumn](#)

[getAppFieldFullName](#), [getAppFieldName](#), [getCaption](#), [getCopyCount](#), [getDataType](#), [getName](#), [getScreenNames](#), [getType](#), [getVariableName](#), [isMasterRow](#), [isToCopy](#), [setAppFieldName](#), [setCaption](#), [setCopyCount](#), [setDataType](#), [setIsMasterRow](#), [setIsToCopy](#), [setName](#), [setScreenNames](#), [setVariableName](#)

## Constructors

(continued from last page)

---

## GXTableColumn

```
public GXTableColumn(String name,  
                     String appFieldName,  
                     String[] screenNames,  
                     String caption,  
                     int dataType)
```

---

## GXTableColumn

```
public GXTableColumn(String name)
```

---

## GXTableColumn

```
public GXTableColumn(String name,  
                     String[] screenNames)
```

---

## GXTableColumn

```
public GXTableColumn(String name,  
                     String caption,  
                     int dataType)
```

---

## GXTableColumn

```
public GXTableColumn(String name,  
                     String variableName,  
                     String caption,  
                     int dataType)
```

---

## Methods

### getDataType

```
public int getDataType()
```

---

### setDataType

```
public void setDataType(int dataType)
```

---

### getName

```
public String getName()
```

---



---

**setName**

```
public void setName(String name)
```

---

**getAppFieldName**

```
public String getAppFieldName()
```

---

**setAppFieldName**

```
public void setAppFieldName(String appFieldName)
```

---

**getAppFieldFullName**

```
public String getAppFieldFullName()
```

---

**setAppFieldFullName**

```
public void setAppFieldFullName(String appFieldName)
```

---

**getVariableName**

```
public String getVariableName()
```

---

**setVariableName**

```
public void setVariableName(String name)
```

---

**getCaption**

```
public String getCaption()
```

---

**setCaption**

```
public void setCaption(String caption)
```

---

**getScreenNames**

```
public String[] getScreenNames()
```

---

---

(continued from last page)

---

---

### **setScreenNames**

```
public void setScreenNames(String[] names)
```

---

---

### **setIsMasterRow**

```
public void setIsMasterRow(boolean isMasterRow)
```

---

---

### **isMasterRow**

```
public boolean isMasterRow()
```

---

---

### **setIsToCopy**

```
public void setIsToCopy(boolean isToCopy)
```

---

---

### **isToCopy**

```
public boolean isToCopy()
```

---

---

### **setCopyCount**

```
public void setCopyCount(int copyCount)
```

---

---

### **getCopyCount**

```
public int getCopyCount()
```

---

---

### **getType**

```
public int getType()
```

---

---

### **equals**

```
public boolean equals(Object obj)
```

---

(continued from last page)

## **toString**

```
public String toString()
```

## com.sabratec.applinx.baseobject.table Class GXTableColumnCollection

java.lang.Object

└-com.sabratec.applinx.baseobject.table.GXTableColumnCollection

### All Implemented Interfaces:

java.io.Externalizable, [GXITableColumnCollection](#)

public class **GXTableColumnCollection**  
 extends Object  
 implements [GXITableColumnCollection](#), java.io.Externalizable

### Constructor Summary

public	<a href="#">GXTableColumnCollection</a> ()
--------	--

### Method Summary

void	<a href="#">addColumn</a> ( <a href="#">GXITableColumn</a> column)
boolean	<a href="#">equals</a> (Object obj)
<a href="#">GXITableColumn</a>	<a href="#">getColumn</a> (int columnIndex)
<a href="#">GXITableColumn</a>	<a href="#">getColumn</a> (String columnName)
int	<a href="#">getColumnCount</a> ()
<a href="#">GXITableColumn[]</a>	<a href="#">getColumns</a> ()
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">removeColumn</a> (int columnIndex)
void	<a href="#">removeColumn</a> (String columnName)
String	<a href="#">toString</a> ()
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Methods inherited from interface [com.sabratec.applinx.baseobject.table.GXITableColumnCollection](#)

---

[addColumn](#), [getColumn](#), [getColumn](#), [getColumnCount](#), [getColumns](#), [removeColumn](#), [removeColumn](#)

Methods inherited from interface `java.io.Externalizable`

`readExternal`, `writeExternal`

---

## Constructors

### **GXTableColumnCollection**

```
public GXTableColumnCollection()
```

## Methods

### **getColumns**

```
public GXITableColumn\[\] getColumns()
```

---

### **getColumnCount**

```
public int getColumnCount()
```

---

### **getColumn**

```
public GXITableColumn getColumn(int columnIndex)
```

---

### **getColumn**

```
public GXITableColumn getColumn(String columnName)
```

---

### **addColumn**

```
public void addColumn(GXITableColumn column)
```

---

### **removeColumn**

```
public void removeColumn(int columnIndex)
```

---

---

(continued from last page)

## **removeColumn**

```
public void removeColumn(String columnName)
```

---

## **equals**

```
public boolean equals(Object obj)
```

---

## **writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```

---

## **readExternal**

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

---

## **toString**

```
public String toString()
```

---

## com.sabratec.applinx.baseobject.table Class GXTableRow

java.lang.Object

└-com.sabratec.applinx.baseobject.table.GXTableRow

### All Implemented Interfaces:

java.io.Externalizable, [GXITableRow](#)

public class **GXTableRow**  
 extends Object  
 implements [GXITableRow](#), java.io.Externalizable

### Constructor Summary

public	<a href="#">GXTableRow()</a>
--------	------------------------------

### Method Summary

boolean	<a href="#">equals</a> (Object obj)
<a href="#">GXITableCell</a>	<a href="#">getItem</a> (int columnIndex)
<a href="#">GXITableCell</a>	<a href="#">getItem</a> (String columnName)
String	<a href="#">getItemContent</a> (int columnIndex)
String	<a href="#">getItemContent</a> (String columnName)
<a href="#">GXITableCell[]</a>	<a href="#">getItems</a> ()
String[]	<a href="#">getItemsContents</a> ()
String	<a href="#">getPrimaryKey</a> ()
void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">removeItem</a> (int columnIndex)
void	<a href="#">removeItem</a> (String columnName)
void	<a href="#">setItem</a> (int columnIndex, <a href="#">GXITableCell</a> item)
void	<a href="#">setItem</a> (String columnName, <a href="#">GXITableCell</a> item)
void	<a href="#">setItemContent</a> (int columnIndex, String content)

void	<a href="#">setItemContent</a> (String columnName, String content)
void	<a href="#">setPrimaryKey</a> (String primaryKey)
String	<a href="#">toString</a> ()
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

#### Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

#### Methods inherited from interface [com.sabratec.applinx.baseobject.table.GXITableRow](#)

[getItem](#), [getItem](#), [getItemContent](#), [getItemContent](#), [getItems](#), [getItemsContents](#), [getPrimaryKey](#), [removeItem](#), [removeItem](#), [setItem](#), [setItem](#), [setItemContent](#), [setItemContent](#)

#### Methods inherited from interface java.io.Externalizable

`readExternal`, `writeExternal`

## Constructors

### **GXTableRow**

```
public GXTableRow()
```

## Methods

### **getItems**

```
public GXITableCell[] getItems()
```

### **getItemsContents**

```
public String[] getItemsContents()
```

### **getItem**

```
public GXITableCell getItem(int columnIndex)
```

### **getItem**

```
public GXITableCell getItem(String columnName)
```



---

(continued from last page)

---

### **setItem**

```
public void setItem(int columnIndex,  
    GXITableCell item)
```

---

### **setItem**

```
public void setItem(String columnName,  
    GXITableCell item)
```

---

### **getItemContent**

```
public String getItemContent(int columnIndex)
```

---

### **getItemContent**

```
public String getItemContent(String columnName)
```

---

### **setItemContent**

```
public void setItemContent(int columnIndex,  
    String content)
```

---

### **setItemContent**

```
public void setItemContent(String columnName,  
    String content)
```

---

### **getPrimaryKey**

```
public String getPrimaryKey()
```

---

### **setPrimaryKey**

```
public void setPrimaryKey(String primaryKey)
```

---

### **removeItem**

```
public void removeItem(int columnIndex)
```

---

---

(continued from last page)

---

## **removeItem**

```
public void removeItem(String columnName)
```

---

## **equals**

```
public boolean equals(Object obj)
```

---

## **readExternal**

```
public void readExternal(java.io.ObjectInput in)  
    throws java.io.IOException,  
           ClassNotFoundException
```

---

## **writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)  
    throws java.io.IOException
```

---

## **toString**

```
public String toString()
```

---

## com.sabratec.applinx.baseobject.table Class GXTableRowCollection

java.lang.Object

└-com.sabratec.applinx.baseobject.table.GXTableRowCollection

### All Implemented Interfaces:

java.io.Externalizable, [GXITableRowCollection](#)

public class **GXTableRowCollection**  
 extends Object  
 implements [GXITableRowCollection](#), java.io.Externalizable

### Constructor Summary

public	<a href="#">GXTableRowCollection()</a>
--------	--

### Method Summary

void	<a href="#">addFilter</a> ( <a href="#">GXIRowsFilter</a> filter)
void	<a href="#">addRow</a> ( <a href="#">GXITableRow</a> row)
boolean	<a href="#">equals</a> (Object obj)
<a href="#">GXITableRowCollection</a>	<a href="#">filterRows</a> ()
<a href="#">GXIRowsFilter[]</a>	<a href="#">getFilters</a> ()
<a href="#">GXITableCell</a>	<a href="#">getItem</a> (int rowIndex, int columnIndex)
<a href="#">GXITableCell</a>	<a href="#">getItem</a> (int rowIndex, String columnName)
String	<a href="#">getItemContent</a> (int rowIndex, int columnIndex)
String	<a href="#">getItemContent</a> (int rowIndex, String columnName)
<a href="#">GXITableRow</a>	<a href="#">getRow</a> (int rowIndex)
<a href="#">GXITableRow</a>	<a href="#">getRowByKey</a> (String primaryKey)
<a href="#">GXITableRow</a>	<a href="#">getRowByKey</a> (String[] primaryKey)
int	<a href="#">getRowCount</a> ()
<a href="#">GXITableRow[]</a>	<a href="#">getRows</a> ()

void	<a href="#">readExternal</a> (java.io.ObjectInput in)
void	<a href="#">removeFilter</a> ( <a href="#">GXIRowsFilter</a> filter)
void	<a href="#">removeRow</a> ( <a href="#">GXITableRow</a> row)
void	<a href="#">removeRow</a> (int rowIndex)
void	<a href="#">setItemContent</a> (int rowIndex, int columnIndex, String content)
void	<a href="#">setItemContent</a> (int rowIndex, String columnName, String content)
void	<a href="#">sort</a> (GXAbstractSorter sorter, GXIComparator comparator)
String	<a href="#">toString</a> ()
void	<a href="#">writeExternal</a> (java.io.ObjectOutput out)

#### Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

#### Methods inherited from interface [com.sabratec.applinx.baseobject.table.GXITableRowCollection](#)

[addFilter](#), [addRow](#), [filterRows](#), [getFilters](#), [getItem](#), [getItem](#), [getItemContent](#), [getItemContent](#), [getRow](#), [getRowByKey](#), [getRowByKey](#), [getRowCount](#), [getRows](#), [removeFilter](#), [removeRow](#), [removeRow](#), [setItemContent](#), [setItemContent](#), [sort](#)

#### Methods inherited from interface java.io.Externalizable

`readExternal`, `writeExternal`

## Constructors

### **GXTableRowCollection**

```
public GXTableRowCollection()
```

## Methods

### **getRows**

```
public GXITableRow\[\] getRows()
```

### **getRowCount**

```
public int getRowCount()
```

(continued from last page)

---

## getRow

```
public GXTableRow getRow(int rowIndex)
```

---

## addRow

```
public void addRow(GXTableRow row)
```

---

## removeRow

```
public void removeRow(int rowIndex)
```

---

## removeRow

```
public void removeRow(GXTableRow row)
```

---

## addFilter

```
public void addFilter(GXIRowsFilter filter)
```

---

## getFilters

```
public GXIRowsFilter[] getFilters()
```

---

## removeFilter

```
public void removeFilter(GXIRowsFilter filter)
```

---

## filterRows

```
public GXTableRowCollection filterRows()
```

---

## getItem

```
public GXTableCell getItem(int rowIndex,  
int columnIndex)
```

---

(continued from last page)

---

## getItem

```
public GXITableCell getItem(int rowIndex,  
                             String columnName)
```

---

## getItemContent

```
public String getItemContent(int rowIndex,  
                             int columnIndex)
```

---

## getItemContent

```
public String getItemContent(int rowIndex,  
                             String columnName)
```

---

## setItemContent

```
public void setItemContent(int rowIndex,  
                           int columnIndex,  
                           String content)
```

---

## setItemContent

```
public void setItemContent(int rowIndex,  
                           String columnName,  
                           String content)
```

---

## getRowByKey

```
public GXITableRow getRowByKey(String[] primaryKey)
```

---

## getRowByKey

```
public GXITableRow getRowByKey(String primaryKey)
```

---

## sort

```
public void sort(GXAbstractSorter sorter,  
                GXIComparator comparator)
```

---

## equals

```
public boolean equals(Object obj)
```

---

(continued from last page)

---

## **writeExternal**

```
public void writeExternal(java.io.ObjectOutput out)
    throws java.io.IOException
```

---

## **readExternal**

```
public void readExternal(java.io.ObjectInput in)
    throws java.io.IOException,
           ClassNotFoundException
```


---

## **toString**

```
public String toString()
```

## com.sabratec.applinx.baseobject.table Class GXVariableTableCell

java.lang.Object



### All Implemented Interfaces:

java.io.Serializable, [GXITableCell](#)

public class **GXVariableTableCell**  
extends [GXTableCell](#)

Variable-based cell.

A table cell based on a path variable array.

### Constructor Summary

public	<a href="#">GXVariableTableCell</a> (String content)
public	<a href="#">GXVariableTableCell</a> ( <a href="#">GXICellable</a> cellable)

### Method Summary

boolean	<a href="#">isProtected</a> ()
---------	--------------------------------

#### Methods inherited from class [com.sabratec.applinx.baseobject.table.GXTableCell](#)

[equals](#), [getContent](#), [setContent](#)

#### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

#### Methods inherited from interface [com.sabratec.applinx.baseobject.table.GXITableCell](#)

[getContent](#), [setContent](#)

### Constructors

#### GXVariableTableCell

public **GXVariableTableCell**(String content)



---

(continued from last page)

## **GXVariableTableCell**

```
public GXVariableTableCell(GXICellable cellable)
```

### Methods

#### **isProtected**

```
public boolean isProtected()
```

---

## Package

# **com.sabratec.applinx.baseobject.table.filter**

Contains classes and interfaces for filtering table's data.

## com.sabratec.applinx.baseobject.table.filter Class GXAddFieldToPreviousRowFilter

java.lang.Object

└-com.sabratec.applinx.baseobject.table.filter.GXAddFieldToPreviousRowFilter

All Implemented Interfaces:

[GXIRowsFilter](#)

```
public class GXAddFieldToPreviousRowFilter
extends Object
implements GXIRowsFilter
```

This filter is used for horizontal scrolling of the same screen id, but with different fields (all mapped in the same screen). For each row, the filter checks if fields (identified by [GXIColumnIdentifier](#)) should be copied to a previous row. If so, it copies them and doesn't add the current row.

### Constructor Summary

public	<a href="#">GXAddFieldToPreviousRowFilter</a> ( <a href="#">GXIColumnIdentifier[]</a> fieldsToCopy)
--------	---

### Method Summary

<a href="#">GXITableRowCollection</a>	<a href="#">filter</a> ( <a href="#">GXITableRowCollection</a> rows)
boolean	<a href="#">isPrimaryKeyValid</a> (String primaryKey, <a href="#">GXITableRowCollection</a> rowsSoFar)
boolean	<a href="#">isRowValid</a> ( <a href="#">GXITableRow</a> row, <a href="#">GXITableRowCollection</a> rowsSoFar)

Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

Methods inherited from interface [com.sabratec.applinx.baseobject.table.GXIRowsFilter](#)

[filter](#), [isPrimaryKeyValid](#), [isRowValid](#)

### Constructors

#### GXAddFieldToPreviousRowFilter

```
public GXAddFieldToPreviousRowFilter(GXIColumnIdentifier\[\] fieldsToCopy)
```

### Methods

---

(continued from last page)

## **filter**

```
public GXITableRowCollection filter(GXITableRowCollection rows)
```

---

## **isRowValid**

```
public boolean isRowValid(GXITableRow row,  
    GXITableRowCollection rowsSoFar)
```

---

## **isPrimaryKeyValid**

```
public boolean isPrimaryKeyValid(String primaryKey,  
    GXITableRowCollection rowsSoFar)
```

## com.sabratec.applinx.baseobject.table.filter Class GXNonDuplicateRowsFilter

java.lang.Object

└-com.sabratec.applinx.baseobject.table.filter.GXNonDuplicateRowsFilter

All Implemented Interfaces:

[GXIRowsFilter](#)

public class **GXNonDuplicateRowsFilter**  
extends Object  
implements [GXIRowsFilter](#)

Filters duplicate rows according to the primary key.

### Constructor Summary

public	<a href="#">GXNonDuplicateRowsFilter</a> ()
--------	---

### Method Summary

<a href="#">GXITableRowCollection</a>	<a href="#">filter</a> ( <a href="#">GXITableRowCollection</a> rows)
boolean	<a href="#">isPrimaryKeyValid</a> (String primaryKey, <a href="#">GXITableRowCollection</a> rowsSoFar)
boolean	<a href="#">isRowValid</a> ( <a href="#">GXITableRow</a> row, <a href="#">GXITableRowCollection</a> rowsSoFar)

Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

Methods inherited from interface [com.sabratec.applinx.baseobject.table.GXIRowsFilter](#)

[filter](#), [isPrimaryKeyValid](#), [isRowValid](#)

### Constructors

#### **GXNonDuplicateRowsFilter**

public **GXNonDuplicateRowsFilter**()

### Methods

#### **filter**

public [GXITableRowCollection](#) **filter**([GXITableRowCollection](#) rows)

(continued from last page)

---

## **isRowValid**

```
public boolean isRowValid(GXITableRow row,  
    GXITableRowCollection rowsSoFar)
```

---

## **isPrimaryKeyValid**

```
public boolean isPrimaryKeyValid(String primaryKey,  
    GXITableRowCollection rowsSoFar)
```

## com.sabratec.applinx.baseobject.table.filter Class GXNonEmptyRowsFilter

java.lang.Object

└-com.sabratec.applinx.baseobject.table.filter.GXNonEmptyRowsFilter

All Implemented Interfaces:

[GXIRowsFilter](#)

public class **GXNonEmptyRowsFilter**  
extends Object  
implements [GXIRowsFilter](#)

Example for filtering rows - filters rows with an empty column. If no column specified, filters rows with an empty primary key.

### Constructor Summary

public	<a href="#">GXNonEmptyRowsFilter</a> (String[] columnNames)
public	<a href="#">GXNonEmptyRowsFilter</a> (GXITableColumn[] columns)
public	<a href="#">GXNonEmptyRowsFilter</a> ()

### Method Summary

<a href="#">GXITableRowCollection</a>	<a href="#">filter</a> ( <a href="#">GXITableRowCollection</a> rows)
String[]	<a href="#">getColumnNames</a> ()
boolean	<a href="#">isPrimaryKeyValid</a> (String primaryKey, <a href="#">GXITableRowCollection</a> rowsSoFar)
boolean	<a href="#">isRowValid</a> ( <a href="#">GXITableRow</a> row, <a href="#">GXITableRowCollection</a> rowsSoFar)
void	<a href="#">setColumnNames</a> (String[] columnNames)
String	<a href="#">toString</a> ()

#### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

#### Methods inherited from interface [com.sabratec.applinx.baseobject.table.GXIRowsFilter](#)

[filter](#), [isPrimaryKeyValid](#), [isRowValid](#)

### Constructors

(continued from last page)

---

## **GXNonEmptyRowsFilter**

```
public GXNonEmptyRowsFilter(String[] columnNames)
```

---

## **GXNonEmptyRowsFilter**

```
public GXNonEmptyRowsFilter(GXITableColumn\[\] columns)
```

---

## **GXNonEmptyRowsFilter**

```
public GXNonEmptyRowsFilter()
```

## Methods

### **filter**

```
public GXITableRowCollection filter(GXITableRowCollection rows)
```

---

### **isRowValid**

```
public boolean isRowValid(GXITableRow row,  
    GXITableRowCollection rowsSoFar)
```

---

### **isPrimaryKeyValid**

```
public boolean isPrimaryKeyValid(String primaryKey,  
    GXITableRowCollection rowsSoFar)
```

---

### **toString**

```
public String toString()
```

---

### **getColumnNames**

```
public String[] getColumnNames()
```

---

### **setColumnNames**

```
public void setColumnNames(String[] columnNames)
```

---



---

Package

**com.sabratec.applinx.common**

## com.sabratec.applinx.common Class GXResponseCodes

java.lang.Object

└-com.sabratec.applinx.common.GXResponseCodes

public class **GXResponseCodes**  
extends Object

Field Summary	
public static final	<a href="#">APPLICATION_RELOAD_FAILED</a> Value: <b>7008</b>
public static final	<a href="#">DESTINATION_FOLDER_IS_SAME</a> Value: <b>7011</b>
public static final	<a href="#">DESTINATION_FOLDER_IS_SUBFOLDER</a> Value: <b>7012</b>
public static final	<a href="#">ERROR_APPLICATION_NOT_DEFINED</a> Value: <b>5007</b>
public static final	<a href="#">ERROR_CANNOT_CONNECT_HOST</a> Value: <b>5002</b>
public static final	<a href="#">ERROR_CANNOT_CONNECT_SERVER</a> Value: <b>5004</b>
public static final	<a href="#">ERROR_CANT_DELETE_ASSIGNED_EXCEPTION_PATH</a> Value: <b>5103</b>
public static final	<a href="#">ERROR_CANT_DELETE_REFERENCED_ENTITY</a> Value: <b>5101</b>
public static final	<a href="#">ERROR_CENTRASITE_REGISTRATION</a> Value: <b>10005</b>
public static final	<a href="#">ERROR_CHANGING_WEB_SERVICE_TARGET_SERVER</a> Value: <b>8500</b>
public static final	<a href="#">ERROR_CONCURRENT_NUMBER_OF_USERS_EXCEEDS_LICENSE_AGREEMENT</a> Value: <b>5060</b>
public static final	<a href="#">ERROR_CONFIGURATION_SAVE_FAILED</a> Value: <b>6001</b>

public static final	<a href="#">ERROR_CONNECTING_DEVICE_NAME</a> Value: <b>5031</b>
public static final	<a href="#">ERROR_CONNECTION_INFO</a> Value: <b>5011</b>
public static final	<a href="#">ERROR_CREATING_ENTITIES_FROM_WSDL</a> Value: <b>8001</b>
public static final	<a href="#">ERROR_CREATING_TABLE</a> Value: <b>5080</b>
public static final	<a href="#">ERROR_CURSOR_POSITION_NOT_SET</a> Value: <b>5030</b>
public static final	<a href="#">ERROR_DB_GENERAL</a> Value: <b>5102</b>
public static final	<a href="#">ERROR_DEPLOYING_WEB_SERVICE</a> Value: <b>10001</b>
public static final	<a href="#">ERROR_DEPLOYMENT_GENERAL</a> Value: <b>10000</b>
public static final	<a href="#">ERROR_DEPLOYMENT_HANDLER_NOT_AVAILABLE</a> Value: <b>10006</b>
public static final	<a href="#">ERROR_DISPLAY_SESSION_REQUEST_FOR_PRINTER_SESSION</a> Value: <b>5070</b>
public static final	<a href="#">ERROR_EXECUTING_MAP_BAD_DESTINATION</a> Value: <b>5035</b>
public static final	<a href="#">ERROR_EXECUTING_MAP_NO_MAP_IN_APPL</a> Value: <b>5034</b>
public static final	<a href="#">ERROR_EXECUTING_MAP_NO_PATH_BETWEEN_SCREEN</a> Value: <b>5033</b>
public static final	<a href="#">ERROR_EXECUTING_MAP_SCREEN_NOT_IN_MAP</a> Value: <b>5032</b>
public static final	<a href="#">ERROR_EXECUTING_PATH_FROMSCREENID</a> Value: <b>5015</b>
public static final	<a href="#">ERROR_EXECUTING_PATH_GENERAL</a> Value: <b>5017</b>

public static final	<a href="#">ERROR_EXECUTING_PATH_RESOLVE_ACTION</a> Value: <b>5029</b>
public static final	<a href="#">ERROR_EXECUTING_PATH_TOSCREENID</a> Value: <b>5016</b>
public static final	<a href="#">ERROR_EXECUTING_PATH_TYPE_EXCEPTION</a> Value: <b>5028</b>
public static final	<a href="#">ERROR_EXECUTING_PROCEDURE_GENERAL</a> Value: <b>9000</b>
public static final	<a href="#">ERROR_EXPORTING_WEB_SERVICE</a> Value: <b>10004</b>
public static final	<a href="#">ERROR_FIELD_CONTENT_NOT_SET</a> Value: <b>5036</b>
public static final	<a href="#">ERROR_GENERAL</a> Value: <b>5000</b>
public static final	<a href="#">ERROR_HOST_EXISTS_IN_APPLICATION</a> Value: <b>6000</b>
public static final	<a href="#">ERROR_HOST_SESSION_DISCONNECTED</a> Value: <b>5018</b>
public static final	<a href="#">ERROR_IMPORT_FILE_REPOSITORY</a> Value: <b>5038</b>
public static final	<a href="#">ERROR_INCOMPATIBLE_VERSIONS</a> Value: <b>6002</b>
public static final	<a href="#">ERROR_INCOMPATIBLE_WSS_VERSION</a> Value: <b>10007</b>
public static final	<a href="#">ERROR_INCORRECT_PASSWORD</a> Value: <b>5012</b>
public static final	<a href="#">ERROR_INDEX_OUT_OF_BOUND</a> Value: <b>5006</b>
public static final	<a href="#">ERROR_INVALID_LICENSE_COMBINATION</a> Value: <b>6113</b>
public static final	<a href="#">ERROR_INVALID_LICENSE_KEY</a> Value: <b>6004</b>

public static final	<a href="#">ERROR_LICENSE_FILE_NOT_FOUND</a> Value: <b>6005</b>
public static final	<a href="#">ERROR_LICENSE_TERMS_VAIOLATION</a> Value: <b>5061</b>
public static final	<a href="#">ERROR_LOGIN_FAILED</a> Value: <b>5023</b>
public static final	<a href="#">ERROR_MAP_STEP_ALREADY_EXISTS</a> Value: <b>5040</b>
public static final	<a href="#">ERROR_NATURAL_DATA_TRANSFER_FAILURE</a> Value: <b>5100</b>
public static final	<a href="#">ERROR_NATURAL_DATA_TRANSFER_INAVLID_STATE</a> Value: <b>5101</b>
public static final	<a href="#">ERROR_OVERWRITING</a> Value: <b>5014</b>
public static final	<a href="#">ERROR_PATH_NOT_FOUND</a> Value: <b>5025</b>
public static final	<a href="#">ERROR_PERMISSION_DENIED</a> Value: <b>5024</b>
public static final	<a href="#">ERROR_PREFS_SAVE_FAILED</a> Value: <b>5026</b>
public static final	<a href="#">ERROR_PRINTER_CONNECT_ERROR</a> Value: <b>5027</b>
public static final	<a href="#">ERROR_PRINTER_DISABLED</a> Value: <b>5021</b>
public static final	<a href="#">ERROR_REPLACING_LICENSE</a> Value: <b>6006</b>
public static final	<a href="#">ERROR_REPLAY_DEVICE_INCOMPATIBILITY</a> Value: <b>5037</b>
public static final	<a href="#">ERROR_REPLAY_FILE</a> Value: <b>5010</b>
public static final	<a href="#">ERROR_REPLAY_FILE_NOT_FOUND</a> Value: <b>5009</b>

public static final	<a href="#">ERROR_RETRIEVING_WSDL_SERVICES</a> Value: <b>8000</b>
public static final	<a href="#">ERROR_RETRIEVING_WSDL_SERVICES_PERMISSION_DENIED</a> Value: <b>8002</b>
public static final	<a href="#">ERROR_SCREEN_NOT_SYNC</a> Value: <b>5027</b>
public static final	<a href="#">ERROR_SECURITY_SAVE_FAILED</a> Value: <b>6003</b>
public static final	<a href="#">ERROR_SERVICE_CONNECTION_NOT_READY</a> Value: <b>5055</b>
public static final	<a href="#">ERROR_SERVICE_CONNECTION_TIMEOUT_EXPIRED</a> Value: <b>5053</b>
public static final	<a href="#">ERROR_SERVICE_GENERAL</a> Value: <b>5050</b>
public static final	<a href="#">ERROR_SERVICE_NO_AVAILABLE_CONNECTION</a> Value: <b>5052</b>
public static final	<a href="#">ERROR_SERVICE_NOT_ACTIVE</a> Value: <b>5051</b>
public static final	<a href="#">ERROR_SERVICE_NOT_FOUND</a> Value: <b>5056</b>
public static final	<a href="#">ERROR_SERVICE_PATH_NOT_FOUND</a> Value: <b>5054</b>
public static final	<a href="#">ERROR_SESSION_VARIABLE_DOESNT_EXIST</a> Value: <b>5090</b>
public static final	<a href="#">ERROR_SESSION_VARIABLE_TYPE_MISMATCH</a> Value: <b>5091</b>
public static final	<a href="#">ERROR_SOCKET</a> Error communicating with ApplinX server, may occur as a result of incompatible client and server version, or network mailfunctions. Value: <b>5005</b>
public static final	<a href="#">ERROR_SYNCHRONIZING_REPOSITORY</a> Value: <b>7019</b>
public static final	<a href="#">ERROR_TIMEOUT_EXPIRED</a> Value: <b>5022</b>

public static final	<a href="#">ERROR_UNDEPLOYING_WEB_SERVICE</a> Value: <b>10002</b>
public static final	<a href="#">ERROR_UNKNOWN_ACTION</a> Value: <b>5200</b>
public static final	<a href="#">ERROR_UNKNOWN_SERVER_ADDRESS</a> Value: <b>5003</b>
public static final	<a href="#">ERROR_UPDATING_WEB_SERVICE</a> Value: <b>10003</b>
public static final	<a href="#">ERROR_USER_ALREADY_ATTACHED</a> Value: <b>5008</b>
public static final	<a href="#">ERROR_USER_NOT_CONNECTED</a> Value: <b>5001</b>
public static final	<a href="#">ERROR_WAIT_CONDITION_NOT_MET</a> Value: <b>5013</b>
public static final	<a href="#">ERROR_WAIT_CONDITION_NOT_VALID</a> Value: <b>5039</b>
public static final	<a href="#">EXPORT_APPLICATION_ENTITIES_FAILED</a> Value: <b>7015</b>
public static final	<a href="#">FAULTY_SCREEN_IMAGE</a> Value: <b>7018</b>
public static final	<a href="#">FIELD_EXISTS_IN_ACTIONS</a> Value: <b>7004</b>
public static final	<a href="#">FILE_DOES_NOT_EXIST</a> Value: <b>5019</b>
public static final	<a href="#">IMPORT_APPLICATION_CONFIG_MISSING</a> Value: <b>7020</b>
public static final	<a href="#">IMPORT_APPLICATION_COULD_NOT_RESTORE_OVERRIDEN_APP_FROM_BACKUP</a> Value: <b>7022</b>
public static final	<a href="#">IMPORT_APPLICATION_ENTITIES_FAILED</a> Value: <b>7014</b>
public static final	<a href="#">IMPORT_APPLICATION_FAILED</a> Value: <b>7013</b>

public static final	<a href="#"><u>IMPORT_APPLICATION_HOST_CATEGORY_UNSUPPORTED</u></a> Value: <b>7021</b>
public static final	<a href="#"><u>INDEXATION_PROCESS_FAILED</u></a> Value: <b>7009</b>
public static final	<a href="#"><u>MAPPING_EXCEEDS_LINE</u></a> Value: <b>7007</b>
public static final	<a href="#"><u>MAPPING_OVERLAP</u></a> Value: <b>7005</b>
public static final	<a href="#"><u>MAPPING_UTILITY_FAILED</u></a> Value: <b>7010</b>
public static final	<a href="#"><u>MESSAGE_PATH_BY_STEP_COMPLETE</u></a> Value: <b>4001</b>
public static final	<a href="#"><u>MESSAGE_PATH_COMPLETE</u></a> Value: <b>4002</b>
public static final	<a href="#"><u>NO_ERROR</u></a> Value: <b>0</b>
public static final	<a href="#"><u>NO_WARNING</u></a> Value: <b>0</b>
public static final	<a href="#"><u>OBJECT_ALREADY_EXISTS</u></a> Value: <b>7001</b>
public static final	<a href="#"><u>OBJECT_NOT_DELETED</u></a> Value: <b>7003</b>
public static final	<a href="#"><u>OBJECT_NOT_FOUND</u></a> Value: <b>7002</b>
public static final	<a href="#"><u>OBJECT_NOT_UPDATED</u></a> Value: <b>7003</b>
public static final	<a href="#"><u>REPOSITORY_NOT_AVAILABLE</u></a> Value: <b>7000</b>
public static final	<a href="#"><u>REPOSITORY_NOT_CREATED</u></a> Value: <b>7006</b>
public static final	<a href="#"><u>REPOSITORY_NOT_SYNCHRONIZED</u></a> Value: <b>7016</b>



public static final	<a href="#">RESTRICTED_ACCESS_TO_URL</a> Value: <b>12001</b>
public static final	<a href="#">SESSION_CANCELED</a> Value: <b>11000</b>
public static final	<a href="#">SESSION_CANCELED_BY_ADMIN</a> Value: <b>11001</b>
public static final	<a href="#">SESSION_CANCELED_BY_INACTIVE_TIMEOUT</a> Value: <b>11002</b>
public static final	<a href="#">UPDATE_NONE_EXISTING_ENTITY</a> Value: <b>7017</b>
public static final	<a href="#">WARNING_30_DAYS_EVAL_VERSION</a> Value: <b>6100</b>
public static final	<a href="#">WARNING_60_DAYS_EVAL_VERSION</a> Value: <b>6101</b>
public static final	<a href="#">WARNING_90_DAYS_EVAL_VERSION</a> Value: <b>6102</b>
public static final	<a href="#">WARNING_DURING_CONNECT</a> Value: <b>3011</b>
public static final	<a href="#">WARNING_EVALUATION_EXPIRED</a> Value: <b>6103</b>
public static final	<a href="#">WARNING_FIELD_CONTENT_ALREADY_EXIST</a> Value: <b>3004</b>
public static final	<a href="#">WARNING_FIELD_IS_PROTECTED</a> Value: <b>3007</b>
public static final	<a href="#">WARNING_PATH_SCREEN_NOT_ADDED_TO_RESPONSE</a> Value: <b>3003</b>
public static final	<a href="#">WARNING_SCREEN_IMAGE_INSERT_FAILED</a> Value: <b>3006</b>
public static final	<a href="#">WARNING_WAIT_CONDITION_FAILED</a> Value: <b>3001</b>

## Constructor Summary

public	<a href="#">GXResponseCodes()</a>
--------	-----------------------------------

**Methods inherited from class** java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

**Fields****NO\_WARNING**

```
public static final int NO_WARNING
```

Constant value: 0

**WARNING\_WAIT\_CONDITION\_FAILED**

```
public static final int WARNING_WAIT_CONDITION_FAILED
```

Constant value: 3001

**WARNING\_PATH\_SCREEN\_NOT\_ADDED\_TO\_RESPONSE**

```
public static final int WARNING_PATH_SCREEN_NOT_ADDED_TO_RESPONSE
```

Constant value: 3003

**WARNING\_FIELD\_CONTENT\_ALREADY\_EXIST**

```
public static final int WARNING_FIELD_CONTENT_ALREADY_EXIST
```

Constant value: 3004

**WARNING\_SCREEN\_IMAGE\_INSERT\_FAILED**

```
public static final int WARNING_SCREEN_IMAGE_INSERT_FAILED
```

Constant value: 3006

**WARNING\_FIELD\_IS\_PROTECTED**

```
public static final int WARNING_FIELD_IS_PROTECTED
```

Constant value: 3007

**WARNING\_DURING\_CONNECT**

```
public static final int WARNING_DURING_CONNECT
```

Constant value: 3011

(continued from last page)

---

**MESSAGE\_PATH\_BY\_STEP\_COMPLETE**

```
public static final int MESSAGE_PATH_BY_STEP_COMPLETE
```

Constant value: 4001

---

**MESSAGE\_PATH\_COMPLETE**

```
public static final int MESSAGE_PATH_COMPLETE
```

Constant value: 4002

---

**NO\_ERROR**

```
public static final int NO_ERROR
```

Constant value: 0

---

**ERROR\_GENERAL**

```
public static final int ERROR_GENERAL
```

Constant value: 5000

---

**ERROR\_USER\_NOT\_CONNECTED**

```
public static final int ERROR_USER_NOT_CONNECTED
```

Constant value: 5001

---

**ERROR\_CANNOT\_CONNECT\_HOST**

```
public static final int ERROR_CANNOT_CONNECT_HOST
```

Constant value: 5002

---

**ERROR\_UNKNOWN\_SERVER\_ADDRESS**

```
public static final int ERROR_UNKNOWN_SERVER_ADDRESS
```

Constant value: 5003

---

**ERROR\_CANNOT\_CONNECT\_SERVER**

```
public static final int ERROR_CANNOT_CONNECT_SERVER
```

Constant value: 5004

---

**ERROR\_SOCKET**

```
public static final int ERROR_SOCKET
```

---

(continued from last page)

Error communicating with ApplinX server, may occur as a result of incompatible client and server version, or network mailfunctions.

Constant value: 5005

---

## **ERROR\_INDEX\_OUT\_OF\_BOUND**

```
public static final int ERROR_INDEX_OUT_OF_BOUND
```

Constant value: 5006

---

## **ERROR\_APPLICATION\_NOT\_DEFINED**

```
public static final int ERROR_APPLICATION_NOT_DEFINED
```

Constant value: 5007

---

## **ERROR\_USER\_ALREADY\_ATTACHED**

```
public static final int ERROR_USER_ALREADY_ATTACHED
```

Constant value: 5008

---

## **ERROR\_REPLAY\_FILE\_NOT\_FOUND**

```
public static final int ERROR_REPLAY_FILE_NOT_FOUND
```

Constant value: 5009

---

## **ERROR\_REPLAY\_FILE**

```
public static final int ERROR_REPLAY_FILE
```

Constant value: 5010

---

## **ERROR\_CONNECTION\_INFO**

```
public static final int ERROR_CONNECTION_INFO
```

Constant value: 5011

---

## **ERROR\_INCORRECT\_PASSWORD**

```
public static final int ERROR_INCORRECT_PASSWORD
```

Constant value: 5012

---

## **ERROR\_WAIT\_CONDITION\_NOT\_MET**

```
public static final int ERROR_WAIT_CONDITION_NOT_MET
```

Constant value: 5013

---

---

## **ERROR\_OVERWRITING**

public static final int **ERROR\_OVERWRITING**

Constant value: 5014

---

## **ERROR\_EXECUTING\_PATH\_FROMSCREENID**

public static final int **ERROR\_EXECUTING\_PATH\_FROMSCREENID**

Constant value: 5015

---

## **ERROR\_EXECUTING\_PATH\_TOSCREENID**

public static final int **ERROR\_EXECUTING\_PATH\_TOSCREENID**

Constant value: 5016

---

## **ERROR\_EXECUTING\_PATH\_GENERAL**

public static final int **ERROR\_EXECUTING\_PATH\_GENERAL**

Constant value: 5017

---

## **ERROR\_HOST\_SESSION\_DISCONNECTED**

public static final int **ERROR\_HOST\_SESSION\_DISCONNECTED**

Constant value: 5018

---

## **FILE\_DOES\_NOT\_EXIST**

public static final int **FILE\_DOES\_NOT\_EXIST**

Constant value: 5019

---

## **ERROR\_PRINTER\_DISABLED**

public static final int **ERROR\_PRINTER\_DISABLED**

Constant value: 5021

---

## **ERROR\_TIMEOUT\_EXPIRED**

public static final int **ERROR\_TIMEOUT\_EXPIRED**

Constant value: 5022

---

(continued from last page)

---

**ERROR\_LOGIN\_FAILED**

```
public static final int ERROR_LOGIN_FAILED
```

Constant value: 5023

---

**ERROR\_PERMISSION\_DENIED**

```
public static final int ERROR_PERMISSION_DENIED
```

Constant value: 5024

---

**ERROR\_PATH\_NOT\_FOUND**

```
public static final int ERROR_PATH_NOT_FOUND
```

Constant value: 5025

---

**ERROR\_PREFS\_SAVE\_FAILED**

```
public static final int ERROR_PREFS_SAVE_FAILED
```

Constant value: 5026

---

**ERROR\_SCREEN\_NOT\_SYNC**

```
public static final int ERROR_SCREEN_NOT_SYNC
```

Constant value: 5027

---

**ERROR\_WAIT\_CONDITION\_NOT\_VALID**

```
public static final int ERROR_WAIT_CONDITION_NOT_VALID
```

Constant value: 5039

---

**ERROR\_UNKNOWN\_ACTION**

```
public static final int ERROR_UNKNOWN_ACTION
```

Constant value: 5200

---

**ERROR\_CANT\_DELETE\_REFERENCED\_ENTITY**

```
public static final int ERROR_CANT_DELETE_REFERENCED_ENTITY
```

Constant value: 5101

---

**ERROR\_DB\_GENERAL**

```
public static final int ERROR_DB_GENERAL
```

---

(continued from last page)

Constant value: 5102

---

**ERROR\_CANT\_DELETE\_ASSIGNED\_EXCEPTION\_PATH**public static final int **ERROR\_CANT\_DELETE\_ASSIGNED\_EXCEPTION\_PATH**

Constant value: 5103

---

**ERROR\_PRINTER\_CONNECT\_ERROR**public static final int **ERROR\_PRINTER\_CONNECT\_ERROR**

Constant value: 5027

---

**ERROR\_EXECUTING\_PATH\_TYPE\_EXCEPTION**public static final int **ERROR\_EXECUTING\_PATH\_TYPE\_EXCEPTION**

Constant value: 5028

---

**ERROR\_EXECUTING\_PATH\_RESOLVE\_ACTION**public static final int **ERROR\_EXECUTING\_PATH\_RESOLVE\_ACTION**

Constant value: 5029

---

**ERROR\_CURSOR\_POSITION\_NOT\_SET**public static final int **ERROR\_CURSOR\_POSITION\_NOT\_SET**

Constant value: 5030

---

**ERROR\_FIELD\_CONTENT\_NOT\_SET**public static final int **ERROR\_FIELD\_CONTENT\_NOT\_SET**

Constant value: 5036

---

**ERROR\_REPLAY\_DEVICE\_INCOMPATIBILITY**public static final int **ERROR\_REPLAY\_DEVICE\_INCOMPATIBILITY**

Constant value: 5037

---

**ERROR\_IMPORT\_FILE\_REPOSITORY**public static final int **ERROR\_IMPORT\_FILE\_REPOSITORY**

Constant value: 5038

---

## **ERROR\_CONNECTING\_DEVICE\_NAME**

public static final int **ERROR\_CONNECTING\_DEVICE\_NAME**

Constant value: 5031

---

## **ERROR\_EXECUTING\_MAP\_SCREEN\_NOT\_IN\_MAP**

public static final int **ERROR\_EXECUTING\_MAP\_SCREEN\_NOT\_IN\_MAP**

Constant value: 5032

---

## **ERROR\_EXECUTING\_MAP\_NO\_PATH\_BETWEEN\_SCREEN**

public static final int **ERROR\_EXECUTING\_MAP\_NO\_PATH\_BETWEEN\_SCREEN**

Constant value: 5033

---

## **ERROR\_EXECUTING\_MAP\_NO\_MAP\_IN\_APPL**

public static final int **ERROR\_EXECUTING\_MAP\_NO\_MAP\_IN\_APPL**

Constant value: 5034

---

## **ERROR\_EXECUTING\_MAP\_BAD\_DESTINATION**

public static final int **ERROR\_EXECUTING\_MAP\_BAD\_DESTINATION**

Constant value: 5035

---

## **ERROR\_MAP\_STEP\_ALREADY\_EXISTS**

public static final int **ERROR\_MAP\_STEP\_ALREADY\_EXISTS**

Constant value: 5040

---

## **ERROR\_CREATING\_TABLE**

public static final int **ERROR\_CREATING\_TABLE**

Constant value: 5080

---

## **ERROR\_DISPLAY\_SESSION\_REQUEST\_FOR\_PRINTER\_SESSION**

public static final int **ERROR\_DISPLAY\_SESSION\_REQUEST\_FOR\_PRINTER\_SESSION**

Constant value: 5070

---



(continued from last page)

---

**ERROR\_CONCURRENT\_NUMBER\_OF\_USERS\_EXCEEDS\_LICENSE\_AGREEMENT**

```
public static final int ERROR_CONCURRENT_NUMBER_OF_USERS_EXCEEDS_LICENSE_AGREEMENT
```

Constant value: 5060

---

**ERROR\_LICENSE\_TERMS\_VAIOLATION**

```
public static final int ERROR_LICENSE_TERMS_VAIOLATION
```

Constant value: 5061

---

**ERROR\_SESSION\_VARIABLE\_DOESNT\_EXIST**

```
public static final int ERROR_SESSION_VARIABLE_DOESNT_EXIST
```

Constant value: 5090

---

**ERROR\_SESSION\_VARIABLE\_TYPE\_MISMATCH**

```
public static final int ERROR_SESSION_VARIABLE_TYPE_MISMATCH
```

Constant value: 5091

---

**ERROR\_SERVICE\_GENERAL**

```
public static final int ERROR_SERVICE_GENERAL
```

Constant value: 5050

---

**ERROR\_SERVICE\_NOT\_ACTIVE**

```
public static final int ERROR_SERVICE_NOT_ACTIVE
```

Constant value: 5051

---

**ERROR\_SERVICE\_NO\_AVAILABLE\_CONNECTION**

```
public static final int ERROR_SERVICE_NO_AVAILABLE_CONNECTION
```

Constant value: 5052

---

**ERROR\_SERVICE\_CONNECTION\_TIMEOUT\_EXPIRED**

```
public static final int ERROR_SERVICE_CONNECTION_TIMEOUT_EXPIRED
```

Constant value: 5053

---

(continued from last page)

---

**ERROR\_SERVICE\_PATH\_NOT\_FOUND**

```
public static final int ERROR_SERVICE_PATH_NOT_FOUND
```

Constant value: 5054

---

**ERROR\_SERVICE\_CONNECTION\_NOT\_READY**

```
public static final int ERROR_SERVICE_CONNECTION_NOT_READY
```

Constant value: 5055

---

**ERROR\_SERVICE\_NOT\_FOUND**

```
public static final int ERROR_SERVICE_NOT_FOUND
```

Constant value: 5056

---

**ERROR\_NATURAL\_DATA\_TRANSFER\_FAILURE**

```
public static final int ERROR_NATURAL_DATA_TRANSFER_FAILURE
```

Constant value: 5100

---

**ERROR\_NATURAL\_DATA\_TRANSFER\_INVALID\_STATE**

```
public static final int ERROR_NATURAL_DATA_TRANSFER_INVALID_STATE
```

Constant value: 5101

---

**ERROR\_HOST\_EXISTS\_IN\_APPLICATION**

```
public static final int ERROR_HOST_EXISTS_IN_APPLICATION
```

Constant value: 6000

---

**ERROR\_CONFIGURATION\_SAVE\_FAILED**

```
public static final int ERROR_CONFIGURATION_SAVE_FAILED
```

Constant value: 6001

---

**ERROR\_INCOMPATIBLE\_VERSIONS**

```
public static final int ERROR_INCOMPATIBLE_VERSIONS
```

Constant value: 6002

---

**ERROR\_SECURITY\_SAVE\_FAILED**

```
public static final int ERROR_SECURITY_SAVE_FAILED
```

---

(continued from last page)

Constant value: 6003

---

## **ERROR\_INVALID\_LICENSE\_KEY**

```
public static final int ERROR_INVALID_LICENSE_KEY
```

Constant value: 6004

---

## **ERROR\_LICENSE\_FILE\_NOT\_FOUND**

```
public static final int ERROR_LICENSE_FILE_NOT_FOUND
```

Constant value: 6005

---

## **ERROR\_REPLACING\_LICENSE**

```
public static final int ERROR_REPLACING_LICENSE
```

Constant value: 6006

---

## **WARNING\_30\_DAYS\_EVAL\_VERSION**

```
public static final int WARNING_30_DAYS_EVAL_VERSION
```

Constant value: 6100

---

## **WARNING\_60\_DAYS\_EVAL\_VERSION**

```
public static final int WARNING_60_DAYS_EVAL_VERSION
```

Constant value: 6101

---

## **WARNING\_90\_DAYS\_EVAL\_VERSION**

```
public static final int WARNING_90_DAYS_EVAL_VERSION
```

Constant value: 6102

---

## **WARNING\_EVALUATION\_EXPIRED**

```
public static final int WARNING_EVALUATION_EXPIRED
```

Constant value: 6103

---

## **ERROR\_INVALID\_LICENSE\_COMBINATION**

```
public static final int ERROR_INVALID_LICENSE_COMBINATION
```

Constant value: 6113

---

---

## **REPOSITORY\_NOT\_AVAILABLE**

```
public static final int REPOSITORY_NOT_AVAILABLE
```

Constant value: 7000

---

## **OBJECT\_ALREADY\_EXISTS**

```
public static final int OBJECT_ALREADY_EXISTS
```

Constant value: 7001

---

## **OBJECT\_NOT\_FOUND**

```
public static final int OBJECT_NOT_FOUND
```

Constant value: 7002

---

## **OBJECT\_NOT\_UPDATED**

```
public static final int OBJECT_NOT_UPDATED
```

Constant value: 7003

---

## **OBJECT\_NOT\_DELETED**

```
public static final int OBJECT_NOT_DELETED
```

Constant value: 7003

---

## **FIELD\_EXISTS\_IN\_ACTIONS**

```
public static final int FIELD_EXISTS_IN_ACTIONS
```

Constant value: 7004

---

## **MAPPING\_OVERLAP**

```
public static final int MAPPING_OVERLAP
```

Constant value: 7005

---

## **REPOSITORY\_NOT\_CREATED**

```
public static final int REPOSITORY_NOT_CREATED
```

Constant value: 7006

---

(continued from last page)

---

**MAPPING\_EXCEEDS\_LINE**

```
public static final int MAPPING_EXCEEDS_LINE
```

Constant value: 7007

---

**APPLICATION\_RELOAD\_FAILED**

```
public static final int APPLICATION_RELOAD_FAILED
```

Constant value: 7008

---

**INDEXATION\_PROCESS\_FAILED**

```
public static final int INDEXATION_PROCESS_FAILED
```

Constant value: 7009

---

**MAPPING\_UTILITY\_FAILED**

```
public static final int MAPPING_UTILITY_FAILED
```

Constant value: 7010

---

**DESTINATION\_FOLDER\_IS\_SAME**

```
public static final int DESTINATION_FOLDER_IS_SAME
```

Constant value: 7011

---

**DESTINATION\_FOLDER\_IS\_SUBFOLDER**

```
public static final int DESTINATION_FOLDER_IS_SUBFOLDER
```

Constant value: 7012

---

**IMPORT\_APPLICATION\_FAILED**

```
public static final int IMPORT_APPLICATION_FAILED
```

Constant value: 7013

---

**IMPORT\_APPLICATION\_ENTITIES\_FAILED**

```
public static final int IMPORT_APPLICATION_ENTITIES_FAILED
```

Constant value: 7014

---

**EXPORT\_APPLICATION\_ENTITIES\_FAILED**

```
public static final int EXPORT_APPLICATION_ENTITIES_FAILED
```

---

(continued from last page)

Constant value: 7015

---

**REPOSITORY\_NOT\_SYNCHRONIZED**public static final int **REPOSITORY\_NOT\_SYNCHRONIZED**

Constant value: 7016

---

**UPDATE\_NONE\_EXISTING\_ENTITY**public static final int **UPDATE\_NONE\_EXISTING\_ENTITY**

Constant value: 7017

---

**FAULTY\_SCREEN\_IMAGE**public static final int **FAULTY\_SCREEN\_IMAGE**

Constant value: 7018

---

**ERROR\_SYNCHRONIZING\_REPOSITORY**public static final int **ERROR\_SYNCHRONIZING\_REPOSITORY**

Constant value: 7019

---

**IMPORT\_APPLICATION\_CONFIG\_MISSING**public static final int **IMPORT\_APPLICATION\_CONFIG\_MISSING**

Constant value: 7020

---

**IMPORT\_APPLICATION\_HOST\_CATEGORY\_UNSUPPORTED**public static final int **IMPORT\_APPLICATION\_HOST\_CATEGORY\_UNSUPPORTED**

Constant value: 7021

---

**IMPORT\_APPLICATION\_COULD\_NOT\_RESTORE\_OVERRIDEN\_APP\_FROM\_BACKUP**public static final int **IMPORT\_APPLICATION\_COULD\_NOT\_RESTORE\_OVERRIDEN\_APP\_FROM\_BACKUP**

Constant value: 7022

---

**ERROR\_RETRIEVING\_WSDL\_SERVICES**public static final int **ERROR\_RETRIEVING\_WSDL\_SERVICES**

Constant value: 8000

---

## **ERROR\_CREATING\_ENTITIES\_FROM\_WSDL**

public static final int **ERROR\_CREATING\_ENTITIES\_FROM\_WSDL**

Constant value: 8001

---

## **ERROR\_RETRIEVING\_WSDL\_SERVICES\_PERMISSION\_DENIED**

public static final int **ERROR\_RETRIEVING\_WSDL\_SERVICES\_PERMISSION\_DENIED**

Constant value: 8002

---

## **ERROR\_CHANGING\_WEB\_SERVICE\_TARGET\_SERVER**

public static final int **ERROR\_CHANGING\_WEB\_SERVICE\_TARGET\_SERVER**

Constant value: 8500

---

## **ERROR\_EXECUTING\_PROCEDURE\_GENERAL**

public static final int **ERROR\_EXECUTING\_PROCEDURE\_GENERAL**

Constant value: 9000

---

## **ERROR\_DEPLOYMENT\_GENERAL**

public static final int **ERROR\_DEPLOYMENT\_GENERAL**

Constant value: 10000

---

## **ERROR\_DEPLOYING\_WEB\_SERVICE**

public static final int **ERROR\_DEPLOYING\_WEB\_SERVICE**

Constant value: 10001

---

## **ERROR\_UNDEPLOYING\_WEB\_SERVICE**

public static final int **ERROR\_UNDEPLOYING\_WEB\_SERVICE**

Constant value: 10002

---

## **ERROR\_UPDATING\_WEB\_SERVICE**

public static final int **ERROR\_UPDATING\_WEB\_SERVICE**

Constant value: 10003

---

(continued from last page)

---

**ERROR\_EXPORTING\_WEB\_SERVICE**

```
public static final int ERROR_EXPORTING_WEB_SERVICE
```

Constant value: 10004

---

**ERROR\_CENTRASITE\_REGISTRATION**

```
public static final int ERROR_CENTRASITE_REGISTRATION
```

Constant value: 10005

---

**ERROR\_DEPLOYMENT\_HANDLER\_NOT\_AVAILABLE**

```
public static final int ERROR_DEPLOYMENT_HANDLER_NOT_AVAILABLE
```

Constant value: 10006

---

**ERROR\_INCOMPATIBLE\_WSS\_VERSION**

```
public static final int ERROR_INCOMPATIBLE_WSS_VERSION
```

Constant value: 10007

---

**SESSION\_CANCELED**

```
public static final int SESSION_CANCELED
```

Constant value: 11000

---

**SESSION\_CANCELED\_BY\_ADMIN**

```
public static final int SESSION_CANCELED_BY_ADMIN
```

Constant value: 11001

---

**SESSION\_CANCELED\_BY\_INACTIVE\_TIMEOUT**

```
public static final int SESSION_CANCELED_BY_INACTIVE_TIMEOUT
```

Constant value: 11002

---

**RESTRICTED\_ACCESS\_TO\_URL**

```
public static final int RESTRICTED_ACCESS_TO_URL
```

Constant value: 12001

---

**Constructors**

---



(continued from last page)

## **GXResponseCodes**

```
public GXResponseCodes()
```

---

Package

**com.sabratec.applinx.framework**

## com.sabratec.applinx.framework Class GXAppConfig

java.lang.Object

↳ com.sabratec.applinx.framework.GXAppConfig

### All Implemented Interfaces:

java.io.Serializable

### Direct Known Subclasses:

[GXWebAppConfig](#)

```
public class GXAppConfig
extends Object
implements java.io.Serializable
```

framework configurations basic class

## Constructor Summary

public	<a href="#">GXAppConfig()</a>
--------	-------------------------------

## Method Summary

String	<a href="#">get_Build()</a> For .NET framework usage.
boolean	<a href="#">get_CaptureTagsEvents()</a> <b>Deprecated.</b> Events are capture on the client side. Use <code>GX_CaptureInputTagEvents</code> in <code>_inc_applconf.js</code>
boolean	<a href="#">get_DesignMode()</a> For .NET framework usage.
String	<a href="#">get_ErrorForm()</a> For .NET framework usage.
int	<a href="#">get_FieldsModification()</a> <b>Deprecated.</b> - ApplinX determines the modified fields both from content difference, and typed fields.
int	<a href="#">get_FieldTypesInUse()</a> For .NET framework usage.
<a href="#">GXFtpConfig</a>	<a href="#">get_FtpConfig()</a> For .NET framework usage.
String	<a href="#">get_IndexForm()</a> For .NET framework usage.
boolean	<a href="#">get_Instant()</a> For .NET framework usage.

<a href="#">GXRenderConfig</a>	<a href="#">get_InstantConfig()</a> For .NET framework usage.
String	<a href="#">get_InstantForm()</a> For .NET framework usage.
String	<a href="#">get_InstantWinForm()</a> For .NET framework usage.
boolean	<a href="#">get_IsInstant()</a> For .NET framework usage.
<a href="#">GXMacroConfig</a>	<a href="#">get_MacroConfig()</a> For .NET framework usage.
String	<a href="#">get_MapPath()</a> For .NET framework usage.
boolean	<a href="#">get_PerformSyncCheckInInstant()</a> For .NET framework usage.
GXProceduresConfig	<a href="#">get_ProceduresConfig()</a> For .NET framework usage.
boolean	<a href="#">get_ReflectBGColors()</a> For .NET framework usage.
boolean	<a href="#">get_ReflectEmulationBehaviour()</a> For .NET framework usage.
boolean	<a href="#">get_ReflectFGColors()</a> For .NET framework usage.
boolean	<a href="#">get_ReflectHostCursor()</a> For .NET framework usage.
boolean	<a href="#">get_ReflectHostProtected()</a> For .NET framework usage.
boolean	<a href="#">get_ReflectMaxlength()</a> For .NET framework usage.
<a href="#">GXConfig</a>	<a href="#">get_SessionConfig()</a> For .NET framework usage.
<a href="#">GXSSOConfig</a>	<a href="#">get_SingleSignOnConfig()</a> For .NET framework usage.
<a href="#">GXSSOConfig</a>	<a href="#">get_SsoConfig()</a> For .NET framework usage.
boolean	<a href="#">get_SupportDupAndFieldMark()</a> For .NET framework usage.
<a href="#">GXTableBuildConfig</a>	<a href="#">get_TableBuildConfig()</a> For .NET framework usage.
boolean	<a href="#">get_TrimLabels()</a> For .NET framework usage.

boolean	<a href="#">get_UseFolders()</a> For .NET framework usage.
boolean	<a href="#">get_UseKeyboardPFKeys()</a> <b>Deprecated.</b> Please use the configuration file <i>config/gx_clientConfig.xml</i>
boolean	<a href="#">get_UseModalWindows()</a> For .NET framework usage.
boolean	<a href="#">get_UseScreenGroups()</a> For .NET framework usage.
String	<a href="#">get_Version()</a> For .NET framework usage.
String	<a href="#">getBuild()</a> Get the current ApplinX build number.
boolean	<a href="#">getCaptureTagsEvents()</a> <b>Deprecated.</b> Events are capture on the client side. Use <i>GX_CaptureInputTagEvents</i> in <i>_inc_applconf.js</i>
boolean	<a href="#">getDesignMode()</a> Get the design of the application, for example: to show the composer link.
String	<a href="#">getErrorForm()</a> The value of the error page.
int	<a href="#">getFieldsModification()</a> <b>Deprecated.</b> - ApplinX determines the modified fields both from content difference, and typed fields
int	<a href="#">getFieldTypesInUse()</a> Enumeration for type of fields should the framework read/update: Possible values: GXFrameworkHandler.GX_USE_ALL_FIELDS GXFrameworkHandler.GX_USE_APPFIELDS_AND_INPUTS GXFrameworkHandler.GX_USE_APPFIELDS GXFrameworkHandler.GX_USE_SINGLE_APPFIELDS
<a href="#">GXftpConfig</a>	<a href="#">getFtpConfig()</a> Contains the FTP configuration
String	<a href="#">getIndexForm()</a>
<a href="#">GXRenderConfig</a>	<a href="#">getInstantConfig()</a> Contains the instant configuration
String	<a href="#">getInstantForm()</a> The value of the instant page.
String	<a href="#">getInstantWinForm()</a> The value of the page when a host window is shown and the framework is using the pop-up manager.
<a href="#">GXMacroConfig</a>	<a href="#">getMacroConfig()</a> Contains the macro configuration
String	<a href="#">getMapPath()</a> <b>Deprecated.</b> Application map are defined globally for each application. Map name will be ignored

boolean	<a href="#">getPerformSyncCheckInInstant()</a> Each page that inherits from GXDefaultLogicWebForm (.NET) / GXDefaultLogicContext (JSP) checks synchronization against the current host screen.
GXProceduresConfig	<a href="#">getProceduresConfig()</a> Contains the procedures configuration for activating ApplinX procedures
boolean	<a href="#">getReflectBGColors()</a> Get if to dynamically add a relevant back color css to the page fields when calling gx_fillForm.
boolean	<a href="#">getReflectEmulationBehaviour()</a> Determines whether to dynamically add to input fields emulation attributes when calling gx_fillForm.
boolean	<a href="#">getReflectFGColors()</a> Get if to dynamically add a relevant color css to the page fields when calling gx_fillForm.
boolean	<a href="#">getReflectHostCursor()</a> When inheriting from GXBasicWebForm (.NET) or from GXBasicContext (JSP), ApplinX full JavaScript is not added to the page.
boolean	<a href="#">getReflectHostProtected()</a> Determines whether to dynamically check the page fields when gx_fillForm is called.
boolean	<a href="#">getReflectMaxlength()</a> Determines whether to dynamically add a maxlength attribute to input fields when calling gx_fillForm in generated pages.
<a href="#">GXConfig</a>	<a href="#">getSessionConfig()</a> Contains the ApplinX session connection declaration
<a href="#">GXSSOConfig</a>	<a href="#">getSingleSignOnConfig()</a> Contains single signon configurations
boolean	<a href="#">getSupportDupAndFieldMark()</a> Is supporting Mainframe host keys Dup and Fieldmark in instant and generated pages.
<a href="#">GXTableBuildConfig</a>	<a href="#">getTableBuildConfig()</a> Contains the table configuration for generated pages
boolean	<a href="#">getTrimLabels()</a> Is trimming the protected field when gx_fillForm is called.
boolean	<a href="#">getUseFolders()</a> Determines whether to use ApplinX folders also for the Web application.
boolean	<a href="#">getUseKeyboardPFKeys()</a> <b>Deprecated.</b> Please use the configuration file config/gx_clientConfig.xml
boolean	<a href="#">getUseModalWindows()</a> Determines whether to activate ApplinX pop-up manager and transform recognized host windows for Web pop-up windows.
boolean	<a href="#">getUseScreenGroups()</a> Determines whether to load a page for the current screen group, when the current screen does not contain a matching page.
String	<a href="#">getVersion()</a> Get the current ApplinX version.

boolean	<a href="#">isInstant()</a> For internal use
void	<a href="#">set_CaptureTagsEvents</a> (boolean captureTagsEvents) <b>Deprecated.</b> <i>Events are capture on the client side. Use GX_CaptureInputTagEvents in _inc_applconf.js</i>
void	<a href="#">set_DesignMode</a> (boolean isDesignMode) For .NET framework usage.
void	<a href="#">set_ErrorForm</a> (String errorForm) For .NET framework usage.
void	<a href="#">set_FieldsModification</a> (int fieldsModification) <b>Deprecated.</b> - <i>Applinx determines the modified fields both from content difference, and typed fields.</i>
void	<a href="#">set_FieldTypesInUse</a> (int fieldTypesInUse) For .NET framework usage.
void	<a href="#">set_FtpConfig</a> ( <a href="#">GXFtpConfig</a> ftpConfig) For .NET framework usage.
void	<a href="#">set_IndexForm</a> (String indexForm) For .NET framework usage.
void	<a href="#">set_Instant</a> (boolean isInstant) For .NET framework usage.
void	<a href="#">set_InstantConfig</a> ( <a href="#">GXRenderConfig</a> instantConfig) For .NET framework usage.
void	<a href="#">set_InstantForm</a> (String instantForm) For .NET framework usage.
void	<a href="#">set_InstantWinForm</a> (String instantWinForm) For .NET framework usage.
void	<a href="#">set_IsInstant</a> (boolean isInstant) For .NET framework usage.
void	<a href="#">set_MacroConfig</a> ( <a href="#">GXMacroConfig</a> macroConfig) For .NET framework usage.
void	<a href="#">set_MapPath</a> (String mapPath) For .NET framework usage.
void	<a href="#">set_PerformSyncCheckInInstant</a> (boolean performSyncCheckInInstant) For .NET framework usage.
void	<a href="#">set_ProceduresConfig</a> ( <a href="#">GXProceduresConfig</a> proceduresConfig) For .NET framework usage.
void	<a href="#">set_ReflectBGColors</a> (boolean reflectBGColors) For .NET framework usage.
void	<a href="#">set_ReflectEmulationBehaviour</a> (boolean reflectEmulationBehaviour) For .NET framework usage.

void	<a href="#">set_ReflectFGColors</a> (boolean reflectFGColors) Set if to dynamically add a relevant color css to the page fields when calling gx_fillForm.
void	<a href="#">set_ReflectHostCursor</a> (boolean reflectHostCursor) For .NET framework usage.
void	<a href="#">set_ReflectHostProtected</a> (boolean reflectHostProtected) For .NET framework usage.
void	<a href="#">set_ReflectMaxlength</a> (boolean reflectMaxlength) For .NET framework usage.
void	<a href="#">set_SessionConfig</a> (GXConfig sessionConfig) For .NET framework usage.
void	<a href="#">set_SingleSignOnConfig</a> (GXSSOConfig ssoConfig) For .NET framework usage.
void	<a href="#">set_SsoConfig</a> (GXSSOConfig ssoConfig) For .NET framework usage.
void	<a href="#">set_SupportDupAndFieldMark</a> (boolean supportDupAndFieldMark) For .NET framework usage.
void	<a href="#">set_TableBuildConfig</a> (GXTableBuildConfig tableConfig) For .NET framework usage.
void	<a href="#">set_TrimLabels</a> (boolean TrimLabels) For .NET framework usage.
void	<a href="#">set_UseFolders</a> (boolean useFolders) For .NET framework usage.
void	<a href="#">set_UseKeyboardPFKeys</a> (boolean useKeyboardPFKeys) <b>Deprecated.</b> Please use the configuration file config/gx_clientConfig.xml
void	<a href="#">set_UseModalWindows</a> (boolean useModalWindows) For .NET framework usage.
void	<a href="#">set_UseScreenGroups</a> (boolean useScreenGroups) For .NET framework usage.
void	<a href="#">setCaptureTagsEvents</a> (boolean captureTagsEvents) <b>Deprecated.</b> Events are capture on the client side. Use GX_CaptureInputTagEvents in _inc_applconf.js
void	<a href="#">setDesignMode</a> (boolean isDesignMode) Set the design of the application, for example: to show the composer link.
void	<a href="#">setErrorForm</a> (String errorForm) The value of the error page.
void	<a href="#">setFieldsModification</a> (int fieldsModification) <b>Deprecated.</b> - ApplinX determines the modified fields both from content difference, and typed fields



void	<a href="#">setFieldTypesInUse</a> (int fieldTypesInUse) Enumeration for type of fields should the framework read/update: Possible values: GXFrameworkHandler.GX_USE_ALL_FIELDS GXFrameworkHandler.GX_USE_APPFIELDS_AND_INPUTS GXFrameworkHandler.GX_USE_APPFIELDS GXFrameworkHandler.GX_USE_SINGLE_APPFIELDS
void	<a href="#">setFtpConfig</a> ( <a href="#">GXFtpConfig</a> ftpConfig) For internal use
void	<a href="#">setIndexForm</a> (String indexForm)
void	<a href="#">setInstantConfig</a> ( <a href="#">GXRenderConfig</a> instantConfig) For internal use
void	<a href="#">setInstantForm</a> (String instantForm) Returns the value of the instant page.
void	<a href="#">setInstantWinForm</a> (String instantWinForm) The value of the page when a host window is shown and the framework is using the pop-up manager.
void	<a href="#">setIsInstant</a> (boolean isInstant) For internal use
void	<a href="#">setMacroConfig</a> ( <a href="#">GXMacroConfig</a> macroConfig) For internal use
void	<a href="#">setMapPath</a> (String mapPath) <b>Deprecated.</b> Application map are defined globally for each application. Map name will be ignored
void	<a href="#">setPerformSyncCheckInInstant</a> (boolean performSyncCheckInInstant) Each page that inherits from GXDefaultLogicWebForm (.NET) / GXDefaultLogicContext (JSP) checks synchronization against the current host screen.
void	<a href="#">setProceduresConfig</a> ( <a href="#">GXProceduresConfig</a> proceduresConfig) For internal use
void	<a href="#">setReflectBGColors</a> (boolean reflectBGColors) Determines whether the field background color in the Web application will be the same as the field background color in the host.
void	<a href="#">setReflectEmulationBehaviour</a> (boolean reflectEmulationBehaviour) Determines whether to add emulation attributes in text fields.
void	<a href="#">setReflectFGColors</a> (boolean reflectFGColors) Determines whether the field foreground color in the Web application will be the same as the field foreground color in the host.
void	<a href="#">setReflectHostCursor</a> (boolean reflectHostCursor) When inheriting from GXBasicWebForm (.NET) or from GXBasicContext (JSP), ApplinX full JavaScript is not added to the page.
void	<a href="#">setReflectHostProtected</a> (boolean reflectHostProtected) Determines whether the protected fields in the host will be read only in the Web application (when gx_fillForm is called).
void	<a href="#">setReflectMaxlength</a> (boolean reflectMaxlength) Determines whether the fields' maximum length attribute in the host will be the maximum length attribute in the input fields in the Web application.

void	<a href="#">setSessionConfig</a> ( <a href="#">GXConfig</a> sessionConfig) For internal use
void	<a href="#">setSingleSignOnConfig</a> ( <a href="#">GXSSOConfig</a> ssoConfig) For internal use
void	<a href="#">setSupportDupAndFieldMark</a> (boolean supportDupAndFieldMark) Dup and FieldMark are special Mainframe characters.
void	<a href="#">setTableBuildConfig</a> ( <a href="#">GXTableBuildConfig</a> tableBuildConfig) For internal use
void	<a href="#">setTrimLabels</a> (boolean TrimLabels) <b>Deprecated.</b> Use ApplinX server configuration, screen content tab
void	<a href="#">setUseFolders</a> (boolean useFolders) Determines whether the Web application folder structure should be the same folder structure as configured in the ApplinX repository.
void	<a href="#">setUseKeyboardPFKeys</a> (boolean useKeyboardPFKeys) <b>Deprecated.</b> Please use the configuration file <i>config/gx_clientConfig.xml</i>
void	<a href="#">setUseModalWindows</a> (boolean useModalWindows) Determines whether to activate ApplinX pop-up manager and transform recognized host windows to Web pop-up windows.
void	<a href="#">setUseScreenGroups</a> (boolean useScreenGroups) Determines whether to load a page for the current screen group, when the current screen does not contain a matching page.

**Methods inherited from class** java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Constructors

### GXAppConfig

public **GXAppConfig**()

## Methods

### get\_Version

public String **get\_Version**()

For .NET framework usage. Expose the method as a property.

### getVersion

public String **getVersion**()

Get the current ApplinX version.

**Returns:**

(continued from last page)

String

---

## get\_Build

```
public String get_Build()
```

For .NET framework usage. Expose the method as a property.

---

## getBuild

```
public String getBuild()
```

Get the current ApplinX build number.

**Returns:**

String

---

## get\_DesignMode

```
public boolean get_DesignMode()
```

For .NET framework usage. Expose the method as a property.

---

## set\_DesignMode

```
public void set_DesignMode(boolean isDesignMode)
```

For .NET framework usage. Expose the method as a property.

---

## getDesignMode

```
public boolean getDesignMode()
```

Get the design of the application, for example: to show the composer link. Default value: true

**Returns:**

String

---

## setDesignMode

```
public void setDesignMode(boolean isDesignMode)
```

Set the design of the application, for example: to show the composer link. It is recommended to change this parameter to false when deploying the application to production Default value: true

---

## get\_UseKeyboardPFKeys

```
public boolean get_UseKeyboardPFKeys()
```

**Deprecated.** Please use the configuration file *config/gx\_clientConfig.xml*

For .NET framework usage. Expose the method as a property.

---

## set\_UseKeyboardPFKeys

```
public void set_UseKeyboardPFKeys(boolean useKeyboardPFKeys)
```

**Deprecated.** Please use the configuration file *config/gx\_clientConfig.xml*

---

---

(continued from last page)

For .NET framework usage. Expose the method as a property.

---

## getUseKeyboardPFKeys

```
public boolean getUseKeyboardPFKeys()
```

**Deprecated.** Please use the configuration file *config/gx\_clientConfig.xml*

Is the pf keys on the browser are activated. Default value: true.

**Returns:**

boolean

---

## setUseKeyboardPFKeys

```
public void setUseKeyboardPFKeys(boolean useKeyboardPFKeys)
```

**Deprecated.** Please use the configuration file *config/gx\_clientConfig.xml*

Set if the pf keys on the browser are activated. Default value: true.

---

## get\_SupportDupAndFieldMark

```
public boolean get_SupportDupAndFieldMark()
```

For .NET framework usage. Expose the method as a property.

---

## set\_SupportDupAndFieldMark

```
public void set_SupportDupAndFieldMark(boolean supportDupAndFieldMark)
```

For .NET framework usage. Expose the method as a property.

---

## getSupportDupAndFieldMark

```
public boolean getSupportDupAndFieldMark()
```

Is supporting Mainframe host keys Dup and Fieldmark in instant and generated pages.

**Returns:**

boolean

---

## setSupportDupAndFieldMark

```
public void setSupportDupAndFieldMark(boolean supportDupAndFieldMark)
```

Dup and FieldMark are special Mainframe characters. In Instant and generated pages, a user can send to the host a non printable character in specific input fields.

---

## get\_FieldTypesInUse

```
public int get_FieldTypesInUse()
```

For .NET framework usage. Expose the method as a property.

---

## set\_FieldTypesInUse

```
public void set_FieldTypesInUse(int fieldTypesInUse)
```

---

(continued from last page)

For .NET framework usage. Expose the method as a property.

---

## getFieldTypesInUse

```
public int getFieldTypesInUse()
```

Enumeration for type of fields should the framework read/update: Possible values:  
GXFrameworkHandler.GX\_USE\_ALL\_FIELDS GXFrameworkHandler.GX\_USE\_APPFIELDS\_AND\_INPUTS  
GXFrameworkHandler.GX\_USE\_APPFIELDS GXFrameworkHandler.GX\_USE\_SINGLE\_APPFIELDS

---

## setFieldTypesInUse

```
public void setFieldTypesInUse(int fieldTypesInUse)
```

Enumeration for type of fields should the framework read/update: Possible values:  
GXFrameworkHandler.GX\_USE\_ALL\_FIELDS GXFrameworkHandler.GX\_USE\_APPFIELDS\_AND\_INPUTS  
GXFrameworkHandler.GX\_USE\_APPFIELDS GXFrameworkHandler.GX\_USE\_SINGLE\_APPFIELDS

---

## get\_TrimLabels

```
public boolean get_TrimLabels()
```

For .NET framework usage. Expose the method as a property.

---

## set\_TrimLabels

```
public void set_TrimLabels(boolean TrimLabels)
```

For .NET framework usage. Expose the method as a property.

---

## getTrimLabels

```
public boolean getTrimLabels()
```

Is trimming the protected field when gx\_fillForm is called.

---

## setTrimLabels

```
public void setTrimLabels(boolean TrimLabels)
```

**Deprecated.** Use *Applinx server configuration, screen content tab*

---

## get\_InstantForm

```
public String get_InstantForm()
```

For .NET framework usage. Expose the method as a property.

---

## set\_InstantForm

```
public void set_InstantForm(String instantForm)
```

For .NET framework usage. Expose the method as a property.

---

## getInstantForm

```
public String getInstantForm()
```

---

---

(continued from last page)

The value of the instant page. By default: instant.jsp (JSP) / instant.aspx (.NET)

---

### **setInstantForm**

```
public void setInstantForm(String instantForm)
```

Returns the value of the instant page. By default: instant.jsp (JSP) / instant.aspx (.NET)

---

### **get\_InstantWinForm**

```
public String get_InstantWinForm()
```

For .NET framework usage. Expose the method as a property.

---

### **set\_InstantWinForm**

```
public void set_InstantWinForm(String instantWinForm)
```

For .NET framework usage. Expose the method as a property.

---

### **getInstantWinForm**

```
public String getInstantWinForm()
```

The value of the page when a host window is shown and the framework is using the pop-up manager. By default: instantWin.jsp (JSP) / instantWin.aspx (.NET)

---

### **setInstantWinForm**

```
public void setInstantWinForm(String instantWinForm)
```

The value of the page when a host window is shown and the framework is using the pop-up manager. By default: instantWin.jsp (JSP) / instantWin.aspx (.NET)

---

### **get\_ErrorForm**

```
public String get_ErrorForm()
```

For .NET framework usage. Expose the method as a property.

---

### **set\_ErrorForm**

```
public void set_ErrorForm(String errorForm)
```

For .NET framework usage. Expose the method as a property.

---

### **getErrorForm**

```
public String getErrorForm()
```

The value of the error page. By default: error.jsp (JSP) / error.aspx (.NET)

---

### **setErrorForm**

```
public void setErrorForm(String errorForm)
```

The value of the error page. By default: error.jsp (JSP) / error.aspx (.NET)

---

## get\_ReflectFGColors

```
public boolean get_ReflectFGColors()
```

For .NET framework usage. Expose the method as a property.

---

## set\_ReflectFGColors

```
public void set_ReflectFGColors(boolean reflectFGColors)
```

Set if to dynamically add a relevant color css to the page fields when calling gx\_fillForm. The relevant css classes are in styles\_instant.css in the new application /css\_colors folder in the emulation template.

---

## getReflectFGColors

```
public boolean getReflectFGColors()
```

Get if to dynamically add a relevant color css to the page fields when calling gx\_fillForm. The relevant css classes are in styles\_instant.css in the new application /css\_colors folder in the emulation template.

**Returns:**

whether to dynamically add a relevant color css to the page input fields

---

## setReflectFGColors

```
public void setReflectFGColors(boolean reflectFGColors)
```

Determines whether the field foreground color in the Web application will be the same as the field foreground color in the host. The relevant css classes are in css/styles\_generated.css file.

**Parameters:**

reflectFGColor - whether to dynamically add a relevant color css to the page input fields

---

## get\_ReflectBGColors

```
public boolean get_ReflectBGColors()
```

For .NET framework usage. Expose the method as a property.

---

## set\_ReflectBGColors

```
public void set_ReflectBGColors(boolean reflectBGColors)
```

For .NET framework usage. Expose the method as a property.

---

## getReflectBGColors

```
public boolean getReflectBGColors()
```

Get if to dynamically add a relevant back color css to the page fields when calling gx\_fillForm. The relevant css classes are in css/styles\_generated.css file.

**Returns:**

whether to dynamically add a relevant back color css to the page input fields

---

(continued from last page)

---

## setReflectBGColors

```
public void setReflectBGColors(boolean reflectBGColors)
```

Determines whether the field background color in the Web application will be the same as the field background color in the host. The relevant css classes are in `css/styles_generated.css` file. `/css_colors` folder in the emulation template.

**Parameters:**

`reflectBGColor` - whether to dynamically add a relevant back color css to the page fields

---

## get\_ReflectEmulationBehaviour

```
public boolean get_ReflectEmulationBehaviour()
```

For .NET framework usage. Expose the method as a property.

---

## set\_ReflectEmulationBehaviour

```
public void set_ReflectEmulationBehaviour(boolean reflectEmulationBehaviour)
```

For .NET framework usage. Expose the method as a property.

---

## getReflectEmulationBehaviour

```
public boolean getReflectEmulationBehaviour()
```

Determines whether to dynamically add to input fields emulation attributes when calling `gx_fillForm`. The emulation attributes cause the input fields to behave like host emulation unprotected fields.

**Returns:**

whether to dynamically add to input fields emulation attributes

---

## setReflectEmulationBehaviour

```
public void setReflectEmulationBehaviour(boolean reflectEmulationBehaviour)
```

Determines whether to add emulation attributes in text fields. Emulation attributes are special ApplinX attributes that start with "gx\_" and are added to the rendered text field tag. These attributes provide additional information to the ApplinX JavaScript engine, which changes the behavior of the text fields. The attributes are:

- `gx_autoSkip` - will cause the text field to skip to the neighboring text field, once it is filled with content.
- `gx_dt` - The data type of the field. See [GXBaseObjectConstants](#) for possible data types.
- `gx_ra` - AS/400 right adjust
- `gx_ae` - AS/400 automatic enter

**Parameters:**

`reflectEmulationBehaviour` - whether to add emulation attributes in text fields

---

## get\_ReflectHostCursor

```
public boolean get_ReflectHostCursor()
```

For .NET framework usage. Expose the method as a property.

---



(continued from last page)

---

## set\_ReflectHostCursor

```
public void set_ReflectHostCursor(boolean reflectHostCursor)
```

For .NET framework usage. Expose the method as a property.

---

## getReflectHostCursor

```
public boolean getReflectHostCursor()
```

When inheriting from GXBasicWebForm (.NET) or from GXBasicContext (JSP), ApplinX full JavaScript is not added to the page. This causes the page not to behave according to the host screen behavior. This parameter adds the functionality of focusing on an input field according to the host.

**Returns:**

whether to add the functionality of focusing on an input field according to the host

---

## setReflectHostCursor

```
public void setReflectHostCursor(boolean reflectHostCursor)
```

When inheriting from GXBasicWebForm (.NET) or from GXBasicContext (JSP), ApplinX full JavaScript is not added to the page. This causes the page not to behave according to the host screen behavior. This parameter adds the functionality of focusing on an input field according to the host.

**Parameters:**

reflectHostCursor - whether to add the functionality of focusing on an input field according to the host

---

## get\_ReflectMaxlength

```
public boolean get_ReflectMaxlength()
```

For .NET framework usage. Expose the method as a property.

---

## set\_ReflectMaxlength

```
public void set_ReflectMaxlength(boolean reflectMaxlength)
```

For .NET framework usage. Expose the method as a property.

---

## getReflectMaxlength

```
public boolean getReflectMaxlength()
```

Determines whether to dynamically add a maxlength attribute to input fields when calling gx\_fillForm in generated pages. This saves you the work of manually adding this attribute to each input field when designing the page.

**Returns:**

whether to dynamically add a maxlength attribute to input fields

---

## setReflectMaxlength

```
public void setReflectMaxlength(boolean reflectMaxlength)
```

Determines whether the fields' maximum length attribute in the host will be the maximum length attribute in the input fields in the Web application. This saves you the work of manually adding this attribute to each input field when designing the page.

**Parameters:**

reflectMaxlength - whether to dynamically add a maxlength attribute to input fields

---

---

## get\_ReflectHostProtected

```
public boolean get_ReflectHostProtected()
```

For .NET framework usage. Expose the method as a property.

---

## set\_ReflectHostProtected

```
public void set_ReflectHostProtected(boolean reflectHostProtected)
```

For .NET framework usage. Expose the method as a property.

---

## getReflectHostProtected

```
public boolean getReflectHostProtected()
```

Determines whether to dynamically check the page fields when gx\_fillForm is called.

**Returns:**

whether to dynamically check the page fields when gx\_fillForm is called

---

## setReflectHostProtected

```
public void setReflectHostProtected(boolean reflectHostProtected)
```

Determines whether the protected fields in the host will be read only in the Web application (when gx\_fillForm is called).

**Parameters:**

reflectHostProtected - whether to dynamically check the page fields when gx\_fillForm is called

---

## get\_MapPath

```
public String get_MapPath()
```

For .NET framework usage. Expose the method as a property.

---

## set\_MapPath

```
public void set_MapPath(String mapPath)
```

For .NET framework usage. Expose the method as a property.

---

## getMapPath

```
public String getMapPath()
```

**Deprecated.** *Application map are defined globally for each application. Map name will be ignored*

Determines the map path used to synchronize the host with the page. It is used only if gx\_syncHostWithForm is called.

**Returns:**

determines the map path used to synchronize the host with the page

---

## setMapPath

```
public void setMapPath(String mapPath)
```

---

---

(continued from last page)

**Deprecated.** *Application map are defined globally for each application. Map name will be ignored*

Determines the map path used to synchronize the host with the page. It is used only if `gx_syncHostWithForm` is called.

**Parameters:**

`mapPath` - determines the map path used to synchronize the host with the page

---

## **get\_SessionConfig**

```
public GXConfig get_SessionConfig()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_SessionConfig**

```
public void set_SessionConfig(GXConfig sessionConfig)
```

For .NET framework usage. Expose the method as a property.

---

## **getSessionConfig**

```
public GXConfig getSessionConfig()
```

Contains the ApplinX session connection declaration

**Returns:**

the ApplinX session connection declaration

---

## **setSessionConfig**

```
public void setSessionConfig(GXConfig sessionConfig)
```

For internal use

---

## **get\_MacroConfig**

```
public GXMacroConfig get_MacroConfig()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_MacroConfig**

```
public void set_MacroConfig(GXMacroConfig macroConfig)
```

For .NET framework usage. Expose the method as a property.

---

## **getMacroConfig**

```
public GXMacroConfig getMacroConfig()
```

Contains the macro configuration

**Returns:**

the macro configuration

---

## **setMacroConfig**

```
public void setMacroConfig(GXMacroConfig macroConfig)
```

---

(continued from last page)

---

For internal use

---

## **get\_UseModalWindows**

```
public boolean get_UseModalWindows()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_UseModalWindows**

```
public void set_UseModalWindows(boolean useModalWindows)
```

For .NET framework usage. Expose the method as a property.

---

## **getUseModalWindows**

```
public boolean getUseModalWindows()
```

Determines whether to activate ApplinX pop-up manager and transform recognized host windows for Web pop-up windows.

**Returns:**

whether to activate ApplinX pop-up manager

---

## **setUseModalWindows**

```
public void setUseModalWindows(boolean useModalWindows)
```

Determines whether to activate ApplinX pop-up manager and transform recognized host windows to Web pop-up windows.

**Parameters:**

useModalWindows - whether to activate ApplinX pop-up manager

---

## **get\_UseFolders**

```
public boolean get_UseFolders()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_UseFolders**

```
public void set_UseFolders(boolean useFolders)
```

For .NET framework usage. Expose the method as a property.

---

## **getUseFolders**

```
public boolean getUseFolders()
```

Determines whether to use ApplinX folders also for the Web application. This way the pages that need to be loaded are searched for in the relevant path

**Returns:**

whether to use ApplinX folders also for the Web application

---

(continued from last page)

---

## setUseFolders

```
public void setUseFolders(boolean useFolders)
```

Determines whether the Web application folder structure should be the same folder structure as configured in the ApplinX repository. Relevant for screens only. This is recommended when the Web application contains a large number of designed Web pages.

**Parameters:**

useFolders - whether to use ApplinX folders also for the Web application

---

## get\_UseScreenGroups

```
public boolean get_UseScreenGroups()
```

For .NET framework usage. Expose the method as a property.

---

## set\_UseScreenGroups

```
public void set_UseScreenGroups(boolean useScreenGroups)
```

For .NET framework usage. Expose the method as a property.

---

## getUseScreenGroups

```
public boolean getUseScreenGroups()
```

Determines whether to load a page for the current screen group, when the current screen does not contain a matching page. If the current screen has more than one screen group, the first screen group which has a matching page will be loaded.

**Returns:**

whether to load a page for the current screen group, when the current screen does not contain a matching page

---

## setUseScreenGroups

```
public void setUseScreenGroups(boolean useScreenGroups)
```

Determines whether to load a page for the current screen group, when the current screen does not contain a matching page. If the current screen has more than one screen group, the first screen group which has a matching page will be loaded.

**Parameters:**

useScreenGroups - whether to load a page for the current screen group, when the current screen does not contain a matching page  
useScreenGroups

---

## get\_CaptureTagsEvents

```
public boolean get_CaptureTagsEvents()
```

**Deprecated.** Events are capture on the client side. Use *GX\_CaptureInputTagEvents* in *\_inc\_applconf.js*

---

## set\_CaptureTagsEvents

```
public void set_CaptureTagsEvents(boolean captureTagsEvents)
```

**Deprecated.** Events are capture on the client side. Use *GX\_CaptureInputTagEvents* in *\_inc\_applconf.js*

---

---

## getCaptureTagsEvents

```
public boolean getCaptureTagsEvents()
```

**Deprecated.** Events are capture on the client side. Use *GX\_CaptureInputTagEvents* in *\_inc\_applconf.js*

---

## setCaptureTagsEvents

```
public void setCaptureTagsEvents(boolean captureTagsEvents)
```

**Deprecated.** Events are capture on the client side. Use *GX\_CaptureInputTagEvents* in *\_inc\_applconf.js*

---

## get\_PerformSyncCheckInInstant

```
public boolean get_PerformSyncCheckInInstant()
```

For .NET framework usage. Expose the method as a property.

---

## set\_PerformSyncCheckInInstant

```
public void set_PerformSyncCheckInInstant(boolean performSyncCheckInInstant)
```

For .NET framework usage. Expose the method as a property.

---

## getPerformSyncCheckInInstant

```
public boolean getPerformSyncCheckInInstant()
```

Each page that inherits from *GXDefaultLogicWebForm* (.NET) / *GXDefaultLogicContext* (JSP) checks synchronization against the current host screen. However instant pages, by default, do not check for synchronization, therefore when *instant.jsp* is called from the URL, the framework will not synchronize to the matching page. Setting this parameter to true: make a synchronization check also in *instant.aspx* / *instantWin.aspx* (.NET) *instant.jsp* / *instantWin.jsp* (JSP).

**Returns:**

whether a synchronization check is done in instant pages

---

## setPerformSyncCheckInInstant

```
public void setPerformSyncCheckInInstant(boolean performSyncCheckInInstant)
```

Each page that inherits from *GXDefaultLogicWebForm* (.NET) / *GXDefaultLogicContext* (JSP) checks synchronization against the current host screen. However instant pages, by default, do not check for synchronization, therefore when *instant.jsp* is called from the URL, the framework will not synchronize to the matching page. Setting this parameter to true: make a synchronization check also in *instant.aspx* / *instantWin.aspx* (.NET) *instant.jsp* / *instantWin.jsp* (JSP).

**Parameters:**

*performSyncCheckInInstant* - whether a synchronization check is done in instant pages

---

## get\_FtpConfig

```
public GXFtpConfig get_FtpConfig()
```

For .NET framework usage. Expose the method as a property.

---

---

## getFtpConfig

```
public GXFtpConfig getFtpConfig()
```

Contains the FTP configuration

**Returns:**

the FTP configuration

---

## setFtpConfig

```
public void setFtpConfig(GXFtpConfig ftpConfig)
```

For internal use

---

## get\_TableBuildConfig

```
public GXTableBuildConfig get_TableBuildConfig()
```

For .NET framework usage. Expose the method as a property.

---

## set\_TableBuildConfig

```
public void set_TableBuildConfig(GXTableBuildConfig tableConfig)
```

For .NET framework usage. Expose the method as a property.

---

## getTableBuildConfig

```
public GXTableBuildConfig getTableBuildConfig()
```

Contains the table configuration for generated pages

**Returns:**

the table configuration for generated pages

---

## setTableBuildConfig

```
public void setTableBuildConfig(GXTableBuildConfig tableBuildConfig)
```

For internal use

**Parameters:**

tableBuildConfig

---

## get\_ProceduresConfig

```
public GXProceduresConfig get_ProceduresConfig()
```

For .NET framework usage. Expose the method as a property.

---

## getProceduresConfig

```
public GXProceduresConfig getProceduresConfig()
```

Contains the procedures configuration for activating ApplinX procedures

**Returns:**

(continued from last page)

the procedures configuration for activating ApplinX procedures

---

## setProceduresConfig

```
public void setProceduresConfig(GXProceduresConfig proceduresConfig)
```

For internal use

---

## get\_InstantConfig

```
public GXRenderConfig get_InstantConfig()
```

For .NET framework usage. Expose the method as a property.

---

## set\_InstantConfig

```
public void set_InstantConfig(GXRenderConfig instantConfig)
```

For .NET framework usage. Expose the method as a property.

---

## getInstantConfig

```
public GXRenderConfig getInstantConfig()
```

Contains the instant configuration

**Returns:**

the instant configuration

---

## setInstantConfig

```
public void setInstantConfig(GXRenderConfig instantConfig)
```

For internal use

---

## get\_FieldsModification

```
public int get_FieldsModification()
```

**Deprecated.** - *ApplinX determines the modified fields both from content difference, and typed fields.*

---

## set\_FieldsModification

```
public void set_FieldsModification(int fieldsModification)
```

**Deprecated.** - *ApplinX determines the modified fields both from content difference, and typed fields.*

---

## getFieldsModification

```
public int getFieldsModification()
```

**Deprecated.** - *ApplinX determines the modified fields both from content difference, and typed fields*

---



---

## setFieldsModification

```
public void setFieldsModification(int fieldsModification)
```

**Deprecated.** - *Applinx determines the modified fields both from content difference, and typed fields*

---

## set\_IsInstant

```
public void set_IsInstant(boolean isInstant)
```

For .NET framework usage. Expose the method as a property.

---

## isInstant

```
public boolean isInstant()
```

For internal use

---

## setIsInstant

```
public void setIsInstant(boolean isInstant)
```

For internal use

---

## get\_IsInstant

```
public boolean get_IsInstant()
```

For .NET framework usage. Expose the method as a property.

---

## set\_Instant

```
public void set_Instant(boolean isInstant)
```

For .NET framework usage. Expose the method as a property.

---

## getSingleSignOnConfig

```
public GXSSOConfig getSingleSignOnConfig()
```

Contains single signon configurations

**Returns:**

the single signon configuration

---

## setSingleSignOnConfig

```
public void setSingleSignOnConfig(GXSSOConfig ssoConfig)
```

For internal use

---

## get\_SsoConfig

```
public GXSSOConfig get_SsoConfig()
```

---

---

(continued from last page)

For .NET framework usage. Expose the method as a property.

---

### **set\_SsoConfig**

```
public void set_SsoConfig(GXSSOConfig ssoConfig)
```

For .NET framework usage. Expose the method as a property.

---

### **getIndexForm**

```
public String getIndexForm()
```

---

### **setIndexForm**

```
public void setIndexForm(String indexForm)
```

---

### **set\_FtpConfig**

```
public void set_FtpConfig(GXFtpConfig ftpConfig)
```

For .NET framework usage. Expose the method as a property.

---

### **set\_ProceduresConfig**

```
public void set_ProceduresConfig(GXProceduresConfig proceduresConfig)
```

For .NET framework usage. Expose the method as a property.

---

### **get\_Instant**

```
public boolean get_Instant()
```

For .NET framework usage. Expose the method as a property.

---

### **get\_SingleSignOnConfig**

```
public GXSSOConfig get_SingleSignOnConfig()
```

For .NET framework usage. Expose the method as a property.

---

### **set\_SingleSignOnConfig**

```
public void set_SingleSignOnConfig(GXSSOConfig ssoConfig)
```

For .NET framework usage. Expose the method as a property.

---

### **get\_IndexForm**

```
public String get_IndexForm()
```

For .NET framework usage. Expose the method as a property.

---

(continued from last page)

## **set\_IndexForm**

```
public void set_IndexForm(String indexForm)
```

For .NET framework usage. Expose the method as a property.

## com.sabratec.applinx.framework Class GXConfig

java.lang.Object

↳ com.sabratec.applinx.framework.GXConfig

### All Implemented Interfaces:

Cloneable

```
public class GXConfig
extends Object
implements Cloneable
```

## Constructor Summary

public	<a href="#">GXConfig()</a>
--------	----------------------------

## Method Summary

void	<a href="#">addVariable(GXVariable variable)</a> Adds a variable to the framework configuration The variable will be used in the internal framework requests to the server.
void	<a href="#">addVariable(String varName, String varValue)</a>
Object	<a href="#">clone()</a>
String	<a href="#">get_ApplicationName()</a> For .NET framework usage.
String	<a href="#">get_Description()</a> For .NET framework usage.
boolean	<a href="#">get_FailOnWarning()</a> For .NET framework usage.
String	<a href="#">get_HostNewPassword()</a> For .NET framework usage.
String	<a href="#">get_HostPassword()</a> For .NET framework usage.
String	<a href="#">get_HostUserName()</a> For .NET framework usage.
String	<a href="#">get_Password()</a> For .NET framework usage.
String	<a href="#">get_ServerURL()</a> For .NET framework usage.

String	<a href="#">get_ServiceName()</a> For .NET framework usage.
String	<a href="#">get_SessionId()</a> For .NET framework usage.
boolean	<a href="#">get_ShowIntermediateScreen()</a> For .NET framework usage.
<a href="#">GXVariable</a>	<a href="#">get_Variable(String varName)</a> For .NET framework usage.
<a href="#">GXVariable[]</a>	<a href="#">get_Variables()</a> For .NET framework usage.
boolean	<a href="#">get_VariablesModified()</a> For .NET framework usage.
String	<a href="#">getApplicationName()</a> The name of the ApplinX application.
String	<a href="#">getDescription()</a> The description of the session in ApplinX server.
String	<a href="#">getHostNewPassword()</a>
String	<a href="#">getHostPassword()</a> The host password.
String	<a href="#">getHostUserName()</a> The host user name for SSH and Natural-Unix protocol only.
String	<a href="#">getPassword()</a> The password to the session in ApplinX server.
GXIApplicationServerContext	<a href="#">getServerContext()</a> For J2EE usage only.
String	<a href="#">getServerURL()</a> The ApplinX server URL, by default it is applinx://localhost:2323.
String	<a href="#">getServiceName()</a> Formally known as host service The connection pool used to get a session.
String	<a href="#">getSessionId()</a> The session ID in ApplinX server.
<a href="#">GXVariable</a>	<a href="#">getVariable(String varName)</a> Returns a variable used by the framework by the specified variable name.
<a href="#">GXVariable[]</a>	<a href="#">getVariables()</a> An array of variables to be passed to the server.
boolean	<a href="#">isFailOnWarning()</a>
boolean	<a href="#">isShowIntermediateScreen()</a> Determines whether to show intermediate host screens.

boolean	<a href="#">isVariablesModified()</a> For internal usage
void	<a href="#">removeVariable</a> (String varName)
void	<a href="#">set_ApplicationName</a> (String applicationName) For .NET framework usage.
void	<a href="#">set_Description</a> (String desc) For .NET framework usage.
void	<a href="#">set_FailOnWarning</a> (boolean failOnWarning) For .NET framework usage.
void	<a href="#">set_HostNewPassword</a> (String hostNewPassword) For .NET framework usage.
void	<a href="#">set_HostPassword</a> (String hostPassword) For .NET framework usage.
void	<a href="#">set_HostUserName</a> (String hostUserName) For .NET framework usage.
void	<a href="#">set_Password</a> (String password) For .NET framework usage.
void	<a href="#">set_ServerURL</a> (String serverURL) For .NET framework usage.
void	<a href="#">set_ServiceName</a> (String serviceName) For .NET framework usage.
void	<a href="#">set_SessionId</a> (String sessionId) For .NET framework usage.
void	<a href="#">set_ShowIntermediateScreen</a> (boolean show) For .NET framework usage.
void	<a href="#">set_Variables</a> (GXVariable[] variables) For .NET framework usage.
void	<a href="#">setApplicationName</a> (String applicationName) The name of the ApplinX application.
void	<a href="#">setDescription</a> (String desc) The description of the session in ApplinX server.
void	<a href="#">setFailOnWarning</a> (boolean failOnWarning)
void	<a href="#">setHostNewPassword</a> (String hostNewPassword)
void	<a href="#">setHostPassword</a> (String hostPassword) The host password.
void	<a href="#">setHostUserName</a> (String hostUserName) The host user name.

void	<a href="#">setPassword</a> (String password) The password required to access a specific session on the ApplinX server.
void	<a href="#">setServerContext</a> (GXIApplicationServerContext serverContext) For J2EE usage only.
void	<a href="#">setServerURL</a> (String serverURL) The ApplinX server URL, by default it is applinx://localhost:2323.
void	<a href="#">setServiceName</a> (String serviceName) Formally known as host service The connection pool used to get a session.
void	<a href="#">setSessionId</a> (String sessionId) The Session ID in the web server.
void	<a href="#">setShowIntermediateScreen</a> (boolean show) Determine whether to show intermediate host screens.
void	<a href="#">setVariables</a> (GXVariable[] variables) An array of variables to be passed to the server.
String	<a href="#">toString</a> ()

#### Methods inherited from class java.lang.Object

`equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait`

## Constructors

### GXConfig

```
public GXConfig()
```

## Methods

### get\_ServerURL

```
public String get_ServerURL()
```

For .NET framework usage. Expose the method as a property.

### set\_ServerURL

```
public void set_ServerURL(String serverURL)
```

For .NET framework usage. Expose the method as a property.

### getServerURL

```
public String getServerURL()
```

The ApplinX server URL, by default it is applinx://localhost:2323. For secured SSL socket: applinxs://localhost:23443

**Returns:**

(continued from last page)

---

The ApplinX server URL

---

## setServerURL

```
public void setServerURL(String serverURL)
```

The ApplinX server URL, by default it is applinx://localhost:2323. For secured SSL socket: applinxs://localhost:23443

### Parameters:

serverURL - The ApplinX server URL

---

## get\_SessionId

```
public String get_SessionId()
```

For .NET framework usage. Expose the method as a property.

---

## set\_SessionId

```
public void set_SessionId(String sessionId)
```

For .NET framework usage. Expose the method as a property.

---

## getSessionId

```
public String getSessionId()
```

The session ID in ApplinX server.

### Returns:

the session ID in ApplinX server

---

## setSessionId

```
public void setSessionId(String sessionId)
```

The Session ID in the web server. Can be set according to the connecting IP address or by an allocated session ID. It is also possible to set the Web Session ID from the code (in the GXBasicContext (JSP)/GXBasicWebForm (.NET) file), overriding the option selected here.

### Parameters:

sessionId - the session ID in ApplinX server

---

## get\_HostUserName

```
public String get_HostUserName()
```

For .NET framework usage. Expose the method as a property.

---

## set\_HostUserName

```
public void set_HostUserName(String hostUserName)
```

For .NET framework usage. Expose the method as a property.

---

## getHostUserName

```
public String getHostUserName()
```

---



---

(continued from last page)

The host user name for SSH and Natural-Unix protocol only.

**Returns:**

The host user name for SSH and Natural-Unix protocol

---

**setHostUserName**

```
public void setHostUserName(String hostUserName)
```

The host user name. Relevant for SSH and Natural-Unix protocol only.

**Parameters:**

hostUserName - the host user name for SSH and Natural-Unix protocol

---

**get\_ApplicationName**

```
public String get_ApplicationName()
```

For .NET framework usage. Expose the method as a property.

---

**set\_ApplicationName**

```
public void set_ApplicationName(String applicationName)
```

For .NET framework usage. Expose the method as a property.

---

**getApplicationName**

```
public String getApplicationName()
```

The name of the ApplinX application.

**Returns:**

the name of the ApplinX application

---

**setApplicationName**

```
public void setApplicationName(String applicationName)
```

The name of the ApplinX application.

**Parameters:**

applicationName - the name of the ApplinX application

---

**get\_Description**

```
public String get_Description()
```

For .NET framework usage. Expose the method as a property.

---

**set\_Description**

```
public void set_Description(String desc)
```

For .NET framework usage. Expose the method as a property.

---

(continued from last page)

---

## getDescription

```
public String getDescription()
```

The description of the session in ApplinX server.

**Returns:**

the description of the session in ApplinX server

---

## setDescription

```
public void setDescription(String desc)
```

The description of the session in ApplinX server. This description appears in the list of sessions in ApplinX Administrator.

The information entered can be dynamic and may include tokens such as:

\$(SESSION\_ID) Represents the Web server session ID.

\$(IP) Represents the user IP address.

\$(BY\_APPLINX) Represents the ApplinX session ID.

**Parameters:**

desc - the description of the session in ApplinX server

---

## get\_Password

```
public String get_Password()
```

For .NET framework usage. Expose the method as a property.

---

## set\_Password

```
public void set_Password(String password)
```

For .NET framework usage. Expose the method as a property.

---

## getPassword

```
public String getPassword()
```

The password to the session in ApplinX server.

**Returns:**

the password to the session in ApplinX server

---

## setPassword

```
public void setPassword(String password)
```

The password required to access a specific session on the ApplinX server. Can be set according to the connecting IP address or by an allocated session ID. It is also possible to set the password from the code (in the GXBasicContext (JSP)/GXBasicWebForm (.NET) file), overriding the option selected here.

**Parameters:**

password - the password to the session in ApplinX server

---

## get\_HostPassword

```
public String get_HostPassword()
```

---

---

(continued from last page)

For .NET framework usage. Expose the method as a property.

---

## set\_HostPassword

```
public void set_HostPassword(String hostPassword)
```

For .NET framework usage. Expose the method as a property.

---

## getHostPassword

```
public String getHostPassword()
```

The host password. Relevant for SSH and Natural-Unix protocol only.

**Returns:**

the host password for SSH and Natural-Unix protocol only

---

## setHostPassword

```
public void setHostPassword(String hostPassword)
```

The host password. Relevant for SSH and Natural-Unix protocol only.

**Parameters:**

hostPassword - the host password for SSH and Natural-Unix protocol only

---

## get\_ServiceName

```
public String get_ServiceName()
```

For .NET framework usage. Expose the method as a property.

---

## set\_ServiceName

```
public void set_ServiceName(String serviceName)
```

For .NET framework usage. Expose the method as a property.

---

## getServiceName

```
public String getServiceName()
```

Formally known as host service

The connection pool used to get a session. When a pool is stated, the framework will connect to the pool instead of using a new session.

**Returns:**

the connection pool used to get a session

---

## setServiceName

```
public void setServiceName(String serviceName)
```

Formally known as host service

The connection pool used to get a session. When a pool is stated, the framework will connect to the pool instead of using a new session.

**Parameters:**

(continued from last page)

serviceName - the connection pool used to get a session

---

## getVariables

```
public GXVariable\[\] getVariables()
```

An array of variables to be passed to the server. For example, changing the host address, before creating a new session or application parameters.

**Returns:**

an array of variables to be passed to the server

**See Also:**

[GXBaseObjectConstants](#)

---

## get\_Variables

```
public GXVariable\[\] get_Variables()
```

For .NET framework usage. Expose the method as a property.

---

## set\_Variables

```
public void set_Variables(GXVariable\[\] variables)
```

For .NET framework usage. Expose the method as a property.

---

## setVariables

```
public void setVariables(GXVariable\[\] variables)
```

An array of variables to be passed to the server. For example, changing the host address, before creating a new session or application parameters. The variables will be used in the internal framework requests to the server.

**Parameters:**

variables - an array of variables to be passed to the server

**See Also:**

[GXBaseObjectConstants](#)

---

## getVariable

```
public GXVariable getVariable(String varName)
```

Returns a variable used by the framework by the specified variable name. The variable will be used in the internal framework requests to the server.

**Returns:**

a variable by the specified variable name

---

## addVariable

```
public void addVariable(GXVariable variable)
```

Adds a variable to the framework configuration The variable will be used in the internal framework requests to the server.

---

(continued from last page)

---

## addVariable

```
public void addVariable(String varName,  
                        String varValue)
```

---

## removeVariable

```
public void removeVariable(String varName)
```

---

## isVariablesModified

```
public boolean isVariablesModified()
```

For internal usage

---

## getServerContext

```
public GXIApplicationServerContext getServerContext()
```

For J2EE usage only. The ApplinX server context when running in local mode.

**Returns:**

the ApplinX server context when running in local mode

---

## setServerContext

```
public void setServerContext(GXIApplicationServerContext serverContext)
```

For J2EE usage only. The ApplinX server context when running in local mode.

**Parameters:**

serverContext - the ApplinX server context when running in local mode

---

## isShowIntermediateScreen

```
public boolean isShowIntermediateScreen()
```

Determines whether to show intermediate host screens. Relevant for Natural Set Control N command

**Returns:**

whether to show host screens

---

## setShowIntermediateScreen

```
public void setShowIntermediateScreen(boolean show)
```

Determine whether to show intermediate host screens. Relevant for Natural Set Control N command.

**Parameters:**

show - whether to show intermediate host screens

---

## get\_ShowIntermediateScreen

```
public boolean get_ShowIntermediateScreen()
```

---

(continued from last page)

For .NET framework usage. Expose the method as a property.

---

### **set\_ShowIntermediateScreen**

```
public void set_ShowIntermediateScreen(boolean show)
```

For .NET framework usage. Expose the method as a property.

---

### **clone**

```
public Object clone()  
    throws CloneNotSupportedException
```

---

### **toString**

```
public String toString()
```

---

### **getHostNewPassword**

```
public String getHostNewPassword()
```

---

### **setHostNewPassword**

```
public void setHostNewPassword(String hostNewPassword)
```

---

### **isFailOnWarning**

```
public boolean isFailOnWarning()
```

---

### **setFailOnWarning**

```
public void setFailOnWarning(boolean failOnWarning)
```

---

### **get\_Variable**

```
public GXVariable get_Variable(String varName)
```

For .NET framework usage. Expose the method as a property.

---

### **get\_VariablesModified**

```
public boolean get_VariablesModified()
```

For .NET framework usage. Expose the method as a property.

---

---

(continued from last page)

## **get\_HostNewPassword**

```
public String get_HostNewPassword()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_HostNewPassword**

```
public void set_HostNewPassword(String hostNewPassword)
```

For .NET framework usage. Expose the method as a property.

---

## **get\_FailOnWarning**

```
public boolean get_FailOnWarning()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_FailOnWarning**


```
public void set_FailOnWarning(boolean failOnWarning)
```

For .NET framework usage. Expose the method as a property.

---

## com.sabratec.applinx.framework Class GXWebAppConfig

java.lang.Object



### All Implemented Interfaces:

Cloneable, java.io.Serializable, java.io.Serializable

public class **GXWebAppConfig**  
 extends [GXAppConfig](#)  
 implements java.io.Serializable, java.io.Serializable, Cloneable

## Constructor Summary

public	<a href="#">GXWebAppConfig()</a>
--------	----------------------------------

## Method Summary

void	<a href="#">addBindingToTemplatePart(String fileId)</a> Allows perform binding to a template part.
Object	<a href="#">clone()</a>
boolean	<a href="#">get_AddJavascript()</a> For .NET framework usage.
boolean	<a href="#">get_AllowTypeAhead()</a> <b>Deprecated.</b> Use <i>gx_container.aspx/jsp emulation frame instead</i>
String[]	<a href="#">get_BoundTemplateParts()</a> For .NET framework usage.
boolean	<a href="#">get_CaptureBrowserClose()</a> For .NET framework usage.
String	<a href="#">get_DynamicDisableCssClass()</a> For .NET framework usage.
String	<a href="#">get_ExternalCssRequestParamName()</a> For .NET framework usage.
String	<a href="#">get_LogOffForm()</a> For .NET framework usage.
<a href="#">GXNdtConfig</a>	<a href="#">get_NaturalDataTransferConfig()</a> For .NET framework usage.
boolean	<a href="#">get_PromptBeforeSessionTimeOut()</a> For .NET framework usage.



String	<a href="#">get_ScreenLocker()</a> For .NET framework usage.
String	<a href="#">get_ScreenLockerText()</a> For .NET framework usage.
boolean	<a href="#">get_SupportPartialPageRendering()</a> <b>Deprecated.</b> <i>Partial page rendering is always supported</i>
String	<a href="#">get_TerminationPath()</a> For .NET framework usage.
boolean	<a href="#">get_UseCache()</a> <b>Deprecated.</b> <i>For .NET framework usage. Expose the method as a property.</i>
boolean	<a href="#">get_UseCalendar()</a> For .NET framework usage.
boolean	<a href="#">get_UseFramesForSubmit()</a> For .NET framework usage.
boolean	<a href="#">get_UseJavaScriptsAsResource()</a> For .NET framework usage.
boolean	<a href="#">get_UseOldJSEngine()</a> For .NET framework usage.
boolean	<a href="#">get_UseScriptsInPage()</a> For .NET framework usage.
boolean	<a href="#">get_UseStateManager()</a> For .NET framework usage.
String	<a href="#">get_VirtualDir()</a> For .NET framework usage.
String	<a href="#">get_WebWindowName()</a> For .NET framework usage.
boolean	<a href="#">get_WritePerformanceLog()</a> For .NET framework usage.
boolean	<a href="#">getAddJavascript()</a> Adds minimal JavaScript to the web page which support basic browser actions
boolean	<a href="#">getAllowTypeAhead()</a> <b>Deprecated.</b> <i>Use gx_container.aspx/jsp emulation frame instead</i>
String[]	<a href="#">getBoundTemplateParts()</a> The template parts may be added one by one by calling the method addTemplatePart or as a list in this method seperated by "," The 2nd options may be used when GXWebAppConfig is read from XML file
boolean	<a href="#">getCaptureBrowserClose()</a> <b>Deprecated.</b> <i>Always performed</i>
String	<a href="#">getDynamicDisableCssClass()</a> The name of the css class that is added to an input field, which changed to read only by the host according to the reflectHostProtected parameter.

String	<a href="#">getExternalCssRequestParamName()</a> Defines an external css request paramater name.
GXIHostKeysTagUserExit	<a href="#">getHostKeysTagUserExit()</a> Defines a user exit for host keys tag(JSP) / control (.NET)
String	<a href="#">getLogOffForm()</a> Detrmine the logoff page of the web application
<a href="#">GXNdtConfig</a>	<a href="#">getNaturalDataTransferConfig()</a> Contains the Natural data transfer configuration
String	<a href="#">getScreenLocker()</a> The purpose of a screen locker is to indicate to the user by means of a message, that the application is processing his request, and blocks him from interfering with the current process by repressing a button/link or keyboard PF/ENTER.
String	<a href="#">getScreenLockerText()</a>
String	<a href="#">getTerminationPath()</a> Defines a termination path to use when the user logs off by either closing the browser, or clicking the logoff link (activates logoff.jsp/aspx).
boolean	<a href="#">getUseCache()</a> Determines whether to allow the back button in the browser.
boolean	<a href="#">getUseStateManager()</a> Not internal usage
String	<a href="#">getVirtualDir()</a> Determines the virtual directory used for the project.
String	<a href="#">getWebWindowName()</a> Determines the ApplinX web window name.
boolean	<a href="#">getWritePerformanceLog()</a> Determines whether to create a performance log. The performance monitor is used for analyzing framework performance.
boolean	<a href="#">isPromptBeforeSessionTimeOut()</a> Set to true to display a message indicating to the user that that the session is about to be disconnected.
boolean	<a href="#">isSupportPartialPageRendering()</a> <b>Deprecated.</b> <i>Partial page rendering is always supported</i>
boolean	<a href="#">isUseCalendar()</a>
boolean	<a href="#">isUseFramesForSubmit()</a> This feature prevents the displayed page from flickering every time the page is submitted.
boolean	<a href="#">isUseJavaScriptsAsResource()</a> For internal use
boolean	<a href="#">isUseOldJSEngine()</a> For internal use
boolean	<a href="#">isUseScriptsInPage()</a> Determines if to add framework scripts to each page.

void	<a href="#">set_AddJavascript</a> (boolean addJavascript) For .NET framework usage.
void	<a href="#">set_AllowTypeAhead</a> (boolean allowTypeAhead) <b>Deprecated.</b> Use <i>gx_container.aspx/jsp emulation frame instead</i>
void	<a href="#">set_CaptureBrowserClose</a> (boolean captureBrowserClose) For .NET framework usage.
void	<a href="#">set_DynamicDisableCssClass</a> (String dynamicDisableCssClass) For .NET framework usage.
void	<a href="#">set_ExternalCssRequestParamName</a> (String externalCssRequestParamName) For .NET framework usage.
void	<a href="#">set_LogOffForm</a> (String logOffForm) For .NET framework usage.
void	<a href="#">set_NaturalDataTransferConfig</a> ( <a href="#">GXNdtConfig</a> naturalDataTransferConfig) For internal use
void	<a href="#">set_PromptBeforeSessionTimeOut</a> (boolean promptBeforeSessionTimeOut) For .NET framework usage.
void	<a href="#">set_ScreenLocker</a> (String screenLockerPage) For .NET framework usage.
void	<a href="#">set_ScreenLockerText</a> (String screenLockerPage) For .NET framework usage.
void	<a href="#">set_SupportPartialPageRendering</a> (boolean supportPartialPageRendering1) <b>Deprecated.</b> <i>Partial page rendering is always supported</i>
void	<a href="#">set_TerminationPath</a> (String terminationPath) For .NET framework usage.
void	<a href="#">set_UseCache</a> (boolean useCache) For .NET framework usage.
void	<a href="#">set_UseCalendar</a> (boolean useCalendar) For .NET framework usage.
void	<a href="#">set_UseFramesForSubmit</a> (boolean useFramesForSubmit) For .NET framework usage.
void	<a href="#">set_UseJavaScriptsAsResource</a> (boolean useJavaScriptsAsResource) For .NET framework usage.
void	<a href="#">set_UseOldJSEngine</a> (boolean useOldJSEngine) For .NET framework usage.
void	<a href="#">set_UseScriptsInPage</a> (boolean useScriptsInPage) For .NET framework usage.
void	<a href="#">set_UseStateManager</a> (boolean useStateManager) For .NET framework usage.
void	<a href="#">set_VirtualDir</a> (String virtualDir) For .NET framework usage.

void	<a href="#">set_WebWindowName</a> (String webWindowName) For .NET framework usage.
void	<a href="#">set_WritePerformanceLog</a> (boolean writePerformanceLog) For .NET framework usage.
void	<a href="#">setAddJavascript</a> (boolean addJavascript) Adds minimal JavaScript to the web page which support basic browser actions
void	<a href="#">setAllowTypeAhead</a> (boolean allowTypeAhead) <b>Deprecated.</b> Use <i>gx_container.aspx/jsp emulation frame</i> instead
void	<a href="#">setCaptureBrowserClose</a> (boolean captureBrowserClose) <b>Deprecated.</b> Always performed
void	<a href="#">setDynamicDisableCssClass</a> (String dynamicDisableCssClass) The css class that is used to give a different look to a read-only input field, which becomes read-only according to the value of the <code>ReflectHostProtected</code> parameter.
void	<a href="#">setExternalCssRequestParamName</a> (String externalCssRequestParamName) Defines an external css request paramater name.
void	<a href="#">setHostKeysTagUserExit</a> (GXHostKeysTagUserExit hostKeysTagUserExit) Defines a user exit for host keys tag(JSP) / control (.NET)
void	<a href="#">setLogOffForm</a> (String logOffForm) Detrmine the logoff page of the web application
void	<a href="#">setNaturalDataTransferConfig</a> ( <a href="#">GXNdtConfig</a> naturalDataTransferConfig) For internal use
void	<a href="#">setPromptBeforeSessionTimeOut</a> (boolean promptBeforeSessionTimeOut) Set to true to display a message indicating to the user that that the session is about to be disconnected.
void	<a href="#">setScreenLocker</a> (String screenLockerPage) The purpose of a screen locker is to indicate to the user by means of a message, that the application is processing his request, and blocks him from interfering with the current process by repressing a button/link or keyboard PF/ENTER.
void	<a href="#">setScreenLockerText</a> (String screenLockerText)
void	<a href="#">setSupportPartialPageRendering</a> (boolean supportPartialPageRendering) <b>Deprecated.</b> <i>Partial page rendering is always supported</i>
void	<a href="#">setTerminationPath</a> (String terminationPath) Defines a termination path to use when the user logs off by either closing the browser, or clicking the logoff link (activates logoff.jsp/asp).
void	<a href="#">setUseCache</a> (boolean useCache) Determines whether to allow the back button in the browser.
void	<a href="#">setUseCalendar</a> (boolean useCalendar)
void	<a href="#">setUseFramesForSubmit</a> (boolean useFramesForSubmit) This feature prevents the displayed page from flickering every time the page is submitted.
void	<a href="#">setUseJavaScriptsAsResource</a> (boolean useJavaScriptsAsResource) For internal use

void	<a href="#">setUseOldJSEngine</a> (boolean useOldJSEngine) For internal use
void	<a href="#">setUseScriptsInPage</a> (boolean useScriptsInPage) Determines if to add framework scripts to each page.
void	<a href="#">setUseStateManager</a> (boolean useStateManager) Not internal usage
void	<a href="#">setVirtualDir</a> (String virtualDir) Determines the virtual directory used for the project.
void	<a href="#">setWebWindowName</a> (String webWindowName) Determines the ApplinX web window name.
void	<a href="#">setWritePerformanceLog</a> (boolean writePerformanceLog) Determines whether to create a performance log. The performance monitor is used for analyzing framework performance.

#### Methods inherited from class [com.sabratec.applinx.framework.GXAppConfig](#)

[get\\_Build](#), [get\\_CaptureTagsEvents](#), [get\\_DesignMode](#), [get\\_ErrorForm](#),  
[get\\_FieldsModification](#), [get\\_FieldTypesInUse](#), [get\\_FtpConfig](#), [get\\_IndexForm](#),  
[get\\_Instant](#), [get\\_InstantConfig](#), [get\\_InstantForm](#), [get\\_InstantWinForm](#), [get\\_IsInstant](#),  
[get\\_MacroConfig](#), [get\\_MapPath](#), [get\\_PerformSyncCheckInInstant](#), [get\\_ProceduresConfig](#),  
[get\\_ReflectBGColors](#), [get\\_ReflectEmulationBehaviour](#), [get\\_ReflectFGColors](#),  
[get\\_ReflectHostCursor](#), [get\\_ReflectHostProtected](#), [get\\_ReflectMaxlength](#),  
[get\\_SessionConfig](#), [get\\_SingleSignOnConfig](#), [get\\_SsoConfig](#), [get\\_SupportDupAndFieldMark](#),  
[get\\_TableBuildConfig](#), [get\\_TrimLabels](#), [get\\_UseFolders](#), [get\\_UseKeyboardPFKeys](#),  
[get\\_UseModalWindows](#), [get\\_UseScreenGroups](#), [get\\_Version](#), [getBuild](#),  
[getCaptureTagsEvents](#), [getDesignMode](#), [getErrorForm](#), [getFieldsModification](#),  
[getFieldTypesInUse](#), [getFtpConfig](#), [getIndexForm](#), [getInstantConfig](#), [getInstantForm](#),  
[getInstantWinForm](#), [getMacroConfig](#), [getMapPath](#), [getPerformSyncCheckInInstant](#),  
[getProceduresConfig](#), [getReflectBGColors](#), [getReflectEmulationBehaviour](#),  
[getReflectFGColors](#), [getReflectHostCursor](#), [getReflectHostProtected](#),  
[getReflectMaxlength](#), [getSessionConfig](#), [getSingleSignOnConfig](#),  
[getSupportDupAndFieldMark](#), [getTableBuildConfig](#), [getTrimLabels](#), [getUseFolders](#),  
[getUseKeyboardPFKeys](#), [getUseModalWindows](#), [getUseScreenGroups](#), [getVersion](#), [isInstant](#),  
[set\\_CaptureTagsEvents](#), [set\\_DesignMode](#), [set\\_ErrorForm](#), [set\\_FieldsModification](#),  
[set\\_FieldTypesInUse](#), [set\\_FtpConfig](#), [set\\_IndexForm](#), [set\\_Instant](#), [set\\_InstantConfig](#),  
[set\\_InstantForm](#), [set\\_InstantWinForm](#), [set\\_IsInstant](#), [set\\_MacroConfig](#), [set\\_MapPath](#),  
[set\\_PerformSyncCheckInInstant](#), [set\\_ProceduresConfig](#), [set\\_ReflectBGColors](#),  
[set\\_ReflectEmulationBehaviour](#), [set\\_ReflectFGColors](#), [set\\_ReflectHostCursor](#),  
[set\\_ReflectHostProtected](#), [set\\_ReflectMaxlength](#), [set\\_SessionConfig](#),  
[set\\_SingleSignOnConfig](#), [set\\_SsoConfig](#), [set\\_SupportDupAndFieldMark](#),  
[set\\_TableBuildConfig](#), [set\\_TrimLabels](#), [set\\_UseFolders](#), [set\\_UseKeyboardPFKeys](#),  
[set\\_UseModalWindows](#), [set\\_UseScreenGroups](#), [setCaptureTagsEvents](#), [setDesignMode](#),  
[setErrorForm](#), [setFieldsModification](#), [setFieldTypesInUse](#), [setFtpConfig](#), [setIndexForm](#),  
[setInstantConfig](#), [setInstantForm](#), [setInstantWinForm](#), [setIsInstant](#), [setMacroConfig](#),  
[setMapPath](#), [setPerformSyncCheckInInstant](#), [setProceduresConfig](#), [setReflectBGColors](#),  
[setReflectEmulationBehaviour](#), [setReflectFGColors](#), [setReflectHostCursor](#),  
[setReflectHostProtected](#), [setReflectMaxlength](#), [setSessionConfig](#),  
[setSingleSignOnConfig](#), [setSupportDupAndFieldMark](#), [setTableBuildConfig](#), [setTrimLabels](#),  
[setUseFolders](#), [setUseKeyboardPFKeys](#), [setUseModalWindows](#), [setUseScreenGroups](#)

#### Methods inherited from class [java.lang.Object](#)

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

---

## Constructors

### GXWebAppConfig

```
public GXWebAppConfig()
```

---

## Methods

### get\_UseCache

```
public boolean get_UseCache()
```

**Deprecated.** For .NET framework usage. Expose the method as a property.

---

### set\_UseCache

```
public void set_UseCache(boolean useCache)
```

For .NET framework usage. Expose the method as a property.

---

### getUseCache

```
public boolean getUseCache()
```

Determines whether to allow the back button in the browser. If it is false, pressing back will get the previous page from the browser cache.

**Returns:**

whether to allow the back button in the browser

---

### setUseCache

```
public void setUseCache(boolean useCache)
```

Determines whether to allow the back button in the browser. If it is false, pressing back will get the previous page from the browser cache.

**Parameters:**

useCache - whether to allow the back button in the browser

---

### get\_VirtualDir

```
public String get_VirtualDir()
```

For .NET framework usage. Expose the method as a property.

---

### set\_VirtualDir

```
public void set_VirtualDir(String virtualDir)
```

For .NET framework usage. Expose the method as a property.

## getVirtualDir

```
public String getVirtualDir()
```

Determines the virtual directory used for the project. Should be without any slashes. Needs to be set only if useFolders is true. For a site the value should be empty string.

**Returns:**

the virtual directory used for the project

---

## setVirtualDir

```
public void setVirtualDir(String virtualDir)
```

Determines the virtual directory used for the project. Should be without any slashes. Needs to be set only if useFolders is true. For a site the value should be empty string.

**Parameters:**

virtualDir - the virtual directory used for the project

---

## get\_AllowTypeAhead

```
public boolean get_AllowTypeAhead()
```

**Deprecated.** Use *gx\_container.aspx/jsp emulation frame instead*

---

## set\_AllowTypeAhead

```
public void set_AllowTypeAhead(boolean allowTypeAhead)
```

**Deprecated.** Use *gx\_container.aspx/jsp emulation frame instead*

---

## getAllowTypeAhead

```
public boolean getAllowTypeAhead()
```

**Deprecated.** Use *gx\_container.aspx/jsp emulation frame instead*

---

## setAllowTypeAhead

```
public void setAllowTypeAhead(boolean allowTypeAhead)
```

**Deprecated.** Use *gx\_container.aspx/jsp emulation frame instead*

---

## get\_LogOffForm

```
public String get_LogOffForm()
```

For .NET framework usage. Expose the method as a property.

---

## set\_LogOffForm

```
public void set_LogOffForm(String logOffForm)
```

For .NET framework usage. Expose the method as a property.

---

## getLogOffForm

```
public String getLogOffForm()
```

Determine the logoff page of the web application

**Returns:**

the logoff page of the web application

---

## setLogOffForm

```
public void setLogOffForm(String logOffForm)
```

Determine the logoff page of the web application

**Parameters:**

logOffForm - the logoff page of the web application

---

## get\_UseStateManager

```
public boolean get_UseStateManager()
```

For .NET framework usage. Expose the method as a property.

---

## set\_UseStateManager

```
public void set_UseStateManager(boolean useStateManager)
```

For .NET framework usage. Expose the method as a property.

---

## getUseStateManager

```
public boolean getUseStateManager()
```

Not internal usage

---

## setUseStateManager

```
public void setUseStateManager(boolean useStateManager)
```

Not internal usage

---

## get\_ScreenLocker

```
public String get_ScreenLocker()
```

For .NET framework usage. Expose the method as a property.

---

## set\_ScreenLocker

```
public void set_ScreenLocker(String screenLockerPage)
```

---



---

(continued from last page)

For .NET framework usage. Expose the method as a property.

---

## getScreenLocker

```
public String getScreenLocker()
```

The purpose of a screen locker is to indicate to the user by means of a message, that the application is processing his request, and blocks him from interfering with the current process by repressing a button/link or keyboard PF/ENTER. To activate the screen locker first select the Use screen locker check box and then access the template/screenLocker.htm file and use the width/height percentages to control the location of the message. Replace the text "Please wait" with an alternative text/image as required.

Refer to the documentation for further details.

### Returns:

the screen locker file name

---

## setScreenLocker

```
public void setScreenLocker(String screenLockerPage)
```

The purpose of a screen locker is to indicate to the user by means of a message, that the application is processing his request, and blocks him from interfering with the current process by repressing a button/link or keyboard PF/ENTER. To activate the screen locker first select the Use screen locker check box and then access the template/screenLocker.htm file and use the width/height percentages to control the location of the message. Replace the text "Please wait" with an alternative text/image as required.

Refer to the documentation for further details.

### Parameters:

screenLockerPage - the screen locker file name.

---

## getScreenLockerText

```
public String getScreenLockerText()
```

---

## setScreenLockerText

```
public void setScreenLockerText(String screenLockerText)
```

---

## get\_DynamicDisableCssClass

```
public String get_DynamicDisableCssClass()
```

For .NET framework usage. Expose the method as a property.

---

## set\_DynamicDisableCssClass

```
public void set_DynamicDisableCssClass(String dynamicDisableCssClass)
```

For .NET framework usage. Expose the method as a property.

---

## getDynamicDisableCssClass

```
public String getDynamicDisableCssClass()
```

The name of the css class that is added to an input field, which changed to read only by the host according to the reflectHostProtected parameter. Used for giving a different look to this type of input field.

---

---

(continued from last page)

**Returns:**

the name of the css class that is added to an input field which is read only in the current screen

---

**setDynamicDisableCssClass**

```
public void setDynamicDisableCssClass(String dynamicDisableCssClass)
```

The css class that is used to give a different look to a read-only input field, which becomes read-only according to the value of the `ReflectHostProtected` parameter.

**Parameters:**

`dynamicDisableCssClass` - the name of the css class that is added to an input field

---

**get\_CaptureBrowserClose**

```
public boolean get_CaptureBrowserClose()
```

For .NET framework usage. Expose the method as a property.

---

**set\_CaptureBrowserClose**

```
public void set_CaptureBrowserClose(boolean captureBrowserClose)
```

For .NET framework usage. Expose the method as a property.

---

**getCaptureBrowserClose**

```
public boolean getCaptureBrowserClose()
```

**Deprecated.** *Always performed*

When inheriting from `GXBasicWebForm (.NET) / GXBasicContext (JSP)`, ApplinX full JavaScript is not added to the page. This causes the page not to have the ability to capture the browser close event in the client side configuration. In this case, this parameter adds the functionality of capturing the browser close and closing the host session.

**Returns:**

whether the framework is capturing the browser close and closing the host session

---

**setCaptureBrowserClose**

```
public void setCaptureBrowserClose(boolean captureBrowserClose)
```

**Deprecated.** *Always performed*

When inheriting from `GXBasicWebForm (.NET) / GXBasicContext (JSP)`, ApplinX full JavaScript is not added to the page. This causes the page not to have the ability to capture the browser close event in the client side configuration. In this case, this parameter adds the functionality of capturing the browser close and closing the host session.

**Parameters:**

`captureBrowserClose` - whether the framework is capturing the browser close and closing the host session

---

**get\_AddJavascript**

```
public boolean get_AddJavascript()
```

For .NET framework usage. Expose the method as a property.

---

---

(continued from last page)

## set\_AddJavascript

```
public void set_AddJavascript(boolean addJavascript)
```

For .NET framework usage. Expose the method as a property.

---

## getAddJavascript

```
public boolean getAddJavascript()
```

Adds minimal JavaScript to the web page which support basic browser actions

**Returns:**

whether minimal JavaScript is added to the web page

---

## setAddJavascript

```
public void setAddJavascript(boolean addJavascript)
```

Adds minimal JavaScript to the web page which support basic browser actions

**Parameters:**

addJavascript - whether minimal JavaScript is added to the web page

---

## get\_WritePerformanceLog

```
public boolean get_WritePerformanceLog()
```

For .NET framework usage. Expose the method as a property.

---

## set\_WritePerformanceLog

```
public void set_WritePerformanceLog(boolean writePerformanceLog)
```

For .NET framework usage. Expose the method as a property.

---

## getWritePerformanceLog

```
public boolean getWritePerformanceLog()
```

Determines whether to create a performance log.

The performance monitor is used for analyzing framework performance.

It writes log comments for every framework request.

A performance log line contains the following data: Session Id, Screen Name, total request time, total server side divided into: attach, sendKeys, instant generation, detach, total page client load time.

**Returns:**

whether to create a performance log

---

## setWritePerformanceLog

```
public void setWritePerformanceLog(boolean writePerformanceLog)
```

Determines whether to create a performance log.

The performance monitor is used for analyzing framework performance.

It writes log comments for every framework request.

A performance log line contains the following data: Session Id, Screen Name, total request time, total server side divided into: attach, sendKeys, instant generation, detach, total page client load time.

**Parameters:**

---

(continued from last page)

writePerformanceLog - whether to create a performance log

---

## addBindingToTemplatePart

```
public void addBindingToTemplatePart(String fileId)
```

Allows perform binding to a template part.

**Parameters:**

fileId - The name of the include file to bind to the current screen. "pageheader" for example.

---

## getBoundTemplateParts

```
public String[] getBoundTemplateParts()
```

The template parts may be added one by one by calling the method addTemplatePart or as a list in this method separated by "," The 2nd options may be used when GXWebAppConfig is read from XML file

**Returns:**

---

## getExternalCssRequestParamName

```
public String getExternalCssRequestParamName()
```

Defines an external css request paramater name. Used for portal integration. A portal application may provide to the framework as a query string a css URL as follows: http://?cssurl= ("cssurl" will be the value of the field in this case)

**Returns:**

an external css request paramater name

---

## setExternalCssRequestParamName

```
public void setExternalCssRequestParamName(String externalCssRequestParamName)
```

Defines an external css request paramater name. Used for portal integration. A portal application may provide to the framework as a query string a css URL as follows: http://?cssurl= ("cssurl" will be the value of the field in this case)

**Parameters:**

externalCssRequestParamName

---

## get\_ExternalCssRequestParamName

```
public String get_ExternalCssRequestParamName()
```

For .NET framework usage. Expose the method as a property.

---

## set\_ExternalCssRequestParamName

```
public void set_ExternalCssRequestParamName(String externalCssRequestParamName)
```

For .NET framework usage. Expose the method as a property.

---

## get\_NaturalDataTransferConfig

```
public GXNdtConfig get_NaturalDataTransferConfig()
```

For .NET framework usage. Expose the method as a property.

## getNaturalDataTransferConfig

```
public GXNdtConfig getNaturalDataTransferConfig()
```

Contains the Natural data transfer configuration

**Returns:**

the Natural data transfer configuration

---

## set\_NaturalDataTransferConfig

```
public void set_NaturalDataTransferConfig(GXNdtConfig naturalDataTransferConfig)
```

For internal use

---

## setNaturalDataTransferConfig

```
public void setNaturalDataTransferConfig(GXNdtConfig naturalDataTransferConfig)
```

For internal use

---

## clone

```
public Object clone()
```

---

## isUseOldJSEngine

```
public boolean isUseOldJSEngine()
```

For internal use

---

## setUseOldJSEngine

```
public void setUseOldJSEngine(boolean useOldJSEngine)
```

For internal use

---

## isUseJavaScriptsAsResource

```
public boolean isUseJavaScriptsAsResource()
```

For internal use

---

## setUseJavaScriptsAsResource

```
public void setUseJavaScriptsAsResource(boolean useJavaScriptsAsResource)
```

For internal use

---

## get\_UseJavaScriptsAsResource

```
public boolean get_UseJavaScriptsAsResource()
```

For .NET framework usage. Expose the method as a property.

---

---

## set\_UseJavaScriptsAsResource

```
public void set_UseJavaScriptsAsResource(boolean useJavaScriptsAsResource)
```

For .NET framework usage. Expose the method as a property.

---

## isUseScriptsInPage

```
public boolean isUseScriptsInPage()
```

Determines if to add framework scripts to each page. Otherwise the application will work from an z\_container.aspx/jsp frameset

**Returns:**

is adding framework scripts to each page

---

## setUseScriptsInPage

```
public void setUseScriptsInPage(boolean useScriptsInPage)
```

Determines if to add framework scripts to each page. Otherwise the application will work from an z\_container.aspx/jsp frameset

**Parameters:**

useScriptsInPage - if to add framework scripts to each page

---

## get\_UseScriptsInPage

```
public boolean get_UseScriptsInPage()
```

For .NET framework usage. Expose the method as a property.

---

## set\_UseScriptsInPage

```
public void set_UseScriptsInPage(boolean useScriptsInPage)
```

For .NET framework usage. Expose the method as a property.

---

## isUseFramesForSubmit

```
public boolean isUseFramesForSubmit()
```

This feature prevents the displayed page from flickering every time the page is submitted. This affect is prevented by using two separate frames, while only one is visible at each stage. These frames continuously switch between being active and passive each time a page is submitted. The active frame is displayed, and every time a page is submitted, the frame becomes the passive frame, in this way preventing the flickering affect. When the modal window feature is enabled in the Framework Configuration Editor or the 'Enable Natural-Data-transfer support' is enabled in the host, this feature is automatically enabled even if this parameter is not selected.

---

## setUseFramesForSubmit

```
public void setUseFramesForSubmit(boolean useFramesForSubmit)
```

This feature prevents the displayed page from flickering every time the page is submitted. This affect is prevented by using two separate frames, while only one is visible at each stage. These frames continuously switch between being active and passive each time a page is submitted. The active frame is displayed, and every time a page is submitted, the frame becomes the passive frame, in this way preventing the flickering affect. When the modal window feature is enabled in the Framework Configuration Editor or the 'Enable Natural-Data-transfer support' is enabled in the host, this feature is automatically enabled even if this parameter is not selected.

---

(continued from last page)

**Parameters:**

useFramesForSubmit

---

**isUseCalendar**

```
public boolean isUseCalendar()
```

---

**setUseCalendar**

```
public void setUseCalendar(boolean useCalendar)
```

---

**isPromptBeforeSessionTimeOut**

```
public boolean isPromptBeforeSessionTimeOut()
```

Set to true to display a message indicating to the user that that the session is about to be disconnected. This message will be displayed towards the end of the Non-activity timeout period (defined in the Application Properties Host tab). The user will be able to select to resume or quit the session. When not selecting either of these options, the user will be logged off automatically. It is possible to customize the relevant prompt page (template/logoffPrompt.htm).

**Returns:**

isPromptBeforeSessionTimeOut

---

**setPromptBeforeSessionTimeOut**

```
public void setPromptBeforeSessionTimeOut(boolean promptBeforeSessionTimeOut)
```

Set to true to display a message indicating to the user that that the session is about to be disconnected. This message will be displayed towards the end of the Non-activity timeout period (defined in the Application Properties Host tab). The user will be able to select to resume or quit the session. When not selecting either of these options, the user will be logged off automatically. It is possible to customize the relevant prompt page (template/logoffPrompt.htm).

**Parameters:**

promptBeforeSessionTimeOut

---

**get\_PromptBeforeSessionTimeOut**

```
public boolean get_PromptBeforeSessionTimeOut()
```

For .NET framework usage. Expose the method as a property.

---

**set\_PromptBeforeSessionTimeOut**

```
public void set_PromptBeforeSessionTimeOut(boolean promptBeforeSessionTimeOut)
```

For .NET framework usage. Expose the method as a property.

---

**getTerminationPath**

```
public String getTerminationPath()
```

Defines a termination path to use when the user logs off by either closing the browser, or clicking the logoff link (activates logoff.jsp/asp).

(continued from last page)

**Returns:**

termination path

---

**setTerminationPath**

```
public void setTerminationPath(String terminationPath)
```

Defines a termination path to use when the user logs off by either closing the browser, or clicking the logoff link (activates logoff.jsp/aspx).

**Parameters:**

terminationPath

---

**getHostKeysTagUserExit**

```
public GXIHostKeysTagUserExit getHostKeysTagUserExit()
```

Defines a user exit for host keys tag(JSP) / control (.NET)

**Returns:**

---

**setHostKeysTagUserExit**

```
public void setHostKeysTagUserExit(GXIHostKeysTagUserExit hostKeysTagUserExit)
```

Defines a user exit for host keys tag(JSP) / control (.NET)

**Parameters:**

HostKeysTagUserExit

---

**isSupportPartialPageRendering**

```
public boolean isSupportPartialPageRendering()
```

**Deprecated.** *Partial page rendering is always supported*

Partial Page Rendering (PPR) is a feature that allows a part of a page to be redrawn rather than having to reload the entire page. You can add server side buttons/links and perform logic on the target server function, and as a result update only a part of the page. Typical use: Paging, sorting, collecting aggregated data from a few screens into the same web page, and more. To implement the feature first select the Support Partial Page Rendering check box and then add a button/link which performs a server side action. Create a wrapping tag (div) to the web page, in the area you want to update and add the required JavaScript code to the link/button (Refer to the documentation for details).

**Returns:**

---

**setSupportPartialPageRendering**

```
public void setSupportPartialPageRendering(boolean supportPartialPageRendering1)
```

**Deprecated.** *Partial page rendering is always supported*

Partial Page Rendering (PPR) is a feature that allows a part of a page to be redrawn rather than having to reload the entire page. You can add server side buttons/links and perform logic on the target server function, and as a result update only a part of the page. Typical use: Paging, sorting, collecting aggregated data from a few screens into the same web page, and more. To implement the feature first select the Support Partial Page Rendering check box and then add a button/link which performs a server side action. Create a wrapping tag (div) to the web page, in the area you want to update and add the required JavaScript code to the link/button (Refer to the documentation for details).

**Parameters:**



(continued from last page)

supportPartialPageRendering1

---

## getWebWindowName

```
public String getWebWindowName()
```

Determines the ApplinX web window name. Useful for activating the web application from an external link which targets to this given name, and avoids opening multiple browsers from this link

**Returns:**

window name

---

## setWebWindowName

```
public void setWebWindowName(String webWindowName)
```

Determines the ApplinX web window name. Useful for activating the web application from an external link which targets to this given name, and avoids opening multiple browsers from this link

**Parameters:**

webWindowName

---

## get\_ScreenLockerText

```
public String get_ScreenLockerText()
```

For .NET framework usage. Expose the method as a property.

---

## set\_ScreenLockerText

```
public void set_ScreenLockerText(String screenLockerPage)
```

For .NET framework usage. Expose the method as a property.

---

## get\_BoundTemplateParts

```
public String[] get_BoundTemplateParts()
```

For .NET framework usage. Expose the method as a property.

---

## get\_UseOldJSEngine

```
public boolean get_UseOldJSEngine()
```

For .NET framework usage. Expose the method as a property.

---

## set\_UseOldJSEngine

```
public void set_UseOldJSEngine(boolean useOldJSEngine)
```

For .NET framework usage. Expose the method as a property.

---

## get\_UseFramesForSubmit

```
public boolean get_UseFramesForSubmit()
```

For .NET framework usage. Expose the method as a property.

---

## set\_UseFramesForSubmit

```
public void set_UseFramesForSubmit(boolean useFramesForSubmit)
```

For .NET framework usage. Expose the method as a property.

---

## get\_UseCalendar

```
public boolean get_UseCalendar()
```

For .NET framework usage. Expose the method as a property.

---

## set\_UseCalendar

```
public void set_UseCalendar(boolean useCalendar)
```

For .NET framework usage. Expose the method as a property.

---

## get\_TerminationPath

```
public String get_TerminationPath()
```

For .NET framework usage. Expose the method as a property.

---

## set\_TerminationPath

```
public void set_TerminationPath(String terminationPath)
```

For .NET framework usage. Expose the method as a property.

---

## get\_SupportPartialPageRendering

```
public boolean get_SupportPartialPageRendering()
```

**Deprecated.** *Partial page rendering is always supported*

For .NET framework usage. Expose the method as a property.

---

## set\_SupportPartialPageRendering

```
public void set_SupportPartialPageRendering(boolean supportPartialPageRendering1)
```

**Deprecated.** *Partial page rendering is always supported*

For .NET framework usage. Expose the method as a property.

---

## get\_WebWindowName

```
public String get_WebWindowName()
```

For .NET framework usage. Expose the method as a property.

---

## set\_WebWindowName

```
public void set_WebWindowName(String webWindowName)
```

For .NET framework usage. Expose the method as a property.

---

---

Package

**com.sabratec.applinx.framework.config.  
doc**

## com.sabratec.applinx.framework.config.doc Class GXLogNode

java.lang.Object

└-com.sabratec.applinx.framework.config.doc.GXLogNode

public class **GXLogNode**  
extends Object

The Framework Log lists the errors and exceptions and can then be used to debug the framework.

### Field Summary

public	<a href="#">AppendFile</a> This parameter determines whether to start the log in a new file or to append the log to the existing file.
public	<a href="#">FileName</a> The framework's log is written to this file.
public	<a href="#">LogHistory</a> The number of backups saved before overwriting the old log files.
public	<a href="#">LogLevel</a> The contents of the log file are as detailed as this property defines, where every level includes the levels above it.
public	<a href="#">MaxFileSize</a> A new log file will be started after the current file has been filled to the maximum file size.

### Constructor Summary

public	<a href="#">GXLogNode()</a>
--------	-----------------------------

Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Fields

#### FileName

public java.lang.String **FileName**

The framework's log is written to this file.

#### AppendFile

public java.lang.String **AppendFile**

This parameter determines whether to start the log in a new file or to append the log to the existing file.

## LogLevel

```
public java.lang.String LogLevel
```

The contents of the log file are as detailed as this property defines, where every level includes the levels above it. For example, the Debug level also logs Normal, Warnings and Errors Only levels. Available values: Normal, Warnings, Errors only, Debug (by default Normal is selected).

---

## LogHistory

```
public java.lang.String LogHistory
```

The number of backups saved before overwriting the old log files.  
For example: 10 means save the last 10 log files, in addition to the current one, then start to overwrite. Default value is 10.

---

## MaxFileSize

```
public java.lang.String MaxFileSize
```

A new log file will be started after the current file has been filled to the maximum file size.

## Constructors

### GXLogNode

```
public GXLogNode()
```

## com.sabratec.applinx.framework.config.doc Class GXPerformanceMonitorNode

java.lang.Object

└-com.sabratec.applinx.framework.config.doc.GXPerformanceMonitorNode

public class **GXPerformanceMonitorNode**  
extends Object

The Performance Monitor monitors user actions and is used for analyzing framework performance. It includes log comments for every framework request. A performance log line contains the following data: Session Id, Screen Name, total request time, total server side divided into: attach, sendKeys, instant generation, detach, total page client load time. Note: Framework performance is recorded only for Instant pages and for generated pages that include PF/ENTER keys. Custom code mapped to server side buttons/links cannot be monitored. The Performance monitor is typically used in Web enabled applications.

### Field Summary

public	<a href="#">FileName</a> The name of the file where the performance log will be saved.
public	<a href="#">PerSessionID</a> Determines whether separate files will be saved for each session.
public	<a href="#">ShortLongDescription</a> Determines whether to write a short description, or a detailed description.
public	<a href="#">TraceSessions</a> Determines whether to trace all sessions or only a specific session.
public	<a href="#">TraceSessionsIDs</a> Enter the IDs of the specific sessions that you wish to trace.

### Constructor Summary

public	<a href="#">GXPerformanceMonitorNode()</a>
--------	--

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Fields

### FileName

public java.lang.String **FileName**

The name of the file where the performance log will be saved.

### PerSessionID

public java.lang.String **PerSessionID**

---

(continued from last page)

Determines whether separate files will be saved for each session.

---

## TraceSessions

```
public java.lang.String TraceSessions
```

Determines whether to trace all sessions or only a specific session.

---

## TraceSessionsIDs

```
public java.lang.String TraceSessionsIDs
```

Enter the IDs of the specific sessions that you wish to trace. Separate the session IDs by a comma.

---

## ShortLongDescription

```
public java.lang.String ShortLongDescription
```

Determines whether to write a short description, or a detailed description. A short description means that the information is displayed in a tabular structure. A detailed description displays the information as a paragraph.

## Constructors

### GXPerformanceMonitorNode

```
public GXPerformanceMonitorNode()
```

---

Package

**com.sabratec.applinx.framework.emulation.ftp.dialog**



## com.sabratec.applinx.framework.emulation.ftp.dialog Class GXFtpConfig

java.lang.Object

└-com.sabratec.applinx.framework.emulation.ftp.dialog.GXFtpConfig

### All Implemented Interfaces:

java.io.Serializable

```
public class GXFtpConfig
extends Object
implements java.io.Serializable
```

In ApplinX framework, it is possible to transfer files from the client to the host or from the host to the client, using the FTP dialog screens. The HTML emulation contains a link in the footer that opens an FTP Web dialog box. To upload/download files using the FTP option, you need to configure the following parameters.

Refer to the ApplinX Frameworks Developer's Guide for details regarding how to implement this feature.

### Field Summary

public static final	<a href="#">AS400</a> Value: 2
public static final	<a href="#">BY_APPLINX</a> Value: 999
public static final	<a href="#">MAIN_FRAME</a> Value: 1
public static final	<a href="#">SIMPLE</a> Value: 0

### Constructor Summary

public	<a href="#">GXFtpConfig()</a>
--------	-------------------------------

### Method Summary

String	<a href="#">get_HostAddress()</a> For .NET framework usage.
String	<a href="#">get_HostType()</a> For .NET framework usage.
String	<a href="#">getHostAddress()</a>
String	<a href="#">getHostType()</a>

void	<a href="#">set_HostAddress</a> (String hostAddress) For .NET framework usage.
void	<a href="#">set_HostType</a> (String hostType) For .NET framework usage.
void	<a href="#">setHostAddress</a> (String hostAddress) Sets the IP address of the remote FTP host.
void	<a href="#">setHostType</a> (String hostType) Sets the type of the remote FTP host.

#### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Fields

### SIMPLE

```
public static final java.lang.String SIMPLE
```

Constant value: **0**

### MAIN\_FRAME

```
public static final java.lang.String MAIN_FRAME
```

Constant value: **1**

### AS400

```
public static final java.lang.String AS400
```

Constant value: **2**

### BY\_APPLINX

```
public static final java.lang.String BY_APPLINX
```

Constant value: **999**

## Constructors

### GXFtpConfig

```
public GXFtpConfig()
```

## Methods

(continued from last page)

---

## getHostType

```
public String getHostType()
```

---

## setHostType

```
public void setHostType(String hostType)
```

Sets the type of the remote FTP host.  
Possible values are:

- Mainframe
- AS400
- Other - for any other kind
- By Applinx - when the FTP host is the same as the host used in the current ApplinX session.

### Parameters:

hostType

---

## get\_HostType

```
public String get_HostType()
```

For .NET framework usage. Expose the method as a property.

---

## set\_HostType

```
public void set_HostType(String hostType)
```

For .NET framework usage. Expose the method as a property.

---

## getHostAddress

```
public String getHostAddress()
```

---

## setHostAddress

```
public void setHostAddress(String hostAddress)
```

Sets the IP address of the remote FTP host.

### Parameters:

hostAddress

---

## get\_HostAddress

```
public String get_HostAddress()
```

For .NET framework usage. Expose the method as a property.

---

(continued from last page)

## **set\_HostAddress**

```
public void set_HostAddress(String hostAddress)
```

For .NET framework usage. Expose the method as a property.

---

Package

**com.sabratec.applinx.framework.emulation.macros**

## com.sabratec.applinx.framework.emulation.macros

### Class GXMacroConfig

java.lang.Object

└-com.sabratec.applinx.framework.emulation.macros.GXMacroConfig

#### All Implemented Interfaces:

java.io.Serializable

```
public class GXMacroConfig
extends Object
implements java.io.Serializable
```

ApplinX emulation framework contains a built-in utility that allows end users to record macros just like in a standard emulation. The macros are saved on the Web server side in an encrypted (by default) xml file per user.

### Constructor Summary

public	<a href="#">GXMacroConfig()</a>
--------	---------------------------------

### Method Summary

boolean	<a href="#">get_EncryptData()</a> For .NET framework usage.
long	<a href="#">get_Flicker()</a> For .NET framework usage.
String	<a href="#">get_MacrosFolder()</a> For .NET framework usage.
boolean	<a href="#">get_SaveUserNameLocally()</a> For .NET framework usage.
String	<a href="#">get_UserName()</a> For .NET framework usage.
boolean	<a href="#">getEncryptData()</a>
long	<a href="#">getFlicker()</a>
String	<a href="#">getMacrosFolder()</a>
String	<a href="#">getUserName()</a>
boolean	<a href="#">saveUserNameLocally()</a>
void	<a href="#">set_EncryptData(boolean encryptData)</a> For .NET framework usage.

void	<a href="#">set_Flicker</a> (long flicker) For .NET framework usage.
void	<a href="#">set_MacrosFolder</a> (String folder) For .NET framework usage.
void	<a href="#">set_SaveUserNameLocally</a> (boolean saveLocal) For .NET framework usage.
void	<a href="#">set_UserName</a> (String userName) For .NET framework usage.
void	<a href="#">setEncryptData</a> (boolean encryptData) Determines whether to encrypt the macro.
void	<a href="#">setFlicker</a> (long flicker)
void	<a href="#">setMacrosFolder</a> (String folder) Determines the folder on the web server where the macros will be saved.
void	<a href="#">setSaveUserNameLocally</a> (boolean saveLocal) This parameter must be set to True when selecting to set the User name based on the user's cookies.
void	<a href="#">setUserName</a> (String userName) The user macros file will be saved according to the user name, therefore it should be a unique ID of the Web user.

#### Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Constructors

### GXMacroConfig

```
public GXMacroConfig()
```

## Methods

### getMacrosFolder

```
public String getMacrosFolder()
```

### setMacrosFolder

```
public void setMacrosFolder(String folder)
```

Determines the folder on the web server where the macros will be saved.

---

(continued from last page)

## **get\_MacrosFolder**

```
public String get_MacrosFolder()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_MacrosFolder**

```
public void set_MacrosFolder(String folder)
```

For .NET framework usage. Expose the method as a property.

---

## **getUserName**

```
public String getUserName()
```

---

## **setUserName**

```
public void setUserName(String userName)
```

The user macros file will be saved according to the user name, therefore it should be a unique ID of the Web user. The User name can be according to the IP Address, it can be cookie based, or set in the code. By default it is configured to IP Address, which is a good idea when the user's IP is constant. When selecting the cookie based option, ApplinX will assign a cookie to the end user, and will read the macro according to the cookie. Macros will be lost when the user deletes his cookies. To enable this option you should set SaveUserNameLocally to true. Select Other to use a session variable which was saved according to the login page user name, or to use the NT user name (relevant for .NET only) (Request.ServerVariables["AUTH\_USER"])

---

## **get\_UserName**

```
public String get_UserName()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_UserName**

```
public void set_UserName(String userName)
```

For .NET framework usage. Expose the method as a property.

---

## **saveUserNameLocally**

```
public boolean saveUserNameLocally()
```

---

## **get\_SaveUserNameLocally**

```
public boolean get_SaveUserNameLocally()
```

For .NET framework usage. Expose the method as a property.

---

## **setSaveUserNameLocally**

```
public void setSaveUserNameLocally(boolean saveLocal)
```

This parameter must be set to True when selecting to set the User name based on the user's cookies.

---



## setEncryptData

```
public void setEncryptData(boolean encryptData)
```

Determines whether to encrypt the macro.

Recommended to use when the macro includes user names and/or passwords.

When changing this setting, existing macros will no longer function. The existing macros will be deleted from the macros folder when recording new macros.

---

## getEncryptData

```
public boolean getEncryptData()
```

---

## set\_EncryptData

```
public void set_EncryptData(boolean encryptData)
```

For .NET framework usage. Expose the method as a property.

---

## get\_EncryptData

```
public boolean get_EncryptData()
```

For .NET framework usage. Expose the method as a property.

---

## setFlicker

```
public void setFlicker(long flicker)
```

---

## getFlicker

```
public long getFlicker()
```

---

## set\_Flicker

```
public void set_Flicker(long flicker)
```

For .NET framework usage. Expose the method as a property.

---

## get\_Flicker

```
public long get_Flicker()
```

For .NET framework usage. Expose the method as a property.

---

## set\_SaveUserNameLocally

```
public void set_SaveUserNameLocally(boolean saveLocal)
```

For .NET framework usage. Expose the method as a property.

---

---

## Package

# com.sabratec.applinx.framework.sso

## Single SignOn

This package is responsible for managing Single SignOn for host applications. The process is combined from 3 parts:

### Recognizing a SignOn screen

The SignOn screen recognition can be one of the followings:

- Automatic (GXSignOnScreenAutomaticRecognizer) - When the first unprotected field of the screen is visible, and the 2nd unprotected field is invisible(password).
- By name (GXSignOnScreenByNameReocgnizer) - May accepts a screen name, and optionally user/password field names.

### Retrieving the host user name/password from

The user/password retrieving part can be implemented by implementing the interface GXIUserPasswordRetriever. By default ApplinX framework provides 2 implementations:

- Http request - user name/password are retrieved as a URL parameter of posted to the ApplinX web application URL to gxfirstpage.jsp/aspx
- Http session - user name/password are retrieved as session variables saved within the ApplinX web application URL to gxfirstpage.jsp/aspx

Both retriever should must accept the paramter name of the request parameters/session variables.

### Executing a SignOn process

Determines what action to perform when a SignOn screen was recognized. The retrieved user/password will be passed to one of the following Single SignOn executer:

- Path executer (GXSSOPathExecuter) - Executes the given path with the retrieved user/password
- SendKeys executer (GXSSOSendKeysExecuter) - Performs the mentioned action key with with the retrieved user/password

All the relevant paramaters can be configured using the framework configuration editor, Single SignOn node.

## com.sabratec.applinx.framework.sso Class GXAbstractSignOnScreenRecognizer

java.lang.Object

└-com.sabratec.applinx.framework.sso.GXAbstractSignOnScreenRecognizer

### All Implemented Interfaces:

[GXISignOnScreenRecognizer](#)

### Direct Known Subclasses:

[GXSignOnScreenAutomaticRecognizer](#)

public abstract class **GXAbstractSignOnScreenRecognizer**

extends Object

implements [GXISignOnScreenRecognizer](#)

## Constructor Summary

public	<a href="#">GXAbstractSignOnScreenRecognizer()</a>
--------	--

## Method Summary

<a href="#">GXIField</a>	<a href="#">get_PasswordField()</a>
<a href="#">GXIField</a>	<a href="#">get_UserField()</a>
<a href="#">GXIField</a>	<a href="#">getPasswordField()</a>
<a href="#">GXIField</a>	<a href="#">getUserField()</a>
void	<a href="#">setPasswordField(<a href="#">GXIField</a> passwordField)</a> For internal use
void	<a href="#">setUserField(<a href="#">GXIField</a> userField)</a> For internal use

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Methods inherited from interface [com.sabratec.applinx.framework.sso.GXISignOnScreenRecognizer](#)

[recognizeScreen](#)

## Constructors

(continued from last page)

## GXAbstractSignOnScreenRecognizer

```
public GXAbstractSignOnScreenRecognizer()
```

### Methods

#### getPasswordField

```
public GXIField getPasswordField()
```

---

#### setPasswordField

```
public void setPasswordField(GXIField passwordField)
```

For internal use

---

#### getUserField

```
public GXIField getUserField()
```

---

#### setUserField

```
public void setUserField(GXIField userField)
```

For internal use

---

#### get\_PasswordField

```
public GXIField get_PasswordField()
```

---

#### get\_UserField

```
public GXIField get_UserField()
```

## com.sabratec.applinx.framework.sso Class GXAbstractSSOExecutor

java.lang.Object

└-com.sabratec.applinx.framework.sso.GXAbstractSSOExecutor

### All Implemented Interfaces:

[GXISSOExecutor](#)

### Direct Known Subclasses:

[GXSSOSendKeysExecutor](#), [GXSSOPathExecutor](#)

public abstract class **GXAbstractSSOExecutor**  
extends Object  
implements [GXISSOExecutor](#)

## Constructor Summary

public	<a href="#">GXAbstractSSOExecutor()</a>
--------	---

## Method Summary

void	<a href="#">performSingleSignOn</a> ( <a href="#">GXSSOConfig</a> ssoConfig, <a href="#">GXIClientBaseObject</a> baseObject)
------	--

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Methods inherited from interface [com.sabratec.applinx.framework.sso.GXISSOExecutor](#)

[performSingleSignOn](#)

## Constructors

### GXAbstractSSOExecutor

public **GXAbstractSSOExecutor**()

## Methods

### performSingleSignOn

public void **performSingleSignOn**([GXSSOConfig](#) ssoConfig,  
[GXIClientBaseObject](#) baseObject)  
throws [GXGeneralException](#)

(continued from last page)

## com.sabratec.applinx.framework.sso Interface GXISignOnScreenRecognizer

All Known Implementing Classes:

[GXAbstractSignOnScreenRecognizer](#)

---

```
public interface GXISignOnScreenRecognizer
    extends java.io.Serializable
```

---

### Method Summary

abstract <a href="#">GXSignOnRecognizerResponse</a>	<a href="#">recognizeScreen</a> ( <a href="#">GXIScreen</a> screen)
--	---

---

### Methods

#### **recognizeScreen**

```
public abstract GXSignOnRecognizerResponse recognizeScreen(GXIScreen screen)
```

## com.sabratec.applinx.framework.sso Interface GXISSOExecuter

All Known Implementing Classes:

[GXAbstractSSOExecuter](#)

```
public interface GXISSOExecuter
extends java.io.Serializable
```

### Method Summary

abstract void	<a href="#">performSingleSignOn</a> ( <a href="#">GXSSOConfig</a> ssoConfig, <a href="#">GXIClientBaseObject</a> baseObject)
---------------	--

### Methods

#### **performSingleSignOn**

```
public abstract void performSingleSignOn(GXSSOConfig ssoConfig,
GXIClientBaseObject baseObject)
throws GXGeneralException
```



## com.sabratec.applinx.framework.sso Interface GXUserPasswordRetriever

All Known Implementing Classes:

[GXAbstractHttpUserPasswordRetriever](#)

```
public interface GXUserPasswordRetriever
extends java.io.Serializable
```

### Method Summary

abstract String	<a href="#">getPassword()</a>
abstract String	<a href="#">getUserName()</a>

### Methods

#### getUserName

```
public abstract String getUserName()
```

#### getPassword

```
public abstract String getPassword()
```

## com.sabratec.applinx.framework.sso Class GXSignOnRecognizerResponse

java.lang.Object

└-com.sabratec.applinx.framework.sso.GXSignOnRecognizerResponse

public class **GXSignOnRecognizerResponse**  
extends Object

### Constructor Summary

public	<a href="#">GXSignOnRecognizerResponse()</a>
--------	--

### Method Summary

<a href="#">GXIField</a>	<a href="#">get_PasswordField()</a> For .NET framework usage.
<a href="#">GXIField</a>	<a href="#">get_UserField()</a> For .NET framework usage.
<a href="#">GXIField</a>	<a href="#">getPasswordField()</a>
<a href="#">GXIField</a>	<a href="#">getUserField()</a>
boolean	<a href="#">isSignOnScreen()</a>
void	<a href="#">setPasswordField(<a href="#">GXIField</a> passwordField)</a> For internal use
void	<a href="#">setSignOnScreen(boolean isSignOnScreen)</a>
void	<a href="#">setUserField(<a href="#">GXIField</a> userField)</a> For internal use

### Methods inherited from class java.lang.Object

`equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait`

### Constructors

#### **GXSignOnRecognizerResponse**

public **GXSignOnRecognizerResponse()**

### Methods

---

(continued from last page)

## getPasswordField

```
public GXIField getPasswordField()
```

---

## getUserField

```
public GXIField getUserField()
```

---

## setPasswordField

```
public void setPasswordField(GXIField passwordField)
```

For internal use

---

## setUserField

```
public void setUserField(GXIField userField)
```

For internal use

---

## get\_PasswordField

```
public GXIField get_PasswordField()
```

For .NET framework usage. Expose the method as a property.

---

## get\_UserField

```
public GXIField get_UserField()
```

For .NET framework usage. Expose the method as a property.

---

## isSignOnScreen

```
public boolean isSignOnScreen()
```

---


## setSignOnScreen

```
public void setSignOnScreen(boolean isSignOnScreen)
```

---

## com.sabratec.applinx.framework.sso Class GXSignOnScreenAutomaticRecognizer

java.lang.Object



### All Implemented Interfaces:

[GXISignOnScreenRecognizer](#)

### Direct Known Subclasses:

[GXSignOnScreenByNameRecognizer](#)

```
public class GXSignOnScreenAutomaticRecognizer
extends GXAbstractSignOnScreenRecognizer
```

This class recognizes a login screen if the 1st field is an unprotected field, and the 2nd field is a hidden field

## Constructor Summary

public	<a href="#">GXSignOnScreenAutomaticRecognizer()</a>
--------	---

## Method Summary

<a href="#">GXSignOnRecognizerResponse</a>	<a href="#">recognizeScreen(GXIScreen screen)</a>
--	---

### Methods inherited from class

[com.sabratec.applinx.framework.sso.GXAbstractSignOnScreenRecognizer](#)

[get\\_PasswordField](#), [get\\_UserField](#), [getPasswordField](#), [getUserField](#), [setPasswordField](#), [setUserField](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Methods inherited from interface [com.sabratec.applinx.framework.sso.GXISignOnScreenRecognizer](#)

[recognizeScreen](#)

## Constructors

### GXSignOnScreenAutomaticRecognizer

```
public GXSignOnScreenAutomaticRecognizer()
```

## Methods


(continued from last page)

## **recognizeScreen**

```
public GXSignInRecognizerResponse recognizeScreen(GXIScreen screen)
```

## com.sabratec.applinx.framework.sso Class GXSignOnScreenByNameRecognizer

java.lang.Object

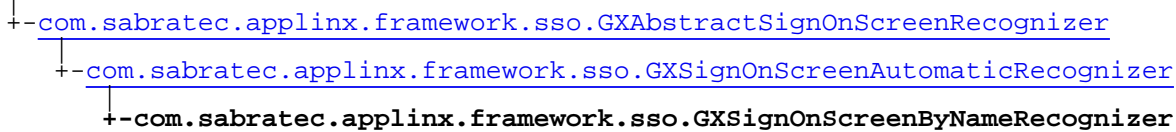

### All Implemented Interfaces:

[GXISignOnScreenRecognizer](#)

public class **GXSignOnScreenByNameRecognizer**  
extends [GXSignOnScreenAutomaticRecognizer](#)

This class determines if a specific screen is a signon screen according to the screen name and/or user/password field name

### Constructor Summary

public	<a href="#">GXSignOnScreenByNameRecognizer()</a>
public	<a href="#">GXSignOnScreenByNameRecognizer(String screenName)</a>
public	<a href="#">GXSignOnScreenByNameRecognizer(String screenName, String userNameFieldName, String passwordFieldName)</a>

### Method Summary

String	<a href="#">get_PasswordFieldName()</a> For .NET framework usage.
String	<a href="#">get_ScreenName()</a> For .NET framework usage.
String	<a href="#">get_UserNameFieldName()</a> For .NET framework usage.
String	<a href="#">getPasswordFieldName()</a> Returns the application field name which determines the password field
String	<a href="#">getScreenName()</a> Returns the screen name which determines that the screen is a signOn screen
String	<a href="#">getUserNameFieldName()</a> Returns the application field name which determines the user name field
<a href="#">GXSignOnRecognizerResponse</a>	<a href="#">recognizeScreen(GXIScreen screen)</a> Determines if the screen is a signon screen
void	<a href="#">set_PasswordFieldName(String passwordFieldName)</a> For .NET framework usage.

void	<a href="#">set_ScreenName</a> (String screenName) For .NET framework usage.
void	<a href="#">set_UserNameFieldName</a> (String userNameFieldName) For .NET framework usage.
void	<a href="#">setPasswordFieldName</a> (String passwordFieldName) Set the application field name which determines the password field
void	<a href="#">setScreenName</a> (String screenName) The name of the SignOn screen, when recognizing the signOn screen according to the screen's name.
void	<a href="#">setUserNameFieldName</a> (String userNameFieldName) Returns the application field name which determines the user name field

**Methods inherited from class**[com.sabratec.applinx.framework.sso.GXSignOnScreenAutomaticRecognizer](#)[recognizeScreen](#)**Methods inherited from class**[com.sabratec.applinx.framework.sso.GXAbstractSignOnScreenRecognizer](#)[get\\_PasswordField](#), [get\\_UserField](#), [getPasswordField](#), [getUserField](#), [setPasswordField](#), [setUserField](#)**Methods inherited from class** java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

**Methods inherited from interface** [com.sabratec.applinx.framework.sso.GXISignOnScreenRecognizer](#)[recognizeScreen](#)

## Constructors

### **GXSignOnScreenByNameRecognizer**

```
public GXSignOnScreenByNameRecognizer()
```

### **GXSignOnScreenByNameRecognizer**

```
public GXSignOnScreenByNameRecognizer(String screenName)
```

### **GXSignOnScreenByNameRecognizer**

```
public GXSignOnScreenByNameRecognizer(String screenName,
                                       String userNameFieldName,
                                       String passwordFieldName)
```

(continued from last page)

## Methods

### recognizeScreen

```
public GXSignOnRecognizerResponse recognizeScreen(GXIScreen screen)
```

Determines if the screen is a signon screen

**Parameters:**

screen - the screen to check

**Returns:**

---

### getPasswordFieldName

```
public String getPasswordFieldName()
```

Returns the application field name which determines the password field

**Returns:**

the application field name which determines the password field

---

### setPasswordFieldName

```
public void setPasswordFieldName(String passwordFieldName)
```

Set the application field name which determines the password field

**Parameters:**

passwordFieldName - the application field name which determines the password field

---

### getScreenName

```
public String getScreenName()
```

Returns the screen name which determines that the screen is a signOn screen

**Returns:**

the screen name which determines that the screen is a signOn screen

---

### setScreenName

```
public void setScreenName(String screenName)
```

The name of the SignOn screen, when recognizing the signOn screen according to the screen's name.

**Parameters:**

screenName - the screen name which determines that the screen is a signOn screen

---

### getUserNameFieldName

```
public String getUserNameFieldName()
```

Returns the application field name which determines the user name field

**Returns:**

the application field name which determines the user name field



## **setUserNameFieldName**

```
public void setUserNameFieldName(String userNameFieldName)
```

Returns the application field name which determines the user name field

### **Parameters:**

userNameFieldName - the application field name which determines the user name field

---

## **get\_PasswordFieldName**

```
public String get_PasswordFieldName()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_PasswordFieldName**

```
public void set_PasswordFieldName(String passwordFieldName)
```

For .NET framework usage. Expose the method as a property.

---

## **get\_ScreenName**

```
public String get_ScreenName()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_ScreenName**

```
public void set_ScreenName(String screenName)
```

For .NET framework usage. Expose the method as a property.

---

## **get\_UserNameFieldName**

```
public String get_UserNameFieldName()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_UserNameFieldName**

```
public void set_UserNameFieldName(String userNameFieldName)
```

For .NET framework usage. Expose the method as a property.

---

## com.sabratec.applinx.framework.sso Class GXSSOConfig

java.lang.Object

└-com.sabratec.applinx.framework.sso.GXSSOConfig

### All Implemented Interfaces:

java.io.Serializable

```
public class GXSSOConfig
extends Object
implements java.io.Serializable
```

This class manages the configuration of a single signOn process against a given host. It holds a [GXISignOnScreenRecognizer](#) which determines whether the screen is a signOn screen, a [GXIUUserPasswordRetriever](#) which returns a user password from an external resource, and a [GXISSOExecuter](#) which performs the SignOn.

## Constructor Summary

public	<a href="#">GXSSOConfig()</a>
--------	-------------------------------

## Method Summary

boolean	<a href="#">get_Enabled()</a> For .NET framework usage.
<a href="#">GXISignOnScreenRecognizer</a>	<a href="#">getSignOnScreenRecognizer()</a> Determines the type of SignOn screen recognizer to use
<a href="#">GXISSOExecuter</a>	<a href="#">getSsoExecuter()</a> Determines the type of single SignOn executer to use
<a href="#">GXIUUserPasswordRetriever</a>	<a href="#">getUserPasswordRetriever()</a> Determines the type of user/password retriever to use
boolean	<a href="#">isEnabled()</a> Determines whether to activate a single sign on to the host
void	<a href="#">set_Enabled(boolean enabled)</a> For .NET framework usage.
void	<a href="#">setEnabled(boolean enabled)</a> Determines whether to activate the single sign option.
void	<a href="#">setSignOnScreenRecognizer(GXISignOnScreenRecognizer signOnScreenRecognizer)</a> Determines the method to use to recognize the sign on screen.
void	<a href="#">setSsoExecuter(GXISSOExecuter ssoExecuter)</a> Determines what happens once the SignOn is recognized
void	<a href="#">setUserPasswordRetriever(GXIUUserPasswordRetriever userPasswordRetriever)</a> Determines the type of user/password retriever to use

**Methods inherited from class** `java.lang.Object``equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait`

## Constructors

### **GXSSOConfig**

```
public GXSSOConfig()
```

## Methods

### **isEnabled**

```
public boolean isEnabled()
```

Determines whether to activate a single sign on to the host

**Returns:**

whether the single signon mechanism is active

### **setEnabled**

```
public void setEnabled(boolean enabled)
```

Determines whether to activate the single sign option.

**Parameters:**

`enabled` - if the sign signon mechanism is active

### **getUserPasswordRetriever**

```
public GX IUserPasswordRetriever getUserPasswordRetriever()
```

Determines the type of user/password retriever to use

**Returns:**

the type of user/password retriever to use

### **setUserPasswordRetriever**

```
public void setUserPasswordRetriever(GX IUserPasswordRetriever userPasswordRetriever)
```

Determines the type of user/password retriever to use

- Based on information retrieved from an HTTP request
- Based on information retrieved from an HTTP session
- Set in the code

**Parameters:**

`userPasswordRetriever` - the type of user/password retriever to use

---

## getSignOnScreenRecognizer

```
public GXISignOnScreenRecognizer getSignOnScreenRecognizer()
```

Determines the type of SignOn screen recognizer to use

**Returns:**

the type of SignOn screen recognizer to use

---

## setSignOnScreenRecognizer

```
public void setSignOnScreenRecognizer(GXISignOnScreenRecognizer  
signOnScreenRecognizer)
```

Determines the method to use to recognize the sign on screen.

- According to the screen name.
- Automatically recognize the user name and password fields.
- Set from the code.

**Parameters:**

signOnScreenRecognizer - the type of SignOn screen recognizer to use

---

## getSsoExecuter

```
public GXISSOExecuter getSsoExecuter()
```

Determines the type of single SignOn executer to use

**Returns:**

Determines the type of single SignOn screen executer to use

---

## setSsoExecuter

```
public void setSsoExecuter(GXISSOExecuter ssoExecuter)
```

Determines what happens once the SignOn is recognized

- Using an action key (enter an action key)
- Executing a path (enter a path name)
- Set in the code

**Parameters:**

ssoExecuter - the type of single SignOn executer to use

---

## get\_Enabled

```
public boolean get_Enabled()
```

For .NET framework usage. Expose the method as a property.

---

## set\_Enabled

```
public void set_Enabled(boolean enabled)
```


---

(continued from last page)

For .NET framework usage. Expose the method as a property.

## com.sabratec.applinx.framework.sso Class GXSSOPathExecuter

java.lang.Object



### All Implemented Interfaces:

[GXISSOExecuter](#)

public class **GXSSOPathExecuter**  
extends [GXAbstractSSOExecuter](#)

This path performs a single signOn according to the specified path name

### Constructor Summary

public	<a href="#">GXSSOPathExecuter</a> ()
public	<a href="#">GXSSOPathExecuter</a> (String pathName)

### Method Summary

String	<a href="#">get_PathName</a> () For .NET framework usage.
String	<a href="#">getPathName</a> ()
void	<a href="#">set_PathName</a> (String pathName) For .NET framework usage.
void	<a href="#">setPathName</a> (String pathName) The name of the path that is to be executed

### Methods inherited from class [com.sabratec.applinx.framework.sso.GXAbstractSSOExecuter](#)

[performSingleSignOn](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Methods inherited from interface [com.sabratec.applinx.framework.sso.GXISSOExecuter](#)

[performSingleSignOn](#)

### Constructors

(continued from last page)

---

## **GXSSOPathExecuter**

```
public GXSSOPathExecuter()
```

---

## **GXSSOPathExecuter**

```
public GXSSOPathExecuter(String pathName)
```

## Methods

### **getPathName**

```
public String getPathName()
```

---

### **setPathName**

```
public void setPathName(String pathName)
```

The name of the path that is to be executed

---

### **get\_PathName**

```
public String get_PathName()
```

For .NET framework usage. Expose the method as a property.

---

### **set\_PathName**

```
public void set_PathName(String pathName)
```

For .NET framework usage. Expose the method as a property.

## com.sabratec.applinx.framework.sso Class GXSSOSendKeysExecuter

java.lang.Object



All Implemented Interfaces:

[GXISSOExecuter](#)

public class **GXSSOSendKeysExecuter**  
extends [GXAbstractSSOExecuter](#)

### Constructor Summary

public	<a href="#">GXSSOSendKeysExecuter()</a>
public	<a href="#">GXSSOSendKeysExecuter(String actionKey)</a>

### Method Summary

String	<a href="#">get_ActionKey()</a> For .NET framework usage.
String	<a href="#">getActionKey()</a>
void	<a href="#">set_ActionKey(String actionKey)</a> For .NET framework usage.
void	<a href="#">setActionKey(String actionKey)</a> Enter the action key that is to be activated

Methods inherited from class [com.sabratec.applinx.framework.sso.GXAbstractSSOExecuter](#)

[performSingleSignOn](#)

Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

Methods inherited from interface [com.sabratec.applinx.framework.sso.GXISSOExecuter](#)

[performSingleSignOn](#)

### Constructors



(continued from last page)

---

## **GXSSOSendKeysExecuter**

```
public GXSSOSendKeysExecuter()
```

---

## **GXSSOSendKeysExecuter**

```
public GXSSOSendKeysExecuter(String actionKey)
```

## **Methods**

### **getActionKey**

```
public String getActionKey()
```

---

### **setActionKey**

```
public void setActionKey(String actionKey)
```

Enter the action key that is to be activated

---

### **get\_ActionKey**

```
public String get_ActionKey()
```

For .NET framework usage. Expose the method as a property.

---

### **set\_ActionKey**

```
public void set_ActionKey(String actionKey)
```

For .NET framework usage. Expose the method as a property.

---

Package

**com.sabratec.applinx.framework.tables**

## com.sabratec.applinx.framework.tables Class GXTableBuildConfig

java.lang.Object

↳ com.sabratec.applinx.framework.tables.GXTableBuildConfig

### All Implemented Interfaces:

java.io.Serializable

public class **GXTableBuildConfig**  
extends Object  
implements java.io.Serializable

Summary description for GXITableBuildConfig.

### Constructor Summary

public	<a href="#">GXTableBuildConfig()</a>
--------	--------------------------------------

### Method Summary

boolean	<a href="#">get_AlternateColors()</a> For .NET framework usage.
String	<a href="#">get_AlternateCssName()</a> For .NET framework usage.
boolean	<a href="#">get_CloneComboxOnClientSide()</a> For .NET framework usage.
String	<a href="#">get_DynamicDisableCssClass()</a> For .NET framework usage.
boolean	<a href="#">get_DynamicFieldCheck()</a> <b>Deprecated.</b> Use <i>ReflectHostProtected</i> instead
String	<a href="#">get_Encoding()</a> For .NET framework usage.
int	<a href="#">get_FromRow()</a> For .NET framework usage.
boolean	<a href="#">get_GenerateTrOnClickEvent()</a> <b>Deprecated.</b>
boolean	<a href="#">get_ReflectBGColor()</a> For .NET framework usage.
boolean	<a href="#">get_ReflectFGColor()</a> For .NET framework usage.
boolean	<a href="#">get_ReflectHostProtected()</a> For .NET framework usage.

int	<a href="#">get_ToRow()</a> For .NET framework usage.
boolean	<a href="#">get_TrimLabels()</a> For .NET framework usage.
boolean	<a href="#">getAlternateColors()</a> Determines whether to use alternate colors for each second table row.
String	<a href="#">getAlternateCssName()</a> The css name used in every alternate table row when AlternateColors is set to true.
boolean	<a href="#">getCloneComboxOnClientSide()</a>
String	<a href="#">getDynamicDisableCssClass()</a> The name of the css class that is added to an input field, which changed to read only according to the ReflectHostProtected parameter.
boolean	<a href="#">getDynamicFieldCheck()</a> <b>Deprecated.</b> Use <i>ReflectHostProtected</i> instead
String	<a href="#">getEncoding()</a> <b>Deprecated.</b> - should no longer be used, UTF-8 is now used when needed.
int	<a href="#">getFromRow()</a> The starting row of the HTML on which the duplication will be based.
boolean	<a href="#">getGenerateTrOnClickEvent()</a> <b>Deprecated.</b>
boolean	<a href="#">getReflectBGColor()</a> Set if to dynamically add a relevant back color css to the page fields when calling <code>gx_fillForm</code> .
boolean	<a href="#">getReflectFGColor()</a> Determine if to dynamically add a relevant color css to the page fields when calling <code>gx_fillForm</code> .
boolean	<a href="#">getReflectHostProtected()</a> Determines whether to dynamically change the page input fields to read only when <code>gx_fillForm</code> is called
int	<a href="#">getToRow()</a> The ending row of the HTML on which the duplication will be based.
boolean	<a href="#">getTrimLabels()</a>
void	<a href="#">set_AlternateColors</a> (boolean alternateColors) For .NET framework usage.
void	<a href="#">set_AlternateCssName</a> (String alternateCssName) For .NET framework usage.
void	<a href="#">set_CloneComboxOnClientSide</a> (boolean cloneComboxOnClientSide) For .NET framework usage.
void	<a href="#">set_DynamicDisableCssClass</a> (String dynamicDisableCssClass) For .NET framework usage.

void	<a href="#">set_DynamicFieldCheck</a> (boolean dynamicFieldCheck) <b>Deprecated.</b> Use <i>ReflectHostProtected</i> instead <i>/** @property</i>
void	<a href="#">set_Encoding</a> (String encoding) For .NET framework usage.
void	<a href="#">set_FromRow</a> (int fromRow) For .NET framework usage.
void	<a href="#">set_GenerateTrOnClickEvent</a> (boolean generateTrOnClickEvent) <b>Deprecated.</b>
void	<a href="#">set_ReflectBGColor</a> (boolean reflectBGColor) For .NET framework usage.
void	<a href="#">set_ReflectFGColor</a> (boolean reflectFGColor) For .NET framework usage.
void	<a href="#">set_ReflectHostProtected</a> (boolean reflectHostProtected) For .NET framework usage.
void	<a href="#">set_ToRow</a> (int toRow) For .NET framework usage.
void	<a href="#">set_TrimLabels</a> (boolean trimLabels) <b>Deprecated.</b> Use <i>Applinx</i> server configuration, screen content tab
void	<a href="#">setAlternateColors</a> (boolean alternateColors) Determines whether to use alternate colors for every other row in a table.
void	<a href="#">setAlternateCssName</a> (String alternateCssName) The css name used in every alternate table row when <i>AlternateColors</i> is set to true.
void	<a href="#">setCloneComboxOnClientSide</a> (boolean cloneComboxOnClientSide) When this parameter is set to true (by default) an HTML text combo box is rendered once to the browser and all the other combo boxes of the following rows are cloned on the browser side from the first one (this significantly reduces the size of the HTML when there are a large number of options in the combo box).
void	<a href="#">setDynamicDisableCssClass</a> (String dynamicDisableCssClass) The name of the css class that is added to an input field, which changed to read only according to the <i>ReflectHostProtected</i> parameter.
void	<a href="#">setDynamicFieldCheck</a> (boolean dynamicFieldCheck) <b>Deprecated.</b> Use <i>ReflectHostProtected</i> instead
void	<a href="#">setEncoding</a> (String encoding) <b>Deprecated.</b> - should no longer be used, UTF-8 is now used when needed.
void	<a href="#">setFromRow</a> (int fromRow) The starting row of the HTML on which the duplication will be based.
void	<a href="#">setGenerateTrOnClickEvent</a> (boolean generateTrOnClickEvent) <b>Deprecated.</b>
void	<a href="#">setReflectBGColor</a> (boolean reflectBGColor) Set if to dynamically add a relevant back color css to the page fields when calling <i>gx_fillForm</i> .

void	<a href="#">setReflectFGColor</a> (boolean reflectFGColor) Determine if to dynamically add a relevant color css to the page fields when calling <code>gx_fillForm</code> .
void	<a href="#">setReflectHostProtected</a> (boolean reflectHostProtected) Determines whether to dynamically change the page input fields to read only when <code>gx_fillForm</code> is called
void	<a href="#">setToRow</a> (int toRow) The ending row of the HTML on which the duplication will be based.
void	<a href="#">setTrimLabels</a> (boolean trimLabels) <b>Deprecated.</b> Use <i>Applinx server configuration, screen content tab</i>

**Methods inherited from class** `java.lang.Object`

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Constructors

### GXTableBuildConfig

```
public GXTableBuildConfig()
```

## Methods

### getFromRow

```
public int getFromRow()
```

The starting row of the HTML on which the duplication will be based. By default, 1 when there is a header row, and 0 when there is not.

**Returns:**

The starting row of the HTML

### setFromRow

```
public void setFromRow(int fromRow)
```

The starting row of the HTML on which the duplication will be based. By default, 1 when there is a header row, and 0 when there is not.

**Parameters:**

`fromRow` - the starting row of the HTML on which the duplication will be based

### get\_FromRow

```
public int get_FromRow()
```

For .NET framework usage. Expose the method as a property.

---

(continued from last page)

## set\_FromRow

```
public void set_FromRow(int fromRow)
```

For .NET framework usage. Expose the method as a property.

---

## getToRow

```
public int getToRow()
```

The ending row of the HTML on which the duplication will be based. By default, 1 when there is a header row, and 0 when there is not. Both these parameters can be used when you want to duplicate host rows based on more than one HTML row. Note: 0 will be the index of the first HTML row (usually the headers row).

### Returns:

the ending row of the HTML on which the duplication will be based

---

## setToRow

```
public void setToRow(int toRow)
```

The ending row of the HTML on which the duplication will be based. By default, 1 when there is a header row, and 0 when there is not. Both these parameters can be used when you want to duplicate host rows based on more than one HTML row. Note: 0 will be the index of the first HTML row (usually the headers row).

### Parameters:

toRow - the ending row of the HTML on which the duplication will be based

---

## get\_ToRow

```
public int get_ToRow()
```

For .NET framework usage. Expose the method as a property.

---

## set\_ToRow

```
public void set_ToRow(int toRow)
```

For .NET framework usage. Expose the method as a property.

---

## setGenerateTrOnClickEvent

```
public void setGenerateTrOnClickEvent(boolean generateTrOnClickEvent)
```

**Deprecated.**

---

## getGenerateTrOnClickEvent

```
public boolean getGenerateTrOnClickEvent()
```

**Deprecated.**

---

## set\_GenerateTrOnClickEvent

```
public void set_GenerateTrOnClickEvent(boolean generateTrOnClickEvent)
```

---

(continued from last page)

**Deprecated.**

---

## **get\_GenerateTrOnClickEvent**

```
public boolean get_GenerateTrOnClickEvent()
```

**Deprecated.**

---

## **setDynamicFieldCheck**

```
public void setDynamicFieldCheck(boolean dynamicFieldCheck)
```

**Deprecated.** Use *ReflectHostProtected* instead

---

## **getDynamicFieldCheck**

```
public boolean getDynamicFieldCheck()
```

**Deprecated.** Use *ReflectHostProtected* instead

---

## **set\_DynamicFieldCheck**

```
public void set_DynamicFieldCheck(boolean dynamicFieldCheck)
```

**Deprecated.** Use *ReflectHostProtected* instead */\*\* @property*

---

## **set\_ReflectHostProtected**

```
public void set_ReflectHostProtected(boolean reflectHostProtected)
```

For .NET framework usage. Expose the method as a property.

---

## **get\_ReflectHostProtected**

```
public boolean get_ReflectHostProtected()
```

For .NET framework usage. Expose the method as a property.

---

## **get\_DynamicFieldCheck**

```
public boolean get_DynamicFieldCheck()
```

**Deprecated.** Use *ReflectHostProtected* instead

---



(continued from last page)

---

## setReflectHostProtected

```
public void setReflectHostProtected(boolean reflectHostProtected)
```

Determines whether to dynamically change the page input fields to read only when gx\_fillForm is called

**Parameters:**

reflectHostProtected - whether to dynamically change the page input fields to read only

---

## getReflectHostProtected

```
public boolean getReflectHostProtected()
```

Determines whether to dynamically change the page input fields to read only when gx\_fillForm is called

**Returns:**

whether to dynamically change the page input fields to read only

---

## setAlternateColors

```
public void setAlternateColors(boolean alternateColors)
```

Determines whether to use alternate colors for every other row in a table. Use AlternateCssName to control the alternate css name.

**Parameters:**

alternateColors - whether to use alternate colors for each second table row

---

## getAlternateColors

```
public boolean getAlternateColors()
```

Determines whether to use alternate colors for each second table row. Use AlternateCssName to control the alternate css name.

**Returns:**

whether to use alternate colors for each second table row

---

## set\_AlternateColors

```
public void set_AlternateColors(boolean alternateColors)
```

For .NET framework usage. Expose the method as a property.

---

## get\_AlternateColors

```
public boolean get_AlternateColors()
```

For .NET framework usage. Expose the method as a property.

---

## setAlternateCssName

```
public void setAlternateCssName(String alternateCssName)
```

The css name used in every alternate table row when AlternateColors is set to true. The default css is: gx\_tbl\_alternate2 , since the default generated table is generated with gx\_tbl\_alternate1.

**Parameters:**

alternateCssName - the css name used in every alternate table row

---

---

## getAlternateCssName

```
public String getAlternateCssName()
```

The css name used in every alternate table row when AlternateColors is set to true. The default css is: gx\_tbl\_alternate2 , since the default generated table is generated with gx\_tbl\_alternate1.

**Returns:**

the css name used in every alternate table row

---

## set\_AlternateCssName

```
public void set_AlternateCssName(String alternateCssName)
```

For .NET framework usage. Expose the method as a property.

---

## get\_AlternateCssName

```
public String get_AlternateCssName()
```

For .NET framework usage. Expose the method as a property.

---

## set\_DynamicDisableCssClass

```
public void set_DynamicDisableCssClass(String dynamicDisableCssClass)
```

For .NET framework usage. Expose the method as a property.

---

## get\_DynamicDisableCssClass

```
public String get_DynamicDisableCssClass()
```

For .NET framework usage. Expose the method as a property.

---

## setDynamicDisableCssClass

```
public void setDynamicDisableCssClass(String dynamicDisableCssClass)
```

The name of the css class that is added to an input field, which changed to read only according to the ReflectHostProtected parameter. Used for giving a different look to this type of input field.

**Parameters:**

dynamicDisableCssClass - the name of the css class that is added to an input field

---

## getDynamicDisableCssClass

```
public String getDynamicDisableCssClass()
```

The name of the css class that is added to an input field, which changed to read only according to the ReflectHostProtected parameter. Used for giving a different look to this type of input field.

**Returns:**

the name of the css class that is added to an input field

---

## setReflectFGColor

```
public void setReflectFGColor(boolean reflectFGColor)
```

---

(continued from last page)

Determine if to dynamically add a relevant color css to the page fields when calling `gx_fillForm`. The relevant css classes are in `styles_instant.css` in the new application /`css_colors` folder in the emulation template.

**Parameters:**

`reflectFGColor` - whether to dynamically add a relevant color css to the page fields

---

**getReflectFGColor**

```
public boolean getReflectFGColor()
```

Determine if to dynamically add a relevant color css to the page fields when calling `gx_fillForm`. The relevant css classes are in `styles_instant.css` in the new application /`css_colors` folder in the emulation template.

**Returns:**

whether to dynamically add a relevant color css to the page fields

---

**set\_ReflectFGColor**

```
public void set_ReflectFGColor(boolean reflectFGColor)
```

For .NET framework usage. Expose the method as a property.

---

**get\_ReflectFGColor**

```
public boolean get_ReflectFGColor()
```

For .NET framework usage. Expose the method as a property.

---

**setReflectBGColor**

```
public void setReflectBGColor(boolean reflectBGColor)
```

Set if to dynamically add a relevant back color css to the page fields when calling `gx_fillForm`. The relevant css classes are in `styles_instant.css` in the new application /`css_colors` folder in the emulation template.

**Parameters:**

`reflectBGColor` - whether to dynamically add a relevant back color css to the page fields

---

**getReflectBGColor**

```
public boolean getReflectBGColor()
```

Set if to dynamically add a relevant back color css to the page fields when calling `gx_fillForm`. The relevant css classes are in `styles_instant.css` in the new application /`css_colors` folder in the emulation template.

**Returns:**

whether to dynamically add a relevant back color css to the page fields

---

**set\_ReflectBGColor**

```
public void set_ReflectBGColor(boolean reflectBGColor)
```

For .NET framework usage. Expose the method as a property.

---

**get\_ReflectBGColor**

```
public boolean get_ReflectBGColor()
```

For .NET framework usage. Expose the method as a property.

---

---

## setCloneComboxOnClientSide

```
public void setCloneComboxOnClientSide(boolean cloneComboxOnClientSide)
```

When this parameter is set to true (by default) an HTML text combo box is rendered once to the browser and all the other combo boxes of the following rows are cloned on the browser side from the first one (this significantly reduces the size of the HTML when there are a large number of options in the combo box). Set this parameter to false when you would like to dynamically manipulate the combo box values using table user exits: `gx_changeTr`, `gx_changeTd`, `gx_changeControl`.

---

## getCloneComboxOnClientSide

```
public boolean getCloneComboxOnClientSide()
```

---

## set\_CloneComboxOnClientSide

```
public void set_CloneComboxOnClientSide(boolean cloneComboxOnClientSide)
```

For .NET framework usage. Expose the method as a property.

---

## get\_CloneComboxOnClientSide

```
public boolean get_CloneComboxOnClientSide()
```

For .NET framework usage. Expose the method as a property.

---

## setTrimLabels

```
public void setTrimLabels(boolean trimLabels)
```

**Deprecated.** Use *ApplinX server configuration, screen content tab*

---

## getTrimLabels

```
public boolean getTrimLabels()
```

---

## set\_TrimLabels

```
public void set_TrimLabels(boolean trimLabels)
```

**Deprecated.** Use *ApplinX server configuration, screen content tab*

---

## get\_TrimLabels

```
public boolean get_TrimLabels()
```

For .NET framework usage. Expose the method as a property.

---

---

(continued from last page)

## getEncoding

```
public String getEncoding()
```

**Deprecated.** - *should no longer be used, UTF-8 is now used when needed.*

For JSP usage only. In JSP tables tags (gx:table), XSL serialization is internally used, and the encoding is required in case the table contains non-english character.

**Returns:**

the encoding used for JSP table tags (gx:table)

---

## setEncoding

```
public void setEncoding(String encoding)
```

**Deprecated.** - *should no longer be used, UTF-8 is now used when needed.*

For JSP usage only. In JSP tables tags (gx:table), XSL serialization is internally used, and the encoding is required in case the table contains non-english character

**Parameters:**

encoding - the encoding used for JSP table tags (gx:table)

---

## get\_Encoding

```
public String get_Encoding()
```

For .NET framework usage. Expose the method as a property.

---

## set\_Encoding

```
public void set_Encoding(String encoding)
```

For .NET framework usage. Expose the method as a property.

---

Package

**com.sabratec.applinx.framework.web.jse  
engine**

## com.sabratec.applinx.framework.web.jsengine Class GXClientConfig

java.lang.Object

└-com.sabratec.applinx.framework.web.jsengine.GXClientConfig

public class **GXClientConfig**  
extends Object

### Constructor Summary

public	<a href="#">GXClientConfig()</a>
--------	----------------------------------

### Method Summary

<a href="#">GXEngineConfig</a>	<a href="#">get_EngineConfig()</a> For .NET framework usage.
<a href="#">GXInstantEmulatorConfig</a>	<a href="#">get_InstantEmulatorConfig()</a> For .NET framework usage.
<a href="#">GXWebEmulatorConfig</a>	<a href="#">get_WebEmulatorConfig()</a> For .NET framework usage.
<a href="#">GXWindowConfig</a>	<a href="#">get_WindowConfig()</a> For .NET framework usage.
<a href="#">GXEngineConfig</a>	<a href="#">getEngineConfig()</a>
<a href="#">GXInstantEmulatorConfig</a>	<a href="#">getInstantEmulatorConfig()</a>
<a href="#">GXWebEmulatorConfig</a>	<a href="#">getWebEmulatorConfig()</a>
<a href="#">GXWindowConfig</a>	<a href="#">getWindowConfig()</a>
void	<a href="#">set_EngineConfig(GXEngineConfig engineConfig)</a> For .NET framework usage.
void	<a href="#">set_InstantEmulatorConfig(GXInstantEmulatorConfig instantEmulatorConfig)</a> For .NET framework usage.
void	<a href="#">set_WebEmulatorConfig(GXWebEmulatorConfig webEmulatorConfig)</a> For .NET framework usage.
void	<a href="#">set_WindowConfig(GXWindowConfig windowConfig)</a> For .NET framework usage.
void	<a href="#">setEngineConfig(GXEngineConfig engineConfig)</a>

void	<a href="#">setInstantEmulatorConfig</a> ( <a href="#">GXInstantEmulatorConfig</a> instantEmulatorConfig)
void	<a href="#">setWebEmulatorConfig</a> ( <a href="#">GXWebEmulatorConfig</a> webEmulatorConfig)
void	<a href="#">setWindowConfig</a> ( <a href="#">GXWindowConfig</a> windowConfig)

Methods inherited from class `java.lang.Object`

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Constructors

### GXClientConfig

```
public GXClientConfig()
```

## Methods

### getEngineConfig

```
public GXEngineConfig getEngineConfig()
```

### setEngineConfig

```
public void setEngineConfig(GXEngineConfig engineConfig)
```

### get\_EngineConfig

```
public GXEngineConfig get_EngineConfig()
```

For .NET framework usage. Expose the method as a property.

### set\_EngineConfig

```
public void set_EngineConfig(GXEngineConfig engineConfig)
```

For .NET framework usage. Expose the method as a property.

### getInstantEmulatorConfig

```
public GXInstantEmulatorConfig getInstantEmulatorConfig()
```

### setInstantEmulatorConfig

```
public void setInstantEmulatorConfig(GXInstantEmulatorConfig instantEmulatorConfig)
```



---

(continued from last page)

---

### **get\_InstantEmulatorConfig**

```
public GXInstantEmulatorConfig get_InstantEmulatorConfig()
```

For .NET framework usage. Expose the method as a property.

---

### **set\_InstantEmulatorConfig**

```
public void set_InstantEmulatorConfig(GXInstantEmulatorConfig instantEmulatorConfig)
```

For .NET framework usage. Expose the method as a property.

---

### **getWebEmulatorConfig**

```
public GXWebEmulatorConfig getWebEmulatorConfig()
```

### **setWebEmulatorConfig**

```
public void setWebEmulatorConfig(GXWebEmulatorConfig webEmulatorConfig)
```

### **get\_WebEmulatorConfig**

```
public GXWebEmulatorConfig get_WebEmulatorConfig()
```

For .NET framework usage. Expose the method as a property.

---

### **set\_WebEmulatorConfig**

```
public void set_WebEmulatorConfig(GXWebEmulatorConfig webEmulatorConfig)
```

For .NET framework usage. Expose the method as a property.

---

### **getWindowConfig**

```
public GXWindowConfig getWindowConfig()
```

### **setWindowConfig**

```
public void setWindowConfig(GXWindowConfig windowConfig)
```

### **get\_WindowConfig**

```
public GXWindowConfig get_WindowConfig()
```

For .NET framework usage. Expose the method as a property.

---

(continued from last page)

## **set\_WindowConfig**

```
public void set_WindowConfig(GXWindowConfig windowConfig)
```

For .NET framework usage. Expose the method as a property.

## com.sabratec.applinx.framework.web.jsengine Class GXEngineConfig

java.lang.Object

└-com.sabratec.applinx.framework.web.jsengine.GXEngineConfig

public class **GXEngineConfig**  
extends Object

framework configurations basic class

### Field Summary

public static final	<a href="#">LOG_LEVEL_DEBUG</a> Value: 3
public static final	<a href="#">LOG_LEVEL_ERROR</a> Value: 0
public static final	<a href="#">LOG_LEVEL_MESSAGE</a> Value: 2
public static final	<a href="#">LOG_LEVEL_WARNING</a> Value: 1

### Constructor Summary

public	<a href="#">GXEngineConfig()</a>
--------	----------------------------------

### Method Summary

String	<a href="#">get_DebugModules()</a> For .NET framework usage.
String	<a href="#">get_DefaultFrameColumns()</a> For .NET framework usage.
int	<a href="#">get_LogLevel()</a> For .NET framework usage.
String	<a href="#">get_LogoffMessage()</a> For .NET framework usage.
boolean	<a href="#">get_LogoffOnBrowserClose()</a> For .NET framework usage.
String	<a href="#">get_MozillaLogoffMessage()</a> For .NET framework usage.
boolean	<a href="#">get_PromptOnBrowserClose()</a> For .NET framework usage.

boolean	<a href="#">get_ShowLogConsole()</a> For .NET framework usage.
String	<a href="#">getDebugModules()</a>
String	<a href="#">getDefaultFrameColumns()</a> Used for debug purposes only.
int	<a href="#">getLogLevel()</a>
String	<a href="#">getLogoffMessage()</a> The popup message that will appear when closing the browser.
String	<a href="#">getMozillaLogoffMessage()</a> <b>Deprecated.</b> use <a href="#">getLogoffMessage()</a>
boolean	<a href="#">isLogoffOnBrowserClose()</a> Determines whether to log off from the host session when the browser is closed.
boolean	<a href="#">isPromptOnBrowserClose()</a> Prompt the user whether to exit the browser session.
boolean	<a href="#">isShowLogConsole()</a>
void	<a href="#">set_DebugModules(String debugModules)</a> For .NET framework usage.
void	<a href="#">set_DefaultFrameColumns(String defaultFrameColumns)</a> For .NET framework usage.
void	<a href="#">set_LogLevel(int logLevel)</a> For .NET framework usage.
void	<a href="#">set_LogoffMessage(String logoffMessage)</a> For .NET framework usage.
void	<a href="#">set_LogoffOnBrowserClose(boolean logoffOnBrowserClose)</a> For .NET framework usage.
void	<a href="#">set_MozillaLogoffMessage(String mozillaLogoffMessage)</a> For .NET framework usage.
void	<a href="#">set_PromptOnBrowserClose(boolean promptOnBrowserClose)</a> For .NET framework usage.
void	<a href="#">set_ShowLogConsole(boolean showLogConsole)</a> For .NET framework usage.
void	<a href="#">setDebugModules(String debugModules)</a>
void	<a href="#">setDefaultFrameColumns(String defaultFrameColumns)</a> Used for debug purposes only.
void	<a href="#">setLogLevel(int logLevel)</a>
void	<a href="#">setLogoffMessage(String logoffMessage)</a> The popup message that will be displayed when closing the browser.

void	<a href="#">setLogoffOnBrowserClose</a> (boolean logoffOnBrowserClose) Determines whether to log off from the host session when the browser is closed.
void	<a href="#">setMozillaLogoffMessage</a> (String mozillaLogoffMessage) <b>Deprecated.</b> use <a href="#">setLogoffMessage(String)</a>
void	<a href="#">setPromptOnBrowserClose</a> (boolean promptOnBrowserClose) Determines whether to disconnect the session once the browser is closed.
void	<a href="#">setShowLogConsole</a> (boolean showLogConsole)

**Methods inherited from class** `java.lang.Object`

`equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait`

## Fields

### LOG\_LEVEL\_ERROR

```
public static final int LOG_LEVEL_ERROR
```

Constant value: 0

### LOG\_LEVEL\_WARNING

```
public static final int LOG_LEVEL_WARNING
```

Constant value: 1

### LOG\_LEVEL\_MESSAGE

```
public static final int LOG_LEVEL_MESSAGE
```

Constant value: 2

### LOG\_LEVEL\_DEBUG

```
public static final int LOG_LEVEL_DEBUG
```

Constant value: 3

## Constructors

### GXEngineConfig

```
public GXEngineConfig()
```

## Methods

(continued from last page)

---

## getLogLevel

```
public int getLogLevel()
```

---

## setLogLevel

```
public void setLogLevel(int logLevel)
```

---

## get\_LogLevel

```
public int get_LogLevel()
```

For .NET framework usage. Expose the method as a property.

---

## set\_LogLevel

```
public void set_LogLevel(int logLevel)
```

For .NET framework usage. Expose the method as a property.

---

## isLogoffOnBrowserClose

```
public boolean isLogoffOnBrowserClose()
```

Determines whether to log off from the host session when the browser is closed. It is recommended to define a session timeout in the ApplinX Designer (Application Properties dialog box>Host tab, Non-activity timeout) to ensure logging off from a session.

**Returns:**

whether to log off from the host session when the browser is closed

---

## setLogoffOnBrowserClose

```
public void setLogoffOnBrowserClose(boolean logoffOnBrowserClose)
```

Determines whether to log off from the host session when the browser is closed. It is recommended to define a session timeout in the ApplinX Designer (Application Properties dialog box>Host tab, Non-activity timeout) to ensure logging off from a session.

**Parameters:**

logoffOnBrowserClose - - whether to log off from the host session when the browser is closed

---

## get\_LogoffOnBrowserClose

```
public boolean get_LogoffOnBrowserClose()
```

For .NET framework usage. Expose the method as a property.

---

## set\_LogoffOnBrowserClose

```
public void set_LogoffOnBrowserClose(boolean logoffOnBrowserClose)
```

For .NET framework usage. Expose the method as a property.

---

---

## getMozillaLogoffMessage

```
public String getMozillaLogoffMessage()
```

**Deprecated.** use [getLogoffMessage\(\)](#)

### Parameters:

mozillaLogoffMessage

---

## set\_MozillaLogoffMessage

```
public void set_MozillaLogoffMessage(String mozillaLogoffMessage)
```

For .NET framework usage. Expose the method as a property.

---

## get\_MozillaLogoffMessage

```
public String get_MozillaLogoffMessage()
```

For .NET framework usage. Expose the method as a property.

---

## setMozillaLogoffMessage

```
public void setMozillaLogoffMessage(String mozillaLogoffMessage)
```

**Deprecated.** use [setLogoffMessage\(String\)](#)

### Parameters:

mozillaLogoffMessage

---

## getLogoffMessage

```
public String getLogoffMessage()
```

The popup message that will appear when closing the browser. Relevant either when closing the configuring `PromptOnBrowserClose` as on or when closing a Mozilla based browsers (FireFox, Netscape). The reason is that it's not possible to determine whether Browser Refresh button/Close button was pressed. Note: The message will not appear when the menu bar in Mozilla is not available (Full screen mode).

### Returns:

the popup message that will appear when closing the browser in Mozilla based browsers

---

## setLogoffMessage

```
public void setLogoffMessage(String logoffMessage)
```

The popup message that will be displayed when closing the browser. Relevant either when closing the configuring `PromptOnBrowserClose` as on or when closing Mozilla based browsers (FireFox, Netscape). The reason is that it's not possible to determine whether Browser Refresh button/Close button was pressed. Note: The message will not appear when the menu bar in Mozilla is not available (Full screen mode).

### Parameters:

logoffMessage - the popup message that will appear when closing the browser in Mozilla based browsers

---

(continued from last page)

---

## getDefaultFrameColumns

```
public String getDefaultFrameColumns()
```

Used for debug purposes only. Shows the invisible frame of the framework frameset. Set it to "70%" for example to see the frameset hidden frames

**Returns:**

the columns width of the active frameset

---

## setDefaultFrameColumns

```
public void setDefaultFrameColumns(String defaultFrameColumns)
```

Used for debug purposes only. Shows the invisible frame of the framework frameset. Set it to "70%" for example to see the frameset hidden frames

**Parameters:**

defaultFrameColumns - the columns width of the active frameset

---

## getDebugModules

```
public String getDebugModules()
```

---

## setDebugModules

```
public void setDebugModules(String debugModules)
```

---

## get\_DebugModules

```
public String get_DebugModules()
```

For .NET framework usage. Expose the method as a property.

---

## set\_DebugModules

```
public void set_DebugModules(String debugModules)
```

For .NET framework usage. Expose the method as a property.

---

## isShowLogConsole

```
public boolean isShowLogConsole()
```

---

## setShowLogConsole

```
public void setShowLogConsole(boolean showLogConsole)
```

---



(continued from last page)

---

## get\_ShowLogConsole

```
public boolean get_ShowLogConsole()
```

For .NET framework usage. Expose the method as a property.

---

## set\_ShowLogConsole

```
public void set_ShowLogConsole(boolean showLogConsole)
```

For .NET framework usage. Expose the method as a property.

---

## get\_DefaultFrameColumns

```
public String get_DefaultFrameColumns()
```

For .NET framework usage. Expose the method as a property.

---

## set\_DefaultFrameColumns

```
public void set_DefaultFrameColumns(String defaultFrameColumns)
```

For .NET framework usage. Expose the method as a property.

---

## isPromptOnBrowserClose

```
public boolean isPromptOnBrowserClose()
```

Prompt the user whether to exit the browser session. Also triggered when user hits refresh button

**Returns:**

whether to exit the browser session

---

## setPromptOnBrowserClose

```
public void setPromptOnBrowserClose(boolean promptOnBrowserClose)
```

Determines whether to disconnect the session once the browser is closed. This parameter also relates to when the Refresh button is pressed.

**Parameters:**

promptOnBrowserClose - whether to exit the browser session

---

## get\_PromptOnBrowserClose

```
public boolean get_PromptOnBrowserClose()
```

For .NET framework usage. Expose the method as a property.

---

## set\_PromptOnBrowserClose

```
public void set_PromptOnBrowserClose(boolean promptOnBrowserClose)
```

For .NET framework usage. Expose the method as a property.

---

## get\_LogoffMessage

```
public String get_LogoffMessage()
```

---

(continued from last page)

For .NET framework usage. Expose the method as a property.

---

## **set\_LogoffMessage**

```
public void set_LogoffMessage(String logoffMessage)
```

For .NET framework usage. Expose the method as a property.

# com.sabratec.applinx.framework.web.jsengine

## Class GXInstantEmulatorConfig

java.lang.Object

└-com.sabratec.applinx.framework.web.jsengine.GXInstantEmulatorConfig

Direct Known Subclasses:

[GXWebEmulatorConfig](#)

```
public class GXInstantEmulatorConfig
extends Object
```

Configuration class for html emulation instant page. Generated to XML file and loaded on the client side

### Field Summary

public static final	<a href="#">ARROWS_ALL_SCREEN</a> Value: <b>2</b>
public static final	<a href="#">ARROWS_INPUT_FIELDS</a> Value: <b>1</b>
public static final	<a href="#">ARROWS_NONE</a> Value: <b>0</b>
public static final	<a href="#">LABEL_FOCUS_BOLD</a> Value: <b>2</b>
public static final	<a href="#">LABEL_FOCUS_NONE</a> Value: <b>0</b>
public static final	<a href="#">LABEL_FOCUS_UNDERLINE</a> Value: <b>1</b>

### Constructor Summary

public	<a href="#">GXInstantEmulatorConfig()</a>
--------	---

### Method Summary

boolean	<a href="#">get_AutoSkipAllFields()</a> For .NET framework usage.
boolean	<a href="#">get_BlinkingCaret()</a> For .NET framework usage.
boolean	<a href="#">get_BlockNumericFields()</a> For .NET framework usage.

boolean	<a href="#">get_CaretAtEndOfField()</a> For .NET framework usage.
String	<a href="#">get_ColorSets()</a> For .NET framework usage.
boolean	<a href="#">get_DoJapaneseDataTypeValidityCheck()</a> For .NET framework usage.
String	<a href="#">get_DoubleClickActionKey()</a> For .NET framework usage.
boolean	<a href="#">get_EmulationPasteBehavior()</a> For .NET framework usage.
boolean	<a href="#">get_HandleMenuSelection()</a> For .NET framework usage.
int	<a href="#">get_LabelFocus()</a> For .NET framework usage.
boolean	<a href="#">get_SelectFieldOnFocus()</a> For .NET framework usage.
boolean	<a href="#">get_ShowBlinkingFields()</a> For .NET framework usage.
boolean	<a href="#">get_TabOnInputsOnly()</a> For .NET framework usage.
int	<a href="#">get_UseArrows()</a> For .NET framework usage.
boolean	<a href="#">get_UseKeyboardPfKeys()</a> For .NET framework usage.
String	<a href="#">getColorSets()</a> This functionality enables the end user select one of the pre-defined style sheets for instant screens.
String	<a href="#">getDoubleClickActionKey()</a> Sends the specified action key to the host when double-clicking on a label.
int	<a href="#">getLabelFocus()</a> This option allows you to determine whether the font style of a protected field will become underline, bold or will not change when a user either clicks on the protected field or moves between the protected fields using the keyboard arrow buttons.
int	<a href="#">getUseArrows()</a> Determines the arrow keys' navigation behavior (none, input fields or all screen).
boolean	<a href="#">isAutoSkipAllFields()</a> Determines whether or not the cursor will automatically move to the next input field once the current input field is filled with text (applies to all input fields).
boolean	<a href="#">isBlinkingCaret()</a>
boolean	<a href="#">isBlockNumericFields()</a> Determines whether it will be possible to type non-numeric characters in numeric input fields.

boolean	<a href="#">isCaretAtEndOfField()</a> Determines whether the caret's position should be at the end of the input fields.
boolean	<a href="#">isDoJapaneseDataTypeValidityCheck()</a>
boolean	<a href="#">isEmulationPasteBehavior()</a> Determines whether the paste behavior of text will be as in terminal emulators, that once a field is filled, the remaining text is pasted in the following field or whether the text will be pasted in a single field.
boolean	<a href="#">isHandleMenuSelection()</a> Enables basic menu support: when clicking on a menu item, the corresponding number is automatically placed in the option field.
boolean	<a href="#">isSelectFieldOnFocus()</a> Determines whether when moving the cursor to the following field (using the arrows or TAB key), the field content will be selected and then overwritten or the text will not be selected and when typing, the text will be inserted in the field.
boolean	<a href="#">isShowBlinkingFields()</a> Some hosts contain definitions determining that certain fields should blink.
boolean	<a href="#">isTabOnInputsOnly()</a> Determines whether the TAB key navigates between the input (unprotected) fields of the screen only, or also between additional buttons and hyperlinks in the Web page.
boolean	<a href="#">isUseKeyboardPfKeys()</a> Use PF keys to send actions to the host.
void	<a href="#">set_AutoSkipAllFields</a> (boolean autoSkipAllFields) For .NET framework usage.
void	<a href="#">set_BlinkingCaret</a> (boolean blinkingCaret) For .NET framework usage.
void	<a href="#">set_BlockNumericFields</a> (boolean blockNumericFields) For .NET framework usage.
void	<a href="#">set_CaretAtEndOfField</a> (boolean caretAtEndOfField) For .NET framework usage.
void	<a href="#">set_ColorSets</a> (String colorSets) For .NET framework usage.
void	<a href="#">set_DoJapaneseDataTypeValidityCheck</a> (boolean doJapaneseDataTypeValidityCheck) For .NET framework usage.
void	<a href="#">set_DoubleClickActionKey</a> (String doubleClickActionKey) For .NET framework usage.
void	<a href="#">set_EmulationPasteBehavior</a> (boolean emulationPasteBehavior) For .NET framework usage.
void	<a href="#">set_HandleMenuSelection</a> (boolean handleMenuSelection) For .NET framework usage.
void	<a href="#">set_LabelFocus</a> (int labelFocus) For .NET framework usage.

void	<a href="#">set_SelectFieldOnFocus</a> (boolean selectFieldOnFocus) For .NET framework usage.
void	<a href="#">set_ShowBlinkingFields</a> (boolean showBlinkingFields)
void	<a href="#">set_TabOnInputsOnly</a> (boolean tabOnInputsOnly) For .NET framework usage.
void	<a href="#">set_UseArrows</a> (int useArrows) For .NET framework usage.
void	<a href="#">set_UseKeyboardPfKeys</a> (boolean useKeyboardPfKeys) For .NET framework usage.
void	<a href="#">setAutoSkipAllFields</a> (boolean autoSkipAllFields) Determines whether or not the cursor will automatically move to the next input field once the current input field is filled with text (applies to all input fields).
void	<a href="#">setBlinkingCaret</a> (boolean blinkingCaret) Displays a blinking caret in input fields
void	<a href="#">setBlockNumericFields</a> (boolean blockNumericFields) Determines whether it will be possible to type non-numeric characters in numeric input fields.
void	<a href="#">setCaretAtEndOfField</a> (boolean caretAtEndOfField) Determines whether the caret's position should be at the end of the input fields.
void	<a href="#">setColorSets</a> (String colorSets) This functionality enables the end user select one of the pre-defined style sheets for instant screens.
void	<a href="#">setDoJapaneseDataTypeValidityCheck</a> (boolean doJapaneseDataTypeValidityCheck)
void	<a href="#">setDoubleClickActionKey</a> (String doubleClickActionKey) Sends the specified action key to the host when double-clicking on a label.
void	<a href="#">setEmulationPasteBehavior</a> (boolean emulationPasteBehavior) Determines whether the paste behavior of text will be as in terminal emulators, that once a field is filled, the remaining text is pasted in the following field or whether the text will be pasted in a single field.
void	<a href="#">setHandleMenuSelection</a> (boolean handleMenuSelection) Enables basic menu support: when clicking on a menu item, the corresponding number is automatically placed in the option field.
void	<a href="#">setLabelFocus</a> (int labelFocus) This option allows you to determine whether the font style of a protected field will become underline, bold or will not change when a user either clicks on the protected field or moves between the protected fields using the keyboard arrow buttons.
void	<a href="#">setSelectFieldOnFocus</a> (boolean selectFieldOnFocus) Determines whether when moving the cursor to the following field (using the arrows or TAB key), the field content will be selected and then overwritten or the text will not be selected and when typing, the text will be inserted in the field.
void	<a href="#">setShowBlinkingFields</a> (boolean showBlinkingFields) Some hosts contain definitions determining that certain fields should blink.

void	<a href="#">setTabOnInputsOnly</a> (boolean tabOnInputsOnly) Determines whether the TAB key navigates between the input (unprotected) fields of the screen only, or also between additional buttons and hyperlinks in the Web page.
void	<a href="#">setUseArrows</a> (int useArrows) This option allows you to determine whether the font style of a protected field will become underline, bold or will not change when a user either clicks on the protected field or moves between the protected fields using the keyboard arrow buttons.
void	<a href="#">setUseKeyboardPfKeys</a> (boolean useKeyboardPfKeys) Use PF keys to send actions to the host.

#### Methods inherited from class `java.lang.Object`

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Fields

### ARROWS\_NONE

```
public static final int ARROWS_NONE
```

Constant value: 0

### ARROWS\_INPUT\_FIELDS

```
public static final int ARROWS_INPUT_FIELDS
```

Constant value: 1

### ARROWS\_ALL\_SCREEN

```
public static final int ARROWS_ALL_SCREEN
```

Constant value: 2

### LABEL\_FOCUS\_NONE

```
public static final int LABEL_FOCUS_NONE
```

Constant value: 0

### LABEL\_FOCUS\_UNDERLINE

```
public static final int LABEL_FOCUS_UNDERLINE
```

Constant value: 1

### LABEL\_FOCUS\_BOLD

```
public static final int LABEL_FOCUS_BOLD
```

(continued from last page)

Constant value: 2

## Constructors

### **GXInstantEmulatorConfig**

```
public GXInstantEmulatorConfig()
```

## Methods

### **isAutoSkipAllFields**

```
public boolean isAutoSkipAllFields()
```

Determines whether or not the cursor will automatically move to the next input field once the current input field is filled with text (applies to all input fields).

**Returns:**

is skip to the next input field when the current input field is filled with content

---

### **setAutoSkipAllFields**

```
public void setAutoSkipAllFields(boolean autoSkipAllFields)
```

Determines whether or not the cursor will automatically move to the next input field once the current input field is filled with text (applies to all input fields).

**Parameters:**

autoSkipAllFields - enables the cursor to automatically move to the next field

---

### **get\_AutoSkipAllFields**

```
public boolean get_AutoSkipAllFields()
```

For .NET framework usage. Expose the method as a property.

---

### **set\_AutoSkipAllFields**

```
public void set_AutoSkipAllFields(boolean autoSkipAllFields)
```

For .NET framework usage. Expose the method as a property.

---

### **getDoubleClickActionKey**

```
public String getDoubleClickActionKey()
```

Sends the specified action key to the host when double-clicking on a label.

**Returns:**

the action key to send

---

### **setDoubleClickActionKey**

```
public void setDoubleClickActionKey(String doubleClickActionKey)
```

Sends the specified action key to the host when double-clicking on a label.



(continued from last page)

**Parameters:**

doubleClickActionKey - the action key to send

---

**get\_DoubleClickActionKey**

```
public String get_DoubleClickActionKey()
```

For .NET framework usage. Expose the method as a property.

---

**set\_DoubleClickActionKey**

```
public void set_DoubleClickActionKey(String doubleClickActionKey)
```

For .NET framework usage. Expose the method as a property.

---

**getLabelFocus**

```
public int getLabelFocus()
```

This option allows you to determine whether the font style of a protected field will become underline, bold or will not change when a user either clicks on the protected field or moves between the protected fields using the keyboard arrow buttons.

**Returns:**

the look-&-feel of a label when it is clicked

**See Also:**

[LABEL\\_FOCUS\\_NONE](#)

[LABEL\\_FOCUS\\_UNDERLINE](#)

[LABEL\\_FOCUS\\_BOLD](#)

---

**setLabelFocus**

```
public void setLabelFocus(int labelFocus)
```

This option allows you to determine whether the font style of a protected field will become underline, bold or will not change when a user either clicks on the protected field or moves between the protected fields using the keyboard arrow buttons.

**Parameters:**

labelFocus - the look-&-feel of a label when it is clicked

**See Also:**

[LABEL\\_FOCUS\\_NONE](#)

[LABEL\\_FOCUS\\_UNDERLINE](#)

[LABEL\\_FOCUS\\_BOLD](#)

---

**get\_LabelFocus**

```
public int get_LabelFocus()
```

For .NET framework usage. Expose the method as a property.

---

**set\_LabelFocus**

```
public void set_LabelFocus(int labelFocus)
```

For .NET framework usage. Expose the method as a property.

---

## isTabOnInputsOnly

```
public boolean isTabOnInputsOnly()
```

Determines whether the TAB key navigates between the input (unprotected) fields of the screen only, or also between additional buttons and hyperlinks in the Web page.

**Returns:**

the tabbing behavior

---

## setTabOnInputsOnly

```
public void setTabOnInputsOnly(boolean tabOnInputsOnly)
```

Determines whether the TAB key navigates between the input (unprotected) fields of the screen only, or also between additional buttons and hyperlinks in the Web page.

**Parameters:**

tabOnInputsOnly - the tabbing behavior

---

## get\_TabOnInputsOnly

```
public boolean get_TabOnInputsOnly()
```

For .NET framework usage. Expose the method as a property.

---

## set\_TabOnInputsOnly

```
public void set_TabOnInputsOnly(boolean tabOnInputsOnly)
```

For .NET framework usage. Expose the method as a property.

---

## getUseArrows

```
public int getUseArrows()
```

Determines the arrow keys' navigation behavior (none, input fields or all screen).

**Returns:**

the arrow keys navigation behavior

**See Also:**

[ARROWS\\_NONE](#)

[ARROWS\\_INPUT\\_FIELDS](#)

[ARROWS\\_ALL\\_SCREEN](#)

---

## setUseArrows

```
public void setUseArrows(int useArrows)
```

This option allows you to determine whether the font style of a protected field will become underline, bold or will not change when a user either clicks on the protected field or moves between the protected fields using the keyboard arrow buttons.

**Parameters:**

useArrows - the arrow keys navigation behavior

**See Also:**

(continued from last page)

[ARROWS\\_NONE](#)[ARROWS\\_INPUT\\_FIELDS](#)[ARROWS\\_ALL\\_SCREEN](#)

---

## get\_UseArrows

```
public int get_UseArrows()
```

For .NET framework usage. Expose the method as a property.

---

## set\_UseArrows

```
public void set_UseArrows(int useArrows)
```

For .NET framework usage. Expose the method as a property.

---

## isUseKeyboardPfKeys

```
public boolean isUseKeyboardPfKeys()
```

Use PF keys to send actions to the host. Default value: true.

**Returns:**

if the pf keys on the browser are activated

---

## setUseKeyboardPfKeys

```
public void setUseKeyboardPfKeys(boolean useKeyboardPfKeys)
```

Use PF keys to send actions to the host. Default value: true.

**Parameters:**

useKeyboardPfKeys - if the pf keys on the browser should be activated

---

## get\_UseKeyboardPfKeys

```
public boolean get_UseKeyboardPfKeys()
```

For .NET framework usage. Expose the method as a property.

---

## set\_UseKeyboardPfKeys

```
public void set_UseKeyboardPfKeys(boolean useKeyboardPfKeys)
```

For .NET framework usage. Expose the method as a property.

---

## getColorSets

```
public String getColorSets()
```

This functionality enables the end user select one of the pre-defined style sheets for instant screens. In the emulation template this functionality is available by default ("change color set" link in the page footer). These relative css file names must be separated by a comma. For example: css/white.css,css/black.css

**Returns:**

list of relative css file names separate by comma

---

(continued from last page)

---

## setColorSets

```
public void setColorSets(String colorSets)
```

This functionality enables the end user select one of the pre-defined style sheets for instant screens. In the emulation template this functionality is available by default ("change color set" link in the page footer). These relative css file names must be separated by a comma. For example: css/white.css, css/black.css

**Parameters:**

colorSets - list of relative css file names separate by comma

---

## get\_ColorSets

```
public String get_ColorSets()
```

For .NET framework usage. Expose the method as a property.

---

## set\_ColorSets

```
public void set_ColorSets(String colorSets)
```

For .NET framework usage. Expose the method as a property.

---

## isBlockNumericFields

```
public boolean isBlockNumericFields()
```

Determines whether it will be possible to type non-numeric characters in numeric input fields. The type of the field is a property of the host field which the input field is based on.

**Returns:**

if to block numeric fields

---

## setBlockNumericFields

```
public void setBlockNumericFields(boolean blockNumericFields)
```

Determines whether it will be possible to type non-numeric characters in numeric input fields. The type of the field is a property of the host field which the input field is based on.

**Parameters:**

blockNumericFields - if to block numeric fields

---

## get\_BlockNumericFields

```
public boolean get_BlockNumericFields()
```

For .NET framework usage. Expose the method as a property.

---

## set\_BlockNumericFields

```
public void set_BlockNumericFields(boolean blockNumericFields)
```

For .NET framework usage. Expose the method as a property.

---

## isCaretAtEndOfField

```
public boolean isCaretAtEndOfField()
```

---

(continued from last page)

Determines whether the caret's position should be at the end of the input fields.

**Returns:**

if to place caret position at the end of input fields

---

## setCaretAtEndOfField

```
public void setCaretAtEndOfField(boolean caretAtEndOfField)
```

Determines whether the caret's position should be at the end of the input fields. Not applicable when "Select content when content on input field" is active.

**Parameters:**

caretAtEndOfField - if to place caret position at the end of input fields

---

## get\_CaretAtEndOfField

```
public boolean get_CaretAtEndOfField()
```

For .NET framework usage. Expose the method as a property.

---

## set\_CaretAtEndOfField

```
public void set_CaretAtEndOfField(boolean caretAtEndOfField)
```

For .NET framework usage. Expose the method as a property.

---

## isHandleMenuSelection

```
public boolean isHandleMenuSelection()
```

Enables basic menu support: when clicking on a menu item, the corresponding number is automatically placed in the option field. The screen should contain only one input field. The clicked label (menu item) must have a number next to it.

**Returns:**

if to support menu selection

---

## setHandleMenuSelection

```
public void setHandleMenuSelection(boolean handleMenuSelection)
```

Enables basic menu support: when clicking on a menu item, the corresponding number is automatically placed in the option field. The screen should contain only one input field. The clicked label (menu item) must have a number next to it.

**Parameters:**

handleMenuSelection - if to support menu selection

---

## get\_HandleMenuSelection

```
public boolean get_HandleMenuSelection()
```

For .NET framework usage. Expose the method as a property.

---

## set\_HandleMenuSelection

```
public void set_HandleMenuSelection(boolean handleMenuSelection)
```

For .NET framework usage. Expose the method as a property.

---

---

## isSelectFieldOnFocus

```
public boolean isSelectFieldOnFocus()
```

Determines whether when moving the cursor to the following field (using the arrows or TAB key), the field content will be selected and then overwritten or the text will not be selected and when typing, the text will be inserted in the field.

**Returns:**

if to select the content of input field when it is focus

---

## setSelectFieldOnFocus

```
public void setSelectFieldOnFocus(boolean selectFieldOnFocus)
```

Determines whether when moving the cursor to the following field (using the arrows or TAB key), the field content will be selected and then overwritten or the text will not be selected and when typing, the text will be inserted in the field.

**Parameters:**

selectFieldOnFocus - if to select the content of input field when it is focus

---

## get\_SelectFieldOnFocus

```
public boolean get_SelectFieldOnFocus()
```

For .NET framework usage. Expose the method as a property.

---

## set\_SelectFieldOnFocus

```
public void set_SelectFieldOnFocus(boolean selectFieldOnFocus)
```

For .NET framework usage. Expose the method as a property.

---

## isShowBlinkingFields

```
public boolean isShowBlinkingFields()
```

Some hosts contain definitions determining that certain fields should blink. This feature enables these fields to blink in the browser.

**Returns:**

if to show blinking host fields to blink in the browser

---

## setShowBlinkingFields

```
public void setShowBlinkingFields(boolean showBlinkingFields)
```

Some hosts contain definitions determining that certain fields should blink. This feature enables these fields to blink in the browser.

**Parameters:**

showBlinkingFields - if to show blinking host fields to blink in the browser

---

## get\_ShowBlinkingFields

```
public boolean get_ShowBlinkingFields()
```

For .NET framework usage. Expose the method as a property.

---

## set\_ShowBlinkingFields

```
public void set_ShowBlinkingFields(boolean showBlinkingFields)
```

### Parameters:

showBlinkingFields

---

## isDoJapaneseDataTypeValidityCheck

```
public boolean isDoJapaneseDataTypeValidityCheck()
```

---

## setDoJapaneseDataTypeValidityCheck

```
public void setDoJapaneseDataTypeValidityCheck(boolean doJapaneseDataTypeValidityCheck)
```

---

## get\_DoJapaneseDataTypeValidityCheck

```
public boolean get_DoJapaneseDataTypeValidityCheck()
```

For .NET framework usage. Expose the method as a property.

---

## set\_DoJapaneseDataTypeValidityCheck

```
public void set_DoJapaneseDataTypeValidityCheck(boolean doJapaneseDataTypeValidityCheck)
```

For .NET framework usage. Expose the method as a property.

---

## isBlinkingCaret

```
public boolean isBlinkingCaret()
```

---

## setBlinkingCaret

```
public void setBlinkingCaret(boolean blinkingCaret)
```

Displays a blinking caret in input fields

### Parameters:

blinkingCaret

---

## get\_BlinkingCaret

```
public boolean get_BlinkingCaret()
```

For .NET framework usage. Expose the method as a property.

---

---

(continued from last page)

## set\_BlinkingCaret

```
public void set_BlinkingCaret(boolean blinkingCaret)
```

For .NET framework usage. Expose the method as a property.

---

## isEmulationPasteBehavior

```
public boolean isEmulationPasteBehavior()
```

Determines whether the paste behavior of text will be as in terminal emulators, that once a field is filled, the remaining text is pasted in the following field or whether the text will be pasted in a single field. Only supported in Internet Explorer.

**Returns:**

---

## setEmulationPasteBehavior

```
public void setEmulationPasteBehavior(boolean emulationPasteBehavior)
```

Determines whether the paste behavior of text will be as in terminal emulators, that once a field is filled, the remaining text is pasted in the following field or whether the text will be pasted in a single field. Only supported in Internet Explorer.

**Parameters:**

emulationPasteBehavior

---

## get\_EmulationPasteBehavior

```
public boolean get_EmulationPasteBehavior()
```

For .NET framework usage. Expose the method as a property.

---

## set\_EmulationPasteBehavior

```
public void set_EmulationPasteBehavior(boolean emulationPasteBehavior)
```


For .NET framework usage. Expose the method as a property.

---



## com.sabratec.applinx.framework.web.jsengine Class GXWebEmulatorConfig

java.lang.Object



public class **GXWebEmulatorConfig**  
extends [GXInstantEmulatorConfig](#)

Configuration class for html emulation web pages (generated & instant). Generated to XML file and loaded on the client side

**Fields inherited from class** [com.sabratec.applinx.framework.web.jsengine.GXInstantEmulatorConfig](#)

[ARROWS\\_ALL\\_SCREEN](#), [ARROWS\\_INPUT\\_FIELDS](#), [ARROWS\\_NONE](#), [LABEL\\_FOCUS\\_BOLD](#), [LABEL\\_FOCUS\\_NONE](#), [LABEL\\_FOCUS\\_UNDERLINE](#)

### Constructor Summary

public	<a href="#">GXWebEmulatorConfig()</a>
--------	---------------------------------------

### Method Summary

boolean	<a href="#">get_AttachInputTagEvents()</a> For .NET framework usage.
boolean	<a href="#">get_CheckHostScreenUpdate()</a> For .NET framework usage.
boolean	<a href="#">get_LoadEmulationComponent()</a> For .NET framework usage.
boolean	<a href="#">get_LoadPrinter()</a> For .NET framework usage.
boolean	<a href="#">get_SupportTypeAheadV2()</a> For .NET framework usage.
String	<a href="#">get_UserExitsFile()</a> For .NET framework usage.
String	<a href="#">getUserExitsFile()</a> Defines a user exits file for the framework
boolean	<a href="#">isAttachInputTagEvents()</a> Determine whether to capture input tag events : onkey, onkeyup, onkeypress, onselectstart, onpaste, onblur, onclick.
boolean	<a href="#">isCheckHostScreenUpdate()</a> Determines whether to continuously check in the background for changes in the host screen.
boolean	<a href="#">isLoadEmulationComponent()</a> <b>Deprecated.</b> <i>should be configured for Natural data transfer or type ahead separately</i>

boolean	<a href="#">isLoadPrinter()</a> Used to determine whether to load the printer applet within internal frame.
boolean	<a href="#">isSupportTypeAheadV2()</a>
void	<a href="#">set_AttachInputTagEvents</a> (boolean attachInputTagEvents) For .NET framework usage.
void	<a href="#">set_CheckHostScreenUpdate</a> (boolean checkHostScreenUpdate) For .NET framework usage.
void	<a href="#">set_LoadEmulationComponent</a> (boolean isLoadEmulationComponent) For .NET framework usage.
void	<a href="#">set_LoadPrinter</a> (boolean isLoadPrinter) For .NET framework usage.
void	<a href="#">set_SupportTypeAheadV2</a> (boolean supportTypeAheadV2) For .NET framework usage.
void	<a href="#">set_UserExitsFile</a> (String userExitsFile) For .NET framework usage.
void	<a href="#">setAttachInputTagEvents</a> (boolean attachInputTagEvents) Determine whether to capture input tag events : onkey, onkeyup, onkeypress, onselectstart, onpaste, onblur, onclick.
void	<a href="#">setCheckHostScreenUpdate</a> (boolean checkHostScreenUpdate) Determines whether to continuously check in the background for changes in the host screen.
void	<a href="#">setLoadEmulationComponent</a> (boolean isLoadEmulationComponent) <b>Deprecated.</b> <i>should be configured for Natural data transfer or type ahead separately</i>
void	<a href="#">setLoadPrinter</a> (boolean isLoadPrinter) Used to determine whether to load the printer applet within internal frame.
void	<a href="#">setSupportTypeAheadV2</a> (boolean supportTypeAheadV2) Determines whether to enable the user to type continuously, without waiting for the browser This feature does not work when a modal window is open, or during the process of opening/closing a pop-up window.
void	<a href="#">setUserExitsFile</a> (String userExitsFile) Defines a user exits file for the framework

**Methods inherited from class**[com.sabratec.applinx.framework.web.jsengine.GXInstantEmulatorConfig](#)

[get\\_AutoSkipAllFields](#), [get\\_BlinkingCaret](#), [get\\_BlockNumericFields](#),  
[get\\_CaretAtEndOfField](#), [get\\_ColorSets](#), [get\\_DoJapaneseDataTypeValidityCheck](#),  
[get\\_DoubleClickActionKey](#), [get\\_EmulationPasteBehavior](#), [get\\_HandleMenuSelection](#),  
[get\\_LabelFocus](#), [get\\_SelectFieldOnFocus](#), [get\\_ShowBlinkingFields](#), [get\\_TabOnInputsOnly](#),  
[get\\_UseArrows](#), [get\\_UseKeyboardPfKeys](#), [getColorSets](#), [getDoubleClickActionKey](#),  
[getLabelFocus](#), [getUseArrows](#), [isAutoSkipAllFields](#), [isBlinkingCaret](#),  
[isBlockNumericFields](#), [isCaretAtEndOfField](#), [isDoJapaneseDataTypeValidityCheck](#),  
[isEmulationPasteBehavior](#), [isHandleMenuSelection](#), [isSelectFieldOnFocus](#),  
[isShowBlinkingFields](#), [isTabOnInputsOnly](#), [isUseKeyboardPfKeys](#), [set\\_AutoSkipAllFields](#),  
[set\\_BlinkingCaret](#), [set\\_BlockNumericFields](#), [set\\_CaretAtEndOfField](#), [set\\_ColorSets](#),  
[set\\_DoJapaneseDataTypeValidityCheck](#), [set\\_DoubleClickActionKey](#),  
[set\\_EmulationPasteBehavior](#), [set\\_HandleMenuSelection](#), [set\\_LabelFocus](#),  
[set\\_SelectFieldOnFocus](#), [set\\_ShowBlinkingFields](#), [set\\_TabOnInputsOnly](#), [set\\_UseArrows](#),  
[set\\_UseKeyboardPfKeys](#), [setAutoSkipAllFields](#), [setBlinkingCaret](#), [setBlockNumericFields](#),  
[setCaretAtEndOfField](#), [setColorSets](#), [setDoJapaneseDataTypeValidityCheck](#),  
[setDoubleClickActionKey](#), [setEmulationPasteBehavior](#), [setHandleMenuSelection](#),  
[setLabelFocus](#), [setSelectFieldOnFocus](#), [setShowBlinkingFields](#), [setTabOnInputsOnly](#),  
[setUseArrows](#), [setUseKeyboardPfKeys](#)

Methods inherited from class `java.lang.Object`

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Constructors

### GXWebEmulatorConfig

```
public GXWebEmulatorConfig()
```

## Methods

### isLoadPrinter

```
public boolean isLoadPrinter()
```

Used to determine whether to load the printer applet within internal frame. The printlet is loaded into an invisible frame rather than opened in a new window.

Clicking the printer link will display the printlet in the main window, clicking Hide printer in the printlet screen will make it disappear and redisplay the session frame.

**Returns:**

if to load the printer applet within internal frame

### setLoadPrinter

```
public void setLoadPrinter(boolean isLoadPrinter)
```

Used to determine whether to load the printer applet within internal frame. The printlet is loaded into an invisible frame rather than opened in a new window.

Clicking the printer link will display the printlet in the main window, clicking Hide printer in the printlet screen will make it disappear and redisplay the session frame.

**Parameters:**

`isLoadPrinter` - determine if to load the printer applet within internal frame

## get\_LoadPrinter

```
public boolean get_LoadPrinter()
```

For .NET framework usage. Expose the method as a property.

---

## set\_LoadPrinter

```
public void set_LoadPrinter(boolean isLoadPrinter)
```

For .NET framework usage. Expose the method as a property.

---

## isLoadEmulationComponent

```
public boolean isLoadEmulationComponent()
```

**Deprecated.** *should be configured for Natural data transfer or type ahead separately*

---

## setLoadEmulationComponent

```
public void setLoadEmulationComponent(boolean isLoadEmulationComponent)
```

**Deprecated.** *should be configured for Natural data transfer or type ahead separately*

---

## getUserExitsFile

```
public String getUserExitsFile()
```

Defines a user exits file for the framework

**Returns:**

a user exits file for the framework

---

## setUserExitsFile

```
public void setUserExitsFile(String userExitsFile)
```

Defines a user exits file for the framework

**Parameters:**

userExitsFile - a user exits file for the framework

---

## get\_UserExitsFile

```
public String get_UserExitsFile()
```

For .NET framework usage. Expose the method as a property.

---

## set\_UserExitsFile

```
public void set_UserExitsFile(String userExitsFile)
```

For .NET framework usage. Expose the method as a property.

---

---

## isSupportTypeAheadV2

```
public boolean isSupportTypeAheadV2()
```

---

## setSupportTypeAheadV2

```
public void setSupportTypeAheadV2(boolean supportTypeAheadV2)
```

Determines whether to enable the user to type continuously, without waiting for the browser. This feature does not work when a modal window is open, or during the process of opening/closing a pop-up window.

**Parameters:**

supportTypeAheadV2

---

## get\_SupportTypeAheadV2

```
public boolean get_SupportTypeAheadV2()
```

For .NET framework usage. Expose the method as a property.

---

## set\_SupportTypeAheadV2

```
public void set_SupportTypeAheadV2(boolean supportTypeAheadV2)
```

For .NET framework usage. Expose the method as a property.

---

## isCheckHostScreenUpdate

```
public boolean isCheckHostScreenUpdate()
```

Determines whether to continuously check in the background for changes in the host screen. If the host screen has changed, the browser is refreshed and a JavaScript event is triggered. As the server is checked continuously, more server resources are required for this. By default, the server is checked every 3, 6, 12 and then every 24 seconds. These intervals can be customized using user exits (refer to the ApplinX documentation for further details).

**Returns:**

---

## setCheckHostScreenUpdate

```
public void setCheckHostScreenUpdate(boolean checkHostScreenUpdate)
```

Determines whether to continuously check in the background for changes in the host screen. If the host screen has changed, the browser is refreshed and a JavaScript event is triggered. As the server is checked continuously, more server resources are required for this. By default, the server is checked every 3, 6, 12 and then every 24 seconds. These intervals can be customized using user exits (refer to the ApplinX documentation for further details).

**Parameters:**

checkHostScreenUpdate

---

## get\_CheckHostScreenUpdate

```
public boolean get_CheckHostScreenUpdate()
```

For .NET framework usage. Expose the method as a property.

---

## set\_CheckHostScreenUpdate

```
public void set_CheckHostScreenUpdate(boolean checkHostScreenUpdate)
```

For .NET framework usage. Expose the method as a property.

---

## setAttachInputTagEvents

```
public void setAttachInputTagEvents(boolean attachInputTagEvents)
```

Determine whether to capture input tag events : onkey, onkeyup, onkeypress, onselectstart, onpaste, onblur, onclick. Should be used only when heavy pages contains a huge amount of input tags (over 100) which may slow the web page load time. Disclaimer \*\*\*\*\*: The following features will not work when this configuration is set to false: Blinking caret, Block numeric fields, auto skip, right adjust, auto enter, select field on focus, emulation paste behavior

### Parameters:

attachInputTagEvents

---

## isAttachInputTagEvents

```
public boolean isAttachInputTagEvents()
```

Determine whether to capture input tag events : onkey, onkeyup, onkeypress, onselectstart, onpaste, onblur, onclick. Should be used only when heavy pages contains a huge amount of input tags (over 100) which may slow the web page load time. Disclaimer \*\*\*\*\*: The following features will not work when this configuration is set to false: Blinking caret, Block numeric fields, auto skip, right adjust, auto enter, select field on focus, emulation paste behavior

### Returns:

---

## set\_AttachInputTagEvents

```
public void set_AttachInputTagEvents(boolean attachInputTagEvents)
```

For .NET framework usage. Expose the method as a property.

---

## get\_AttachInputTagEvents

```
public boolean get_AttachInputTagEvents()
```

For .NET framework usage. Expose the method as a property.

---

## get\_LoadEmulationComponent

```
public boolean get_LoadEmulationComponent()
```

For .NET framework usage. Expose the method as a property.

---

## set\_LoadEmulationComponent

```
public void set_LoadEmulationComponent(boolean isLoadEmulationComponent)
```

For .NET framework usage. Expose the method as a property.

---

## com.sabratec.applinx.framework.web.jsengine Class GXWindowConfig

java.lang.Object

└-com.sabratec.applinx.framework.web.jsengine.GXWindowConfig

public class **GXWindowConfig**  
extends Object

### Constructor Summary

public	<a href="#">GXWindowConfig()</a>
--------	----------------------------------

### Method Summary

int	<a href="#">get_DefaultOpenedWindowHeight()</a> For .NET framework usage.
int	<a href="#">get_DefaultOpenedWindowLeft()</a> For .NET framework usage.
int	<a href="#">get_DefaultOpenedWindowTop()</a> For .NET framework usage.
int	<a href="#">get_DefaultOpenedWindowWidth()</a> For .NET framework usage.
String	<a href="#">get_OpenedWindowAttributes()</a> For .NET framework usage.
boolean	<a href="#">get_OpenWindowCenter()</a> For .NET framework usage.
String	<a href="#">get_PopupCloseSentKey()</a> For .NET framework usage.
int	<a href="#">getDefaultOpenedWindowHeight()</a> Determines the default window's height when using the method <code>gx_window.open</code>
int	<a href="#">getDefaultOpenedWindowLeft()</a> Determines the default window's left position when using the method <code>gx_window.open</code>
int	<a href="#">getDefaultOpenedWindowTop()</a> Determines the default window's top position when using the method <code>gx_window.open</code>
int	<a href="#">getDefaultOpenedWindowWidth()</a> Determines the default window's width when using the method <code>gx_window.open</code>
String	<a href="#">getOpenedWindowAttributes()</a> Determines the opened window's attributes when using the method <code>gx_window.open</code>
String	<a href="#">getPopupCloseSentKey()</a> Determines the key to send to the host when the modal window is closed

boolean	<a href="#">isOpenWindowCenter()</a> According to the selected radio button, determines whether the popup window is opened in the center of the screen or in a specific position.
void	<a href="#">set_DefaultOpenedWindowHeight(int defaultOpenedWindowHeight)</a> For .NET framework usage.
void	<a href="#">set_DefaultOpenedWindowLeft(int defaultOpenedWindowLeft)</a> For .NET framework usage.
void	<a href="#">set_DefaultOpenedWindowTop(int defaultOpenedWindowTop)</a> For .NET framework usage.
void	<a href="#">set_DefaultOpenedWindowWidth(int defaultOpenedWindowWidth)</a> For .NET framework usage.
void	<a href="#">set_OpenedWindowAttributes(String openedWindowAttributes)</a> For .NET framework usage.
void	<a href="#">set_OpenWindowCenter(boolean openWindowCenter)</a> For .NET framework usage.
void	<a href="#">set_PopupCloseSentKey(String popupCloseSentKey)</a> For .NET framework usage.
void	<a href="#">setDefaultOpenedWindowHeight(int defaultOpenedWindowHeight)</a> Determines the default window's height when using the method <code>gx_window.open</code>
void	<a href="#">setDefaultOpenedWindowLeft(int defaultOpenedWindowLeft)</a> Determines the default window's left position when using the method <code>gx_window.open</code>
void	<a href="#">setDefaultOpenedWindowTop(int defaultOpenedWindowTop)</a> Determines the default window's top position when using the method <code>gx_window.open</code>
void	<a href="#">setDefaultOpenedWindowWidth(int defaultOpenedWindowWidth)</a> Determines the default window's width when using the method <code>gx_window.open</code>
void	<a href="#">setOpenedWindowAttributes(String openedWindowAttributes)</a> Determines the opened window's attributes when using the method <code>gx_window.open</code>
void	<a href="#">setOpenWindowCenter(boolean openWindowCenter)</a> According to the selected radio button, determines whether the popup window is opened in the center of the screen or in a specific position.
void	<a href="#">setPopupCloseSentKey(String popupCloseSentKey)</a> Determines the key to send to the host when the modal window is closed

#### Methods inherited from class `java.lang.Object`

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Constructors

### GXWindowConfig

```
public GXWindowConfig()
```



(continued from last page)

## Methods

### getDefaultOpenedWindowHeight

```
public int getDefaultOpenedWindowHeight()
```

Determines the default window's height when using the method `gx_window.open`

**Returns:**

the default window height

### setDefaultOpenedWindowHeight

```
public void setDefaultOpenedWindowHeight(int defaultOpenedWindowHeight)
```

Determines the default window's height when using the method `gx_window.open`

**Parameters:**

`defaultOpenedWindowHeight` - the default window height

### getDefaultOpenedWindowLeft

```
public int getDefaultOpenedWindowLeft()
```

Determines the default window's left position when using the method `gx_window.open`

**Returns:**

the default window left position

### setDefaultOpenedWindowLeft

```
public void setDefaultOpenedWindowLeft(int defaultOpenedWindowLeft)
```

Determines the default window's left position when using the method `gx_window.open`

**Parameters:**

`defaultOpenedWindowLeft` - the default window left position

### isOpenWindowCenter

```
public boolean isOpenWindowCenter()
```

According to the selected radio button, determines whether the popup window is opened in the center of the screen or in a specific position.

**Returns:**

`openWindowCenter`

### setOpenWindowCenter

```
public void setOpenWindowCenter(boolean openWindowCenter)
```

According to the selected radio button, determines whether the popup window is opened in the center of the screen or in a specific position.

**Parameters:**

`openWindowCenter`

## getDefaultOpenedWindowTop

```
public int getDefaultOpenedWindowTop()
```

Determines the default window's top position when using the method `gx_window.open`

**Returns:**

the default window top position

---

## setDefaultOpenedWindowTop

```
public void setDefaultOpenedWindowTop(int defaultOpenedWindowTop)
```

Determines the default window's top position when using the method `gx_window.open`

**Parameters:**

`defaultOpenedWindowTop` - the default window top position

---

## getDefaultOpenedWindowWidth

```
public int getDefaultOpenedWindowWidth()
```

Determines the default window's width when using the method `gx_window.open`

**Returns:**

the default window width

---

## setDefaultOpenedWindowWidth

```
public void setDefaultOpenedWindowWidth(int defaultOpenedWindowWidth)
```

Determines the default window's width when using the method `gx_window.open`

**Parameters:**

`defaultOpenedWindowWidth` - the default window width

---

## getOpenedWindowAttributes

```
public String getOpenedWindowAttributes()
```

Determines the opened window's attributes when using the method `gx_window.open`

**Returns:**

the opened window attributes

---

## setOpenedWindowAttributes

```
public void setOpenedWindowAttributes(String openedWindowAttributes)
```

Determines the opened window's attributes when using the method `gx_window.open`

**Parameters:**

`openedWindowAttributes` - the opened window attributes

---

## getPopupCloseSentKey

```
public String getPopupCloseSentKey()
```

---

---

(continued from last page)

Determines the key to send to the host when the modal window is closed

**Returns:**

---

## **setPopupCloseSentKey**

```
public void setPopupCloseSentKey(String popupCloseSentKey)
```

Determines the key to send to the host when the modal window is closed

**Parameters:**

popupCloseSentKey

---

## **get\_DefaultOpenedWindowHeight**

```
public int get_DefaultOpenedWindowHeight()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_DefaultOpenedWindowHeight**

```
public void set_DefaultOpenedWindowHeight(int defaultOpenedWindowHeight)
```

For .NET framework usage. Expose the method as a property.

---

## **get\_DefaultOpenedWindowLeft**

```
public int get_DefaultOpenedWindowLeft()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_DefaultOpenedWindowLeft**

```
public void set_DefaultOpenedWindowLeft(int defaultOpenedWindowLeft)
```

For .NET framework usage. Expose the method as a property.

---

## **get\_DefaultOpenedWindowTop**

```
public int get_DefaultOpenedWindowTop()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_DefaultOpenedWindowTop**

```
public void set_DefaultOpenedWindowTop(int defaultOpenedWindowTop)
```

For .NET framework usage. Expose the method as a property.

---

## **get\_DefaultOpenedWindowWidth**

```
public int get_DefaultOpenedWindowWidth()
```

For .NET framework usage. Expose the method as a property.

---

---

(continued from last page)

## **set\_DefaultOpenedWindowWidth**

```
public void set_DefaultOpenedWindowWidth(int defaultOpenedWindowWidth)
```

For .NET framework usage. Expose the method as a property.

---

## **get\_OpenedWindowAttributes**

```
public String get_OpenedWindowAttributes()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_OpenedWindowAttributes**

```
public void set_OpenedWindowAttributes(String openedWindowAttributes)
```

For .NET framework usage. Expose the method as a property.

---

## **get\_PopupCloseSentKey**

```
public String get_PopupCloseSentKey()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_PopupCloseSentKey**

```
public void set_PopupCloseSentKey(String popupCloseSentKey)
```

For .NET framework usage. Expose the method as a property.

---

## **get\_OpenWindowCenter**

```
public boolean get_OpenWindowCenter()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_OpenWindowCenter**

```
public void set_OpenWindowCenter(boolean openWindowCenter)
```

For .NET framework usage. Expose the method as a property.

---

---

Package

**com.sabratec.applinx.framework.web.nd  
t**

## com.sabratec.applinx.framework.web.ndt Class GXNdtConfig

java.lang.Object

└-com.sabratec.applinx.framework.web.ndt.GXNdtConfig

### All Implemented Interfaces:

java.io.Serializable

```
public class GXNdtConfig
extends Object
implements java.io.Serializable
```

## Constructor Summary

public	<a href="#">GXNdtConfig()</a>
--------	-------------------------------

## Method Summary

boolean	<a href="#">get_AutomaticDownload()</a> For .NET framework usage.
String	<a href="#">get_DefaultExtension()</a> For .NET framework usage.
String	<a href="#">get_HostDownloadForm()</a> For .NET framework usage.
String	<a href="#">get_UploadForm()</a> For .NET framework usage.
String	<a href="#">get_WebDownloadForm()</a> For .NET framework usage.
String	<a href="#">getDefaultExtension()</a>
String	<a href="#">getHostDownloadForm()</a> For internal usage
String	<a href="#">getUploadForm()</a> For internal usage
String	<a href="#">getWebDownloadForm()</a> For internal usage
boolean	<a href="#">isAutomaticDownload()</a> Determines whether to automatically start downloading a file, when the first download screen is displayed.
void	<a href="#">set_AutomaticDownload(boolean isAutomaticDownload)</a> For .NET framework usage.

void	<a href="#">set_DefaultExtension</a> (String defaultExtension) For .NET framework usage.
void	<a href="#">set_HostDownloadForm</a> (String hostDownloadForm) For .NET framework usage.
void	<a href="#">set_UploadForm</a> (String uploadForm) For .NET framework usage.
void	<a href="#">set_WebDownloadForm</a> (String webDownloadForm) For .NET framework usage.
void	<a href="#">setAutomaticDownload</a> (boolean isAutomaticDownload) Determines whether to automatically start downloading a file, when the first download screen is displayed.
void	<a href="#">setDefaultExtension</a> (String defaultExtension) Enables defining the default file extension: TXT or CSV.
void	<a href="#">setHostDownloadForm</a> (String hostDownloadForm) For internal usage
void	<a href="#">setUpUploadForm</a> (String uploadForm) For internal usage
void	<a href="#">setWebDownloadForm</a> (String webDownloadForm) For internal usage

#### Methods inherited from class `java.lang.Object`

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Constructors

### **GXNdtConfig**

```
public GXNdtConfig()
```

## Methods

### **getHostDownloadForm**

```
public String getHostDownloadForm()
```

For internal usage

### **setHostDownloadForm**

```
public void setHostDownloadForm(String hostDownloadForm)
```

For internal usage

(continued from last page)

---

## getWebDownloadForm

```
public String getWebDownloadForm()
```

For internal usage

---

## setWebDownloadForm

```
public void setWebDownloadForm(String webDownloadForm)
```

For internal usage

---

## getUploadForm

```
public String getUploadForm()
```

For internal usage

---

## setUploadForm

```
public void setUploadForm(String uploadForm)
```

For internal usage

---

## isAutomaticDownload

```
public boolean isAutomaticDownload()
```

Determines whether to automatically start downloading a file, when the first download screen is displayed. When not selected, a message appears informing you that the host requires you to download a Natural file. If there is a record count from the download, it will be displayed on the page.

**Returns:**

---

## setAutomaticDownload

```
public void setAutomaticDownload(boolean isAutomaticDownload)
```

Determines whether to automatically start downloading a file, when the first download screen is displayed. When not selected, a message appears informing you that the host requires you to download a Natural file. If there is a record count from the download, it will be displayed on the page.

**Parameters:**

`isAutomaticDownload` - detrmines if to automatically start download a file, when the first download screen is displayed

---

## get\_AutomaticDownload

```
public boolean get_AutomaticDownload()
```

For .NET framework usage. Expose the method as a property.

---

## set\_AutomaticDownload

```
public void set_AutomaticDownload(boolean isAutomaticDownload)
```

For .NET framework usage. Expose the method as a property.

---



---

## getDefaultExtension

```
public String getDefaultExtension()
```

---

## setDefaultExtension

```
public void setDefaultExtension(String defaultExtension)
```

Enables defining the default file extension: TXT or CSV.

**Parameters:**

defaultExtension

---

## get\_DefaultExtension

```
public String get_DefaultExtension()
```

For .NET framework usage. Expose the method as a property.

---

## set\_DefaultExtension

```
public void set_DefaultExtension(String defaultExtension)
```

For .NET framework usage. Expose the method as a property.

---

## get\_HostDownloadForm

```
public String get_HostDownloadForm()
```

For .NET framework usage. Expose the method as a property.

---

## set\_HostDownloadForm

```
public void set_HostDownloadForm(String hostDownloadForm)
```

For .NET framework usage. Expose the method as a property.

---

## get\_WebDownloadForm

```
public String get_WebDownloadForm()
```

For .NET framework usage. Expose the method as a property.

---

## set\_WebDownloadForm

```
public void set_WebDownloadForm(String webDownloadForm)
```

For .NET framework usage. Expose the method as a property.

---

## get\_UploadForm

```
public String get_UploadForm()
```

For .NET framework usage. Expose the method as a property.

## **set\_UploadForm**

```
public void set_UploadForm(String uploadForm)
```

For .NET framework usage. Expose the method as a property.

---

Package

**com.sabratec.applinx.framework.web.ss  
0**

## com.sabratec.applinx.framework.web.sso Class GXAbstractHttpUserPasswordRetriever

java.lang.Object

└-com.sabratec.applinx.framework.web.sso.GXAbstractHttpUserPasswordRetriever

### All Implemented Interfaces:

[GXUserPasswordRetriever](#)

### Direct Known Subclasses:

[GXHttpSessionUserPasswordRetriever](#), [GXHttpRequestUserPasswordRetriever](#)

public abstract class **GXAbstractHttpUserPasswordRetriever**

extends Object

implements [GXUserPasswordRetriever](#)

## Constructor Summary

public	<a href="#">GXAbstractHttpUserPasswordRetriever</a> ()
public	<a href="#">GXAbstractHttpUserPasswordRetriever</a> (String userParameterName, String passwordParameterName)

## Method Summary

void	<a href="#">adoptHttpWrapper</a> (GXHttpWebWrapper httpWrapper)
String	<a href="#">getPasswordParameterName</a> () For internal use
String	<a href="#">getUserParameterName</a> () For internal use
void	<a href="#">setPasswordParameterName</a> (String passwordParameterName) For internal use
void	<a href="#">setUserParameterName</a> (String userParameterName) For internal use

### Methods inherited from class java.lang.Object

`equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait`

### Methods inherited from interface [com.sabratec.applinx.framework.sso.GXUserPasswordRetriever](#)

[getPassword](#), [getUserName](#)

## Constructors

(continued from last page)

---

## **GXAbstractHttpUserPasswordRetriever**

```
public GXAbstractHttpUserPasswordRetriever()
```

---

## **GXAbstractHttpUserPasswordRetriever**

```
public GXAbstractHttpUserPasswordRetriever(String userParameterName,  
                                             String passwordParameterName)
```

## Methods

### **adoptHttpWrapper**

```
public void adoptHttpWrapper(GXHttpWebWrapper httpWrapper)
```

---

### **getPasswordParameterName**

```
public String getPasswordParameterName()
```

For internal use

---

### **setPasswordParameterName**

```
public void setPasswordParameterName(String passwordParameterName)
```

For internal use

---

### **getUserParameterName**

```
public String getUserParameterName()
```

For internal use

---

### **setUserParameterName**

```
public void setUserParameterName(String userParameterName)
```

For internal use

---

## com.sabratec.applinx.framework.web.sso Class GXHttpRequestUserPasswordRetriever

java.lang.Object

├- [com.sabratec.applinx.framework.web.sso.GXAbstractHttpUserPasswordRetriever](#)  
└- **com.sabratec.applinx.framework.web.sso.GXHttpRequestUserPasswordRetriever**

All Implemented Interfaces:

[GXUserPasswordRetriever](#)

public class **GXHttpRequestUserPasswordRetriever**  
extends [GXAbstractHttpUserPasswordRetriever](#)

### Constructor Summary

public	<a href="#">GXHttpRequestUserPasswordRetriever()</a>
public	<a href="#">GXHttpRequestUserPasswordRetriever</a> (String userParameterName, String passwordParameterName)

### Method Summary

String	<a href="#">getPassword()</a>
String	<a href="#">getUserName()</a>

#### Methods inherited from class

[com.sabratec.applinx.framework.web.sso.GXAbstractHttpUserPasswordRetriever](#)

[adoptHttpWrapper](#), [getPasswordParameterName](#), [getUserParameterName](#),  
[setPasswordParameterName](#), [setUserParameterName](#)

#### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

#### Methods inherited from interface [com.sabratec.applinx.framework.sso.GXUserPasswordRetriever](#)

[getPassword](#), [getUserName](#)

### Constructors

#### **GXHttpRequestUserPasswordRetriever**

public **GXHttpRequestUserPasswordRetriever**()

## **GXHttpRequestUserPasswordRetriever**

```
public GXHttpRequestUserPasswordRetriever(String userParameterName,  
                                           String passwordParameterName)
```

### **Methods**

#### **getUserName**

```
public String getUserName()
```

---

#### **getPassword**

```
public String getPassword()
```

## com.sabratec.applinx.framework.web.sso Class GXHttpSessionUserPasswordRetriever

java.lang.Object

└- [com.sabratec.applinx.framework.web.sso.GXAbstractHttpUserPasswordRetriever](#)  
└- [com.sabratec.applinx.framework.web.sso.GXHttpSessionUserPasswordRetriever](#)

All Implemented Interfaces:

[GXUserPasswordRetriever](#)

public class **GXHttpSessionUserPasswordRetriever**  
extends [GXAbstractHttpUserPasswordRetriever](#)

### Constructor Summary

public	<a href="#">GXHttpSessionUserPasswordRetriever()</a>
public	<a href="#">GXHttpSessionUserPasswordRetriever</a> (String userParameterName, String passwordParameterName)

### Method Summary

String	<a href="#">getPassword()</a>
String	<a href="#">getUserName()</a>

#### Methods inherited from class

[com.sabratec.applinx.framework.web.sso.GXAbstractHttpUserPasswordRetriever](#)

[adoptHttpWrapper](#), [getPasswordParameterName](#), [getUserParameterName](#),  
[setPasswordParameterName](#), [setUserParameterName](#)

#### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

#### Methods inherited from interface [com.sabratec.applinx.framework.sso.GXUserPasswordRetriever](#)

[getPassword](#), [getUserName](#)

### Constructors

#### **GXHttpSessionUserPasswordRetriever**

public **GXHttpSessionUserPasswordRetriever**()



---

## **GXHttpSessionUserPasswordRetriever**

```
public GXHttpSessionUserPasswordRetriever(String userParameterName,  
                                           String passwordParameterName)
```

### **Methods**

#### **getUserName**

```
public String getUserName()
```

---

#### **getPassword**

```
public String getPassword()
```

---

## Package

# com.sabratec.applinx.presentation

This package and its sub packages are responsible for creating a tag representation output from a host screen. The tag representation output is used for creating Instant HTML pages from a host screen.

The following API enables registering as many transformation classes as you require. These transformations can manipulate the output by adding, removing, replacing and changing the screen tag model using a rich library of tags and an easy-to-use API.

The tags are rendered in absolute terms, as oppose to the relative rendering used previously. Rendering the HTML tags relatively caused indentation problems when trying to add or change elements or style sheets such as GUI elements, host windows and different fonts. In the following API, each tag is rendered with corresponding top/left attributes which places the tag in an exact position. The main advantage of this approach is that changing/adding tags/stylesheets doesn't affect the neighboring tags of the modified tag.

## The Main entities used in the API:

### Base Object Entities:

#### Host screen (com.sabratec.applinx.baseobject.GXIScreen)

The host screen entity (which is part of the base object API) is the data model that represents the host screen. The host screen is a collection of fields and additional screen data. The host screen is used in transformations as an event parameter. The host screen event parameter can be used for querying the host screen as to its field contents and properties. (Refer to BaseObject JavaDoc for further documentation).

#### Host field (com.sabratec.applinx.baseobject.GXIField)

The host field entity (which is part of the base object API) contains various ApplinX and/or host properties such as content, protected/unprotected, color, intensified, ApplinX application field name, etc. The host field is also a tag property for tags that are screen based. (Refer to BaseObject JavaDoc for further documentation).

### General Entities:

#### Position (com.sabratec.util.GXPosition)

This class represents a position on the host screen. It is used by the host field and the tag to indicate a specific position on the host screen.

#### Rectangle (com.sabratec.util.GXRectangle)

This class represents a rectangle area of positions on the screen. This class is used to determine the screen area of the tags output in the Renderer configuration, and can perform area queries, on a specific area.

# Instant API Entities:

## Renderer

This entity is represented as an instant tag in the JSP/Instant control in .NET (in `instant.jsp/aspx`). The `Renderer` tag renders the HTML output based on the current host screen `Renderer` configuration settings and registered transformations.

## Renderer Configuration

### (`com.sabratec.applinx.presentation.GXRenderConfig`)

The `Renderer Configuration` class contains various configurations such as screen area, font size and sub configurations for various built-in transformations. Examples for such sub configurations include host keys, GUI elements, tables, windows, etc. Each sub configuration also allows disabling specific built-in transformations. The `Renderer` configuration provides transformation registration of the tag listener and completion listener.

## Screen tag model

### (`com.sabratec.applinx.presentation.tags.GXIScreenTagModel`)

The screen tag model is the model which contains a list of tags. The model provides various methods for adding, removing, replacing and searching tags. The final tag list in the screen tag model (after all transformations have been completed) will be rendered to the HTML output by the `Renderer` entity.

## Tag (`com.sabratec.applinx.presentation.tags.GXITag`)

The tag entity is the root class of all tag types, such as text fields, labels, links, combo boxes etc. The tag is a host oriented entity.

The tag provides a reference to the host field, and allows locating tags by setting their position in host units (row, column). The initial position is derived from the host field, and can be modified by the developer. The position will be rendered to HTML units as top/left.

Each tag type contains methods relevant to its type. Special HTML tags are also available such as `GXHtmlGenericTag` for creating a generic tag by specifying the tag name and `GXHtmlString` for using direct strings and adding them to the screen tag model.

## Tags factory

### (`com.sabratec.applinx.presentation.tags.html.GXHtmlTagFactory`)

The tags factory is used for creating new HTML tags and for improving performance.

**Syntax:** `GXHtmlTagFactory.instance().newLink()`

This class contains methods for each type of tag.

## Transformations

Transformations are listeners which are registered to the `Renderer` configuration by the developer, and allow modifying the screen tag model before it is rendered. The transformations can be one of the following types: Tag listeners or Completion listeners.

Note: All ApplinX special entities such as host keys, tables, GUI elements and windows are also represented as built-in transformations, and are performed automatically by the `Renderer` entity.

## Tag listener(`com.sabratec.applinx.presentation.event.GXTagListener`)

When inheriting from this class, you will receive an event on the creation of each type of tag such as: `onNewTextField` , `onNewLabel` , `onNewButton` , etc. It should be used for tag level manipulations, such as changing the content and attributes, adding icons, etc.

## Completion listener(`com.sabratec.applinx.presentation.event.GXICompletionListener`)

When implementing this class you will receive an `onComplete` event, which should be used for manipulating the entire tag model.

## Render Event

### (`com.sabratec.applinx.presentation.event.GXRenderEvent`)

An event is thrown by the `Renderer` to registered transformations when either a new tag is created (tag listener) or the screen tag model has completed its creation process (completion listener). The thrown event passes the `Render` event as a parameter. The `Render` event contains the host screen and the screen tag model. Use the screen tag model for manipulating the HTML output by modifying its contained tags.

## Query (`com.sabratec.applinx.presentation.queries.GXITagQuery`)

Used for performing queries on the screen tag model. Each query retrieves a list of the tags that meet the query criteria. The instant API contains a few built-in queries such as a text query and area query. In addition, you can write your own queries by implementing the `GXITagQuery` interface.

## com.sabratec.applinx.presentation Interface GXIBrowserSupportedFeatures

public interface **GXIBrowserSupportedFeatures**

### Field Summary

public static final	<a href="#">BROWSER_WINDOW_SUPPORT</a> Value: <code>browser.window.support</code>
public static final	<a href="#">HTML_INPUT_TYPE_DATE</a> Value: <code>html.inputtypes.date</code>
public static final	<a href="#">HTML_INPUT_TYPE_DATETIME</a> Value: <code>html.inputtypes.datetime</code>
public static final	<a href="#">HTML_INPUT_TYPE_MONTH</a> Value: <code>html.inputtypes.month</code>

### Method Summary

abstract boolean	<a href="#">isFeatureSupported</a> (String featureKey)
abstract void	<a href="#">setFeatureSupport</a> (String featureKey, boolean supported)

### Fields

#### HTML\_INPUT\_TYPE\_DATE

public static final java.lang.String **HTML\_INPUT\_TYPE\_DATE**

Constant value: `html.inputtypes.date`

#### HTML\_INPUT\_TYPE\_MONTH

public static final java.lang.String **HTML\_INPUT\_TYPE\_MONTH**

Constant value: `html.inputtypes.month`

#### HTML\_INPUT\_TYPE\_DATETIME

public static final java.lang.String **HTML\_INPUT\_TYPE\_DATETIME**

Constant value: `html.inputtypes.datetime`

---

## **BROWSER\_WINDOW\_SUPPORT**

```
public static final java.lang.String BROWSER_WINDOW_SUPPORT
```

Constant value: `browser.window.support`

## Methods

### **isFeatureSupported**

```
public abstract boolean isFeatureSupported(String featureKey)
```

---

### **setFeatureSupport**

```
public abstract void setFeatureSupport(String featureKey,  
    boolean supported)
```

## com.sabratec.applinx.presentation Class GXIllegalPositionException

java.lang.Object

├--GXGeneralException

└--com.sabratec.applinx.presentation.GXIllegalPositionException

```
public class GXIllegalPositionException
extends GXGeneralException
```

This exception is thrown when performing a query on a screen tag model that requires a position but the specified position is outside the screen tag model bounds.

### Constructor Summary

public	<a href="#">GXIllegalPositionException</a> (String message)
--------	---

Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Constructors

#### **GXIllegalPositionException**

```
public GXIllegalPositionException(String message)
```

**Parameters:**

message - The thrown message

## com.sabratec.applinx.presentation Class GXPresentationConstants

java.lang.Object

└-com.sabratec.applinx.presentation.GXPresentationConstants

public class **GXPresentationConstants**  
extends Object

This class contains general constants that are used by the API and its sub packages.

### Field Summary

public static final	<a href="#">ALIGNMENT_HORIZONTAL</a> Represents horizontal alignment Value: <b>1</b>
public static final	<a href="#">ALIGNMENT_VERTICAL</a> Represents vertical alignment Value: <b>0</b>

### Constructor Summary

public	<a href="#">GXPresentationConstants</a> ()
--------	--

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Fields

#### **ALIGNMENT\_VERTICAL**

public static final int **ALIGNMENT\_VERTICAL**

Represents vertical alignment  
Constant value: **0**

#### **ALIGNMENT\_HORIZONTAL**

public static final int **ALIGNMENT\_HORIZONTAL**

Represents horizontal alignment  
Constant value: **1**

### Constructors

#### **GXPresentationConstants**

public **GXPresentationConstants**()



(continued from last page)

## com.sabratec.applinx.presentation Class GXRenderConfig

java.lang.Object

↳ com.sabratec.applinx.presentation.GXRenderConfig

### All Implemented Interfaces:

java.io.Serializable

```
public class GXRenderConfig
extends Object
implements java.io.Serializable
```

This class is used for setting the Renderer configuration. It contains various configurations such as screen area, font size and sub classes for various built-in transformation configurations such as:

Host keys, GUI elements, Tables, Windows, etc.

Each configuration sub class allows disabling a specific built-in transformation.

This class also provides transformations registration of tag listener [GXTagListener](#) and completion listener [GXCompletionListener](#).

## Constructor Summary

public	<a href="#">GXRenderConfig()</a>
--------	----------------------------------

## Method Summary

void	<a href="#">addCompletionListener(GXCompletionListener listener)</a> Used for registering a listener class that can modify the screen tag model.
void	<a href="#">addTagListener(GXITagListener listener)</a> Used for registering a listener class which accepts an event for each tag type.
Vector	<a href="#">get_CompleteListenersVector()</a> For .NET framework usage.
boolean	<a href="#">get_Dynamic()</a> For .NET framework usage.
<a href="#">GXEmulationTransformConfig</a>	<a href="#">get_EmulationConfig()</a> For .NET framework usage.
String	<a href="#">get_FontFamily()</a> For .NET framework usage.
int	<a href="#">get_FontSize()</a> For .NET framework usage.
<a href="#">GXGuiElementsTransformConfig</a>	<a href="#">get_GuiElementsConfig()</a> For .NET framework usage.
<a href="#">GXHostKeysTransformConfig</a>	<a href="#">get_HostKeysConfig()</a> For .NET framework usage.

boolean	<a href="#">get_PaintAllColumnHeight()</a> For .NET framework usage.
GXRectangle	<a href="#">get_Rectangle()</a> For .NET framework usage.
GXRectangle	<a href="#">get_RenderArea()</a> For .NET framework usage.
boolean	<a href="#">get_RenderTagsFromRightToLeft()</a> For .NET framework usage.
int	<a href="#">get_RowSpacingPrecentageFactor()</a> For .NET framework usage.
<a href="#">GXTableTransformConfig</a>	<a href="#">get_TableConfig()</a> For .NET framework usage.
<a href="#">GXWindowFrameTransformConfig</a>	<a href="#">get_WindowFrameConfig()</a> For .NET framework usage.
<a href="#">GXICompletionListener</a>	<a href="#">getCompletionListener()</a> Used for retrieving all the registered completion listeners.
<a href="#">GXEmulationTransformConfig</a>	<a href="#">getEmulationConfig()</a> The emulation transformation configuration contains properties which determine the rendered tag look-and-feel and behavior.
String	<a href="#">getFontFamily()</a> Sets the font family to be used for instant rendering.
int	<a href="#">getFontSize()</a> Used for retrieving the font size.
double	<a href="#">getFontWidth()</a>
<a href="#">GXGuiElementsTransformConfig</a>	<a href="#">getGuiElementsConfig()</a> The GUI elements transformation configuration.
<a href="#">GXHostKeysTransformConfig</a>	<a href="#">getHostKeysConfig()</a> The Host keys transformation configuration.
double	<a href="#">getInputBorderWidth()</a>
double	<a href="#">getInputFieldHeight()</a>
boolean	<a href="#">getIsDynamicFont()</a>
boolean	<a href="#">getPaintAllColumnHeight()</a> Returns the value that determines if the full height of the column should be background colored in reversed video or just the font size height.
GXRectangle	<a href="#">getRenderArea()</a> The rendered area of the host screen which the tags are rendered from.
int	<a href="#">getRowSpacingPrecentageFactor()</a> Returns the row height to be used for instant rendering.

<a href="#">GXTableTransformConfig</a>	<a href="#">getTableConfig()</a> The table transformation configuration.
GXITagListener[]	<a href="#">getTagListeners()</a> Used for retrieving all the registered tag listeners.
<a href="#">GXWindowFrameTransformConfig</a>	<a href="#">getWindowFrameConfig()</a> The window transformation configuration.
boolean	<a href="#">isRenderTagsFromRightToLeft()</a> Determines that the HTML tags will be positioned from right to left.
void	<a href="#">removeAllListeners()</a>
void	<a href="#">set_Dynamic</a> (boolean isDynamic) For .NET framework usage.
void	<a href="#">set_EmulationConfig</a> ( <a href="#">GXEmulationTransformConfig</a> emulationConfig) For .NET framework usage.
void	<a href="#">set_FontFamily</a> (String fontFamily) For .NET framework usage.
void	<a href="#">set_FontSize</a> (int fontSize) For .NET framework usage.
void	<a href="#">set_GuiElementsConfig</a> ( <a href="#">GXGuiElementsTransformConfig</a> guiElementsConfig) For .NET framework usage.
void	<a href="#">set_HostKeysConfig</a> ( <a href="#">GXHostKeysTransformConfig</a> hostKeysConfig) For .NET framework usage.
void	<a href="#">set_PaintAllColumnHeight</a> (boolean isPaintAllColumnHeight) For .NET framework usage.
void	<a href="#">set_Rectangle</a> (GXRectangle rectangle) For .NET framework usage.
void	<a href="#">set_RenderArea</a> (GXRectangle rectangle) For .NET framework usage.
void	<a href="#">set_RenderTagsFromRightToLeft</a> (boolean renderTagsFromRightToLeft) For .NET framework usage.
void	<a href="#">set_RowSpacingPrecentageFactor</a> (int rowSpacingPrecentageFactor) For .NET framework usage.
void	<a href="#">set_TableConfig</a> ( <a href="#">GXTableTransformConfig</a> tableConfig) For .NET framework usage.
void	<a href="#">set_WindowFrameConfig</a> ( <a href="#">GXWindowFrameTransformConfig</a> windowConfig) For .NET framework usage.
void	<a href="#">setEmulationConfig</a> ( <a href="#">GXEmulationTransformConfig</a> emulationConfig)
void	<a href="#">setFontFamily</a> (String fontFamily) Sets the font family to be used for instant rendering.

void	<a href="#">setFontSize</a> (int fontSize) It is possible to change the default font size to a different size (in pixels).
void	<a href="#">setFontWidth</a> (double m_fontWidth)
void	<a href="#">setGuiElementsConfig</a> ( <a href="#">GXGuiElementsTransformConfig</a> guiElementsConfig)
void	<a href="#">setHostKeysConfig</a> ( <a href="#">GXHostKeysTransformConfig</a> hostKeysConfig)
void	<a href="#">setInputBorderWidth</a> (double inputBorderWidth)
void	<a href="#">setInputFieldHeight</a> (double inputFieldHeight)
void	<a href="#">setIsDynamicFont</a> (boolean isDynamic)
void	<a href="#">setPaintAllColumnHeight</a> (boolean isPaintAllColumnHeight) The row height is the font size plus the font size multiplied in the value of the rowSpacing variable.
void	<a href="#">setRenderArea</a> (GXRectangle rectangle) Used to define that a specific area of the host screen will be rendered as HTML in Instant HTML pages by specifying the area's boundaries and in this way hide certain portions of the screen. By default, the entire screen is configured to be rendered to the HTML output.
void	<a href="#">setRenderTagsFromRightToLeft</a> (boolean renderTagsFromRightToLeft) Determines that the HTML tags will be positioned from right to left.
void	<a href="#">setRowSpacingPrecentageFactor</a> (int rowSpacingPrecentageFactor) Sets the row height to be used for instant rendering.
void	<a href="#">setTableConfig</a> ( <a href="#">GXTableTransformConfig</a> tableConfig)
void	<a href="#">setWindowFrameConfig</a> ( <a href="#">GXWindowFrameTransformConfig</a> windowFrameConfig)

**Methods inherited from class** java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Constructors

### GXRenderConfig

public **GXRenderConfig**()

## Methods

### addTagListener

public void **addTagListener**(GXITagListener listener)

Used for registering a listener class which accepts an event for each tag type.

(continued from last page)

**Parameters:**

listener - The tag listener

---

**addCompletionListener**

```
public void addCompletionListener(GXICompletionListener listener)
```

Used for registering a listener class that can modify the screen tag model.

**Parameters:**

listener - The completion listener

---

**setRenderArea**

```
public void setRenderArea(GXRectangle rectangle)
```

Used to define that a specific area of the host screen will be rendered as HTML in Instant HTML pages by specifying the area's boundaries and in this way hide certain portions of the screen.

By default, the entire screen is configured to be rendered to the HTML output.

When setting the area to be rendered, tags positioned outside the rendered area will not be available for query execution on the screen tag model. The rendered area also affects the rendered top/left attributes of the tag. The top/left tag will be calculated relatively to the starting position of the rendered area.

**Parameters:**

rectangle - The positions of the rendered area

---

**set\_RenderArea**

```
public void set_RenderArea(GXRectangle rectangle)
```

For .NET framework usage. Expose the method as a property.

**See Also:**[setRenderArea\(GXRectangle\)](#)

---

**getRenderArea**

```
public GXRectangle getRenderArea()
```

The rendered area of the host screen which the tags are rendered from.

**Returns:**

A rectangle that represent the render area

**See Also:**[setRenderArea\(GXRectangle\)](#)

---

**get\_Rectangle**

```
public GXRectangle get_Rectangle()
```

For .NET framework usage. Expose the method as a property.

---

**set\_Rectangle**

```
public void set_Rectangle(GXRectangle rectangle)
```

For .NET framework usage. Expose the method as a property.

---

## get\_RenderArea

```
public GXRectangle get_RenderArea()
```

For .NET framework usage. Expose the method as a property.

**See Also:**

[getRenderArea\(\)](#)

---

## getFontSize

```
public int getFontSize()
```

Used for retrieving the font size.

**Returns:**

The font size

**See Also:**

[setFontSize\(int\)](#)

---

## get\_FontSize

```
public int get_FontSize()
```

For .NET framework usage. Expose the method as a property.

**See Also:**

[getFontSize\(\)](#)

---

## setFontSize

```
public void setFontSize(int fontSize)
```

It is possible to change the default font size to a different size (in pixels). Since the change affects the rendering process performed by the framework on the Web server, this setting is not part of the CSS style sheet file (unlike other font settings), but instead it is included in the server-side instant configuration parameters.

Note: Changing the font sizes for generated Web pages is done in the CSS style sheet node.

The possible values include the different pixel possibilities as well as "Dynamic by Resolution". The HTML emulation recognizes user resolution and dynamically changes the css name according to the matching resolution. The resolution can be either 640x480, 800x600, 1024x768 or 1280x1024 pixels. The resolution may also depend on the host resolution (80 or 132 characters). The best-fit functionality is configured by default in the emulation template in all frameworks. It is used by the renderer to calculate the top/left according to each tag's position.

**Parameters:**

fontSize - The font size to set.

---

## set\_FontSize

```
public void set_FontSize(int fontSize)
```

For .NET framework usage. Expose the method as a property.

**See Also:**

[setFontSize\(int\)](#)

---

---

(continued from last page)

## getEmulationConfig

```
public GXEmulationTransformConfig getEmulationConfig()
```

The emulation transformation configuration contains properties which determine the rendered tag look-and-feel and behavior.

**Returns:**

The emulation transformation configuration.

---

## setEmulationConfig

```
public void setEmulationConfig(GXEmulationTransformConfig emulationConfig)
```

---

## get\_EmulationConfig

```
public GXEmulationTransformConfig get_EmulationConfig()
```

For .NET framework usage. Expose the method as a property.

**See Also:**

[getEmulationConfig\(\)](#)

---

## set\_EmulationConfig

```
public void set_EmulationConfig(GXEmulationTransformConfig emulationConfig)
```

For .NET framework usage. Expose the method as a property.

---

## getGuiElementsConfig

```
public GXGuiElementsTransformConfig getGuiElementsConfig()
```

The GUI elements transformation configuration. The GUI elements transformation represents GUI elements which were configured using the ApplinX composer.

**Returns:**

The GUI elements' transformation configuration.

---

## setGuiElementsConfig

```
public void setGuiElementsConfig(GXGuiElementsTransformConfig guiElementsConfig)
```

---

## get\_GuiElementsConfig

```
public GXGuiElementsTransformConfig get_GuiElementsConfig()
```

For .NET framework usage. Expose the method as a property.

**See Also:**

[getGuiElementsConfig\(\)](#)

---



---

(continued from last page)

## getHostKeysConfig

```
public GXHostKeysTransformConfig getHostKeysConfig()
```

The Host keys transformation configuration. Host keys transformation represents host keys patterns which were configured using the ApplinX composer.

**Returns:**

The host keys transformation configuration

---

## setHostKeysConfig

```
public void setHostKeysConfig(GXHostKeysTransformConfig hostKeysConfig)
```

---

## get\_HostKeysConfig

```
public GXHostKeysTransformConfig get_HostKeysConfig()
```

For .NET framework usage. Expose the method as a property.

**See Also:**

[getHostKeysConfig\(\)](#)

---

## set\_HostKeysConfig

```
public void set_HostKeysConfig(GXHostKeysTransformConfig hostKeysConfig)
```

For .NET framework usage. Expose the method as a property.

---

## getTableConfig

```
public GXTableTransformConfig getTableConfig()
```

The table transformation configuration. The table transformation is based on a host table that was configured using the ApplinX composer.

**Returns:**

The table configuration

---

## setTableConfig

```
public void setTableConfig(GXTableTransformConfig tableConfig)
```

---

## get\_TableConfig

```
public GXTableTransformConfig get_TableConfig()
```

For .NET framework usage. Expose the method as a property.

**See Also:**

[getTableConfig\(\)](#)

---

---

(continued from last page)

## set\_TableConfig

```
public void set_TableConfig(GXTableTransformConfig tableConfig)
```

For .NET framework usage. Expose the method as a property.

---

## getWindowFrameConfig

```
public GXWindowFrameTransformConfig getWindowFrameConfig()
```

The window transformation configuration. Window frame transformation draws a rectangle instead of drawing a host window which is represented as characters or reversed video.

**Returns:**

The window frame configuration

---

## setWindowFrameConfig

```
public void setWindowFrameConfig(GXWindowFrameTransformConfig windowFrameConfig)
```

---

## get\_WindowFrameConfig

```
public GXWindowFrameTransformConfig get_WindowFrameConfig()
```

For .NET framework usage. Expose the method as a property.

**See Also:**

[getWindowFrameConfig\(\)](#)

---

## set\_WindowFrameConfig

```
public void set_WindowFrameConfig(GXWindowFrameTransformConfig windowConfig)
```

For .NET framework usage. Expose the method as a property.

---

## getTagListeners

```
public GXITagListener[] getTagListeners()
```

Used for retrieving all the registered tag listeners.

**Returns:**

An array of the registered tag listeners

---

## getCompletionListener

```
public GXICompletionListener[] getCompletionListener()
```

Used for retrieving all the registered completion listeners.

**Returns:**

An array of the completion listeners

---

## removeAllListeners

```
public void removeAllListeners()
```

---

(continued from last page)

---

## getFontFamily

```
public String getFontFamily()
```

Sets the font family to be used for instant rendering.

**Returns:**

the font family in use. null if no specific font to use(defined in the CSS file).

---

## setFontFamily

```
public void setFontFamily(String fontFamily)
```

Sets the font family to be used for instant rendering. It is used for proportion calculation to best fit specific fonts for Japanese & Arabic applications.

For Japanese the best fitted fixed fonts are: "MS Mincho" or "MS Gothic"

For Arabic the best fitted fixed font is: "Courier".

For other languages the best fitted font is "Courier New", which is by default declared in the CSS files. Defining the font here will override the CSS definition.

**Parameters:**

fontFamily - the font family in use. null if no specific font to use(defined in the CSS file).

---

## get\_FontFamily

```
public String get_FontFamily()
```

For .NET framework usage. Expose the method as a property.

---

## set\_FontFamily

```
public void set_FontFamily(String fontFamily)
```

For .NET framework usage. Expose the method as a property.

---

## getRowSpacingPrecentageFactor

```
public int getRowSpacingPrecentageFactor()
```

Returns the row height to be used for instant rendering. This height is calculated relatively to the rows font size. The default row height is set to 53% (153% of the font size). For example: When the font size is set to 13px, and using the default row height value of 53%, the row height will be:  $13 * 1.53 = 19.89 = \sim 20px$ .

**Returns:**

the row height to be used

---

## setRowSpacingPrecentageFactor

```
public void setRowSpacingPrecentageFactor(int rowSpacingPrecentageFactor)
```

Sets the row height to be used for instant rendering. This height is calculated relatively to the rows font size. The default row height is set to 53% (153% of the font size). For example: When the font size is set to 13px, and using the default row height value of 53%, the row height will be:  $13 * 1.53 = 19.89 = \sim 20px$ .

**Parameters:**

rowHeightPrecentageFactor - the row height to be used

---

---

## get\_RowSpacingPrecentageFactor

```
public int get_RowSpacingPrecentageFactor()
```

For .NET framework usage. Expose the method as a property.

---

## set\_RowSpacingPrecentageFactor

```
public void set_RowSpacingPrecentageFactor(int rowSpacingPrecentageFactor)
```

For .NET framework usage. Expose the method as a property.

---

## getPaintAllColumnHeight

```
public boolean getPaintAllColumnHeight()
```

Returns the value that determines if the full height of the column should be background colored in reversed video or just the font size height.

**Returns:**

should the full height will be painted or just the font size height.

---

## setPaintAllColumnHeight

```
public void setPaintAllColumnHeight(boolean isPaintAllColumnHeight)
```

The row height is the font size plus the font size multiplied in the value of the rowSpacing variable. This property determines if the full height of the column should be background colored in reversed video or just the font size height.

---

## get\_PaintAllColumnHeight

```
public boolean get_PaintAllColumnHeight()
```

For .NET framework usage. Expose the method as a property.

---

## set\_PaintAllColumnHeight

```
public void set_PaintAllColumnHeight(boolean isPaintAllColumnHeight)
```

For .NET framework usage. Expose the method as a property.

---

## isRenderTagsFromRightToLeft

```
public boolean isRenderTagsFromRightToLeft()
```

Determines that the HTML tags will be positioned from right to left. The usage is in Hebrew/Arabic applications when using non-fixed font, to ensure alignment to the right. By default the tags are positioned from left to right.

**Returns:**

---

## setRenderTagsFromRightToLeft

```
public void setRenderTagsFromRightToLeft(boolean renderTagsFromRightToLeft)
```

Determines that the HTML tags will be positioned from right to left. The usage is in Hebrew/Arabic applications when using non-fixed font, to ensure alignment to the right. By default the tags are positioned from left to right.

---

(continued from last page)

**Parameters:**`renderTagsFromRightToLeft`

---

**get\_RenderTagsFromRightToLeft**

```
public boolean get_RenderTagsFromRightToLeft()
```

For .NET framework usage. Expose the method as a property.

---

**set\_RenderTagsFromRightToLeft**

```
public void set_RenderTagsFromRightToLeft(boolean renderTagsFromRightToLeft)
```

For .NET framework usage. Expose the method as a property.

---

**set\_GuiElementsConfig**

```
public void set_GuiElementsConfig(GXGuiElementsTransformConfig guiElementsConfig)
```

For .NET framework usage. Expose the method as a property.

---

**get\_CompleteListenersVector**

```
public Vector get_CompleteListenersVector()
```

For .NET framework usage. Expose the method as a property.

---

**getFontWidth**

```
public double getFontWidth()
```

---

**setFontWidth**

```
public void setFontWidth(double m_fontWidth)
```

---

**setInputFieldHeight**

```
public void setInputFieldHeight(double inputFieldHeight)
```

---

**getInputFieldHeight**

```
public double getInputFieldHeight()
```

---

**getInputBorderWidth**

```
public double getInputBorderWidth()
```

---

(continued from last page)

## **setInputBorderWidth**

```
public void setInputBorderWidth(double inputBorderWidth)
```

---

## **getIsDynamicFont**

```
public boolean getIsDynamicFont()
```

---

## **setIsDynamicFont**

```
public void setIsDynamicFont(boolean isDynamic)
```

---

## **get\_Dynamic**

```
public boolean get_Dynamic()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_Dynamic**

```
public void set_Dynamic(boolean isDynamic)
```

For .NET framework usage. Expose the method as a property.

---

## com.sabratec.applinx.presentation Class GXTagUtil

java.lang.Object

└-com.sabratec.applinx.presentation.GXTagUtil

public class **GXTagUtil**  
extends Object

### Constructor Summary

public	<a href="#">GXTagUtil()</a>
--------	-----------------------------

### Method Summary

static double	<a href="#">getHeightPixels</a> ( <a href="#">GXRenderConfig</a> config, int height, int fontSize) This method is used for determine the proportion between a given height & font size to actual height in pixels
static double	<a href="#">getTagHeight</a> ( <a href="#">GXITag</a> tag, int fontSize, <a href="#">GXRenderConfig</a> renderConfig) This methd returns the tag height in pixels, in order to know if the tag is overriding his below neighbour
static double	<a href="#">getTagWidth</a> ( <a href="#">GXITag</a> tag, int fontSize, <a href="#">GXRenderConfig</a> renderConfig) This method returns the tag width in pixels, in order to know if the tag is overriding his right/left neighbor
static double	<a href="#">getWidthPixels</a> ( <a href="#">GXRenderConfig</a> renderConfig, int length, int fontSize) This method is used for determine the proportion between a given length & font size to actual width in pixels

Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Constructors

#### **GXTagUtil**

public **GXTagUtil**()

### Methods

#### **getWidthPixels**

public static double **getWidthPixels**([GXRenderConfig](#) renderConfig,  
int length,  
int fontSize)

---

(continued from last page)

This method is used to determine the proportion between a given length & font size to actual width in pixels

**Parameters:**

length - The host field length  
fontSize - The display font size in pixels

**Returns:**

The actual width in pixels

---

## getHeightPixels

```
public static double getHeightPixels(GXRenderConfig config,  
    int height,  
    int fontSize)
```

This method is used to determine the proportion between a given height & font size to actual height in pixels

**Parameters:**

height - The host field height  
fontSize - The display font size in pixels

**Returns:**

The actual height in pixels

---

## getTagWidth

```
public static double getTagWidth(GXITag tag,  
    int fontSize,  
    GXRenderConfig renderConfig)
```

This method returns the tag width in pixels, in order to know if the tag is overriding his right/left neighbor

**Parameters:**

tag - The tag which its width is required  
fontSize - The font size

**Returns:**

The tag width in pixels

---

## getTagHeight

```
public static double getTagHeight(GXITag tag,  
    int fontSize,  
    GXRenderConfig renderConfig)
```

This method returns the tag height in pixels, in order to know if the tag is overriding his below neighbour

**Parameters:**

tag - The tag which its height is required  
fontSize - The display font size in pixels

**Returns:**

The tag height in pixels

---



## com.sabratec.applinx.presentation Class GXUndefinedPositionException

```
java.lang.Object
  |
  +-GXGeneralException
     |
     +-com.sabratec.applinx.presentation.GXUndefinedPositionException
```

```
public class GXUndefinedPositionException
extends GXGeneralException
```

This exception is thrown when performing a query on a screen tag model that requires a position but the specified position is empty.

### Constructor Summary

public	<a href="#">GXUndefinedPositionException(GXITag tag)</a> Throws an exception with the specified tag details
--------	--

### Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

### Constructors

#### **GXUndefinedPositionException**

```
public GXUndefinedPositionException(GXITag tag)
```

Throws an exception with the specified tag details

**Parameters:**

`tag` - The tag whose position is empty

---

## Package

# **com.sabratec.applinx.presentation.event**

This package contains the events and listeners. These classes are used by the Renderer for notifying transformations of the creation of the screen tag model and new tags.

## com.sabratec.applinx.presentation.event Interface GXICompletionListener

All Known Implementing Classes:  
[GXHebrewTransform](#)

---

public interface **GXICompletionListener**

This listener is notified when the screen tag model building process is completed.

Classes that implement this listener should be registered in the Render configuration.

When the building process is completed, a GXRenderEvent event is thrown, and the `onComplete` method is called.

**See Also:**

[GXRenderConfig.addCompletionListener\(GXICompletionListener\)](#), [onComplete\(GXRenderEvent\)](#),  
[GXRenderEvent](#)

---

### Method Summary

abstract void	<a href="#">onComplete(GXRenderEvent event)</a> Invoked when screen tag model build process has been completed.
---------------	--

---

### Methods

#### **onComplete**

public abstract void **onComplete**([GXRenderEvent](#) event)

Invoked when screen tag model build process has been completed.

**Parameters:**

event - The event arguments

## com.sabratec.applinx.presentation.event Class GXRenderEvent

java.lang.Object

└─com.sabratec.applinx.presentation.event.GXRenderEvent

public class **GXRenderEvent**  
extends Object

An event that indicates that the screen tag model building process has been completed. This event is used both for tag completion events and screen-model completion events.

A GXRenderEvent is passed to every tag listener [GXTagListener](#) and every completion listener [GXCompletionListener](#) that were registered within the Renderer configuration.

**See Also:**

[GXCompletionListener](#), [GXTagListener](#)

### Constructor Summary

public	<a href="#">GXRenderEvent</a> ( <a href="#">GXIScreenTagModel</a> screenTagModel, <a href="#">GXIScreen</a> screen) For internal usage.
--------	--

### Method Summary

<a href="#">GXIScreen</a>	<a href="#">getHostScreen</a> () Used for retrieving the current host screen.
<a href="#">GXIScreenTagModel</a>	<a href="#">getScreenTagModel</a> () Used for retrieving the screen tag model created by the renderer.

**Methods inherited from class** java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Constructors

#### **GXRenderEvent**

public **GXRenderEvent**([GXIScreenTagModel](#) screenTagModel,  
[GXIScreen](#) screen)

For internal usage. Initialized by the renderer.

**Parameters:**

screenTagModel - The screen tag model

screen - The host screen

### Methods

(continued from last page)

## getScreenTagModel

```
public GXIScreenTagModel getScreenTagModel()
```

Used for retrieving the screen tag model created by the renderer.

**Returns:**

The screen model created by the renderer

---

## getHostScreen

```
public GXIScreen getHostScreen()
```

Used for retrieving the current host screen.

**Returns:**

The current host screen

## com.sabratec.applinx.presentation.event Class GXTagListener

java.lang.Object

└-com.sabratec.applinx.presentation.event.GXTagListener

Direct Known Subclasses:

[GXSapPortalTransform](#)

```
public abstract class GXTagListener
extends Object
```

This listener is notified when a tag rendering is completed.

Classes that extend this listener should be registered in the Render configuration.

The class that requires processing a render event extends this abstract [GXTagListener](#) class (overriding only the methods of interest).

When a single tag rendering is completed, a `GXRenderEvent` event is thrown, and the `onNew[TagName]` method is called. The methods in this class are empty. This class exists to be used to conveniently create listener objects.

See Also:

[GXRenderEvent](#), `addTagListener(GXTagListener)`

### Constructor Summary

public	<a href="#">GXTagListener()</a>
--------	---------------------------------

### Method Summary

void	<a href="#">onNewButton</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXIButtonTag</a> button) Invoked when a link has been created.
void	<a href="#">onNewCheckbox</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXICheckboxTag</a> checkbox) Invoked when a checkbox has been created.
void	<a href="#">onNewCombobox</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXIComboboxTag</a> combobox) Invoked when a combo box has been created.
void	<a href="#">onNewLabel</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXILabelTag</a> label) Invoked when a label (protected field) has been created.
void	<a href="#">onNewLink</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXILinkTag</a> link) Invoked when a link has been created.
void	<a href="#">onNewRadioButtonGroup</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXIRadioButtonGroupTag</a> radioGroup) Invoked when a radio buttons group has been created.
void	<a href="#">onNewTable</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXITableTag</a> table) Invoked when a table tag has been created.
void	<a href="#">onNewTableCell</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXITableCellTag</a> tableCell) Invoked when a table cell has been created.

void	<a href="#">onNewTableRow</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXITableRowTag</a> tableRow) Invoked when a table row tag has been created.
void	<a href="#">onNewTextField</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXITextFieldTag</a> textField) Invoked when a text field has been created.

#### Methods inherited from class `java.lang.Object`

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Constructors

### GXTagListener

```
public GXTagListener()
```

## Methods

### onNewTextField

```
public void onNewTextField(GXRenderEvent event,
GXITextFieldTag textField)
```

Invoked when a text field has been created. The common usage is for unprotected fields that are rendered as text fields.

#### Parameters:

`event` - The event arguments  
`textField` - The text field tag which has been created

### onNewLabel

```
public void onNewLabel(GXRenderEvent event,
GXILabelTag label)
```

Invoked when a label (protected field) has been created. The common usage is for protected fields that are rendered as text fields.

#### Parameters:

`event` - The event arguments  
`label` - The label tag which has been created

### onNewLink

```
public void onNewLink(GXRenderEvent event,
GXILinkTag link)
```

Invoked when a link has been created. The common usage is for host-keys that may be rendered as links.

#### Parameters:

`event` - The event arguments  
`link` - The linked tag which has been created

(continued from last page)

---

## onNewButton

```
public void onNewButton(GXRenderEvent event,  
    GXIButtonTag button)
```

Invoked when a link has been created. The common usage is for host-keys that may be rendered as buttons.

**Parameters:**

event - the event arguments  
button - the button tag which has been created

---

## onNewCombobox

```
public void onNewCombobox(GXRenderEvent event,  
    GXIComboboxTag combobox)
```

Invoked when a combo box has been created. The common usage is for a GUI-element that may be rendered as a combo box.

**Parameters:**

event - The event arguments  
combobox - The combo box tag which has been created

---

## onNewCheckbox

```
public void onNewCheckbox(GXRenderEvent event,  
    GXICheckboxTag checkbox)
```

Invoked when a checkbox has been created. The common usage is for a GUI-element that may be rendered as a check box.

---

## onNewRadioButtonGroup

```
public void onNewRadioButtonGroup(GXRenderEvent event,  
    GXIRadioButtonGroupTag radioButton)
```

Invoked when a radio buttons group has been created. The common usage is for a GUI-element that may be rendered as a radio button's group.

**Parameters:**

event - The event arguments  
radioGroup - The radio buttons group tag which has been created

---

## onNewTable

```
public void onNewTable(GXRenderEvent event,  
    GXITableTag table)
```

Invoked when a table tag has been created.

In this case, `table.getHostField()` returns null.

**Parameters:**

event - The event arguments  
table - The table tag which has been created

**See Also:**

[GXITable](#)  
[GXIScreen](#)

---



---

(continued from last page)

## onNewTableRow

```
public void onNewTableRow(GXRenderEvent event,  
    GXITableRowTag tableRow)
```

Invoked when a table row tag has been created.

In this case, `table.getHostField()` returns null.

### Parameters:

event - The event arguments

tableRow - The table row tag which has been created

### See Also:

[GXITable](#)

[GXIScreen](#)

---

## onNewTableCell

```
public void onNewTableCell(GXRenderEvent event,  
    GXITableCellTag tableCell)
```

Invoked when a table cell has been created.

Unlike the other table-related event objects, `tableCell.getHostField()` returns the host field the cell is based on.

### Parameters:

event - The event arguments

tableCell - The table tag which has been created

### See Also:

[GXIField](#)

---

---

## Package

# **com.sabratec.applinx.presentation.queries**

This package contains the query interface and built-in queries such as text query, area query, which should be used for executing queries against the screen tag model.

## com.sabratec.applinx.presentation.queries Class GXAreaQuery

java.lang.Object

↳ com.sabratec.applinx.presentation.queries.GXAreaQuery

All Implemented Interfaces:

[GXITagQuery](#)

public class **GXAreaQuery**  
extends Object  
implements [GXITagQuery](#)

This query returns tags in the given area. The query can be either row based by using the constructor [GXAreaQuery\(int, int\)](#) or rectangle based [GXAreaQuery\(GXRectangle, int, boolean\)](#)

See Also:

[GXIScreenTagModel.executeQuery\(GXITagQuery\)](#)

### Field Summary

public static	<a href="#">RETRIEVE_INSIDE_AREA</a> Indicates retrieval of tags from inside the area.
public static	<a href="#">RETRIEVE_OUTSIDE_AREA</a> Indicates retrieval of tags from outside the area.

### Constructor Summary

public	<a href="#">GXAreaQuery()</a> Creates an empty instance.
public	<a href="#">GXAreaQuery(GXRectangle area, int retrievalMode, boolean entireTag)</a> Creates an instance of a rectangular area query.
public	<a href="#">GXAreaQuery(int startRow, int endRow)</a> Creates an instance of a rectangular area query using to start and end rows.

### Method Summary

<a href="#">GXTagList</a>	<a href="#">find(GXIScreenTagModel screenModel)</a> Only tags that have host-screen positions will be returned.
void	<a href="#">setArea(GXRectangle area)</a> Sets the rectangular area according to which tags will be retrieved.
void	<a href="#">setEntireTag(boolean entireTag)</a> Defines whether tags that intersect with the area's frame will be considered as meeting the criteria.
void	<a href="#">setRetrievalMode(int retrievalMode)</a> Sets the retrieval mode, either tags inside or outside the area.
void	<a href="#">setRowRange(int startRow, int endRow)</a> Sets the rectangular area using the start and end rows.

**Methods inherited from class** `java.lang.Object`

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

**Methods inherited from interface** [com.sabratec.applinx.presentation.queries.GXITagQuery](#)

[find](#)

## Fields

### RETRIEVE\_INSIDE\_AREA

```
public static int RETRIEVE_INSIDE_AREA
```

Indicates retrieval of tags from inside the area. This is the default value.

### RETRIEVE\_OUTSIDE\_AREA

```
public static int RETRIEVE_OUTSIDE_AREA
```

Indicates retrieval of tags from outside the area.

## Constructors

### GXAreaQuery

```
public GXAreaQuery()
```

Creates an empty instance.

### GXAreaQuery

```
public GXAreaQuery(GXRectangle area,  
                  int retrievalMode,  
                  boolean entireTag)
```

Creates an instance of a rectangular area query.

**Parameters:**

`area` - The rectangular area according which determine tags will be retrieved  
`retrievalMode` - indicates retrieval of tags from either inside or outside the area  
`entireTag` - indicates whether tags that intersect with the area's frame will be considered as a matching tags

### GXAreaQuery

```
public GXAreaQuery(int startRow,  
                  int endRow)
```

Creates an instance of a rectangular area query using to start and end rows. The criteria is inclusive, i.e. tags which are positioned in the rows themselves will also be retrieved.

**Parameters:**

`startRow` - the row where the range starts, inclusive.  
`endRow` - the row where the range ends, inclusive.

## Methods

(continued from last page)

---

## setArea

```
public void setArea(GXRectangle area)
```

Sets the rectangular area according to which tags will be retrieved.

**Parameters:**

area - the rectangular area according to which tags will be retrieved

---

## setRowRange

```
public void setRowRange(int startRow,  
int endRow)
```

Sets the rectangular area using the start and end rows. The criteria is inclusive, i.e. tags which are positioned in the rows themselves will also be retrieved.

**Parameters:**

startRow - the row where the range starts (including this row).

endRow - the row where the range ends (including this row).

---

## setRetrievalMode

```
public void setRetrievalMode(int retrievalMode)
```

Sets the retrieval mode, either tags inside or outside the area.

**Parameters:**

retrievalMode - indicates retrieval of tags from either inside or outside the area

**See Also:**

[RETRIEVE\\_INSIDE\\_AREA](#)

[RETRIEVE\\_OUTSIDE\\_AREA](#)

---

## setEntireTag

```
public void setEntireTag(boolean entireTag)
```

Defines whether tags that intersect with the area's frame will be considered as meeting the criteria.

**Parameters:**

entireTag - true if the entire tag has to be contained in the area

---

## find

```
public GXTagList find(GXIScreenTagModel screenModel)
```

Only tags that have host-screen positions will be returned.

## com.sabratec.applinx.presentation.queries Interface GXITagQuery

All Known Implementing Classes:

[GXSimpleTagQuery](#), [GXAreaQuery](#)

---

public interface **GXITagQuery**

An interface for queries executed on a screen tag model. By implementing this interface, you should be able to write your own query classes. The query is defined using the [find\(GXIScreenTagModel\)](#) method.

**See Also:**

[GXIScreenTagModel.executeQuery\(GXITagQuery\)](#)

---

### Method Summary

abstract <a href="#">GXTagList</a>	<a href="#">find(GXIScreenTagModel screenModel)</a> Performs a query against a given screen model.
------------------------------------	---

---

### Methods

#### **find**

public abstract [GXTagList](#) **find**([GXIScreenTagModel](#) screenModel)

Performs a query against a given screen model.

**Parameters:**

screenModel - The screen model that the query is performed against

**Returns:**

All tags meeting the query. If there are no tags that meet the query, an empty list is returned

## com.sabratec.applinx.presentation.queries Class GXSimpleTagQuery

java.lang.Object

└─com.sabratec.applinx.presentation.queries.GXSimpleTagQuery

### All Implemented Interfaces:

[GXITagQuery](#)

### Direct Known Subclasses:

[GXTextQuery](#)

```
public abstract class GXSimpleTagQuery
extends Object
implements GXITagQuery
```

This abstract class provides a simple implementation for the [GXITagQuery](#) interface. The implementation consists of iterating over the entire screen model tag, and at the end returning all tags which meet a given criteria.

Overriding classes should implement the abstract method `matchesCriteria(GXITag)`.

### See Also:

[GXIScreenTagModel.executeQuery\(GXITagQuery\)](#)

## Constructor Summary

public	<a href="#">GXSimpleTagQuery()</a>
--------	------------------------------------

## Method Summary

<a href="#">GXTagList</a>	<a href="#">find</a> ( <a href="#">GXIScreenTagModel</a> screenTagModel) Finds tags meeting the specific query criteria.
---------------------------	---

### Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

### Methods inherited from interface [com.sabratec.applinx.presentation.queries.GXITagQuery](#)

[find](#)

## Constructors

### GXSimpleTagQuery

```
public GXSimpleTagQuery()
```

## Methods

(continued from last page)

## **find**

```
public GXTagList find(GXIScreenTagModel screenTagModel)
```

Finds tags meeting the specific query criteria.

### **Parameters:**

`screenTagModel` - the screen tag model.

### **Returns:**

the matching tag list



## com.sabratec.applinx.presentation.queries

### Class GXTextQuery

java.lang.Object

└- [com.sabratec.applinx.presentation.queries.GXSimpleTagQuery](#)  
 └- [com.sabratec.applinx.presentation.queries.GXTextQuery](#)

All Implemented Interfaces:

[GXITagQuery](#)

public class **GXTextQuery**  
 extends [GXSimpleTagQuery](#)

This query returns tags that contain the specified texts. This class requires at least one text that is to be searched for, which should be specified in the constructor. For additional texts use the method [addSearchText\(String\)](#). Tags that contain either one of the search texts will be returned.

See Also:

[GXIScreenTagModel.executeQuery\(GXITagQuery\)](#)

## Constructor Summary

public	<a href="#">GXTextQuery</a> (String searchText) The constructor accepts the text to search for.
--------	--

## Method Summary

void	<a href="#">addSearchText</a> (String searchText) Adds the specified search text to searched texts list
------	--

Methods inherited from class [com.sabratec.applinx.presentation.queries.GXSimpleTagQuery](#)

[find](#)

Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

Methods inherited from interface [com.sabratec.applinx.presentation.queries.GXITagQuery](#)

[find](#)

## Constructors

### GXTextQuery

public **GXTextQuery**(String searchText)

The constructor accepts the text to search for.

**Parameters:**

searchText - The text to search for.

## Methods

### **addSearchText**

```
public void addSearchText(String seacrhText)
```

Adds the specified search text to searched texts list

**Parameters:**

seacrhText

---

## Package

# **com.sabratec.applinx.presentation.tags**

This package provides interfaces for the screen tag model, common tags and tag lists.

## com.sabratec.applinx.presentation.tags Interface GXIButtonTag

All Superinterfaces:

[GXIClickableTag](#), [GXITag](#)

public interface **GXIButtonTag**  
extends [GXIClickableTag](#)

This interface represents a button tag. The common usage is for a host key when setting the Render configuration for buttons.

An `onNewButton` event is thrown when a new button is created by the Renderer. The method `getContent()` returns the caption of the button.

To create a new button use `GXHtmlTagFactory.instance().newButton(...)`

See Also:

[GXTagListener.onNewButton\(GXRenderEvent, GXIButtonTag\)](#),  
[GXHostKeysTransformConfig.setRenderingType\(int\)](#), [GXTransformConstants.HOSTKEYS\\_BUTTONS](#),  
[GXHtmlTagFactory.newButton\(\)](#)

### Method Summary

abstract String	<a href="#">getCaption()</a>
abstract String	<a href="#">getOnClick()</a>
abstract void	<a href="#">setCaption(String caption)</a>
abstract void	<a href="#">setOnClick(String onClick)</a>

#### Methods inherited from interface [com.sabratec.applinx.presentation.tags.GXIClickableTag](#)

[handleEvent](#)

#### Methods inherited from interface [com.sabratec.applinx.presentation.tags.GXITag](#)

[copyFrom](#), [getAttribute](#), [getBottomMargin](#), [getBottomPadding](#), [getChildren](#), [getContent](#), [getHostField](#), [getId](#), [getLength](#), [getOffsetHeight](#), [getOffsetLeft](#), [getOffsetRight](#), [getOffsetTop](#), [getParent](#), [getPosition](#), [getTagName](#), [getTopMargin](#), [getTopPadding](#), [hasChildren](#), [isVisible](#), [removeAttribute](#), [setAttribute](#), [setBottomMargin](#), [setBottomPadding](#), [setId](#), [setLength](#), [setOffsetHeight](#), [setOffsetLeft](#), [setOffsetRight](#), [setOffsetTop](#), [setPosition](#), [setPosition](#), [setTopMargin](#), [setTopPadding](#), [setVisible](#), [setVisible](#)

### Methods

#### **getCaption**

public abstract String **getCaption()**

---

(continued from last page)

**Returns:**

The caption of the button. **value** attribute in HTML.

---

**setCaption**

```
public abstract void setCaption(String caption)
```

**Parameters:**

caption - The caption of the button. **value** attribute in HTML.

---

**getOnClick**

```
public abstract String getOnClick()
```

**Returns:**

The onClick action to execute. JavaScript command in HTML.

---

**setOnClick**

```
public abstract void setOnClick(String onClick)
```

**Parameters:**

onClick - The onClick action to execute. JavaScript command in HTML.

## com.sabratec.applinx.presentation.tags Interface GXICheckboxTag

All Superinterfaces:

[GXITag](#)

public interface **GXICheckboxTag**  
extends [GXITag](#)

This interface represents a check box tag. The common usage is for when creating a GUI element in ApplinX composer.

An `onNewCheckbox` event is thrown when a new check box is created by the renderer. The method `getContent()` returns the checked/unchecked value of the check box depending if it is checked or not.

To create a new check box use `GXHtmlTagFactory.instance().newCheckbox(...)`

In HTML, this tag renders a hidden tag that saves the checked/unchecked value of the tag, so the checked/unchecked value will be passed to the server when the form is submitted.

### Method Summary

abstract String	<a href="#">getCaption()</a>
abstract String	<a href="#">getCheckedValue()</a>
abstract String	<a href="#">getUncheckedValue()</a>
abstract boolean	<a href="#">isChecked()</a>
abstract void	<a href="#">setCaption(String caption)</a>
abstract void	<a href="#">setChecked(boolean isChecked)</a>
abstract void	<a href="#">setCheckedValue(String checkedValue)</a>
abstract void	<a href="#">setUncheckedValue(String uncheckedValue)</a>

### Methods inherited from interface [com.sabratec.applinx.presentation.tags.GXITag](#)

[copyFrom](#), [getAttribute](#), [getBottomMargin](#), [getBottomPadding](#), [getChildren](#), [getContent](#), [getHostField](#), [getId](#), [getLength](#), [getOffsetHeight](#), [getOffsetLeft](#), [getOffsetRight](#), [getOffsetTop](#), [getParent](#), [getPosition](#), [getTagName](#), [getTopMargin](#), [getTopPadding](#), [hasChildren](#), [isVisible](#), [removeAttribute](#), [setAttribute](#), [setBottomMargin](#), [setBottomPadding](#), [setId](#), [setLength](#), [setOffsetHeight](#), [setOffsetLeft](#), [setOffsetRight](#), [setOffsetTop](#), [setPosition](#), [setPosition](#), [setTopMargin](#), [setTopPadding](#), [setVisible](#), [setVisible](#)

### Methods

---

(continued from last page)

## isChecked

```
public abstract boolean isChecked()
```

### Returns:

is the check box checked.

---

## setChecked

```
public abstract void setChecked(boolean isChecked)
```

### Parameters:

isChecked - Set the check box to be checked.

---

## getCheckedValue

```
public abstract String getCheckedValue()
```

### Returns:

the checked value

---

## setCheckedValue

```
public abstract void setCheckedValue(String checkedValue)
```

### Parameters:

checkedValue - the checked value

---

## getUncheckedValue

```
public abstract String getUncheckedValue()
```

### Returns:

the unchecked value

---

## setUncheckedValue

```
public abstract void setUncheckedValue(String uncheckedValue)
```

### Parameters:

uncheckedValue - Set the unchecked value

---

## getCaption

```
public abstract String getCaption()
```

---

(continued from last page)

**Returns:**

the check box caption

---

**setCaption**

```
public abstract void setCaption(String caption)
```

**Parameters:**

caption - Set the check box caption



## com.sabratec.applinx.presentation.tags Interface GXIClickableTag

All Superinterfaces:

[GXITag](#)

All Subinterfaces:

[GXImageTag](#), [GXILinkTag](#), [GXIButtonTag](#)

---

public interface **GXIClickableTag**  
extends [GXITag](#)

### Method Summary

abstract void	<a href="#">handleEvent</a> (GXIClickEvent event, <a href="#">GXIScreen</a> screen)
---------------	---

Methods inherited from interface [com.sabratec.applinx.presentation.tags.GXITag](#)

[copyFrom](#), [getAttribute](#), [getBottomMargin](#), [getBottomPadding](#), [getChildren](#), [getContent](#), [getHostField](#), [getId](#), [getLength](#), [getOffsetHeight](#), [getOffsetLeft](#), [getOffsetRight](#), [getOffsetTop](#), [getParent](#), [getPosition](#), [getTagName](#), [getTopMargin](#), [getTopPadding](#), [hasChildren](#), [isVisible](#), [removeAttribute](#), [setAttribute](#), [setBottomMargin](#), [setBottomPadding](#), [setId](#), [setLength](#), [setOffsetHeight](#), [setOffsetLeft](#), [setOffsetRight](#), [setOffsetTop](#), [setPosition](#), [setPosition](#), [setTopMargin](#), [setTopPadding](#), [setVisible](#), [setVisible](#)

### Methods

#### handleEvent

public abstract void **handleEvent**(GXIClickEvent event, [GXIScreen](#) screen)

## com.sabratec.applinx.presentation.tags Interface GXIComboboxTag

All Superinterfaces:

[GXITag](#)

public interface **GXIComboboxTag**  
extends [GXITag](#)

This interface represents a combo box tag. The common usage is for when creating a GUI element in ApplinX composer.

An `onNewCombobox` event is thrown when a new combo box is created by the renderer. The method `getContent()` returns the checked value of the combo box.

To create a new combo box use `GXHtmlTagFactory.instance().newCombobox(...)`

### Method Summary

abstract GXTextValueList	<a href="#">getItems()</a>
abstract String	<a href="#">getSelectedValue()</a> Gets the value of the selected option
abstract void	<a href="#">setItems(GXTextValueList items)</a> Sets a predefined text/value list
abstract void	<a href="#">setSelectedValue(String selectedValue)</a> used for setting the option with the specified value

### Methods inherited from interface [com.sabratec.applinx.presentation.tags.GXITag](#)

[copyFrom](#), [getAttribute](#), [getBottomMargin](#), [getBottomPadding](#), [getChildren](#), [getContent](#), [getHostField](#), [getId](#), [getLength](#), [getOffsetHeight](#), [getOffsetLeft](#), [getOffsetRight](#), [getOffsetTop](#), [getParent](#), [getPosition](#), [getTagName](#), [getTopMargin](#), [getTopPadding](#), [hasChildren](#), [isVisible](#), [removeAttribute](#), [setAttribute](#), [setBottomMargin](#), [setBottomPadding](#), [setId](#), [setLength](#), [setOffsetHeight](#), [setOffsetLeft](#), [setOffsetRight](#), [setOffsetTop](#), [setPosition](#), [setPosition](#), [setTopMargin](#), [setTopPadding](#), [setVisible](#), [setVisible](#)

### Methods

#### getItems

public abstract GXTextValueList **getItems()**

#### Returns:

The text/value list

---

(continued from last page)

## setItems

```
public abstract void setItems(GXTextValueList items)
```

Sets a predefined text/value list

**Parameters:**

items - The combo box items

---

## getSelectedValue

```
public abstract String getSelectedValue()
```

Gets the value of the selected option

**Returns:**

the value of the selected option

---

## setSelectedValue

```
public abstract void setSelectedValue(String selectedValue)
```

used for setting the option with the specified value

**Parameters:**

selectedValue - The option value

---

## com.sabratec.applinx.presentation.tags Interface GXILabelTag

All Superinterfaces:

[GXITag](#)

public interface **GXILabelTag**

extends [GXITag](#)

This interface represents a label tag. The common usage is for displaying protected fields received from the host screen.

An `onNewLabel` event is thrown when a new label is created by the `Renderer`. The method `getContent()` returns the text of the label.

To create a new label use `GXHtmlTagFactory.instance().newLabel(...)`

### Method Summary

abstract String	<a href="#">getText()</a> Returns the tag's text.
abstract void	<a href="#">setText(String text)</a> Sets the tag's text.

### Methods inherited from interface [com.sabratec.applinx.presentation.tags.GXITag](#)

[copyFrom](#), [getAttribute](#), [getBottomMargin](#), [getBottomPadding](#), [getChildren](#), [getContent](#), [getHostField](#), [getId](#), [getLength](#), [getOffsetHeight](#), [getOffsetLeft](#), [getOffsetRight](#), [getOffsetTop](#), [getParent](#), [getPosition](#), [getTagName](#), [getTopMargin](#), [getTopPadding](#), [hasChildren](#), [isVisible](#), [removeAttribute](#), [setAttribute](#), [setBottomMargin](#), [setBottomPadding](#), [setId](#), [setLength](#), [setOffsetHeight](#), [setOffsetLeft](#), [setOffsetRight](#), [setOffsetTop](#), [setPosition](#), [setPosition](#), [setTopMargin](#), [setTopPadding](#), [setVisible](#), [setVisible](#)

### Methods

#### getText

public abstract String **getText()**

Returns the tag's text.

**Returns:**

the tag's text

#### setText

public abstract void **setText(String text)**

Sets the tag's text.

**Parameters:**

text - the tag's text

## com.sabratec.applinx.presentation.tags Interface GXILinkTag

All Superinterfaces:

[GXIClickableTag](#), [GXITag](#)

public interface **GXILinkTag**  
extends [GXIClickableTag](#)

This interface represents a link tag. The common usage is for displaying the host keys as links.

An `onNewLink` event is thrown when a new link is created by the `Renderer`. The method `getContent()` returns the text of the link.

To create a new link use `GXHtmlTagFactory.instance().newLink(...)` TODO roi render config links

### Method Summary

abstract String	<a href="#">getOnClick()</a>
abstract String	<a href="#">getTarget()</a>
abstract String	<a href="#">getText()</a> Returns the tag's text.
abstract void	<a href="#">setOnClick(String onClick)</a>
abstract void	<a href="#">setTarget(String targetUrl)</a>
abstract void	<a href="#">setText(String text)</a> Sets the tag's text.

#### Methods inherited from interface [com.sabratec.applinx.presentation.tags.GXIClickableTag](#)

[handleEvent](#)

#### Methods inherited from interface [com.sabratec.applinx.presentation.tags.GXITag](#)

[copyFrom](#), [getAttribute](#), [getBottomMargin](#), [getBottomPadding](#), [getChildren](#), [getContent](#), [getHostField](#), [getId](#), [getLength](#), [getOffsetHeight](#), [getOffsetLeft](#), [getOffsetRight](#), [getOffsetTop](#), [getParent](#), [getPosition](#), [getTagName](#), [getTopMargin](#), [getTopPadding](#), [hasChildren](#), [isVisible](#), [removeAttribute](#), [setAttribute](#), [setBottomMargin](#), [setBottomPadding](#), [setId](#), [setLength](#), [setOffsetHeight](#), [setOffsetLeft](#), [setOffsetRight](#), [setOffsetTop](#), [setPosition](#), [setPosition](#), [setTopMargin](#), [setTopPadding](#), [setVisible](#), [setVisible](#)

### Methods

#### **getOnClick**

public abstract String **getOnClick()**

---

(continued from last page)

**Returns:**

The onClick action to execute. JavaScript command in HTML.

---

**setOnClick**

```
public abstract void setOnClick(String onClick)
```

**Parameters:**

onClick - The onClick action to execute. JavaScript command in HTML

---

**getTarget**

```
public abstract String getTarget()
```

**Returns:**

The target URL. In HTML the default value is "#", which stands for no action.

---

**setTarget**

```
public abstract void setTarget(String targetUrl)
```

**Parameters:**

targetUrl - The target URL. The default value is "#".

---

**getText**

```
public abstract String getText()
```

Returns the tag's text.

**Returns:**

the tag's text

---

**setText**

```
public abstract void setText(String text)
```

Sets the tag's text.

**Parameters:**

text - the tag's text

---

## com.sabratec.applinx.presentation.tags Interface GXImageTag

All Superinterfaces:

[GXIClickableTag](#), [GXITag](#)

public interface **GXImageTag**

extends [GXIClickableTag](#)

Methods inherited from interface [com.sabratec.applinx.presentation.tags.GXIClickableTag](#)

[handleEvent](#)

Methods inherited from interface [com.sabratec.applinx.presentation.tags.GXITag](#)

[copyFrom](#), [getAttribute](#), [getBottomMargin](#), [getBottomPadding](#), [getChildren](#), [getContent](#), [getHostField](#), [getId](#), [getLength](#), [getOffsetHeight](#), [getOffsetLeft](#), [getOffsetRight](#), [getOffsetTop](#), [getParent](#), [getPosition](#), [getTagName](#), [getTopMargin](#), [getTopPadding](#), [hasChildren](#), [isVisible](#), [removeAttribute](#), [setAttribute](#), [setBottomMargin](#), [setBottomPadding](#), [setId](#), [setLength](#), [setOffsetHeight](#), [setOffsetLeft](#), [setOffsetRight](#), [setOffsetTop](#), [setPosition](#), [setPosition](#), [setTopMargin](#), [setTopPadding](#), [setVisible](#), [setVisible](#)

## com.sabratec.applinx.presentation.tags Interface GXIRadioButtonGroupTag

All Superinterfaces:

[GXITag](#)

public interface **GXIRadioButtonGroupTag**  
extends [GXITag](#)

This interface represents a radio button group tag. The common usage is for when creating a GUI element in ApplinX composer.

An `onNewRadioButtonGroup` event is thrown when a new radio button group is created by the Renderer. The method `getContent()` returns the value of the selected radio button.

To create a radio button group use `GXHtmlTagFactory.instance().newRadioButtonGroup(...)`

HTML Typical Output:

```
<table>
<tr>
<td>CAPTION1</td> <td><input type="radio" name="<TAG ID>" /></td>
<td>CAPTION2</td>
<td><input type="radio" name="<TAG ID>" /></td>
</tr>
</table>
```

### Method Summary

abstract int	<a href="#">getAlignment()</a> Used to determine if the radio button list will be rendered vertically or horizontally
abstract GXTextValueList	<a href="#">getItems()</a> Retrieves the list of text/values which represents the radio button items.
abstract String	<a href="#">getSelectedValue()</a>
abstract void	<a href="#">setAlignment(int alignment)</a> Used to determine if the radio button list will be rendered vertically or horizontally
abstract void	<a href="#">setItems(GXTextValueList items)</a> Sets a predefined text/value list
abstract void	<a href="#">setSelectedValue(String value)</a> Used for setting the relevant radio button according to a single radio button value

### Methods inherited from interface [com.sabratec.applinx.presentation.tags.GXITag](#)

[copyFrom](#), [getAttribute](#), [getBottomMargin](#), [getBottomPadding](#), [getChildren](#), [getContent](#), [getHostField](#), [getId](#), [getLength](#), [getOffsetHeight](#), [getOffsetLeft](#), [getOffsetRight](#), [getOffsetTop](#), [getParent](#), [getPosition](#), [getTagName](#), [getTopMargin](#), [getTopPadding](#), [hasChildren](#), [isVisible](#), [removeAttribute](#), [setAttribute](#), [setBottomMargin](#), [setBottomPadding](#), [setId](#), [setLength](#), [setOffsetHeight](#), [setOffsetLeft](#), [setOffsetRight](#), [setOffsetTop](#), [setPosition](#), [setPosition](#), [setTopMargin](#), [setTopPadding](#), [setVisible](#), [setVisible](#)



## Methods

### getAlignment

```
public abstract int getAlignment()
```

Used to determine if the radio button list will be rendered vertically or horizontally

**Returns:**

vertical/horizontal alignment constant

**See Also:**

[GXPresentationConstants.ALIGNMENT\\_HORIZONTAL](#)

[GXPresentationConstants.ALIGNMENT\\_VERTICAL](#)

### setAlignment

```
public abstract void setAlignment(int alignment)
```

Used to determine if the radio button list will be rendered vertically or horizontally

**Parameters:**

alignment - either vertical or horizontal constant

**See Also:**

[GXPresentationConstants.ALIGNMENT\\_HORIZONTAL](#)

[GXPresentationConstants.ALIGNMENT\\_VERTICAL](#)

### getItems

```
public abstract GXTextValueList getItems()
```

Retrieves the list of text/values which represents the radio button items.

**Returns:**

text/value list of the radio buttons

### setItems

```
public abstract void setItems(GXTextValueList items)
```

Sets a predefined text/value list

**Parameters:**

items - The combo box items

### getSelectedValue

```
public abstract String getSelectedValue()
```

**Returns:**

The selected radio button value

(continued from last page)

## **setSelectedValue**

```
public abstract void setSelectedValue(String value)
```

Used for setting the relevant radio button according to a single radio button value

### **Parameters:**

`value` - The value of the radio button to be selected

## com.sabratec.applinx.presentation.tags Interface GXIRadioButtonTag

All Superinterfaces:

[GXITag](#)

public interface **GXIRadioButtonTag**  
extends [GXITag](#)

This interface represents a single radio button, with a caption.

It should be used for creating single radio buttons and associating them to other single radio buttons. For example, in host tables and action fields, replace each action field in a table row with a radio button.

Use the `setName` method to associate it with other radio buttons.

The method `getContent()` returns the checked value of the radio button, when it is checked, and `null` when it is not.

To create a new radio button use `GXHtmlTagFactory.instance().newRadioButton(...)`

### Method Summary

abstract String	<a href="#">getCaption()</a> Returns the caption of the radio button.
abstract String	<a href="#">getCheckedValue()</a> Returns the checked value of the radio button.
abstract String	<a href="#">getName()</a> Returns the name of the radio button tag.
abstract boolean	<a href="#">isChecked()</a> Determines if the radio button is checked.
abstract void	<a href="#">setCaption(String caption)</a> Sets the caption.
abstract void	<a href="#">setChecked(boolean checked)</a> Sets if the radio button is checked.
abstract void	<a href="#">setCheckedValue(String checkedValue)</a> Sets the checked value of the radio button.
abstract void	<a href="#">setName(String name)</a> Sets a name for the radio button tag.

### Methods inherited from interface [com.sabratec.applinx.presentation.tags.GXITag](#)

[copyFrom](#), [getAttribute](#), [getBottomMargin](#), [getBottomPadding](#), [getChildren](#), [getContent](#), [getHostField](#), [getId](#), [getLength](#), [getOffsetHeight](#), [getOffsetLeft](#), [getOffsetRight](#), [getOffsetTop](#), [getParent](#), [getPosition](#), [getTagName](#), [getTopMargin](#), [getTopPadding](#), [hasChildren](#), [isVisible](#), [removeAttribute](#), [setAttribute](#), [setBottomMargin](#), [setBottomPadding](#), [setId](#), [setLength](#), [setOffsetHeight](#), [setOffsetLeft](#), [setOffsetRight](#), [setOffsetTop](#), [setPosition](#), [setPosition](#), [setTopMargin](#), [setTopPadding](#), [setVisible](#), [setVisible](#)

---

## Methods

### getName

```
public abstract String getName()
```

Returns the name of the radio button tag.

**Returns:**

the name of the radio button tag

---

### setName

```
public abstract void setName(String name)
```

Sets a name for the radio button tag.

**Parameters:**

name - a name for the radio button tag

---

### isChecked

```
public abstract boolean isChecked()
```

Determines if the radio button is checked.

**Returns:**

If the radio button is checked

---

### setChecked

```
public abstract void setChecked(boolean checked)
```

Sets if the radio button is checked.

**Parameters:**

checked - is the radio button checked

---

### getCheckedValue

```
public abstract String getCheckedValue()
```

Returns the checked value of the radio button.

**Returns:**

Returns the checked value of the radio button

---

### setCheckedValue

```
public abstract void setCheckedValue(String checkedValue)
```

Sets the checked value of the radio button.

**Parameters:**

checkedValue - the checked value of the radio button

---

## getCaption

```
public abstract String getCaption()
```

Returns the caption of the radio button. The caption is written near the radio button tag.

**Returns:**

the caption of the radio button

---

## setCaption

```
public abstract void setCaption(String caption)
```

Sets the caption. The caption is written near the radio button tag.

**Parameters:**

`caption` - the caption of the radio button

## com.sabratec.applinx.presentation.tags Interface GXIScreenTagModel

### public interface GXIScreenTagModel

This class is the model which contains a list of tags.

The model provides various methods for adding, removing, replacing and searching tags.

The final tag list in the screen tag model (after all transformations have been completed) will be rendered to the HTML output by the Renderer entity.

The tags are basically organised in the order they were created, but the order is not important for HTML presentation, since all tags are rendered in absolute terms. The way to search tags is either by checking the direction of the neighboring tag, by ID, by text or by specific position (row, column or both).

Method Summary	
abstract void	<a href="#">add(GXITag tag)</a> Add the specified tag to the screen tag model.
abstract void	<a href="#">addNeighbor(GXITag tag, GXITag neighborTag, GXPosition offset)</a> Add the specified tag to the screen tag model next to the neighboring tag.
abstract <a href="#">GXTagList</a>	<a href="#">executeColumnQuery(int column)</a> Used for executing column based queries on the screen tag model.
abstract <a href="#">GXITag</a>	<a href="#">executePositionQuery(GXPosition position)</a> Used for executing position-based queries on the screen model.
abstract <a href="#">GXITag</a>	<a href="#">executePositionQuery(int row, int column)</a> Used for executing position-based queries, on the screen tag model.
abstract <a href="#">GXTagList</a>	<a href="#">executeQuery(GXITagQuery query)</a> Executes a query on the screen model.
abstract <a href="#">GXTagList</a>	<a href="#">executeRowQuery(int row)</a> Used for executing row based queries on the screen tag model.
abstract <a href="#">GXTagList</a>	<a href="#">executeTextQuery(String searchText)</a> Used for executing text based queries on the screen tag model.
abstract int	<a href="#">getFontSize()</a> The font size (in pixels) in which the tags will be displayed.
abstract <a href="#">GXITag</a>	<a href="#">getNeighbor(GXITag tag, int direction)</a> Returns the neighboring tag in the specified direction.
abstract <a href="#">GXRenderConfig</a>	<a href="#">getRenderConfig()</a>
abstract <a href="#">GXITag</a>	<a href="#">getTagById(String tagId)</a> Finds a tag by the specified tag ID
abstract <a href="#">GXITag[]</a>	<a href="#">getTags()</a> Returns a tag's array which contains all the screen tag model root tags.

abstract void	<a href="#">remove(GXITag tag)</a> Removes the specified tag.
abstract void	<a href="#">replace(GXITag originalTag, GXITag newTag)</a> Replaces the specified tag with the original tag in the screen tag model.

## Methods

### getTagById

public abstract [GXITag](#) **getTagById**(String tagId)

Finds a tag by the specified tag ID

**Parameters:**

tagId - the ID of the searched tag

**Returns:**

The tag whose ID matches the searched tag ID

### executeQuery

public abstract [GXTagList](#) **executeQuery**([GXITagQuery](#) query)

Executes a query on the screen model.

The query can be either a built-in query such as:

[GXTextQuery](#),

[GXAreaQuery](#)

or a user defined query (class that implements [GXITagQuery](#))

**Parameters:**

query - the query to execute.

**Returns:**

the tags meeting the query. If the query is not met, then an empty list is returned

### executeTextQuery

public abstract [GXTagList](#) **executeTextQuery**(String searchText)

Used for executing text based queries on the screen tag model.

**Parameters:**

searchText - the text to search for within the tags. Searches for sub string matches.

**Returns:**

Tags meeting the search criteria.

### executeColumnQuery

public abstract [GXTagList](#) **executeColumnQuery**(int column)  
throws [GXIllegalPositionException](#)

Used for executing column based queries on the screen tag model.

**Parameters:**

---

(continued from last page)

column - The searched tags column

**Returns:**

Tags meeting the search criteria.

**Throws:**

`GXIllegalPositionException` - when the column is outside the screen tag model bounds

---

## executeRowQuery

```
public abstract GXTagList executeRowQuery(int row)
    throws GXIllegalPositionException
```

Used for executing row based queries on the screen tag model.

**Parameters:**

row - The searched tags row

**Returns:**

tags meeting the search criteria

**Throws:**

`GXIllegalPositionException` - when the column is outside the screen tag model bounds

---

## executePositionQuery

```
public abstract GXITag executePositionQuery(int row,
    int column)
    throws GXIllegalPositionException
```

Used for executing position-based queries, on the screen tag model.

**Parameters:**

row - The searched tag row

column - The searched tag column

**Returns:**

the tag in the specified position

**Throws:**

`GXIllegalPositionException` - when the column is outside the screen tag model bounds

---

## executePositionQuery

```
public abstract GXITag executePositionQuery(GXPosition position)
    throws GXIllegalPositionException
```

Used for executing position-based queries on the screen model.

**Parameters:**

position - The searched position

**Returns:**

the tag in the specified position

**Throws:**

`GXIllegalPositionException` - when the column is outside the screen tag model bounds

---



(continued from last page)

## getFontSize

```
public abstract int getFontSize()
```

The font size (in pixels) in which the tags will be displayed. The font size is also used for calculating actual top/left according to the tag's position.

**Returns:**

the font size.

**See Also:**

[GXRenderConfig.setFontSize\(int\)](#)

---

## getNeighbor

```
public abstract GXITag getNeighbor(GXITag tag,  
int direction)  
throws GXUndefinedPositionException
```

Returns the neighboring tag in the specified direction.

**Parameters:**

tag - the tag whose neighbor is being searched for  
direction - The direction to search

**Returns:**

the neighboring tag in the specified direction

**Throws:**

[GXUndefinedPositionException](#) - when the specified tag's position is empty

**See Also:**

[GXTagModelConstants.NEIGHBOR\\_ABOVE](#)

[GXTagModelConstants.NEIGHBOR\\_BELOW](#)

[GXTagModelConstants.NEIGHBOR\\_LEFT](#)

[GXTagModelConstants.NEIGHBOR\\_RIGHT](#)

---

## add

```
public abstract void add(GXITag tag)
```

Add the specified tag to the screen tag model.

Note: The Insert method is not supported since the tags order is not important for the rendering.

**Parameters:**

tag - The new tag to add

---

## getTags

```
public abstract GXITag[] getTags()
```

Returns a tag's array which contains all the screen tag model root tags. Child tags of other tags will not be included in the list, but may be accessed by their parent tag. This method should be used for performing iterations on the tags.

**Returns:**

A tags array

---

(continued from last page)

## addNeighbor

```
public abstract void addNeighbor(GXITag tag,  
    GXITag neighborTag,  
    GXPosition offset)
```

Add the specified tag to the screen tag model next to the neighboring tag. The added tag will copy its position taking into account the offset position from the neighboring tag and the length of the neighboring tag. The tag offset top/left will also be copied, in cases where the neighboring tag has an additional offset from its position. This method can be used for adding icons near a tag. For example, adding a calendar icon next to a date text field.

### Parameters:

tag - The new tag to add  
neighborTag - The neighboring tag of the new tag  
offset - the new tag offset position from the neighboring tag

---

## replace

```
public abstract void replace(GXITag originalTag,  
    GXITag newTag)
```

Replaces the specified tag with the original tag in the screen tag model.

The following original tag properties will be copied to the new tag: position, length, offsetTop, offsetLeft, hostField

Is useful for changing a tag type. For example, changing a text to a link.

### Parameters:

originalTag - the original tag which should be replaced  
newTag - the new tag that should replace the original tag

---

## remove

```
public abstract void remove(GXITag tag)
```

Removes the specified tag. The removed tag will not be displayed in the rendering process result.

### Parameters:

tag - the tag to remove.

---

## getRenderConfig

```
public abstract GXRenderConfig getRenderConfig()
```

## com.sabratec.applinx.presentation.tags Interface GXITableCellTag

All Superinterfaces:

[GXITag](#)

public interface **GXITableCellTag**  
extends [GXITag](#)

This interface represents a table cell tag. The common usage is for creating a table cell within a host table in the ApplinX composer. An `onNewTableCell` event is thrown when a new table cell is created by the Renderer. The method `getContent()` returns the text of the cell. If it's empty, it returns the content of the 1st child tag, which is common behavior in host tables. The method `getHostField()` returns the host field the cell is based on. To create a new table cell use `GXHtmlTagFactory.instance().newTableCell(...)`

### Method Summary

abstract String	<a href="#">getText()</a> Returns the cell's text.
abstract void	<a href="#">setIsHeader</a> (boolean isHeader) Determines if the cell is a table header cell or a table body cell.
abstract void	<a href="#">setText</a> (String text) Sets the cell's text.

### Methods inherited from interface [com.sabratec.applinx.presentation.tags.GXITag](#)

[copyFrom](#), [getAttribute](#), [getBottomMargin](#), [getBottomPadding](#), [getChildren](#), [getContent](#), [getHostField](#), [getId](#), [getLength](#), [getOffsetHeight](#), [getOffsetLeft](#), [getOffsetRight](#), [getOffsetTop](#), [getParent](#), [getPosition](#), [getTagName](#), [getTopMargin](#), [getTopPadding](#), [hasChildren](#), [isVisible](#), [removeAttribute](#), [setAttribute](#), [setBottomMargin](#), [setBottomPadding](#), [setId](#), [setLength](#), [setOffsetHeight](#), [setOffsetLeft](#), [setOffsetRight](#), [setOffsetTop](#), [setPosition](#), [setPosition](#), [setTopMargin](#), [setTopPadding](#), [setVisible](#), [setVisible](#)

### Methods

#### setIsHeader

public abstract void **setIsHeader**(boolean isHeader)

Determines if the cell is a table header cell or a table body cell.

#### Parameters:

isHeader - if the cell is a header cell

#### getText

public abstract String **getText**()

Returns the cell's text. If the cell text is empty, returns the content of the 1st child tag if only one child tag exists.

(continued from last page)

**Returns:**

the cell's text

---

**setText**

public abstract void **setText**(String text)

Sets the cell's text.

**Parameters:**

text - the cell's text

## com.sabratec.applinx.presentation.tags Interface GXITableRowTag

All Superinterfaces:

[GXITag](#)

public interface **GXITableRowTag**  
extends [GXITag](#)

This interface represents a table row tag. The common usage is for creating a table row within a host table in the ApplinX composer . An `onNewTableRow` event is thrown when a new table row is created by the Renderer.

The method `getContent()` returns null.

The method `getHostField()` also returns null.

To create a new table row use `GXHtmlTagFactory.instance().newTableRow(...)`

### Method Summary

abstract <a href="#">GXTableCellList</a>	<a href="#">getCells()</a>
---	----------------------------

Methods inherited from interface [com.sabratec.applinx.presentation.tags.GXITag](#)

[copyFrom](#), [getAttribute](#), [getBottomMargin](#), [getBottomPadding](#), [getChildren](#), [getContent](#), [getHostField](#), [getId](#), [getLength](#), [getOffsetHeight](#), [getOffsetLeft](#), [getOffsetRight](#), [getOffsetTop](#), [getParent](#), [getPosition](#), [getTagName](#), [getTopMargin](#), [getTopPadding](#), [hasChildren](#), [isVisible](#), [removeAttribute](#), [setAttribute](#), [setBottomMargin](#), [setBottomPadding](#), [setId](#), [setLength](#), [setOffsetHeight](#), [setOffsetLeft](#), [setOffsetRight](#), [setOffsetTop](#), [setPosition](#), [setPosition](#), [setTopMargin](#), [setTopPadding](#), [setVisible](#), [setVisible](#)

### Methods

#### getCells

public abstract [GXTableCellList](#) **getCells()**

**Returns:**

The child cells of the row

## com.sabratec.applinx.presentation.tags Interface GXITableTag

All Superinterfaces:

[GXITag](#)

public interface **GXITableTag**

extends [GXITag](#)

This interface represents a table tag. The common usage for using this tag is when a host table is created in ApplinX composer. An `onNewTable` event is thrown when a new table row is created by the Renderer.

The method `getContent()` returns null.

The method `getHostField()` also returns null.

To create a new table use `GXHtmlTagFactory. instance().newTable(...)`

### Method Summary

abstract <a href="#">GXITableRowTag</a>	<a href="#">getHeaders()</a>
abstract <a href="#">GXTableRowList</a>	<a href="#">getRows()</a> Returns the children

### Methods inherited from interface [com.sabratec.applinx.presentation.tags.GXITag](#)

[copyFrom](#), [getAttribute](#), [getBottomMargin](#), [getBottomPadding](#), [getChildren](#), [getContent](#), [getHostField](#), [getId](#), [getLength](#), [getOffsetHeight](#), [getOffsetLeft](#), [getOffsetRight](#), [getOffsetTop](#), [getParent](#), [getPosition](#), [getTagName](#), [getTopMargin](#), [getTopPadding](#), [hasChildren](#), [isVisible](#), [removeAttribute](#), [setAttribute](#), [setBottomMargin](#), [setBottomPadding](#), [setId](#), [setLength](#), [setOffsetHeight](#), [setOffsetLeft](#), [setOffsetRight](#), [setOffsetTop](#), [setPosition](#), [setPosition](#), [setTopMargin](#), [setTopPadding](#), [setVisible](#), [setVisible](#)

### Methods

#### getHeaders

public abstract [GXITableRowTag](#) **getHeaders()**

**Returns:**

a table row tag which contains the header cell's.

#### getRows

public abstract [GXTableRowList](#) **getRows()**

Returns the children

**Returns:**

a list of the table's row tags

## com.sabratec.applinx.presentation.tags Interface GXITag

### All Subinterfaces:

[GXITextFieldTag](#), [GXITableTag](#), [GXITableRowTag](#), [GXITableCellTag](#), [GXIRadioButtonTag](#), [GXIRadioButtonGroupTag](#), [GXILabelTag](#), [GXIComboboxTag](#), [GXIClickableTag](#), [GXImageTag](#), [GXILinkTag](#), [GXIButtonTag](#), [GXICheckboxTag](#)

### public interface **GXITag**

This interface is the root of all tag classes, such as text fields, labels, links, combo boxes, etc.

The tag class is host oriented. It provides a reference to the host field, and allows locating tags by setting their position [setPosition\(int, int\)](#) in host units (row, column).

The initial position is derived from the host field, and can be modified. The position will be rendered to HTML units as top/left. The tag also contains the methods [getAttribute](#) and [setAttribute](#) which can be used to read/modify any attribute of the tag.

The tag may have an offset [setOffsetLeft\(double\)](#), [setOffsetTop\(double\)](#) from its position.

The offset is used for aligning the tag when neighboring tags such as a combo box that may overlap the tag.

The offset will be added to the final calculated top/left attributes which are derived from the tag's position. In case the tag doesn't have any position, the offset top/left will be considered as the actual top/left.

A tag may have child tags - [getChildren\(\)](#), and a parent tag [getParent\(\)](#)

HTML specific tags are also available such as:

- [GXHtmlGenericTag](#) for creating a generic tag by specifying the tag name
- [GXHtmlString](#) for using direct strings and adding them to the screen tag model.

Method Summary	
abstract void	<a href="#">copyFrom(GXITag tag)</a> Copies tags fields
abstract String	<a href="#">getAttribute</a> (String name) Returns the value of an attribute according to its name.
abstract double	<a href="#">getBottomMargin()</a>
abstract double	<a href="#">getBottomPadding()</a>
abstract <a href="#">GXTagList</a>	<a href="#">getChildren()</a> Returns the tag's child tags.
abstract String	<a href="#">getContent()</a> Used for retrieving the content of the tag.
abstract <a href="#">GXIField</a>	<a href="#">getHostField()</a> Returns the host field which the tag is based on.
abstract String	<a href="#">getId()</a> Returns the tag's unique ID.
abstract int	<a href="#">getLength()</a> Returns the length that the tag is considered to occupy on the host screen.

abstract double	<a href="#">getOffsetHeight()</a>
abstract double	<a href="#">getOffsetLeft()</a> Returns the offset left position from the position attribute.
abstract double	<a href="#">getOffsetRight()</a> Returns the offset right position.
abstract double	<a href="#">getOffsetTop()</a> Returns the offset top position from the position attribute.
abstract <a href="#">GXITag</a>	<a href="#">getParent()</a> Returns the parent tag.
abstract <a href="#">GXPosition</a>	<a href="#">getPosition()</a> Returns the position of the tag in host screen units (row, column).
abstract String	<a href="#">getTagName()</a> Returns the concrete name of the tag type.
abstract double	<a href="#">getTopMargin()</a>
abstract double	<a href="#">getTopPadding()</a>
abstract boolean	<a href="#">hasChildren()</a> Returns true if the tag has child tags.
abstract boolean	<a href="#">isVisible()</a> Determines whether to display the tag or not.
abstract void	<a href="#">removeAttribute(String name)</a> Removes an attribute according to its name.
abstract void	<a href="#">setAttribute(String name, String value)</a> Sets the value of a given attribute.
abstract void	<a href="#">setBottomMargin(double margin)</a>
abstract void	<a href="#">setBottomPadding(double topPadding)</a>
abstract void	<a href="#">setId(String id)</a> Sets a unique ID for the tag.
abstract void	<a href="#">setLength(int length)</a> Sets the actual length of the tag on the screen tag model.
abstract void	<a href="#">setOffsetHeight(double height)</a>
abstract void	<a href="#">setOffsetLeft(double left)</a> Sets the offset left position.
abstract void	<a href="#">setOffsetRight(double right)</a> Sets the offset right position.
abstract void	<a href="#">setOffsetTop(double top)</a> Sets the offset top position.



abstract void	<a href="#">setPosition</a> ( <a href="#">GXPosition</a> position) Sets the position of the tag in host screen units (row, column).
abstract void	<a href="#">setPosition</a> (int row, int column) A convenient method for setting row and column instead of using a position object.
abstract void	<a href="#">setTopMargin</a> (double margin)
abstract void	<a href="#">setTopPadding</a> (double topPadding)
abstract void	<a href="#">setVisible</a> (boolean isVisible) Sets the tag to be visible/invisible.
abstract void	<a href="#">setVisible</a> (boolean isVisible, boolean doRender) Used for setting the tag to be visible/invisible.

## Methods

### getParent

public abstract [GXITag](#) **getParent**()

Returns the parent tag. If this tag has no parent, returns null.

**Returns:**

the parent tag.

### hasChildren

public abstract boolean **hasChildren**()

Returns true if the tag has child tags.

**Returns:**

true if the tag has child tags. If this tag doesn't support child tags, this method always returns false.

### getChildren

public abstract [GXTagList](#) **getChildren**()

Returns the tag's child tags. If there are no child tags defined, returns an empty list.  
If this tag doesn't support child tags, returns null.

**Returns:**

the tag's children tags.

### getId

public abstract String **getId**()

(continued from last page)

Returns the tag's unique ID.

Naming convention:

- When the tag is based on a host field, it will have the ID: "POS<ABSOLUTE SCREEN POSITION>". For example "POS1232".
- If the tag is based on an application field then the tag will have it's name.
- If the tag is based on a multiple application field then the tag will have the name "<APPFIELD\_NAME>\_00<INDEX>". For example: "ItemNumber\_003"

**Returns:**

the tag's unique ID.

---

## setId

```
public abstract void setId(String id)
```

Sets a unique ID for the tag.

**Parameters:**

id - a unique ID for tag

---

## getOffsetTop

```
public abstract double getOffsetTop()
```

Returns the offset top position from the `position` attribute.

The default value is 0.

When either a GUI element transformation and/or a Table transformation is activated, this attribute may contain a positive value since GUI elements and tables are "higher" elements than standard labels and text fields, and the transformation may change this attribute to avoid tags overlapping each other.

**Returns:**

the offset top position attribute

**See Also:**

[setOffsetTop\(double\)](#)  
[getOffsetLeft\(\)](#)  
[setOffsetLeft\(double\)](#)  
[setPosition\(GXPosition\)](#)  
[getPosition\(\)](#)

---

## setOffsetTop

```
public abstract void setOffsetTop(double top)
```

Sets the offset top position. This attribute, along with the `offsetLeft` attribute, adjusts the tag's final top/left positioning which is based on the `position` attribute of the tag. When the tag has no position, the offset top will be the actual top attribute in the tag output.

**Parameters:**

top - the top position attribute.

**See Also:**

[getOffsetTop\(\)](#)  
[getOffsetLeft\(\)](#)  
[setOffsetLeft\(double\)](#)

## getOffsetLeft

```
public abstract double getOffsetLeft()
```

Returns the offset left position from the `position` attribute.

The default value is 0.

When a GUI element transformation is activated, this attribute may contain a positive value since GUI elements are "longer" elements than standard text fields, and the transformation may change this attribute to avoid tags overriding each other.

**Returns:**

the left position attribute

**See Also:**

[setOffsetLeft\(double\)](#)  
[getOffsetTop\(\)](#)  
[setOffsetTop\(double\)](#)  
[setPosition\(GXPosition\)](#)  
[getPosition\(\)](#)

---

## getOffsetRight

```
public abstract double getOffsetRight()
```

Returns the offset right position. from the `position` attribute. Rendered only when left is 0.

The default value is 0.

**Returns:**

the right position attribute

**See Also:**

[setOffsetRight\(double\)](#)  
[getOffsetTop\(\)](#)  
[setOffsetTop\(double\)](#)  
[setPosition\(GXPosition\)](#)  
[getPosition\(\)](#)

---

## setOffsetLeft

```
public abstract void setOffsetLeft(double left)
```

Sets the offset left position. This attribute, along with the `offsetTop` attribute, adjusts the tag's final top/left positioning which is based on the `position` attribute of the tag. When the tag has no position, the offset left will be the actual left attribute in the tag output.

**Parameters:**

`left` - the left position attribute

**See Also:**

[getOffsetLeft\(\)](#)  
[getOffsetTop\(\)](#)  
[setOffsetTop\(double\)](#)  
[setPosition\(GXPosition\)](#)  
[getPosition\(\)](#)

---

(continued from last page)

---

## setOffsetRight

```
public abstract void setOffsetRight(double right)
```

Sets the offset right position. This attribute, along with the `offsetTop` attribute, adjusts the tag's final top/right positioning which is based on the `position` attribute of the tag, and when configuring to render from right to left. When the tag has no position, the offset right will be the actual right attribute in the tag output. For this method to work, you must open the ApplinX Framework Configuration Editor and select the Render tags from right check box in the Instant node.

### Parameters:

`right` - the right position attribute

### See Also:

[getOffsetRight\(\)](#)

[getOffsetTop\(\)](#)

[setOffsetTop\(double\)](#)

[setPosition\(GXPosition\)](#)

[getPosition\(\)](#)

---

## setOffsetHeight

```
public abstract void setOffsetHeight(double height)
```

---

## getOffsetHeight

```
public abstract double getOffsetHeight()
```

---

## setTopPadding

```
public abstract void setTopPadding(double topPadding)
```

---

## getTopPadding

```
public abstract double getTopPadding()
```

---

## setBottomPadding

```
public abstract void setBottomPadding(double topPadding)
```

---

## getBottomPadding

```
public abstract double getBottomPadding()
```

---

## getTopMargin

```
public abstract double getTopMargin()
```

---

(continued from last page)

---

## setTopMargin

```
public abstract void setTopMargin(double margin)
```

---

## getBottomMargin

```
public abstract double getBottomMargin()
```

---

## setBottomMargin

```
public abstract void setBottomMargin(double margin)
```

---

## setPosition

```
public abstract void setPosition(GXPosition position)
```

Sets the position of the tag in host screen units (row, column). The position will be translated in the result as top/left attributes, using the configured font size [GXRenderConfig.setFontSize\(int\)](#), and the specified offset top/left attributes of the tag.

Other considerations:

- When a tag has leading spaces, it will increase the tag's left attribute, and the spaces will be trimmed (only in the final result).
- RTL languages - Hebrew/Arabic.

This attribute is not rendered, since it does not contribute any visual information.

### Parameters:

`position` - the position that the tag is considered to have on the host screen

### See Also:

[GXIScreenTagModel.getNeighbor\(GXITag, int\)](#)

---

## setPosition

```
public abstract void setPosition(int row,  
int column)
```

A convenient method for setting row and column instead of using a position object.

### Parameters:

`row` - the row of the position

`column` - the column of the position

### See Also:

[setPosition\(GXPosition\)](#)

---

(continued from last page)

## getPosition

```
public abstract GXPosition getPosition()
```

Returns the position of the tag in host screen units (row, column). A tag that was derived from the host screen will have the position of the field it was derived from.

The position may also be used for locating neighboring tags using the [GXIScreenTagModel.getNeighbor\(GXITag, int\)](#) method.

In addition the position may be used for locating tags by position using the [GXIScreenTagModel.executePositionQuery\(GXPosition\)](#) method.

This attribute is not rendered, since it does not contribute any visual information.

**Returns:**

the position of the tag on the screen tag model. If the tag is not related to a host field element, the returned value is null.

---

## getLength

```
public abstract int getLength()
```

Returns the length that the tag is considered to occupy on the host screen.

This attribute should not be rendered, since it does not contribute any visual information.

**Returns:**

the length of the tag on the host screen. If the tag does not have a length on the host screen, 0 is returned.

---

## setLength

```
public abstract void setLength(int length)
```

Sets the actual length of the tag on the screen tag model.

The length is primarily used for locating the tag by position using the [GXIScreenTagModel.executePositionQuery\(GXPosition\)](#) method, and for locating neighbors [GXIScreenTagModel.getNeighbor\(GXITag, int\)](#). If a length is not specified the tag will be considered as the size of 1 for search purposes.

For text fields, the length attribute determines the actual size of the text field.

This attribute should not be rendered, since it does not contribute any visual information.

**Parameters:**

length - the length of the tag on the screen tag model

**See Also:**

[GXIScreenTagModel.executePositionQuery\(GXPosition\)](#)  
[GXIScreenTagModel.getNeighbor\(GXITag, int\)](#)

---

## getTagName

```
public abstract String getTagName()
```

Returns the concrete name of the tag type. Example, 'A' for links in HTML.

**Returns:**

the actual tag name (not the Name attribute)

---

---

(continued from last page)

## setAttribute

```
public abstract void setAttribute(String name,  
    String value)
```

Sets the value of a given attribute.

If the attribute doesn't exist - it is added. If the attribute exists - its value is replaced.

The attribute is case sensitive. All the attributes built by the renderer are lower case. When adding an HTML css class, it is appended to the other css classes.

To set a single css class use `removeAttribute("class")` before the above method.

### Parameters:

name - the name of the attribute

value - the value to set for the attribute

---

## getAttribute

```
public abstract String getAttribute(String name)
```

Returns the value of an attribute according to its name.

### Parameters:

name - the name of the attribute

### Returns:

the value of the attribute. If the attribute doesn't exist, `null` is returned.

---

## removeAttribute

```
public abstract void removeAttribute(String name)
```

Removes an attribute according to its name.

### Parameters:

name - the name of the attribute

---

## isVisible

```
public abstract boolean isVisible()
```

Determines whether to display the tag or not. The tag will still remain part of the tag model.

### Returns:

if the the tag visible

---

## setVisible

```
public abstract void setVisible(boolean isVisible)
```

Sets the tag to be visible/invisible. The tag will not be included at all in the result.

### Parameters:

isVisible - if the tag should be visible

### See Also:

[setVisible\(boolean, boolean\)](#)

---

---

(continued from last page)

## setVisible

```
public abstract void setVisible(boolean isVisible,  
    boolean doRender)
```

Used for setting the tag to be visible/invisible. For HTML tags if setVisible is false and doRender is true, then the tag will be rendered with style="display:none" attribute.

### Parameters:

isVisible - if the tag should be visible  
doRender - determines if the tag should be rendered invisibly

---

## getContent

```
public abstract String getContent()
```

Used for retrieving the content of the tag.

A unified method for all types of tags. All tag types implementation returns the content from a different property, in order to be able to query any tag for it's content in a generic way.

For example:

- A combo box returns the selected value as the content
- An HTML label returns it's inner text

### Returns:

the content of the tag

---

## getHostField

```
public abstract GXIField getHostField()
```

Returns the host field which the tag is based on. May be used for querying the host field content and properties.

### Returns:

the host field that the tag is based on

---

## copyFrom

```
public abstract void copyFrom(GXITag tag)
```

Copies tags fields

### Parameters:

tag - the tag to copy from

---



## com.sabratec.applinx.presentation.tags Interface GXITextFieldTag

All Superinterfaces:

[GXITag](#)

public interface **GXITextFieldTag**  
extends [GXITag](#)

This interface represents a text field tag. The common usage for using this tag is when a host field is an unprotected field.

An `onNewTextField` event is thrown when a new text field is created by the `Renderer`.

The method `{#getContent() }` returns the text of the text field (**value** attribute in HTML).

To create a new text field use `GXHtmlTagFactory.istance().newTextField(...)`

See Also:

[GXTagListener.onNewTextField\(GXRenderEvent, GXITextFieldTag\)](#),  
[GXHtmlTagFactory.newTextField\(String\)](#)

### Method Summary

abstract String	<a href="#">getText()</a> Returns the tag's text, <b>value</b> attribute in HTML.
abstract boolean	<a href="#">isPassword()</a> Returns if the text field is a password field.
abstract void	<a href="#">setPassword</a> (boolean isPassword) Set if the text field is a password field.
abstract void	<a href="#">setText</a> (String text) Sets the tag's text, <b>value</b> attribute in HTML.

### Methods inherited from interface [com.sabratec.applinx.presentation.tags.GXITag](#)

[copyFrom](#), [getAttribute](#), [getBottomMargin](#), [getBottomPadding](#), [getChildren](#), [getContent](#), [getHostField](#), [getId](#), [getLength](#), [getOffsetHeight](#), [getOffsetLeft](#), [getOffsetRight](#), [getOffsetTop](#), [getParent](#), [getPosition](#), [getTagName](#), [getTopMargin](#), [getTopPadding](#), [hasChildren](#), [isVisible](#), [removeAttribute](#), [setAttribute](#), [setBottomMargin](#), [setBottomPadding](#), [setId](#), [setLength](#), [setOffsetHeight](#), [setOffsetLeft](#), [setOffsetRight](#), [setOffsetTop](#), [setPosition](#), [setPosition](#), [setTopMargin](#), [setTopPadding](#), [setVisible](#), [setVisible](#)

## Methods

### isPassword

public abstract boolean **isPassword**()

Returns if the text field is a password field.

**Returns:**

if the text field is a password field

## setPassword

```
public abstract void setPassword(boolean isPassword)
```

Set if the text field is a password field.

**Parameters:**

isPassword - If the text field is a password field

---

## getText

```
public abstract String getText()
```

Returns the tag's text, **value** attribute in HTML.

**Returns:**

the tag's text

---

## setText

```
public abstract void setText(String text)
```

Sets the tag's text, **value** attribute in HTML.

**Parameters:**

text - the tag's text

---

## com.sabratec.applinx.presentation.tags Class GXTableCellList

```
java.lang.Object
```

```
├--GXInitializableTagList
```

```
├--com.sabratec.applinx.presentation.tags.GXTableCellList
```

```
public class GXTableCellList
extends GXInitializableTagList
```

This interface represents a list of table cell tags. The list is a member of a table row tag. It allows retrieving, adding and removing table cells from the cell list. Each cell also may have child tags such as text fields, labels, combo boxes, etc.

**See Also:**

[GXITableRowTag.getCells\(\)](#)

### Constructor Summary

public	<a href="#">GXTableCellList(GXITableRowTag rowTag)</a> Initializes the list and associates it to the specified row tag.
--------	--

### Method Summary

void	<a href="#">add(GXITableCellTag cell)</a> Adds a new cell to the table cell list.
<a href="#">GXITableCellTag</a>	<a href="#">get(int index)</a> Returns the table cell according to the index.
void	<a href="#">insert(GXITableCellTag cell, int index)</a> Inserts the cell at the specified index.

### Methods inherited from class java.lang.Object

`equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait`

## Constructors

### GXTableCellList

```
public GXTableCellList(GXITableRowTag rowTag)
```

Initializes the list and associates it to the specified row tag. All added cell tags `getParent()` method will return the row tag

**Parameters:**

`rowTag` - the row's parent tag

## Methods

---

(continued from last page)

## get

```
public GXTableCellTag get(int index)
    throws ArrayIndexOutOfBoundsException
```

Returns the table cell according to the index.

**Parameters:**

index - the index of the requested cell

**Returns:**

the table cell according to the index

**Throws:**

[ArrayIndexOutOfBoundsException](#) - if the index was invalid.

---

## insert

```
public void insert(GXTableCellTag cell,
    int index)
    throws ArrayIndexOutOfBoundsException
```

Inserts the cell at the specified index.

**Parameters:**

cell - the new table cell to insert

index - the cell-list index to insert the cell at

**Throws:**

[ArrayIndexOutOfBoundsException](#) - if the index was invalid.

---

## add

```
public void add(GXTableCellTag cell)
```

Adds a new cell to the table cell list.

**Parameters:**

cell - The new cell to add

---

## com.sabratec.applinx.presentation.tags Class GXTableRowList

```
java.lang.Object
  |
  +-GXInitializableTagList
    |
    +-com.sabratec.applinx.presentation.tags.GXTableRowList
```

```
public class GXTableRowList
extends GXInitializableTagList
```

This interface represents a list of table row tags. The list is a member of a table tag. It allows retrieving, adding and removing table rows from the row list.

**See Also:**

[GXITableTag.getRows\(\)](#)

### Constructor Summary

public	<a href="#">GXTableRowList</a> ( <a href="#">GXITableTag</a> tableTag) Initializes the list and associates it to the specified table tag.
--------	--

### Method Summary

void	<a href="#">add</a> ( <a href="#">GXITableRowTag</a> row) Adds a new row to the table row list
<a href="#">GXITableRowTag</a>	<a href="#">get</a> (int index) Returns the table row according to the index.
void	<a href="#">insert</a> ( <a href="#">GXITableRowTag</a> row, int index) Inserts the row at the specified index.

### Methods inherited from class java.lang.Object

`equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait`

## Constructors

### GXTableRowList

```
public GXTableRowList(GXITableTag tableTag)
```

Initializes the list and associates it to the specified table tag. All added row tags `getParent()` method will return the row tag

**Parameters:**

tableTag - the row's parent tag

## Methods

---

(continued from last page)

## get

```
public GXTableRowTag get(int index)  
    throws ArrayIndexOutOfBoundsException
```

Returns the table row according to the index.

**Parameters:**

index - the index of the requested row

**Returns:**

the table row according to the index

**Throws:**

[ArrayIndexOutOfBoundsException](#) - if the index was invalid.

---

## insert

```
public void insert(GXTableRowTag row,  
    int index)
```

Inserts the row at the specified index.

**Parameters:**

row - the new table row to insert

index - the row-list index to insert the row at

**Throws:**

[ArrayIndexOutOfBoundsException](#) - if the index was invalid.

---

## add

```
public void add(GXTableRowTag row)
```

Adds a new row to the table row list

**Parameters:**

row - The new row to add

---

## com.sabratec.applinx.presentation.tags Class GXTagList

java.lang.Object

└-GXInitializableTagList

└-com.sabratec.applinx.presentation.tags.GXTagList

public class **GXTagList**  
extends GXInitializableTagList

This interface represents a list of tags. The list may be retrieved from an executed query on the screen tag model. The list allows retrieving, adding and removing tags from the tags list.

**See Also:**

[GXIScreenTagModel.executeQuery\(GXITagQuery\)](#)

### Constructor Summary

public	<a href="#">GXTagList()</a>
public	<a href="#">GXTagList(GXITag parentTag)</a> Initializes the list and associates it to the parent tag.

### Method Summary

void	<a href="#">add(GXITag tag)</a> Add a new tag to the tag list
<a href="#">GXITag</a>	<a href="#">get(int index)</a> Return the cell according to the index.
void	<a href="#">insert(GXITag tag, int index)</a> Inserts the tag at the specified index.
void	<a href="#">remove(GXITag tag)</a> Removes the specified tag from the tag list
void	<a href="#">replace(GXITag originalTag, GXITag newTag)</a> Replaces the specified tag with the original tag in the tag list.

**Methods inherited from class** java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Constructors

#### **GXTagList**

public **GXTagList()**

---

## GXTagList

```
public GXTagList(GXITag parentTag)
```

Initializes the list and associates it to the parent tag. All added tags `getParent()` method will return the parent tag

**Parameters:**

`parentTag` - the parent tag

## Methods

### replace

```
public void replace(GXITag originalTag,  
GXITag newTag)
```

Replaces the specified tag with the original tag in the tag list.

The following original tag properties will be copied to the new tag:  
`position, length, offsetTop, offsetLeft, hostField`

**Parameters:**

`originalTag` - the original tag which should be replaced  
`newTag` - the new tag that should replace the original tag

---

### remove

```
public void remove(GXITag tag)
```

Removes the specified tag from the tag list

**Parameters:**

`tag` - The tag to remove

---

### insert

```
public void insert(GXITag tag,  
int index)
```

Inserts the tag at the specified index.

**Parameters:**

`tag` - the new tag to insert  
`index` - the tag-list index to insert the tag at

**Throws:**

`ArrayIndexOutOfBoundsException` - if the index was invalid.

---

### get

```
public GXITag get(int index)
```

Return the cell according to the index.

**Parameters:**

`index` - the index of the requested tag



(continued from last page)

**Returns:**

the tag according to the index

**Throws:**

`ArrayIndexOutOfBoundsException` - if the index was invalid.

---

## **add**

```
public void add(GXITag tag)
```

Add a new tag to the tag list

**Parameters:**

tag - The new tag to add

## com.sabratec.applinx.presentation.tags Class GXTagModelConstants

java.lang.Object

└-com.sabratec.applinx.presentation.tags.GXTagModelConstants

public class **GXTagModelConstants**  
extends Object

This class contains constants used by [GXIScreenTagModel](#)

### Field Summary

public static final	<a href="#">NEIGHBOR_ABOVE</a> Value: 0
public static final	<a href="#">NEIGHBOR_BELOW</a> Value: 1
public static final	<a href="#">NEIGHBOR_LEFT</a> Value: 2
public static final	<a href="#">NEIGHBOR_RIGHT</a> Value: 3

### Constructor Summary

public	<a href="#">GXTagModelConstants()</a>
--------	---------------------------------------

Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Fields

#### NEIGHBOR\_ABOVE

public static final int **NEIGHBOR\_ABOVE**

Constant value: 0

**See Also:**

[GXIScreenTagModel.getNeighbor\(GXITag, int\)](#)

#### NEIGHBOR\_BELOW

public static final int **NEIGHBOR\_BELOW**

---

(continued from last page)

Constant value: **1**

**See Also:**

[GXIScreenTagModel.getNeighbor\(GXITag, int\)](#)

---

## **NEIGHBOR\_LEFT**

public static final int **NEIGHBOR\_LEFT**

Constant value: **2**

**See Also:**

[GXIScreenTagModel.getNeighbor\(GXITag, int\)](#)

---

## **NEIGHBOR\_RIGHT**

public static final int **NEIGHBOR\_RIGHT**

Constant value: **3**

**See Also:**

[GXIScreenTagModel.getNeighbor\(GXITag, int\)](#)

---

## **Constructors**

### **GXTagModelConstants**

public **GXTagModelConstants**()

---

## Package

# **com.sabratec.applinx.presentation.tags.html**

This package provides specific HTML tags such as: HTML hidden tag, Generic tag nad HTML string tag.

## com.sabratec.applinx.presentation.tags.html Class GXHtmlGenericTag

```
java.lang.Object
  |
  +-GXHtmlTag
    |
    +-com.sabratec.applinx.presentation.tags.html.GXHtmlGenericTag
```

```
public class GXHtmlGenericTag
extends GXHtmlTag
```

This class represents a generic HTML tag, which has a display functionality only  
For example, <div>, <font>, <p> etc.

To create a new HTML generic tag, use `GXHtmlTagFactory. instance().newGenericTag(<TAG NAME>)`.

Use the `setInnerText` method to set text to the tag. Use `setAttribute` to add an attribute to the tag. Use `getChildren().add(...)` to create child tags.

**See Also:**

[GXHtmlTagFactory.newGenericTag\(String\)](#)

### Method Summary

String	<a href="#">getContent()</a> Returns the inner text of the tag.
void	<a href="#">setInnerText(String innerText)</a> Sets the inner text of the tag
void	<a href="#">setTagName(String tagName)</a> Sets the concrete tag name.

#### Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

### Methods

#### setInnerText

```
public void setInnerText(String innerText)
```

Sets the inner text of the tag

**Parameters:**

`innerText` - The inner text of the tag

#### setTagName

```
public void setTagName(String tagName)
```

Sets the concrete tag name.

(continued from last page)

**Parameters:**

tagName - the concrete tag name.

---

**getContent**

```
public String getContent()
```

Returns the inner text of the tag.

**Returns:**

The inner text of the tag

## com.sabratec.applinx.presentation.tags.html Class GXHtmlHidden

```

java.lang.Object
  |
  +-GXHtmlTag
    |
    +-com.sabratec.applinx.presentation.tags.html.GXHtmlHidden
  
```

```

public class GXHtmlHidden
extends GXHtmlTag
  
```

This class represents an HTML hidden input (<input type="hidden").

The method {#getContent()} returns the **value** attribute of the hidden tag.

To create a new hidden tag use `GXHtmlTagFactory. instance().newHiddenTag(...)`

### Method Summary

String	<a href="#">getContent()</a> Returns the value of the hidden tag
String	<a href="#">getValue()</a>
void	<a href="#">initialize()</a> For internal use
void	<a href="#">setId(String tagId)</a> Sets the tag ID, also sets the name attribute
void	<a href="#">setValue(String value)</a> Sets the value of the text field

#### Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

### Methods

#### getValue

```
public String getValue()
```

##### Returns:

The value of the hidden tag

#### setValue

```
public void setValue(String value)
```

Sets the value of the text field

(continued from last page)

**Parameters:**value - the value of the hidden tag

---

**setId**

```
public void setId(String tagId)
```

Sets the tag ID, also sets the name attribute

**Parameters:**tagId - the tag ID

---

**initialize**

```
public void initialize()
```

For internal use

---

**getContent**

```
public String getContent()
```

Returns the value of the hidden tag

**Returns:**the value of the hidden tag

---



## com.sabratec.applinx.presentation.tags.html Class GXHtmlString

```
java.lang.Object
  |
  +-GXHtmlTag
    |
    +-com.sabratec.applinx.presentation.tags.html.GXHtmlString
```

```
public class GXHtmlString
  extends GXHtmlTag
```

This class is used for adding HTML free text. The text may also contain tags.

To create a new HTML string use `GXHtmlTagFactory.intance().newHtmlString(...)`

### Method Summary

String	<a href="#">getContent()</a>
void	<a href="#">renderInto</a> (StringBuffer result) For internal use
void	<a href="#">setTagName</a> (String tagName) Sets the concrete name of the tag
void	<a href="#">setTagText</a> (String htmlText) Sets the tag's text.

### Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

### Methods

#### setTagText

```
public void setTagText(String htmlText)
```

Sets the tag's text. May contain any HTML characters, such as "<" & ">".

**Parameters:**

htmlText - HTML text of the tag

#### renderInto

```
public void renderInto(StringBuffer result)
```

For internal use

**Parameters:**

result

## **getContent**

```
public String getContent()
```

**Returns:**

The HTML text of the tag

---

## **setTagName**

```
public void setTagName(String tagName)
```

Sets the concrete name of the tag

**Parameters:**

tagName - The name of the tag

## com.sabratec.applinx.presentation.tags.html Class GXHtmlTagFactory

java.lang.Object

└-com.sabratec.applinx.presentation.tags.html.GXHtmlTagFactory

public class **GXHtmlTagFactory**  
extends Object

### Method Summary

<a href="#">GXHtmlTagFactory</a> static	<a href="#">instance()</a> Returns an instance of the HTML tag factory.
<a href="#">GXIButtonTag</a>	<a href="#">newButton()</a> Returns a new HTML button tag (<input type="button">)
<a href="#">GXICheckboxTag</a>	<a href="#">newCheckbox(String tagId)</a> Returns a new HTML check box tag.
<a href="#">GXIComboboxTag</a>	<a href="#">newCombobox(String tagId)</a> Returns a new HTML combo box tag (<select>) The tag ID also sets the name of the tag.
<a href="#">GXHtmlGenericTag</a>	<a href="#">newGenericTag(String tagName)</a> Returns a new HTML generic tag, which may be used for creating a tag.
<a href="#">GXHtmlHidden</a>	<a href="#">newHiddenTag(String tagId)</a> Returns a new HTML hidden tag (<input type="hidden">) The tag ID also sets the name of the tag.
<a href="#">GXHtmlString</a>	<a href="#">newHtmlString(String text)</a> Used for creating a free text HTML tag.
<a href="#">GXImageTag</a>	<a href="#">newImage()</a>
<a href="#">GXILabelTag</a>	<a href="#">newLabel(String text)</a> Returns a new HTML label tag (<span>)
<a href="#">GXILinkTag</a>	<a href="#">newLink(String text)</a> Returns a new HTML link tag (<a ...>).
<a href="#">GXIRadioButtonTag</a>	<a href="#">newRadioButton(String tagName, String tagCheckedValue)</a> Returns a new HTML radio button tag (<input type="radio">) The tag name is used for associating single radio buttons by specifying the same name.
<a href="#">GXIRadioButtonGroupTag</a>	<a href="#">newRadioButtonGroup(String tagId)</a> Returns a new HTML radio button group tag.
<a href="#">GXILabelTag</a>	<a href="#">newStaticLabel(String text)</a>
<a href="#">GXITableTag</a>	<a href="#">newTable()</a> Returns a new HTML table tag (<table>)

<a href="#">GXITableCellTag</a>	<a href="#">newTableCell()</a> Returns a new HTML table cell tag (<td>)
<a href="#">GXITableCellTag</a>	<a href="#">newTableHeader()</a>
<a href="#">GXITableRowTag</a>	<a href="#">newTableRow()</a> Returns a new HTML table row tag (<tr>)
<a href="#">GXITextFieldTag</a>	<a href="#">newTextField(String tagId)</a> Returns a new HTML text field tag (<input type="text">,<input type="password">).
void	<a href="#">recycle(GXITag tag)</a>

#### Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Methods

### instance

```
public static GXHtmlTagFactory instance()
```

Returns an instance of the HTML tag factory. This class is a singleton and using this method is the only way to use this class.

**Syntax:**

```
GXHtmlTagFactory.instance().new<LT;TAG NAME>...
```

**Returns:**

an instance of the HTML tag factory.

### recycle

```
public void recycle(GXITag tag)
```

### newLabel

```
public GXILabelTag newLabel(String text)
```

Returns a new HTML label tag (<span>)

**Parameters:**

text - The inner text of the label

**Returns:**

a new HTML label tag(<span>)

### newStaticLabel

```
public GXILabelTag newStaticLabel(String text)
```

---

## newTextField

```
public GXITextFieldTag newTextField(String tagId)
```

Returns a new HTML text field tag (<input type="text">,<input type="password">).

The tag ID also sets the name of the tag. It is required for returning the content to the server when the page is submitted.

To set as a password text field, use the `GXITextFieldTag.setPassword(true)` method.

### Parameters:

tagId - The text field ID.

### Returns:

a new HTML text field tag (<input type="text">,<input type="password">)

---

## newTable

```
public GXITableTag newTable()
```

Returns a new HTML table tag (<table>)

### Returns:

a new HTML table tag (<table>)

---

## newTableRow

```
public GXITableRowTag newTableRow()
```

Returns a new HTML table row tag (<tr>)

### Returns:

a new HTML table row tag (<tr>)

---

## newTableCell

```
public GXITableCellTag newTableCell()
```

Returns a new HTML table cell tag (<td>)

### Returns:

a new HTML table cell tag (<td>)

---

## newButton

```
public GXIButtonTag newButton()
```

Returns a new HTML button tag (<input type="button">)

### Returns:

a new HTML button tag (<input type="button">)

---

## newLink

```
public GXILinkTag newLink(String text)
```

Returns a new HTML link tag (<a ...>).

---

(continued from last page)

**Parameters:**

text - The inner text of the link

**Returns:**

a new HTML link tag (<a ...>)

---

## newCombobox

```
public GXIComboboxTag newCombobox(String tagId)
```

Returns a new HTML combo box tag (<select>) The tag ID also sets the name of the tag. It is required for returning the content to the server when the page is submitted.

**Parameters:**

tagId - The tag ID

**Returns:**

a new HTML combo box tag(<select>)

---

## newGenericTag

```
public GXHtmlGenericTag newGenericTag(String tagName)
```

Returns a new HTML generic tag, which may be used for creating a tag.

**Parameters:**

tagName - The specified tag name

**Returns:**

a new HTML generic tag

---

## newRadioButtonGroup

```
public GXIRadioButtonGroupTag newRadioButtonGroup(String tagId)
```

Returns a new HTML radio button group tag. It is rendered as a table with radio buttons and captions. The tag ID sets the name of the radio button tags. It is required for returning the content to the server when the page is submitted.

**Parameters:**

tagId - The radio button group tag ID

**Returns:**

a new HTML label tag (<span>)

---

## newRadioButton

```
public GXIRadioButtonTag newRadioButton(String tagName,  
String tagCheckedValue)
```

Returns a new HTML radio button tag (<input type="radio">) The tag name is used for associating single radio buttons by specifying the same name.

**Parameters:**

tagName - The tag name

tagCheckedValue - The value of the tag when it is selected

**Returns:**

a new HTML radio button tag (<input type="radio">)

---

## newHiddenTag

```
public GXHtmlHidden newHiddenTag(String tagId)
```

Returns a new HTML hidden tag (<input type="hidden">) The tag ID also sets the name of the tag. It is required for returning the content to the server when the page is submitted.

**Parameters:**

tagId - The tag ID

**Returns:**

a new HTML hidden tag (<input type="hidden">)

---

## newCheckbox

```
public GXICheckboxTag newCheckbox(String tagId)
```

Returns a new HTML check box tag.

**Parameters:**

tagId - The tag ID

**Returns:**

a new HTML check box tag

---

## newImage

```
public GXImageTag newImage()
```

---

## newHtmlString

```
public GXHtmlString newHtmlString(String text)
```

Used for creating a free text HTML tag.

**Parameters:**

text - the HTML text

**Returns:**

an HTML string tag

---

## newTableHeader

```
public GXITableCellTag newTableHeader()
```

---

---

## Package


# **com.sabratec.applinx.presentation.transf orms**

This package contains the ApplinX built-in transformation configurations. The built-in transformations are: Host keys, Tables, GUI elements, Window frames and emulation behavior.



## com.sabratec.applinx.presentation.transforms Class GXEmulationTransformConfig

java.lang.Object



### All Implemented Interfaces:

java.io.Serializable, java.io.Serializable

public class **GXEmulationTransformConfig**  
 extends [GXTransformConfig](#)  
 implements java.io.Serializable, java.io.Serializable

This class is the transformation configuration of various emulation features. It determines the behavior and UI of a tag which may be derived from its host field.

Among the features:

- Field colors: all, background only, none
- Emulation attributes: data type, automatic skip, right adjust, automatic enter
- Intensified

### See Also:

[GXRenderConfig.getEmulationConfig\(\)](#)

## Constructor Summary

public	<a href="#">GXEmulationTransformConfig()</a>
--------	--

## Method Summary

boolean	<a href="#">get_ClientBlinking()</a> For .NET framework usage.
int	<a href="#">get_ColorMode()</a> For .NET framework usage.
boolean	<a href="#">get_RenderAppFieldCss()</a> For .NET framework usage.
boolean	<a href="#">get_RenderEmulationAttributes()</a> For .NET framework usage.
boolean	<a href="#">get_RenderIntensifiedCss()</a> For .NET framework usage.
int	<a href="#">getColorMode()</a> Determines whether to display all the colors as they are displayed in the host (Background & foreground), display only the background colors or not display any colors at all.
boolean	<a href="#">isClientBlinking()</a> client configuration allows blinking

boolean	<a href="#">isRenderAppFieldCss()</a> Determines whether to render a css class for application fields
boolean	<a href="#">isRenderEmulationAttributes()</a> Returns if emulation attributes are rendered.
boolean	<a href="#">isRenderIntensifiedCss()</a> Determines whether to render an intensified css class for intensified host fields.
void	<a href="#">set_ClientBlinking</a> (boolean isClientBlinking) For .NET framework usage.
void	<a href="#">set_ColorMode</a> (int colorMode) For .NET framework usage.
void	<a href="#">set_RenderAppFieldCss</a> (boolean isRenderAppFieldCss) For .NET framework usage.
void	<a href="#">set_RenderEmulationAttributes</a> (boolean isRenderEmulationAttributes) For .NET framework usage.
void	<a href="#">set_RenderIntensifiedCss</a> (boolean isRenderIntensifiedCss) For .NET framework usage.
void	<a href="#">setClientBlinking</a> (boolean isClientBlinking) client configuration allows blinking
void	<a href="#">setColorMode</a> (int colorMode) Determines whether to display all the colors as they are displayed in the host (Background & foreground), display only the background colors or not display any colors at all.
void	<a href="#">setRenderAppFieldCss</a> (boolean isRenderAppFieldCss) Sets if to render the application field css class.
void	<a href="#">setRenderEmulationAttributes</a> (boolean isRenderEmulationAttributes) Determines whether to render emulation attributes in text fields.
void	<a href="#">setRenderIntensifiedCss</a> (boolean isRenderIntensifiedCss) Sets if to render intensified css class for intensified host fields.

**Methods inherited from class** [com.sabratec.applinx.presentation.transforms.GXTransformConfig](#)

[get\\_Enabled](#), [isEnabled](#), [set\\_Enabled](#), [setEnabled](#)

**Methods inherited from class** `java.lang.Object`

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Constructors

### **GXEmulationTransformConfig**

```
public GXEmulationTransformConfig()
```

## Methods

(continued from last page)

---

## getColorMode

```
public int getColorMode()
```

Determines whether to display all the colors as they are displayed in the host (Background & foreground), display only the background colors or not display any colors at all.

**Returns:**

Returns the color mode.

**See Also:**

[GXTransformConstants.COLORS\\_ALL](#)

[GXTransformConstants.COLORS\\_NONE](#)

[GXTransformConstants.COLORS\\_REVERSED\\_VIDEO](#)

---

## setColorMode

```
public void setColorMode(int colorMode)
```

Determines whether to display all the colors as they are displayed in the host (Background & foreground), display only the background colors or not display any colors at all.

**Parameters:**

colorMode - The color mode to set.

**See Also:**

[GXTransformConstants.COLORS\\_ALL](#)

[GXTransformConstants.COLORS\\_NONE](#)

[GXTransformConstants.COLORS\\_REVERSED\\_VIDEO](#)

---

## isRenderEmulationAttributes

```
public boolean isRenderEmulationAttributes()
```

Returns if emulation attributes are rendered.

**Returns:**

if emulation attributes are rendered

**See Also:**

[setRenderEmulationAttributes\(boolean\)](#)

---

## setRenderEmulationAttributes

```
public void setRenderEmulationAttributes(boolean isRenderEmulationAttributes)
```

Determines whether to render emulation attributes in text fields. Emulation attributes are special ApplinX attributes that start with "gx\_" and are added to the rendered text field tag. These attributes provide additional information to the ApplinX JavaScript engine, which changes the behavior of the text fields.  
The attributes are:

- Automatic skipping (gx\_autoSkip) - will cause the text field to skip to the neighboring text field, once it is filled with content.
  - Data type (gx\_dt) - The data type of the field. See [GXBaseObjectConstants](#) for possible data types.
  - Right adjustment (gx\_ra) - AS/400 right adjust
  - Automatic ENTER (gx\_ae) - AS/400 automatic enter
-

(continued from last page)

**Parameters:**

`isRenderEmulationAttributes` - whether to add emulation attributes in text fields

---

**isRenderAppFieldCss**

```
public boolean isRenderAppFieldCss()
```

Determines whether to render a css class for application fields

**Returns:**

if an application field css class is rendered

---

**setRenderAppFieldCss**

```
public void setRenderAppFieldCss(boolean isRenderAppFieldCss)
```

Sets if to render the application field css class.

**Parameters:**

`isRenderAppFieldCss` - whether to render an application field's css class

---

**isRenderIntensifiedCss**

```
public boolean isRenderIntensifiedCss()
```

Determines whether to render an intensified css class for intensified host fields.

**Returns:**

if an intensified css class is rendered

---

**setRenderIntensifiedCss**

```
public void setRenderIntensifiedCss(boolean isRenderIntensifiedCss)
```

Sets if to render intensified css class for intensified host fields.

**Parameters:**

`isRenderIntensifiedCss` - whether to render an intensified css class

---

**isClientBlinking**

```
public boolean isClientBlinking()
```

client configuration allows blinking

**Returns:****setClientBlinking**

```
public void setClientBlinking(boolean isClientBlinking)
```

client configuration allows blinking

**Parameters:**

`isClientBlinking`

---

---

(continued from last page)

## **get\_RenderEmulationAttributes**

```
public boolean get_RenderEmulationAttributes()
```

For .NET framework usage. Expose the method as a property.

---

## **get\_RenderAppFieldCss**

```
public boolean get_RenderAppFieldCss()
```

For .NET framework usage. Expose the method as a property.

---

## **get\_RenderIntensifiedCss**

```
public boolean get_RenderIntensifiedCss()
```

For .NET framework usage. Expose the method as a property.

---

## **get\_ColorMode**

```
public int get_ColorMode()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_ColorMode**

```
public void set_ColorMode(int colorMode)
```

For .NET framework usage. Expose the method as a property.

---

## **set\_RenderEmulationAttributes**

```
public void set_RenderEmulationAttributes(boolean isRenderEmulationAttributes)
```

For .NET framework usage. Expose the method as a property.

---

## **set\_RenderAppFieldCss**

```
public void set_RenderAppFieldCss(boolean isRenderAppFieldCss)
```

For .NET framework usage. Expose the method as a property.

---

## **set\_RenderIntensifiedCss**

```
public void set_RenderIntensifiedCss(boolean isRenderIntensifiedCss)
```

For .NET framework usage. Expose the method as a property.

---

## **get\_ClientBlinking**

```
public boolean get_ClientBlinking()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_ClientBlinking**


```
public void set_ClientBlinking(boolean isClientBlinking)
```

(continued from last page)

For .NET framework usage. Expose the method as a property.

## com.sabratec.applinx.presentation.transforms Class GXGuiElementsTransformConfig

java.lang.Object



### All Implemented Interfaces:

java.io.Serializable, java.io.Serializable

**Deprecated.** *Gui elements are translated into transformations, and should be controls from ApplinX composer. This class is the transformation configuration for GUI elements as defined in ApplinX composer. It determines the css class for each GUI element and the alignment of radio button groups.*

```

public class GXGuiElementsTransformConfig
extends GXTransformConfig
implements java.io.Serializable, java.io.Serializable
  
```

### See Also:

[GXRenderConfig.getGuiElementsConfig\(\)](#)

## Constructor Summary

public	<a href="#">GXGuiElementsTransformConfig()</a> <b>Deprecated.</b>
--------	--

## Method Summary

boolean	<a href="#">get_AdjustNeighbours()</a> <b>Deprecated.</b>
int	<a href="#">get_Alignment()</a> <b>Deprecated.</b>
String	<a href="#">get_CheckboxCss()</a> <b>Deprecated.</b>
String	<a href="#">get_ComboboxCss()</a> <b>Deprecated.</b>
String	<a href="#">get_RadioButtonCss()</a> <b>Deprecated.</b>
int	<a href="#">getAlignment()</a> <b>Deprecated.</b>
String	<a href="#">getCheckboxCss()</a> <b>Deprecated.</b>
String	<a href="#">getComboboxCss()</a> <b>Deprecated.</b>

String	<a href="#">getRadioButtonCss()</a> <b>Deprecated.</b>
boolean	<a href="#">isAdjustNeighbours()</a> <b>Deprecated.</b>
void	<a href="#">set_AdjustNeighbours</a> (boolean isAdjustNeighbours) <b>Deprecated.</b>
void	<a href="#">set_Alignment</a> (int alignment) <b>Deprecated.</b>
void	<a href="#">set_CheckboxCss</a> (String checkboxCss) <b>Deprecated.</b>
void	<a href="#">set_ComboboxCss</a> (String comboboxCss) <b>Deprecated.</b>
void	<a href="#">set_RadioButtonCss</a> (String radioButtonCss) <b>Deprecated.</b>
void	<a href="#">setAdjustNeighbours</a> (boolean isAdjustNeighbours) <b>Deprecated.</b>
void	<a href="#">setAlignment</a> (int alignment) <b>Deprecated.</b>
void	<a href="#">setCheckboxCss</a> (String checkboxCss) <b>Deprecated.</b>
void	<a href="#">setComboboxCss</a> (String comboboxCss) <b>Deprecated.</b>
void	<a href="#">setRadioButtonCss</a> (String radioButtonCss) <b>Deprecated.</b>

Methods inherited from class [com.sabratec.applinx.presentation.transforms.GXTransformConfig](#)

[get\\_Enabled](#), [isEnabled](#), [set\\_Enabled](#), [setEnabled](#)

Methods inherited from class `java.lang.Object`

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Constructors

### GXGuiElementsTransformConfig

```
public GXGuiElementsTransformConfig()
```

**Deprecated.**

## Methods



(continued from last page)

---

## getAlignment

```
public int getAlignment()
```

**Deprecated.**

**Returns:**

Returns the alignment.

**See Also:**

[GXPresentationConstants.ALIGNMENT\\_HORIZONTAL](#)

[GXPresentationConstants.ALIGNMENT\\_VERTICAL](#)

---

## setAlignment

```
public void setAlignment(int alignment)
```

**Deprecated.**

**Parameters:**

alignment - The alignment to set.

**See Also:**

[GXPresentationConstants.ALIGNMENT\\_HORIZONTAL](#)

[GXPresentationConstants.ALIGNMENT\\_VERTICAL](#)

---

## isAdjustNeighbours

```
public boolean isAdjustNeighbours()
```

**Deprecated.**

**Returns:**

whether the neighboring tags will be adjusted

**See Also:**

[setAdjustNeighbours\(boolean\)](#)

---

## setAdjustNeighbours

```
public void setAdjustNeighbours(boolean isAdjustNeighbours)
```

**Deprecated.**

Determines whether to adjust the neighboring tags when replacing a text field with a GUI element. The replacement is done according to the GUI pixel offset from the original text field. `true` by default.

**Parameters:**

isAdjustNeighbours - whether to adjust the neighboring tags

---

(continued from last page)

---

## getCheckboxCss

```
public String getCheckboxCss()
```

### Deprecated.

The css class for a checkbox.

### Returns:

the css class for a check box

---

## setCheckboxCss

```
public void setCheckboxCss(String checkboxCss)
```

### Deprecated.

The css class for a checkbox.

### Parameters:

checkboxCss - the css class for a check box

---

## getComboboxCss

```
public String getComboboxCss()
```

### Deprecated.

The css class for a combo box.

### Returns:

the css class for a combo box

---

## setComboboxCss

```
public void setComboboxCss(String comboboxCss)
```

### Deprecated.

The css class for a combo box.

### Parameters:

comboboxCss - the css class for a combo box

---

## getRadioButtonCss

```
public String getRadioButtonCss()
```

### Deprecated.

The css class for a radio button.

### Returns:

the css class for radio button groups

---

## setRadioButtonCss

```
public void setRadioButtonCss(String radioButtonCss)
```

---

---

(continued from last page)

**Deprecated.**

The css class for a radio button.

**Parameters:**

radioButtonCss - the css class for radio button groups

---

## **get\_AdjustNeighbours**

```
public boolean get_AdjustNeighbours()
```

**Deprecated.**

For .NET framework usage. Expose the method as a property.

---

## **set\_AdjustNeighbours**

```
public void set_AdjustNeighbours(boolean isAdjustNeighbours)
```

**Deprecated.**

For .NET framework usage. Expose the method as a property.

---

## **get\_Alignment**

```
public int get_Alignment()
```

**Deprecated.**

For .NET framework usage. Expose the method as a property.

---

## **set\_Alignment**

```
public void set_Alignment(int alignment)
```

**Deprecated.**

For .NET framework usage. Expose the method as a property.

---

## **get\_CheckboxCss**

```
public String get_CheckboxCss()
```

**Deprecated.**

For .NET framework usage. Expose the method as a property.

---

## **set\_CheckboxCss**

```
public void set_CheckboxCss(String checkboxCss)
```

**Deprecated.**

For .NET framework usage. Expose the method as a property.

---

## **get\_ComboboxCss**

```
public String get_ComboboxCss()
```

**Deprecated.**

---

---

(continued from last page)

For .NET framework usage. Expose the method as a property.

---

### **set\_ComboboxCss**

```
public void set_ComboboxCss(String comboboxCss)
```

**Deprecated.**

For .NET framework usage. Expose the method as a property.

---

### **get\_RadioButtonCss**

```
public String get_RadioButtonCss()
```

**Deprecated.**

For .NET framework usage. Expose the method as a property.

---

### **set\_RadioButtonCss**

```
public void set_RadioButtonCss(String radioButtonCss)
```

**Deprecated.**

For .NET framework usage. Expose the method as a property.

## com.sabratec.applinx.presentation.transforms Class GXHebrewTransform

java.lang.Object

└-com.sabratec.applinx.presentation.transforms.GXHebrewTransform

All Implemented Interfaces:

[GXCompletionListener](#)

public class **GXHebrewTransform**  
 extends Object  
 implements [GXCompletionListener](#)

### Constructor Summary

public	<a href="#">GXHebrewTransform</a> (boolean isTypingRTL)
--------	---

### Method Summary

void	<a href="#">addRtlAttribute</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXILabelTag</a> label)
------	---

void	<a href="#">onComplete</a> ( <a href="#">GXRenderEvent</a> event)
------	---

Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

Methods inherited from interface [com.sabratec.applinx.presentation.event.GXCompletionListener](#)

[onComplete](#)

### Constructors

#### GXHebrewTransform

public **GXHebrewTransform**(boolean isTypingRTL)

### Methods

#### onComplete

public void **onComplete**([GXRenderEvent](#) event)


(continued from last page)

## **addRtlAttribute**

```
public void addRtlAttribute(GXRenderEvent event,  
    GXILabelTag label)
```

## com.sabratec.applinx.presentation.transforms Class GXHostKeysTransformConfig

java.lang.Object



### All Implemented Interfaces:

java.io.Serializable, java.io.Serializable

public class **GXHostKeysTransformConfig**  
 extends [GXTransformConfig](#)  
 implements java.io.Serializable, java.io.Serializable

This class is the transformation configuration for host keys as defined in the ApplinX application. It determines the rendering type of the host keys (links/buttons), and the css class of the host keys.

### See Also:

[GXRenderConfig.getHostKeysConfig\(\)](#)

## Constructor Summary

public	<a href="#">GXHostKeysTransformConfig()</a>
--------	---

## Method Summary

String	<a href="#">get_HostKeyCss()</a> For .NET framework usage.
int	<a href="#">get_RenderingType()</a> For .NET framework usage.
String	<a href="#">getHostKeyCss()</a>
int	<a href="#">getRenderingType()</a> The type of the rendered host keys.
void	<a href="#">set_HostKeyCss(String hostKeyCss)</a> For .NET framework usage.
void	<a href="#">set_RenderingType(int renderingType)</a> For .NET framework usage.
void	<a href="#">setHostKeyCss(String hostKeyCss)</a>
void	<a href="#">setRenderingType(int renderingType)</a> The type of the rendered host keys.

Methods inherited from class [com.sabratec.applinx.presentation.transforms.GXTransformConfig](#)

[get\\_Enabled](#), [isEnabled](#), [set\\_Enabled](#), [setEnabled](#)

Methods inherited from class java.lang.Object

```
equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait
```

## Constructors

### **GXHostKeysTransformConfig**

```
public GXHostKeysTransformConfig()
```

## Methods

### **setRenderingType**

```
public void setRenderingType(int renderingType)
```

The type of the rendered host keys.

**Parameters:**

`renderingType` - constant representing the type of the host keys.

**See Also:**

[GXTransformConstants.HOSTKEYS\\_BUTTONS](#)

[GXTransformConstants.HOSTKEYS\\_LINKS](#)

[GXTransformConstants.HOSTKEYS\\_DELETE](#)

### **getRenderingType**

```
public int getRenderingType()
```

The type of the rendered host keys.

**Returns:**

A constant representing the type of the host keys. Listens only to the `onComplete` event.

**See Also:**

[GXTransformConstants.HOSTKEYS\\_BUTTONS](#)

[GXTransformConstants.HOSTKEYS\\_LINKS](#)

[GXTransformConstants.HOSTKEYS\\_DELETE](#)

### **set\_RenderingType**

```
public void set_RenderingType(int renderingType)
```

For .NET framework usage. Expose the method as a property.

### **get\_RenderingType**

```
public int get_RenderingType()
```

For .NET framework usage. Expose the method as a property.

### **getHostKeyCss**

```
public String getHostKeyCss()
```



---

(continued from last page)

**Returns:**

the CSS class of the host keys

---

**setHostKeyCss**

```
public void setHostKeyCss(String hostKeyCss)
```

**Parameters:**

hostKeyCss - the CSS class of the host keys

---

**get\_HostKeyCss**

```
public String get_HostKeyCss()
```

For .NET framework usage. Expose the method as a property.

---

**set\_HostKeyCss**


```
public void set_HostKeyCss(String hostKeyCss)
```

For .NET framework usage. Expose the method as a property.

## com.sabratec.applinx.presentation.transforms

### Class GXSapPortalTransform

java.lang.Object



public class **GXSapPortalTransform**  
 extends [GXTagListener](#)

This class is registered from sap portal jsp application

#### Constructor Summary

public	<a href="#">GXSapPortalTransform()</a>
--------	--

#### Method Summary

void	<a href="#">onNewButton</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXIButtonTag</a> button)
void	<a href="#">onNewCheckbox</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXICheckboxTag</a> checkbox)
void	<a href="#">onNewCombobox</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXIComboboxTag</a> combobox)
void	<a href="#">onNewLabel</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXILabelTag</a> label)
void	<a href="#">onNewLink</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXILinkTag</a> link)
void	<a href="#">onNewRadioButtonGroup</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXIRadioButtonGroupTag</a> radioGroup)
void	<a href="#">onNewTable</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXITableTag</a> table)
void	<a href="#">onNewTableCell</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXITableCellTag</a> tableCell)
void	<a href="#">onNewTableRow</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXITableRowTag</a> tableRow)
void	<a href="#">onNewTextField</a> ( <a href="#">GXRenderEvent</a> event, <a href="#">GXITextFieldTag</a> textField)

#### Methods inherited from class [com.sabratec.applinx.presentation.event.GXTagListener](#)

[onNewButton](#), [onNewCheckbox](#), [onNewCombobox](#), [onNewLabel](#), [onNewLink](#),  
[onNewRadioButtonGroup](#), [onNewTable](#), [onNewTableCell](#), [onNewTableRow](#), [onNewTextField](#)

#### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

---

## Constructors

### GXSapPortalTransform

```
public GXSapPortalTransform()
```

---

## Methods

### onNewLabel

```
public void onNewLabel(GXRenderEvent event,  
    GXILabelTag label)
```

Invoked when a label (protected field) has been created. The common usage is for protected fields that are rendered as text fields.

---

### onNewTextField

```
public void onNewTextField(GXRenderEvent event,  
    GXITextFieldTag textField)
```

Invoked when a text field has been created. The common usage is for unprotected fields that are rendered as text fields.

---

### onNewButton

```
public void onNewButton(GXRenderEvent event,  
    GXIButtonTag button)
```

Invoked when a link has been created. The common usage is for host-keys that may be rendered as buttons.

---

### onNewLink

```
public void onNewLink(GXRenderEvent event,  
    GXILinkTag link)
```

Invoked when a link has been created. The common usage is for host-keys that may be rendered as links.

---

### onNewCheckbox

```
public void onNewCheckbox(GXRenderEvent event,  
    GXICheckboxTag checkbox)
```

Invoked when a checkbox has been created. The common usage is for a GUI-element that may be rendered as a check box.

---

### onNewCombobox

```
public void onNewCombobox(GXRenderEvent event,  
    GXIComboboxTag combobox)
```

Invoked when a combo box has been created. The common usage is for a GUI-element that may be rendered as a combo box.

---

(continued from last page)

## onNewRadioButtonGroup

```
public void onNewRadioButtonGroup(GXRenderEvent event,  
    GXIRadioButtonGroupTag radioGroup)
```

Invoked when a radio buttons group has been created. The common usage is for a GUI-element that may be rendered as a radio button's group.

---

## onNewTable

```
public void onNewTable(GXRenderEvent event,  
    GXITableTag table)
```

Invoked when a table tag has been created.

In this case, `table.getHostField()` returns null.

---

## onNewTableRow

```
public void onNewTableRow(GXRenderEvent event,  
    GXITableRowTag tableRow)
```

Invoked when a table row tag has been created.

In this case, `table.getHostField()` returns null.

---

## onNewTableCell


```
public void onNewTableCell(GXRenderEvent event,  
    GXITableCellTag tableCell)
```

Invoked when a table cell has been created.

Unlike the other table-related event objects, `tableCell.getHostField()` returns the host field the cell is based on.

## com.sabratec.applinx.presentation.transforms Class GXTableTransformConfig

java.lang.Object



### All Implemented Interfaces:

java.io.Serializable, java.io.Serializable

public class **GXTableTransformConfig**  
 extends [GXTransformConfig](#)  
 implements java.io.Serializable, java.io.Serializable

This class is the transformation configuration for host tables as defined in ApplinX composer. It determines whether to adjust the tags beneath the table tag since a table tag is "taller" than standard label & text field tags. true by default. In addition it determines the various css classes of the tables.

### See Also:

[GXRenderConfig.getTableConfig\(\)](#)

## Constructor Summary

public	<a href="#">GXTableTransformConfig()</a>
--------	--

## Method Summary

boolean	<a href="#">get_AdjustNeighbours()</a> For .NET framework usage.
boolean	<a href="#">get_RenderAlternatingCssClass()</a> For .NET framework usage.
String	<a href="#">get_TableAlternating1CssClass()</a> For .NET framework usage.
String	<a href="#">get_TableAlternating2CssClass()</a> For .NET framework usage.
String	<a href="#">get_TableCssClass()</a> For .NET framework usage.
boolean	<a href="#">get_WindowRelative()</a> For .NET framework usage.
String	<a href="#">getTableAlternating1CssClass()</a>
String	<a href="#">getTableAlternating2CssClass()</a>
String	<a href="#">getTableCssClass()</a>

boolean	<a href="#">isAdjustNeighbours()</a> Determines whether to adjust the tags below the table tag, as the table tag is taller than the default tags.
boolean	<a href="#">isRenderAlternatingCssClass()</a>
boolean	<a href="#">isWindowRelative()</a> For internal usage
void	<a href="#">set_AdjustNeighbours</a> (boolean isAdjustNeighbours) For .NET framework usage.
void	<a href="#">set_RenderAlternatingCssClass</a> (boolean isRenderAlternatingCssClass) For .NET framework usage.
void	<a href="#">set_TableAlternating1CssClass</a> (String tableAlternating1CssClass) For .NET framework usage.
void	<a href="#">set_TableAlternating2CssClass</a> (String tableAlternating2CssClass) For .NET framework usage.
void	<a href="#">set_TableCssClass</a> (String tableCssClass) For .NET framework usage.
void	<a href="#">set_WindowRelative</a> (boolean isWindowRelative) For .NET framework usage.
void	<a href="#">setAdjustNeighbours</a> (boolean isAdjustNeighbours) Determines whether to adjust the tags below the table tag, as the table tag is taller than the default tags.
void	<a href="#">setRenderAlternatingCssClass</a> (boolean isRenderAlternatingCssClass)
void	<a href="#">setTableAlternating1CssClass</a> (String tableAlternating1CssClass)
void	<a href="#">setTableAlternating2CssClass</a> (String tableAlternating2CssClass)
void	<a href="#">setTableCssClass</a> (String tableCssClass)
void	<a href="#">setWindowRelative</a> (boolean isWindowRelative) For internal usage

**Methods inherited from class** [com.sabratec.applinx.presentation.transforms.GXTransformConfig](#)

[get\\_Enabled](#), [isEnabled](#), [set\\_Enabled](#), [setEnabled](#)

**Methods inherited from class** [java.lang.Object](#)

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

(continued from last page)

## GXTableTransformConfig

```
public GXTableTransformConfig()
```

### Methods

#### getTableAlternating1CssClass

```
public String getTableAlternating1CssClass()
```

**Returns:**

the css class of the odd rows

---

#### setTableAlternating1CssClass

```
public void setTableAlternating1CssClass(String tableAlternating1CssClass)
```

**Parameters:**

tableAlternating1CssClass - the css class of the odd rows

---

#### getTableAlternating2CssClass

```
public String getTableAlternating2CssClass()
```

**Returns:**

the css class of the even rows

---

#### setTableAlternating2CssClass

```
public void setTableAlternating2CssClass(String tableAlternating2CssClass)
```

**Parameters:**

tableAlternating2CssClass - the css class of the even rows

---

#### getTableCssClass

```
public String getTableCssClass()
```

**Returns:**

the css class of the table tag

---

#### setTableCssClass

```
public void setTableCssClass(String tableCssClass)
```

(continued from last page)

**Parameters:**

tableCssClass - the css class of the table tag

---

**isRenderAlternatingCssClass**public boolean **isRenderAlternatingCssClass**()**Returns:**

whether to render alternating css classes

---

**setRenderAlternatingCssClass**public void **setRenderAlternatingCssClass**(boolean isRenderAlternatingCssClass)**Parameters:**

isRenderAlternatingCssClass - whether to render alternating css classes

---

**isAdjustNeighbours**public boolean **isAdjustNeighbours**()

Determines whether to adjust the tags below the table tag, as the table tag is taller than the default tags.

**Returns:**

whether to adjust the top/left attributes of the tags below the table tag

---

**setAdjustNeighbours**public void **setAdjustNeighbours**(boolean isAdjustNeighbours)

Determines whether to adjust the tags below the table tag, as the table tag is taller than the default tags.

**Parameters:**

isAdjustNeighbors - whether the top/left attributes of the tags below the table tag will be adjusted

---

**isWindowRelative**public boolean **isWindowRelative**()

For internal usage

**Returns:**

---

**setWindowRelative**public void **setWindowRelative**(boolean isWindowRelative)

For internal usage

**Parameters:**

isWindowRelative



---

## **get\_TableAlternating1CssClass**

```
public String get_TableAlternating1CssClass()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_TableAlternating1CssClass**

```
public void set_TableAlternating1CssClass(String tableAlternating1CssClass)
```

For .NET framework usage. Expose the method as a property.

---

## **get\_TableAlternating2CssClass**

```
public String get_TableAlternating2CssClass()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_TableAlternating2CssClass**

```
public void set_TableAlternating2CssClass(String tableAlternating2CssClass)
```

For .NET framework usage. Expose the method as a property.

---

## **get\_TableCssClass**

```
public String get_TableCssClass()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_TableCssClass**

```
public void set_TableCssClass(String tableCssClass)
```

For .NET framework usage. Expose the method as a property.

---

## **get\_RenderAlternatingCssClass**

```
public boolean get_RenderAlternatingCssClass()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_RenderAlternatingCssClass**

```
public void set_RenderAlternatingCssClass(boolean isRenderAlternatingCssClass)
```

For .NET framework usage. Expose the method as a property.

---

## **get\_AdjustNeighbours**

```
public boolean get_AdjustNeighbours()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_AdjustNeighbours**

```
public void set_AdjustNeighbours(boolean isAdjustNeighbours)
```

---

(continued from last page)

For .NET framework usage. Expose the method as a property.

---

### **get\_WindowRelative**

```
public boolean get_WindowRelative()
```

For .NET framework usage. Expose the method as a property.

---

### **set\_WindowRelative**

```
public void set_WindowRelative(boolean isWindowRelative)
```

For .NET framework usage. Expose the method as a property.

## com.sabratec.applinx.presentation.transforms Class GXTransformConfig

java.lang.Object

└-com.sabratec.applinx.presentation.transforms.GXTransformConfig

### All Implemented Interfaces:

java.io.Serializable

### Direct Known Subclasses:

[GXWindowFrameTransformConfig](#), [GXTableTransformConfig](#), [GXHostKeysTransformConfig](#),  
[GXGuiElementsTransformConfig](#), [GXEmulationTransformConfig](#)

```
public abstract class GXTransformConfig
extends Object
implements java.io.Serializable
```

Abstract class for all transformation configurations. Contains a method `setEnabled` for enabling/disabling the transformation.

## Constructor Summary

public	<a href="#">GXTransformConfig()</a>
--------	-------------------------------------

## Method Summary

boolean	<a href="#">get_Enabled()</a> For .NET framework usage.
boolean	<a href="#">isEnabled()</a>
void	<a href="#">set_Enabled(boolean isEnabled)</a> For .NET framework usage.
void	<a href="#">setEnabled(boolean isEnabled)</a>

### Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Constructors

### GXTransformConfig

```
public GXTransformConfig()
```

## Methods

---

(continued from last page)

## **isEnabled**

```
public boolean isEnabled()
```

### **Returns:**

whether the relevant transformation (such as displaying tables, or displaying the graphical window frame) is enabled

---

## **setEnabled**

```
public void setEnabled(boolean isEnabled)
```

### **Parameters:**

`isEnabled` - whether to enable the relevant transformation

---

## **get\_Enabled**

```
public boolean get_Enabled()
```

For .NET framework usage. Expose the method as a property.

---

## **set\_Enabled**

```
public void set_Enabled(boolean isEnabled)
```

For .NET framework usage. Expose the method as a property.

---

## com.sabratec.applinx.presentation.transforms Class GXTransformConstants

java.lang.Object

└-com.sabratec.applinx.presentation.transforms.GXTransformConstants

public class **GXTransformConstants**  
extends Object

This class contains various constants which are used for ApplinX built-in transformations.

Field Summary	
public static final	<a href="#">COLORS_ALL</a> Renders both foreground and background colors for each tag. Value: 0
public static final	<a href="#">COLORS_NONE</a> Renders no colors Value: 1
public static final	<a href="#">COLORS_REVERSED_VIDEO</a> Render only back colors Value: 2
public static final	<a href="#">HOSTKEYS_BUTTONS</a> Renders host keys as buttons. Value: 1
public static final	<a href="#">HOSTKEYS_DELETE</a> Deletes the button screen text from the screen. Value: 2
public static final	<a href="#">HOSTKEYS_LINKS</a> Renders host-keys as links. Value: 0

Constructor Summary	
public	<a href="#">GXTransformConstants()</a>

Methods inherited from class java.lang.Object
equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Fields

### COLORS\_ALL

public static final int **COLORS\_ALL**

(continued from last page)

Renders both foreground and background colors for each tag.  
Constant value: **0**

**See Also:**[GXEmulationTransformConfig.setColorMode\(int\)](#)

---

## COLORS\_NONE

```
public static final int COLORS_NONE
```

Renders no colors  
Constant value: **1**

**See Also:**[GXEmulationTransformConfig.setColorMode\(int\)](#)

---

## COLORS\_REVERSED\_VIDEO

```
public static final int COLORS_REVERSED_VIDEO
```

Render only back colors  
Constant value: **2**

**See Also:**[GXEmulationTransformConfig.setColorMode\(int\)](#)

---

## HOSTKEYS\_LINKS

```
public static final int HOSTKEYS_LINKS
```

Renders host-keys as links. The links will be rendered in the same position as the host key's caption, if the host key's action and caption are in the same row. If they are not, the links will be rendered after the last line.  
Constant value: **0**

**See Also:**[GXHostKeysTransformConfig.setRenderingType\(int\)](#)

---

## HOSTKEYS\_BUTTONS

```
public static final int HOSTKEYS_BUTTONS
```

Renders host keys as buttons. The buttons will be rendered in the same position as the host key's caption, if the host key's action and caption are in the same row. If they are not, the buttons will be rendered after the last line.  
Constant value: **1**

**See Also:**[GXHostKeysTransformConfig.setRenderingType\(int\)](#)

---

## HOSTKEYS\_DELETE

```
public static final int HOSTKEYS_DELETE
```

Deletes the button screen text from the screen.  
Constant value: **2**

**See Also:**[GXHostKeysTransformConfig.setRenderingType\(int\)](#)

---

## Constructors


(continued from last page)

## **GXTransformConstants**

```
public GXTransformConstants()
```

## com.sabratec.applinx.presentation.transforms Class GXWindowFrameTransformConfig

java.lang.Object



### All Implemented Interfaces:

java.io.Serializable, java.io.Serializable

public class **GXWindowFrameTransformConfig**  
 extends [GXTransformConfig](#)  
 implements java.io.Serializable, java.io.Serializable

This class is the transformation configuration for window frames as defined in the ApplinX application. It replaces the host window characters/reverse video with a solid bordered frame. The configuration determines the CSS class for the window frame transformation.

### Constructor Summary

public	<a href="#">GXWindowFrameTransformConfig()</a>
--------	--

### Method Summary

boolean	<a href="#">get_HideOnly()</a> For .NET framework usage.
String	<a href="#">get_TitleWindowFrameCssClass()</a> For .NET framework usage.
String	<a href="#">get_WindowFrameCssClass()</a> For .NET framework usage.
String	<a href="#">getTitleWindowFrameCssClass()</a> The CSS class of window frame title.
String	<a href="#">getWindowFrameCssClass()</a> The CSS class of window frame.
boolean	<a href="#">isHideOnly()</a>
void	<a href="#">set_HideOnly(boolean hideOnly)</a> For .NET framework usage.
void	<a href="#">set_TitleWindowFrameCssClass(String titleWindowFrameCssClass)</a> For .NET framework usage.
void	<a href="#">set_WindowFrameCssClass(String windowFrameCssClass)</a> For .NET framework usage.
void	<a href="#">setHideOnly(boolean hideOnly)</a>



void	<a href="#">setTitleWindowFrameCssClass</a> (String titleWindowFrameCssClass) The CSS class of window frame Title.
void	<a href="#">setWindowFrameCssClass</a> (String windowFrameCssClass) The CSS class of window frame.

Methods inherited from class [com.sabratec.applinx.presentation.transforms.GXTransformConfig](#)

[get\\_Enabled](#), [isEnabled](#), [set\\_Enabled](#), [setEnabled](#)

Methods inherited from class `java.lang.Object`

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Constructors

### **GXWindowFrameTransformConfig**

```
public GXWindowFrameTransformConfig()
```

## Methods

### **getWindowFrameCssClass**

```
public String getWindowFrameCssClass()
```

The CSS class of window frame.

**Returns:**

the CSS class of window frame

### **setWindowFrameCssClass**

```
public void setWindowFrameCssClass(String windowFrameCssClass)
```

The CSS class of window frame.

**Parameters:**

`windowFrameCssClass` - the css class of window frame

### **getTitleWindowFrameCssClass**

```
public String getTitleWindowFrameCssClass()
```

The CSS class of window frame title.

**Returns:**

the css class of window frame title

### **setTitleWindowFrameCssClass**

```
public void setTitleWindowFrameCssClass(String titleWindowFrameCssClass)
```

---

(continued from last page)

The CSS class of window frame Title.

**Parameters:**

windowFrameCssClass - the css class of window frame title

---

### **setHideOnly**

```
public void setHideOnly(boolean hideOnly)
```

---

### **isHideOnly**

```
public boolean isHideOnly()
```

---

### **get\_WindowFrameCssClass**

```
public String get_WindowFrameCssClass()
```

For .NET framework usage. Expose the method as a property.

---

### **set\_WindowFrameCssClass**

```
public void set_WindowFrameCssClass(String windowFrameCssClass)
```

For .NET framework usage. Expose the method as a property.

---

### **get\_TitleWindowFrameCssClass**

```
public String get_TitleWindowFrameCssClass()
```

For .NET framework usage. Expose the method as a property.

---

### **set\_TitleWindowFrameCssClass**

```
public void set_TitleWindowFrameCssClass(String titleWindowFrameCssClass)
```

For .NET framework usage. Expose the method as a property.

---

### **set\_HideOnly**

```
public void set_HideOnly(boolean hideOnly)
```

For .NET framework usage. Expose the method as a property.

---

### **get\_HideOnly**

```
public boolean get_HideOnly()
```

For .NET framework usage. Expose the method as a property.

---

---

## Package

# com.sabratec.ci.print

ApplinX supports printer sessions on AS400 and mainframe hosts. It connects to the host, retrieves the print buffers and analyzes them. The host handles the printers queue and connection of printer sessions to display sessions. ApplinX connects to the host as a printer session to receive the print buffers and allows you to work with them.

The printer session has two levels. The first level is by way of the application programming interface which reflects the data returned into your required environment for example, XML, database, email, web or desktop application. The second level is the default behavior where ApplinX sends all print jobs to the clients machine by means of an applet that runs on the clients browser.

## com.sabratec.ci.print Class GXPage

java.lang.Object

└-com.sabratec.ci.print.GXPage

public class **GXPage**  
extends Object

This class implements one page that is going to be printed. The object can be retrieved from a GXPrintObject by the getPageAt() or getPages() methods once there is a print buffer.

**See Also:**

[GXPrintObject.getPageAt\(int\)](#), [GXPrintObject.getPages\(\)](#)

### Constructor Summary

public	<a href="#">GXPage()</a>
--------	--------------------------

### Method Summary

String	<a href="#">getLineAt(int index)</a> Returns the line at the specified index.
int	<a href="#">getLineCount()</a> Returns the number of lines in the page.
Vector	<a href="#">getLines()</a>
String	<a href="#">getOriginalBuffer()</a> Returns the portion of the buffer that corresponds to the current page as a string.
GXISCSInterface[]	<a href="#">getSCSElements()</a> Returns an array of SCS elements that correspond to the current page.
int	<a href="#">getSeqPageNumber()</a> Returns the sequential number of the page in the current print.
boolean	<a href="#">hasContent()</a> Return whether the page contains at least one char or not.
boolean	<a href="#">isComplete()</a> Returns true if the page is complete.
boolean	<a href="#">isEmphasis(String content)</a>
void	<a href="#">setComplete()</a>
void	<a href="#">setIsWrapTextOnMPP(boolean isWrap)</a>

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Constructors

### GXPage

```
public GXPage()
```

## Methods

### setIsWrapTextOnMPP

```
public void setIsWrapTextOnMPP(boolean isWrap)
```

---

### setComplete

```
public void setComplete()
```

---

### isComplete

```
public boolean isComplete()
```

Returns true if the page is complete. A page can be not complete if it is the last page that was analyzed from an incomplete buffer.

---

### isEmphasis

```
public boolean isEmphasis(String content)
```

---

### getLineCount

```
public int getLineCount()
```

Returns the number of lines in the page.

**Returns:**

number of lines in the page.

---

### hasContent

```
public boolean hasContent()
```

Return whether the page contains at least one char or not.

**Returns:**

whether the page contains at least one char or not.

---

(continued from last page)

## **getLineAt**

```
public String getLineAt(int index)
```

Returns the line at the specified index.

**Parameters:**

index - ranges from 0 to line count?1.

---

## **getSeqPageNumber**

```
public int getSeqPageNumber()
```

Returns the sequential number of the page in the current print.

---

## **getOriginalBuffer**

```
public String getOriginalBuffer()
```

Returns the portion of the buffer that corresponds to the current page as a string.

---

## **getSCSElements**

```
public GXISCSInterface[] getSCSElements()
```

Returns an array of SCS elements that correspond to the current page.

---

## **getLines**

```
public Vector getLines()
```

## com.sabratec.ci.print Class GXPrinter

```

java.lang.Object
  |
  +-GXGeneralSession
     |
     +-com.sabratec.ci.print.GXPrinter
  
```

```

public class GXPrinter
extends GXGeneralSession
  
```

This class represents a printer session. The methods to connect to the Applinx Server are similar to the connection methods in the display session.

Field Summary	
public static final	<a href="#">LOG_MODE_DEBUG</a> Value: 1
public static final	<a href="#">LOG_MODE_NORMAL</a> Value: 0

Constructor Summary	
public	<a href="#">GXPrinter()</a>
public	<a href="#">GXPrinter(GXParameters params)</a>

Method Summary	
int	<a href="#">attach()</a>
int	<a href="#">getCharactersPerLine()</a>
int	<a href="#">getLinesPerPage()</a>
GXIPrintObjectInterface	<a href="#">getPrint()</a> Sends a request to the server to get the latest buffer and returns the GXPrintObject object.
int	<a href="#">getPrinterStatus()</a> Returns the printer status.
void	<a href="#">setCharactersPerLine(int charactersPerLine)</a>
void	<a href="#">setLinesPerPage(int linesPerPage)</a>
void	<a href="#">setLogLevel(int logLevel)</a>

int	<a href="#">setWaitCondition</a> (int type, String paramString, int intParam1, int intParam2, int caseSensitive, long timeout, long flicker)
-----	--

Methods inherited from class `java.lang.Object`

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Fields

### LOG\_MODE\_NORMAL

public static final int **LOG\_MODE\_NORMAL**

Constant value: 0

### LOG\_MODE\_DEBUG

public static final int **LOG\_MODE\_DEBUG**

Constant value: 1

## Constructors

### GXPrinter

public **GXPrinter**()

### GXPrinter

public **GXPrinter**(GXParameters params)

## Methods

### attach

public int **attach**()

### getPrint

public GXIPrintObjectInterface **getPrint**()

Sends a request to the server to get the latest buffer and returns the GXPrintObject object. If the sequential print number was increased or the current print was not retrieved, it returns a new GXPrintObject object, otherwise it returns null.

### getPrinterStatus

public int **getPrinterStatus**()



(continued from last page)

Returns the printer status. Possible printer status parameters and their descriptions: GX\_PRINTER\_STATUS\_BUSY The print job is in process. GX\_PRINTER\_STATUS\_CANCELLING Canceling a print job. GX\_PRINTER\_STATUS\_ERROR The host believes that there is an error in the print session. GX\_PRINTER\_STATUS\_INUSE Trying to connect a print session that is engaged to another device. For example, two print sessions are opened with the same printer. GX\_PRINTER\_STATUS\_INVALID The printer object is not attached to the server (default). GX\_PRINTER\_STATUS\_PAPEROUT ApplinX Server has advised the host that it is out of paper. GX\_PRINTER\_STATUS\_READY The printer session is connected to the host and the printer is ready to accept print jobs from the host. GX\_PRINTER\_STATUS\_TIMEDOUT The host attempts to send a print job, however a problem exists with connecting with the ApplinX Server and the time has elapsed.

---

## setLogLevel

```
public void setLogLevel(int logLevel)
```

### Parameters:

logLevel - possible values: LOG\_MODE\_NORMAL, LOG\_MODE\_DEBUG

---

## setLinesPerPage

```
public void setLinesPerPage(int linesPerPage)
```

---

## getLinesPerPage

```
public int getLinesPerPage()
```

---

## setCharactersPerLine

```
public void setCharactersPerLine(int charactersPerLine)
```

---

## getCharactersPerLine

```
public int getCharactersPerLine()
```

---

## setWaitCondition

```
public int setWaitCondition(int type,  
    String paramString,  
    int intParam1,  
    int intParam2,  
    int caseSensitive,  
    long timeout,  
    long flicker)
```

## com.sabratec.ci.print Class GXPrinterSessionConstants

java.lang.Object

└-com.sabratec.ci.print.GXPrinterSessionConstants

public class **GXPrinterSessionConstants**  
extends Object

This class holds all the constants of the printer session objects. Used mainly in .NET (where static variables in interfaces are not exposed).

### Field Summary

public static final	<a href="#">GX_APPLICATION_PARM_ASSOCIATE_DEVICE_NAME</a>
public static final	<a href="#">GX_APPLICATION_PARM_DEVICE_NAME</a>
public static final	<a href="#">GX_APPLICATION_PARM_DEVICE_TYPE</a>
public static final	<a href="#">GX_APPLICATION_PARM_DISPLAY_DEVICE_NAME</a>
public static final	<a href="#">GX_APPLICATION_PARM_HOST_ADDRESS</a>
public static final	<a href="#">GX_APPLICATION_PARM_HOST_PORT</a>
public static final	<a href="#">GX_APPLICATION_PARM_IGNORE_FIRST_FORM_FEED</a>
public static final	<a href="#">GX_APPLICATION_PARM_IGNORE_FORMFEED_IN_TRANSPARENT</a>
public static final	<a href="#">GX_APPLICATION_PARM_IGNORE_HOST_FORMATTING</a>
public static final	<a href="#">GX_APPLICATION_PARM_IGNORE_HOST_SETTING_FOR_MAX_CHARACTERS_PER_LINE</a>
public static final	<a href="#">GX_APPLICATION_PARM_IGNORE_HOST_SETTING_FOR_MAX_LINES_PER_PAGE</a>
public static final	<a href="#">GX_APPLICATION_PARM_IGNORE_TRANSPARENT</a>
public static final	<a href="#">GX_APPLICATION_PARM_IGNORE_VERTICAL_CHANNEL_SELECT</a>
public static final	<a href="#">GX_APPLICATION_PARM_LANGUAGE</a>
public static final	<a href="#">GX_APPLICATION_PARM_MESSAGE_LIBRARY</a>
public static final	<a href="#">GX_APPLICATION_PARM_MESSAGE_QUEUE</a>
public static final	<a href="#">GX_APPLICATION_PARM_REPLAY_FILE</a>

public static final	<a href="#">GX_APPLICATION_PARM_TRACE_FILE</a>
public static final	<a href="#">GX_APPLICATION_PARM_TRANSLATE_ESCAPE</a>
public static final	<a href="#">GX_APPLICATION_PARM_TRANSPARENT_DATA_IS_ASCII</a>
public static final	<a href="#">GX_PRINT_OBJECT_STATUS_COMPLETE</a>
public static final	<a href="#">GX_PRINT_OBJECT_STATUS_EMPTY</a>
public static final	<a href="#">GX_PRINT_OBJECT_STATUS_NOT_COMPLETE</a>
public static final	<a href="#">GX_PRINTER_STATUS_BUSY</a>
public static final	<a href="#">GX_PRINTER_STATUS_CANCELLING</a>
public static final	<a href="#">GX_PRINTER_STATUS_ERROR</a>
public static final	<a href="#">GX_PRINTER_STATUS_INUSE</a>
public static final	<a href="#">GX_PRINTER_STATUS_INVALID</a>
public static final	<a href="#">GX_PRINTER_STATUS_PAPEROUT</a>
public static final	<a href="#">GX_PRINTER_STATUS_READY</a>
public static final	<a href="#">GX_PRINTER_STATUS_TIMEOUT</a>
public static final	<a href="#">GX_WAIT_COND_END_OF_PRINT</a>
public static final	<a href="#">GX_WAIT_COND_PRINTER_READY</a>

## Constructor Summary

public	<a href="#">GXPrinterSessionConstants()</a>
--------	---

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Fields

### **GX\_APPLICATION\_PARM\_LANGUAGE**

public static final java.lang.String **GX\_APPLICATION\_PARM\_LANGUAGE**

---

## **GX\_APPLICATION\_PARM\_DEVICE\_TYPE**

```
public static final java.lang.String GX_APPLICATION_PARM_DEVICE_TYPE
```

---

---

## **GX\_APPLICATION\_PARM\_DEVICE\_NAME**

```
public static final java.lang.String GX_APPLICATION_PARM_DEVICE_NAME
```

---

---

## **GX\_APPLICATION\_PARM\_TRACE\_FILE**

```
public static final java.lang.String GX_APPLICATION_PARM_TRACE_FILE
```

---

---

## **GX\_APPLICATION\_PARM\_REPLAY\_FILE**

```
public static final java.lang.String GX_APPLICATION_PARM_REPLAY_FILE
```

---

---

## **GX\_APPLICATION\_PARM\_HOST\_ADDRESS**

```
public static final java.lang.String GX_APPLICATION_PARM_HOST_ADDRESS
```

---

---

## **GX\_APPLICATION\_PARM\_HOST\_PORT**

```
public static final java.lang.String GX_APPLICATION_PARM_HOST_PORT
```

---

---

## **GX\_APPLICATION\_PARM\_ASSOCIATE\_DEVICE\_NAME**

```
public static final java.lang.String GX_APPLICATION_PARM_ASSOCIATE_DEVICE_NAME
```

---

---

## **GX\_APPLICATION\_PARM\_DISPLAY\_DEVICE\_NAME**

```
public static final java.lang.String GX_APPLICATION_PARM_DISPLAY_DEVICE_NAME
```

---

---

## **GX\_APPLICATION\_PARM\_MESSAGE\_QUEUE**

```
public static final java.lang.String GX_APPLICATION_PARM_MESSAGE_QUEUE
```

---

---

## **GX\_APPLICATION\_PARM\_MESSAGE\_LIBRARY**

```
public static final java.lang.String GX_APPLICATION_PARM_MESSAGE_LIBRARY
```

---

(continued from last page)

---

**GX\_APPLICATION\_PARM\_IGNORE\_HOST\_SETTING\_FOR\_MAX\_CHARACTERS\_PER\_LINE**

```
public static final java.lang.String  
GX_APPLICATION_PARM_IGNORE_HOST_SETTING_FOR_MAX_CHARACTERS_PER_LINE
```

---

**GX\_APPLICATION\_PARM\_IGNORE\_HOST\_SETTING\_FOR\_MAX\_LINES\_PER\_PAGE**

```
public static final java.lang.String  
GX_APPLICATION_PARM_IGNORE_HOST_SETTING_FOR_MAX_LINES_PER_PAGE
```

---

**GX\_APPLICATION\_PARM\_IGNORE\_TRANSPARENT**

```
public static final java.lang.String GX_APPLICATION_PARM_IGNORE_TRANSPARENT
```

---

**GX\_APPLICATION\_PARM\_TRANSPARENT\_DATA\_IS\_ASCII**

```
public static final java.lang.String GX_APPLICATION_PARM_TRANSPARENT_DATA_IS_ASCII
```

---

**GX\_APPLICATION\_PARM\_IGNORE\_FORMFEED\_IN\_TRANSPARENT**

```
public static final java.lang.String  
GX_APPLICATION_PARM_IGNORE_FORMFEED_IN_TRANSPARENT
```

---

**GX\_APPLICATION\_PARM\_IGNORE\_VERTICAL\_CHANNEL\_SELECT**

```
public static final java.lang.String  
GX_APPLICATION_PARM_IGNORE_VERTICAL_CHANNEL_SELECT
```

---

**GX\_APPLICATION\_PARM\_TRANSLATE\_ESCAPE**

```
public static final java.lang.String GX_APPLICATION_PARM_TRANSLATE_ESCAPE
```

---

**GX\_APPLICATION\_PARM\_IGNORE\_FIRST\_FORM\_FEED**

```
public static final java.lang.String GX_APPLICATION_PARM_IGNORE_FIRST_FORM_FEED
```

---

(continued from last page)

---

**GX\_APPLICATION\_PARM\_IGNORE\_HOST\_FORMATTING**

```
public static final java.lang.String GX_APPLICATION_PARM_IGNORE_HOST_FORMATTING
```

---

**GX\_WAIT\_COND\_END\_OF\_PRINT**

```
public static final int GX_WAIT_COND_END_OF_PRINT
```

---

**GX\_WAIT\_COND\_PRINTER\_READY**

```
public static final int GX_WAIT_COND_PRINTER_READY
```

---

**GX\_PRINTER\_STATUS\_INVALID**

```
public static final int GX_PRINTER_STATUS_INVALID
```

---

**GX\_PRINTER\_STATUS\_READY**

```
public static final int GX_PRINTER_STATUS_READY
```

---

**GX\_PRINTER\_STATUS\_BUSY**

```
public static final int GX_PRINTER_STATUS_BUSY
```

---

**GX\_PRINTER\_STATUS\_ERROR**

```
public static final int GX_PRINTER_STATUS_ERROR
```

---

**GX\_PRINTER\_STATUS\_TIMEDOUT**

```
public static final int GX_PRINTER_STATUS_TIMEDOUT
```

---

**GX\_PRINTER\_STATUS\_PAPEROUT**

```
public static final int GX_PRINTER_STATUS_PAPEROUT
```

---

**GX\_PRINTER\_STATUS\_INUSE**

```
public static final int GX_PRINTER_STATUS_INUSE
```

---

---

(continued from last page)

---

## **GX\_PRINTER\_STATUS\_CANCELLING**

```
public static final int GX_PRINTER_STATUS_CANCELLING
```

---

## **GX\_PRINT\_OBJECT\_STATUS\_EMPTY**

```
public static final int GX_PRINT_OBJECT_STATUS_EMPTY
```

---

## **GX\_PRINT\_OBJECT\_STATUS\_NOT\_COMPLETE**

```
public static final int GX_PRINT_OBJECT_STATUS_NOT_COMPLETE
```

---

## **GX\_PRINT\_OBJECT\_STATUS\_COMPLETE**

```
public static final int GX_PRINT_OBJECT_STATUS_COMPLETE
```

---

## Constructors

### **GXPrinterSessionConstants**

```
public GXPrinterSessionConstants()
```

## com.sabratec.ci.print Class GXPrintObject

java.lang.Object

└-com.sabratec.ci.print.GXPrintObject

public class **GXPrintObject**  
extends Object

This class implements one print job from the host. Every new print job requires a new print object. The object is created by the `getPrint()` method of the `GXPrinter`.

**See Also:**

[GXPrinter.getPrint\(\)](#)

### Constructor Summary

public	<a href="#">GXPrintObject()</a>
--------	---------------------------------

### Method Summary

int	<a href="#">completeBuffer()</a> Completes the buffer using the printer session (if alive).
String	<a href="#">getBuffer()</a> Returns the buffer that currently exists in the object as string.
String	<a href="#">getBuffer(int size)</a> Retrieves a portion of the buffer.
int	<a href="#">getBufferLength()</a> Returns the length of the current buffer.
int	<a href="#">getError()</a>
String	<a href="#">getErrorMessage()</a>
GXIPageInterface	<a href="#">getPageAt(int index)</a> Returns the page at the specified index.
int	<a href="#">getPageCount()</a> Returns the number of pages in the current print buffer, as they were analyzed by ApplinX.
GXIPageInterface[]	<a href="#">getPages()</a> Returns an array of GXPage objects according to the current buffer in the print object.
<a href="#">GXSCS[]</a>	<a href="#">getSCSElements()</a> Returns an array of GXSCS objects that hold all the printer controls that were retrieved along with the current buffer.
int	<a href="#">getSeqPrintNumber()</a> Returns the sequential print number ? the number of prints received from the host since the beginning of the current session.



boolean	<a href="#">isComplete()</a> Returns true if the print object holds the complete buffer.
boolean	<a href="#">isCurrentPrint()</a> Returns true if this print object is the printer session?s current print object.
boolean	<a href="#">isEmpty()</a> Returns true if the current print object is empty.
boolean	<a href="#">isPassThroughData()</a>
void	<a href="#">setCharactersPerLine(int maxCharactersPerLine)</a> Sets the number of characters per page.
void	<a href="#">setLinesPerPage(int maxLinesPerPage)</a> Sets the number of lines per page.
String	<a href="#">toString()</a>

#### Methods inherited from class `java.lang.Object`

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Constructors

### GXPrintObject

```
public GXPrintObject()
```

## Methods

### isPassThroughData

```
public boolean isPassThroughData()
```

### isCurrentPrint

```
public boolean isCurrentPrint()
```

Returns true if this print object is the printer session?s current print object.

**Returns:**

whether this print object is the current print in the printer session.

### isComplete

```
public boolean isComplete()
```

Returns true if the print object holds the complete buffer. If it returns false further requests must be sent to the server to retrieve the rest of the buffer.

---

(continued from last page)

**Returns:**

whether the print buffer is complete.

---

**isEmpty**

```
public boolean isEmpty()
```

Returns true if the current print object is empty.

---

**getSeqPrintNumber**

```
public int getSeqPrintNumber()
```

Returns the sequential print number ? the number of prints received from the host since the beginning of the current session.

**Returns:**

the sequential print number since the current print session was started.

---

**getBuffer**

```
public String getBuffer()
```

Returns the buffer that currently exists in the object as string.

---

**getBuffer**

```
public String getBuffer(int size)
```

Retrieves a portion of the buffer.

**Parameters:**

size -- optional - retrieves a portion of the buffer.

---

**getPageAt**

```
public GXIPageInterface getPageAt(int index)
```

Returns the page at the specified index. Page starts from zero.

**Parameters:**

index -- starts from 0.

**Returns:**

analyzed page at the specified index.

---

**getPages**

```
public GXIPageInterface[] getPages()
```

Returns an array of GXPage objects according to the current buffer in the print object.

---

**getPageCount**

```
public int getPageCount()
```

Returns the number of pages in the current print buffer, as they were analyzed by ApplinX.

---

(continued from last page)

**Returns:**

number of pages according to the current buffer in the object.

---

**getBufferLength**

```
public int getBufferLength()
```

Returns the length of the current buffer.

**Returns:**

length of the current buffer.

---

**getSCSElements**

```
public GXSCS\[\] getSCSElements()
```

Returns an array of GXSCS objects that hold all the printer controls that were retrieved along with the current buffer.

**Returns:**

an array of GXSCS objects for the current print buffer.

---

**completeBuffer**

```
public int completeBuffer()
```

Completes the buffer using the printer session (if alive). Sends a request to the server to complete the current buffer. This method can be used only if the print object is the current print object and if its status is not complete already.

---

**getError**

```
public int getError()
```

---

**getErrorMessage**

```
public String getErrorMessage()
```

---

**setLinesPerPage**

```
public void setLinesPerPage(int maxLinesPerPage)
```

Sets the number of lines per page. Only applicable if you want to change the current print job settings. The default is the setting of the printer session's configuration, which you configured at the start of the print job.

**Parameters:**

maxLinesPerPage - the maximum lines per page.

---

**setCharactersPerLine**

```
public void setCharactersPerLine(int maxCharactersPerLine)
```

Sets the number of characters per page. Only applicable if you want to change the current print job settings. The default is the setting of the printer session's configuration, which you configured at the start of the print job.

**Parameters:**

maxCharactersPerLine - the maximum characters per line.

## **toString**

```
public String toString()
```

## com.sabratec.ci.print Class GXSCS

java.lang.Object

└-com.sabratec.ci.print.GXSCS

public class **GXSCS**  
extends Object

This class represents a scs element. SCS are controls sent by the host that inform the printer how the print buffers should be presented.

### Method Summary

int	<a href="#">getBufferPosition()</a> Retrieves point in complete buffer print-job.
int	<a href="#">getColumnNumber()</a> Retrieves the column where the control string should be implemented.
byte[]	<a href="#">getData()</a> Retrieves the complete data of the control string (SCS).
int	<a href="#">getKeyAt(int index)</a> Retrieves a value key according to the key?s index.
int	<a href="#">getKeysCount()</a> Number of dynamic values in the control string data.
int	<a href="#">getLineNumber()</a> Retrieves the line where the control string should be implemented.
int	<a href="#">getPageBufferPosition()</a> Retrieves a point in the portion of the original buffer that is in the current page.
int	<a href="#">getType()</a> Retrieves a type of control string (SCS).
String	<a href="#">toString()</a>

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Methods

#### getKeysCount

public int **getKeysCount()**

Number of dynamic values in the control string data.

---

## getKeyAt

```
public int getKeyAt(int index)
```

Retrieves a value key according to the key's index. Starts from zero.

---

## getType

```
public int getType()
```

Retrieves a type of control string (SCS). List of types: GX\_TYPE\_UNKNOWN GX\_TYPE\_LINE\_DENSITY GX\_TYPE\_GRAPHIC\_ESCAPE GX\_TYPE\_CHARACTER\_DENSITY GX\_TYPE\_PAGE\_PRESETATION\_MEDIA GX\_TYPE\_VERTICAL\_CHANNEL\_SELECT GX\_TYPE\_TRANSPARENT GX\_TYPE\_HORIZONTAL\_TAB GX\_TYPE\_FORM\_FEED GX\_TYPE\_CARRIAGE\_RETURN GX\_TYPE\_NEW\_LINE GX\_TYPE\_BACKSPACE GX\_TYPE\_INTERCHANGE\_RECORD\_SEPARATOR GX\_TYPE\_LINE\_FEED GX\_TYPE\_HORIZONTAL\_FORMAT GX\_TYPE\_VERTICAL\_FORMAT GX\_TYPE\_VERTICAL\_TAB. SCS controls for double byte languages (Japanese / Korean) GX\_TYPE\_SHIFT\_IN GX\_TYPE\_SHIFT\_OUT GX\_TYPE\_SET\_ATTRIBUTE

The following SCS type instructions should be ignored. GX\_TYPE\_NO\_OPERATION

GX\_TYPE\_ENABLE\_PRESENTATION GX\_TYPE\_INHIBIT\_PRESENTATION GX\_TYPE\_ALERT\_BELL

The following are applicable to AS/400 hosts only: GX\_TYPE\_GRAPHIC\_ERROR\_ACTION

GX\_TYPE\_TEXT\_ORIENTATION GX\_TYPE\_FONT\_ID GX\_TYPE\_DEVICE\_EXCEPTION\_ACTION

GX\_TYPE\_JUSTIFY\_TEXT\_FIELD GX\_TYPE\_JUSTIFY\_MODE GX\_TYPE\_HORIZONTAL\_MARGINS

GX\_TYPE\_VERTICAL\_MARGINS GX\_TYPE\_PRESENTATION\_PAGE\_SIZE GX\_TYPE\_SUBSCRIPT

GX\_TYPE\_SUPERSCRIPT GX\_TYPE\_SUBSTITUTE GX\_TYPE\_WORD\_UNDERSCORE

GX\_TYPE\_BEGIN\_EMPHASIS GX\_TYPE\_BEGIN\_OVERSTRIKE GX\_TYPE\_BEGIN\_UNDERSCORE

GX\_TYPE\_END\_EMPHASIS GX\_TYPE\_END\_OVERSTRIKE GX\_TYPE\_END\_UNDERSCORE

GX\_TYPE\_REQUIRED\_NEW\_LINE GX\_TYPE\_EXPANDED\_BACKSPACE GX\_TYPE\_UNIT\_BACKSPACE

GX\_TYPE\_INDENT\_TAB GX\_TYPE\_INDEX\_RETURN GX\_TYPE\_PRINT\_POSITION

GX\_TYPE\_REQUIRED\_FORM\_FEED GX\_TYPE\_CODEPAGE\_LOCAL\_ID GX\_TYPE\_CODEPAGE\_GCID

GX\_TYPE\_INITIAL\_CONDITIONS GX\_TYPE\_HORIZONTAL\_TAB\_STOPS GX\_TYPE\_INDENT\_LEVEL

GX\_TYPE\_LINE\_SPACING GX\_TYPE\_SINGLE\_LINE\_DISTANCE GX\_TYPE\_ASCII\_TRANSPARENT

SCS Types for Double Byte Languages (Japanese / Korean) GX\_TYPE\_FONT\_SIZE\_SCALING

GX\_TYPE\_LOAD\_ALTERNATE\_CHARACTER GX\_TYPE\_DEFINE\_GRID\_LINE GX\_TYPE\_SET\_IGC\_TYPE

GX\_TYPE\_PRESENTATION\_OF\_CONTROL\_CHARACTER

The following SCS type instructions should be ignored. GX\_TYPE\_REPEAT GX\_TYPE\_SWITCH

GX\_TYPE\_PRINT\_SETUP GX\_TYPE\_RELEASE\_LEFT\_MARGIN 1303

---

## getLineNumber

```
public int getLineNumber()
```

Retrieves the line where the control string should be implemented.

---

## getColumnNumber

```
public int getColumnNumber()
```

Retrieves the column where the control string should be implemented.

---

## getBufferPosition

```
public int getBufferPosition()
```

Retrieves point in complete buffer print-job.

---

## getPageBufferPosition

```
public int getPageBufferPosition()
```

Retrieves a point in the portion of the original buffer that is in the current page.

---

## **getData**

```
public byte[] getData()
```

Retrieves the complete data of the control string (SCS).

---

## **toString**

```
public String toString()
```

---

**Package**

**com.sabratec.j2ee.framework.web.taglib**



## com.sabratec.j2ee.framework.web.taglib Class GXAnchorTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.taglib.GXAnchorTag
  
```

### All Implemented Interfaces:

java.io.Serializable

### Direct Known Subclasses:

[GXAbstractAnchorTag](#)

```

public class GXAnchorTag
extends GXAbstractTag
  
```

This class represents an anchor tag (link) which can be used to activate both client side functionality and server side functionality.

### Syntax:

```
<gx:a id="<TAG_ID>" onserverclick="<SERVER_FUNCTION_NAME>">
```

## Constructor Summary

public	<a href="#">GXAnchorTag</a> ( )
--------	---------------------------------

## Method Summary

void	<a href="#">setHref</a> (String value) Called by the JSP page for setting the href attribute to the tag output HTML.
void	<a href="#">setOnClick</a> (String value) Called by the JSP page for setting the onclick attribute to the HTML tag output.
void	<a href="#">setOnmouseout</a> (String value) Called by the JSP page for setting the onmouseout attribute to the tag output HTML.
void	<a href="#">setOnmouseover</a> (String value) Called by the JSP page for setting the onmouseover attribute to the tag output HTML.
void	<a href="#">setOnserverclick</a> (String value) Called by the JSP page for setting a server side function name that will be activated when the anchor (link) is clicked. <b>Syntax:</b> <gx:a id="<TAG_ID>" onserverclick="<SERVER_FUNCTION_NAME>"> The server side function is in the class which was set in: <gx:html gx_context="CONTEXT CLASS" ...>

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

---

```
equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait
```

---

## Constructors

### GXAnchorTag

```
public GXAnchorTag()
```

## Methods

### setOnserverclick

```
public void setOnserverclick(String value)
```

Called by the JSP page for setting a server side function name that will be activated when the anchor (link) is clicked.

**Syntax:**

```
<gx:a id="<TAG_ID>" onserverclick="<SERVER_FUNCTION_NAME>">
```

The server side function is in the class which was set in:

```
<gx:html gx_context="CONTEXT CLASS" ...>
```

**Parameters:**

value - The onserverclick function name (without brackets)

---

### setOnClick

```
public void setOnClick(String value)
```

Called by the JSP page for setting the onclick attribute to the HTML tag output. If onserverclick is also specified for the tag, the onserverclick will be added before the onclick attribute.

**Parameters:**

value - The onclick attribute value

---

### setOnmouseover

```
public void setOnmouseover(String value)
```

Called by the JSP page for setting the onmouseover attribute to the tag output HTML.

**Parameters:**

value - The onmouseover attribute value

---

### setOnmouseout

```
public void setOnmouseout(String value)
```

Called by the JSP page for setting the onmouseout attribute to the tag output HTML.

**Parameters:**

value - The onmouseout attribute value

---

(continued from last page)

## **setHref**

```
public void setHref(String value)
```

Called by the JSP page for setting the `href` attribute to the tag output HTML.

### **Parameters:**

`value` - The `href` attribute value

## com.sabratec.j2ee.framework.web.taglib

### Class GXBoldTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.tags.GXAbstractGenericTag
        |
        +-com.sabratec.j2ee.framework.web.taglib.GXBoldTag
  
```

#### All Implemented Interfaces:

java.io.Serializable

```

public class GXBoldTag
extends GXAbstractGenericTag
  
```

## Constructor Summary

public	<a href="#">GXBoldTag()</a>
--------	-----------------------------

#### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractGenericTag](#)

[setDir](#)

#### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

#### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXBoldTag

```
public GXBoldTag()
```

## com.sabratec.j2ee.framework.web.taglib Class GXCheckBoxTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.taglib.GXCheckBoxTag
  
```

### All Implemented Interfaces:

java.io.Serializable

### Direct Known Subclasses:

[GXAbstractCheckBoxTag](#)

```

public class GXCheckBoxTag
extends GXAbstractTag
  
```

Represents a <gx:checkbox> dynamic tag.

#### Syntax:

```
<gx:checkbox id="<TAG ID>" checkedValue="Y" uncheckValue="N" checked="true"/>
```

The advantage of this tag over a regular HTML check box is that a regular check box retrieves null when the check box is not selected, whereas this tag returns the value of the cleared check box.

The tag renders a hidden input field along with the check box. To retrieve the check box content (checked/unchecked value) use: `getTagsAccesor().getTagContent("")`

## Constructor Summary

public	<a href="#">GXCheckBoxTag()</a>
--------	---------------------------------

## Method Summary

void	<a href="#">setChecked</a> (String value) Called by the JSP page for setting the checked attribute of the tag.
void	<a href="#">setCheckedValue</a> (String value) Called by the JSP page for setting a checked value when the check box is selected.
void	<a href="#">setOnClick</a> (String value) Called by the JSP page for setting the onclick attribute to the tag output HTML.
void	<a href="#">setUncheckedValue</a> (String value) Called by the JSP page for setting an unchecked value when the check box is not selected.

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### **GXCheckBoxTag**

```
public GXCheckBoxTag()
```

## Methods

### **setCheckedValue**

```
public void setCheckedValue(String value)
```

Called by the JSP page for setting a checked value when the check box is selected.

**Parameters:**

value - The selected value

---

### **setUncheckedValue**

```
public void setUncheckedValue(String value)
```

Called by the JSP page for setting an unchecked value when the check box is not selected.

**Parameters:**

value - The unchecked value

---

### **setOnClick**

```
public void setOnClick(String value)
```

Called by the JSP page for setting the onclick attribute to the tag output HTML.

**Parameters:**

value - The onclick attribute value

---

### **setChecked**

```
public void setChecked(String value)
```

Called by the JSP page for setting the checked attribute of the tag.

**Parameters:**

value - The onclick attribute value

## com.sabratec.j2ee.framework.web.taglib

### Class GXDivTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.tags.GXAbstractGenericTag
        |
        +-com.sabratec.j2ee.framework.web.taglib.GXDivTag
  
```

#### All Implemented Interfaces:

java.io.Serializable

```

public class GXDivTag
extends GXAbstractGenericTag
  
```

## Constructor Summary

public	<a href="#">GXDivTag()</a>
--------	----------------------------

#### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractGenericTag](#)

[setDir](#)

#### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

#### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXDivTag

```
public GXDivTag()
```

## com.sabratec.j2ee.framework.web.taglib Class GXFormTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.taglib.GXFormTag
  
```

### All Implemented Interfaces:

java.io.Serializable

### Direct Known Subclasses:

[GXAbstractFormTag](#)

```

public class GXFormTag
extends GXAbstractTag
  
```

Represents the main form tag in the JSP page. The tag renders a <form> tag. Along with the form, the JavaScript function `gx_postBack` and a hidden field which saves the target function are rendered.

This function triggers a server function according to the specified function name.

### Syntax:

```

<gx:form>
...
Field1: <gx:input ...>
Field2: <gx:input ...>
...
</gx:form>
  
```

## Constructor Summary

public	<a href="#">GXFormTag()</a>
--------	-----------------------------

## Method Summary

String	<a href="#">getId()</a> Returns the form ID.
void	<a href="#">setOnsubmit</a> (String value) Called by the JSP page for setting the <code>onsubmit</code> attribute to the tag output HTML.
void	<a href="#">setSupportFileUpload()</a>

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class `java.lang.Object`

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`



## Constructors

### GXFormTag

```
public GXFormTag()
```

## Methods

### setOnsubmit

```
public void setOnsubmit(String value)
```

Called by the JSP page for setting the `onsubmit` attribute to the tag output HTML.

**Parameters:**

`value` - The `onsubmit` attribute value

---

### getId

```
public String getId()
```

Returns the form ID. If an ID is not specified the ID is "GX\_form".

---

### setSupportFileUpload

```
public void setSupportFileUpload()
```

# com.sabratec.j2ee.framework.web.taglib

## Class GXHtmlTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.taglib.GXHtmlTag
  
```

### All Implemented Interfaces:

java.io.Serializable

### Direct Known Subclasses:

[GXAbstractHtmlTag](#), [GXPageTag](#)

```

public class GXHtmlTag
extends GXAbstractTag
  
```

This class is the root tag of the JSP page, and the tag that initializes and activates the context class.

### Syntax:

```

<gx:html gx_context="<CONTEXT CLASS>">
...
<gx:form>
...
</gx:form>
...
</gx:html>
  
```

This class throws the following events in the context class:

- Page Initialization - `gx_onInit()`
- Page Load - `gx_onLoad()`
- Post Back (page is submitted to itself) - activating a target function using reflection from a `serverclick` event.
- Before html rendering - `gx_preRender()`
- Unload (for cleanup) - `gx_onUnload()`
- Error handling - `gx_onError(RuntimeException)()`

## Field Summary

public static final	<a href="#">HTML_TAG_ID</a> Value: <code>gx_html</code>
---------------------	--

## Constructor Summary

public	<a href="#">GXHtmlTag()</a>
--------	-----------------------------

## Method Summary

int	<a href="#">doEndTag()</a> Method called at end of tag.
int	<a href="#">doStartTag()</a> Method called at beginning of tag.

String	<a href="#">getId()</a>
void	<a href="#">setGx_context</a> (String gx_contextName)
void	<a href="#">setPageContext</a> (PageContext pageContext)

#### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

#### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Fields

### HTML\_TAG\_ID

```
public static final java.lang.String HTML_TAG_ID
```

Constant value: `gx_html`

## Constructors

### GXHtmlTag

```
public GXHtmlTag()
```

## Methods

### setPageContext

```
public void setPageContext(PageContext pageContext)
```

Overrides the BodyTagSupport class, and is used for initializing the current tag.

### doStartTag

```
public int doStartTag()
throws JspException
```

Method called at beginning of tag.

#### Returns:

EVAL\_BODY\_TAG

(continued from last page)

## doEndTag

```
public int doEndTag()  
    throws JspTagException
```

Method called at end of tag.

**Returns:**

EVAL\_PAGE

---

## setGx\_context

```
public void setGx_context(String gx_contextName)  
    throws ClassNotFoundException,  
        IllegalAccessException,  
        InstantiationException
```

---

## getId

```
public String getId()
```

Retrieves the ID of the current tag

## com.sabratec.j2ee.framework.web.taglib Class GXImageTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.tags.GXAbstractGenericTag
        |
        +-com.sabratec.j2ee.framework.web.taglib.GXImageTag
  
```

### All Implemented Interfaces:

java.io.Serializable

```

public class GXImageTag
extends GXAbstractGenericTag
  
```

### Constructor Summary

public	<a href="#">GXImageTag()</a>
--------	------------------------------

### Method Summary

void	<a href="#">setOnmouseout</a> (String value) Called by the JSP page for setting the onmouseout attribute to the tag output HTML.
void	<a href="#">setOnmouseover</a> (String value) Called by the JSP page for setting the onmouseover attribute to the tag output HTML.
void	<a href="#">setSrc</a> (String value)

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractGenericTag](#)

[setDir](#)

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Constructors

(continued from last page)

## GXImageTag

```
public GXImageTag()
```

## Methods

### setSrc

```
public void setSrc(String value)
```

---

### setOnmouseover

```
public void setOnmouseover(String value)
```

Called by the JSP page for setting the onmouseover attribute to the tag output HTML.

**Parameters:**

value - The onmouseover attribute value

---

### setOnmouseout

```
public void setOnmouseout(String value)
```

Called by the JSP page for setting the onmouseout attribute to the tag output HTML.

**Parameters:**

value - The onmouseout attribute value

## com.sabratec.j2ee.framework.web.taglib Class GXInputTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.taglib.GXInputTag
  
```

### All Implemented Interfaces:

java.io.Serializable

### Direct Known Subclasses:

[GXAbstractInputTag](#)

```

public class GXInputTag
extends GXAbstractTag
  
```

This class represents an HTML input tag which can be one of the following types: text, hidden, password, button, image, submit . It should not be used for the following types of inputs:

- Checkbox - use [GXAbstractCheckBoxTag](#)
- Radio - use [GXAbstractRadioButtonList](#)
- 

### Syntax:

```
<gx:input id="<TAG_ID>" type="text" maxlength="10">
```

```
<gx:input id="<TAG_ID>" type="button" onclick="<SERVER_FUNCTION_NAME>">
```

To dynamically set content to the input field use: `getTagsAccesor().setTagContent(, )`

To dynamically set attribute to the input field use: `getTagsAccesor().setTagAttribute(, , )`

## Constructor Summary

public	<a href="#">GXInputTag()</a>
--------	------------------------------

## Method Summary

void	<a href="#">setChecked</a> (String value)
void	<a href="#">setDir</a> (String value)
void	<a href="#">setMaxlength</a> (String value)
void	<a href="#">setOnchange</a> (String value)
void	<a href="#">setOnClick</a> (String value)
void	<a href="#">setOnkeydown</a> (String value)
void	<a href="#">setOnkeypress</a> (String value)

void	<a href="#">setOnkeyup</a> (String value)
void	<a href="#">setOnserverclick</a> (String value)
void	<a href="#">setSize</a> (String value)
void	<a href="#">setSrc</a> (String value)
void	<a href="#">setTabIndex</a> (String value)
void	<a href="#">setType</a> (String value)
void	<a href="#">setValue</a> (String value)

**Methods inherited from class** [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

**Methods inherited from class** [java.lang.Object](#)

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### **GXInputTag**

```
public GXInputTag()
```

## Methods

### **setOnserverclick**

```
public void setOnserverclick(String value)
```

### **setValue**

```
public void setValue(String value)
```

### **setOnClick**

```
public void setOnClick(String value)
```

Called by the JSP page for setting the onclick attribute to the tag output html.



### **setDir**

public void **setDir**(String value)

---

### **setType**

public void **setType**(String value)

---

### **setSize**

public void **setSize**(String value)

---

### **setMaxlength**

public void **setMaxlength**(String value)

---

### **setSrc**

public void **setSrc**(String value)

---

### **setOnkeydown**

public void **setOnkeydown**(String value)

---

### **setOnkeypress**

public void **setOnkeypress**(String value)

---

### **setOnkeyup**

public void **setOnkeyup**(String value)

---

### **setOnchange**

public void **setOnchange**(String value)

---

### **setTabIndex**

public void **setTabIndex**(String value)

---

(continued from last page)

---

## **setChecked**

```
public void setChecked(String value)
```

## com.sabratec.j2ee.framework.web.taglib Class GXJNLPTag

java.lang.Object

└-GXAbstractApplinXTag

└-com.sabratec.j2ee.framework.web.taglib.GXJNLPTag

public class **GXJNLPTag**  
extends GXAbstractApplinXTag

### Constructor Summary

public	<a href="#">GXJNLPTag()</a>
--------	-----------------------------

### Method Summary

void	<a href="#">setAddress</a> (String address)
void	<a href="#">setAppend_to_file</a> (boolean append_to_file)
void	<a href="#">setApplication</a> (String application)
void	<a href="#">setAssociate_device_name</a> (String associate_device_name)
void	<a href="#">setAuto_reconnect_number_of_tries</a> (int auto_reconnect_number_of_tries)
void	<a href="#">setAuto_reconnect_time_interval</a> (int auto_reconnect_time_interval)
void	<a href="#">setBest_fit_row_proportion</a> (String best_fit_row_proportion)
void	<a href="#">setBottom_margin</a> (float bottom_margin)
void	<a href="#">setBypass_gdi</a> (boolean bypass_gdi)
void	<a href="#">setChange_font_size_by_chars_per_line</a> (boolean change_font_size_by_chars_per_line)
void	<a href="#">setChange_orientation_by_chars_per_line</a> (boolean change_orientation_by_chars_per_line)
void	<a href="#">setCharacters_per_line</a> (int characters_per_line)
void	<a href="#">setCheck_each_page_separately</a> (boolean check_each_page_separately)
void	<a href="#">setCpi_translation</a> (String cpi_translation)

void	<a href="#">setCPI</a> (Double cPI)
void	<a href="#">setCustomized_library</a> (String customized_library)
void	<a href="#">setCustomized_object</a> (String customized_object)
void	<a href="#">setDescription</a> (String description)
void	<a href="#">setDevice_name</a> (String device_name)
void	<a href="#">setDisconnect_previous_session</a> (boolean disconnect_previous_session)
void	<a href="#">setDisplay_device_name</a> (String display_device_name)
void	<a href="#">setDisplayDeviceName</a> (String displayDeviceName)
void	<a href="#">setDo_not_add_form_feed_at_end_of_job</a> (boolean do_not_add_form_feed_at_end_of_job)
void	<a href="#">setDo_not_print_siso_as_space</a> (boolean do_not_print_siso_as_space)
void	<a href="#">setDo_not_return_print_buffers</a> (boolean do_not_return_print_buffers)
void	<a href="#">setDrawer1</a> (boolean drawer1)
void	<a href="#">setDrawer2</a> (boolean drawer2)
void	<a href="#">setEnabled_presentation</a> (boolean enable_presentation)
void	<a href="#">setEnvelope_hopper</a> (boolean envelope_hopper)
void	<a href="#">setExclude_last_line_if_empty</a> (boolean exclude_last_line_if_empty)
void	<a href="#">setExclude_last_page_if_empty</a> (boolean exclude_last_page_if_empty)
void	<a href="#">setFont_bold</a> (boolean font_bold)
void	<a href="#">setFont_id_translation</a> (String font_id_translation)
void	<a href="#">setFont_italic</a> (boolean font_italic)
void	<a href="#">setFont_name</a> (String font_name)
void	<a href="#">setFont_size</a> (int font_size)
void	<a href="#">setFont_width</a> (int font_width)
void	<a href="#">setGx_context</a> (String gx_contextName)

void	<a href="#">setHost_address</a> (String host_address)
void	<a href="#">setHost_port</a> (int host_port)
void	<a href="#">setHost_print_transform</a> (String host_print_transform)
void	<a href="#">setIgnore_FF_in_transparent_blocks</a> (boolean ignore_FF_in_transparent_blocks)
void	<a href="#">setIgnore_transparent_blocks</a> (boolean ignore_transparent_blocks)
void	<a href="#">setIgnore_vertical_channel_select</a> (boolean ignore_vertical_channel_select)
void	<a href="#">setIs_ascii899</a> (boolean is_ascii899)
void	<a href="#">setLeft_margin</a> (float left_margin)
void	<a href="#">setLines_per_page</a> (int lines_per_page)
void	<a href="#">setLogLevel</a> (String loglevel)
void	<a href="#">setLPI</a> (Double LPI)
void	<a href="#">setLU1_transparent_byte</a> (boolean LU1_transparent_byte)
void	<a href="#">setMax_pages_per_print_job</a> (int max_pages_per_print_job)
void	<a href="#">setMessage_lib</a> (String message_lib)
void	<a href="#">setMessage_queue</a> (String message_queue)
void	<a href="#">setMinimal_font_size</a> (int minimal_font_size)
void	<a href="#">setOrientation_type</a> (String orientation_type)
void	<a href="#">setOutput_file_name</a> (String output_file_name)
void	<a href="#">setPassword</a> (String password)
void	<a href="#">setPrint_as_text</a> (boolean print_as_text)
void	<a href="#">setPrint_model</a> (String print_model)
void	<a href="#">setPrinter_device</a> (String printer_device)
void	<a href="#">setPrintjob_separator_add_new_line</a> (boolean printjob_separator_add_new_line)

void	<a href="#">setPrintjob_separator_text</a> (String printjob_separator_text)
void	<a href="#">setTrace_File</a> (String trace_file)
void	<a href="#">setRecalculate_global_fit</a> (boolean recalculate_global_fit)
void	<a href="#">setReplay_File</a> (String replay_file)
void	<a href="#">setRight_margin</a> (float right_margin)
void	<a href="#">setServerPort</a> (int port)
void	<a href="#">setServerURL</a> (String serverURL)
void	<a href="#">setSleep</a> (long sleep)
void	<a href="#">setTop_margin</a> (float top_margin)
void	<a href="#">setTransparent_data_is_ASCII</a> (boolean transparent_data_is_ASCII)
void	<a href="#">setTransparent_end_trigger</a> (String transparentEndTrigger)
void	<a href="#">setTransparent_start_trigger</a> (String transparent_start_trigger)
void	<a href="#">setTreat_carriage_return_as_new_line</a> (boolean treat_carriage_return_as_new_line)
void	<a href="#">setUserid</a> (String userid)
void	<a href="#">setWait</a> (long wait)
void	<a href="#">setWindow_minimized_on_start</a> (boolean windowMinimized)

#### Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Constructors

### **GXJNLPTag**

```
public GXJNLPTag()
```

## Methods

(continued from last page)

---

## setGx\_context

```
public void setGx_context(String gx_contextName)
    throws ClassNotFoundException,
        IllegalAccessException,
        InstantiationException
```

---

## setAddress

```
public void setAddress(String address)
```

---

## setServerPort

```
public void setServerPort(int port)
```

---

## setServerURL

```
public void setServerURL(String serverURL)
```

---

## setApplication

```
public void setApplication(String application)
```

---

## setUserid

```
public void setUserid(String userid)
```

---

## setPassword

```
public void setPassword(String password)
```

---

## setDescription

```
public void setDescription(String description)
```

---

## setDevice\_name

```
public void setDevice_name(String device_name)
```

---

(continued from last page)

---

**setTrace\_File**

```
public void setTrace_File(String trace_file)
```

---

**setReplay\_File**

```
public void setReplay_File(String replay_file)
```

---

**setHost\_address**

```
public void setHost_address(String host_address)
```

---

**setHost\_port**

```
public void setHost_port(int host_port)
```

---

**setDisplay\_device\_name**

```
public void setDisplay_device_name(String display_device_name)
```

---

**setAssociate\_device\_name**

```
public void setAssociate_device_name(String associate_device_name)
```

---

**setAuto\_reconnect\_number\_of\_tries**

```
public void setAuto_reconnect_number_of_tries(int auto_reconnect_number_of_tries)
```

---

**setAuto\_reconnect\_time\_interval**

```
public void setAuto_reconnect_time_interval(int auto_reconnect_time_interval)
```

---

**setDisconnect\_previous\_session**

```
public void setDisconnect_previous_session(boolean disconnect_previous_session)
```

---

**setLogLevel**

```
public void setLogLevel(String loglevel)
```

---



(continued from last page)

---

**setEnabled\_presentation**

```
public void setEnabled_presentation(boolean enable_presentation)
```

---

**setWait**

```
public void setWait(long wait)
```

---

**setSleep**

```
public void setSleep(long sleep)
```

---

**setPrinter\_device**

```
public void setPrinter_device(String printer_device)
```

---

**setOutput\_file\_name**

```
public void setOutput_file_name(String output_file_name)
```

---

**setAppend\_to\_file**

```
public void setAppend_to_file(boolean append_to_file)
```

---

**setPrint\_as\_text**

```
public void setPrint_as_text(boolean print_as_text)
```

---

**setPrintjob\_separator\_add\_new\_line**

```
public void setPrintjob_separator_add_new_line(boolean  
printjob_separator_add_new_line)
```

---

**setPrintjob\_separator\_text**

```
public void setPrintjob_separator_text(String printjob_separator_text)
```

---

(continued from last page)

---

**setDo\_not\_return\_print\_buffers**

```
public void setDo_not_return_print_buffers(boolean do_not_return_print_buffers)
```

---

**setFont\_name**

```
public void setFont_name(String font_name)
```

---

**setFont\_bold**

```
public void setFont_bold(boolean font_bold)
```

---

**setFont\_italic**

```
public void setFont_italic(boolean font_italic)
```

---

**setFont\_size**

```
public void setFont_size(int font_size)
```

---

**setFont\_width**

```
public void setFont_width(int font_width)
```

---

**setLeft\_margin**

```
public void setLeft_margin(float left_margin)
```

---

**setRight\_margin**

```
public void setRight_margin(float right_margin)
```

---

**setTop\_margin**

```
public void setTop_margin(float top_margin)
```

---

**setBottom\_margin**

```
public void setBottom_margin(float bottom_margin)
```

---

(continued from last page)

---

**setMinimal\_font\_size**

```
public void setMinimal_font_size(int minimal_font_size)
```

---

**setMax\_pages\_per\_print\_job**

```
public void setMax_pages_per_print_job(int max_pages_per_print_job)
```

---

**setLPI**

```
public void setLPI(Double lPI)
```

---

**setCPI**

```
public void setCPI(Double cPI)
```

---

**setLines\_per\_page**

```
public void setLines_per_page(int lines_per_page)
```

---

**setCharacters\_per\_line**

```
public void setCharacters_per_line(int characters_per_line)
```

---

**setCpi\_translation**

```
public void setCpi_translation(String cpi_translation)
```

---

**setMessage\_queue**

```
public void setMessage_queue(String message_queue)
```

---

**setMessage\_lib**

```
public void setMessage_lib(String message_lib)
```

---

(continued from last page)

---

**setDisplayDeviceName**

```
public void setDisplayDeviceName(String displayDeviceName)
```

---

**setFont\_id\_translation**

```
public void setFont_id_translation(String font_id_translation)
```

---

**setRecalculate\_global\_fit**

```
public void setRecalculate_global_fit(boolean recalculate_global_fit)
```

---

**setExclude\_last\_page\_if\_empty**

```
public void setExclude_last_page_if_empty(boolean exclude_last_page_if_empty)
```

---

**setExclude\_last\_line\_if\_empty**

```
public void setExclude_last_line_if_empty(boolean exclude_last_line_if_empty)
```

---

**setDo\_not\_add\_form\_feed\_at\_end\_of\_job**

```
public void setDo_not_add_form_feed_at_end_of_job(boolean  
do_not_add_form_feed_at_end_of_job)
```

---

**setChange\_font\_size\_by\_chars\_per\_line**

```
public void setChange_font_size_by_chars_per_line(boolean  
change_font_size_by_chars_per_line)
```

---

**setChange\_orientation\_by\_chars\_per\_line**

```
public void setChange_orientation_by_chars_per_line(boolean  
change_orientation_by_chars_per_line)
```

---

**setCheck\_each\_page\_separately**

```
public void setCheck_each_page_separately(boolean check_each_page_separately)
```

---

(continued from last page)

---

**setBest\_fit\_row\_proportion**

```
public void setBest_fit_row_proportion(String best_fit_row_proportion)
```

---

**setLU1\_transparent\_byte**

```
public void setLU1_transparent_byte(boolean LU1_transparent_byte)
```

---

**setTransparent\_data\_is\_ASCII**

```
public void setTransparent_data_is_ASCII(boolean transparent_data_is_ASCII)
```

---

**setIgnore\_FF\_in\_transparent\_blocks**

```
public void setIgnore_FF_in_transparent_blocks(boolean  
ignore_FF_in_transparent_blocks)
```

---

**setBypass\_gdi**

```
public void setBypass_gdi(boolean bypass_gdi)
```

---

**setIgnore\_transparent\_blocks**

```
public void setIgnore_transparent_blocks(boolean ignore_transparent_blocks)
```

---

**setIgnore\_vertical\_channel\_select**

```
public void setIgnore_vertical_channel_select(boolean ignore_vertical_channel_select)
```

---

**setTransparent\_start\_trigger**

```
public void setTransparent_start_trigger(String transparent_start_trigger)
```

---

**setTransparent\_end\_trigger**

```
public void setTransparent_end_trigger(String transparentEndTrigger)
```

---

**setOrientation\_type**

```
public void setOrientation_type(String orientation_type)
```

---

(continued from last page)

---

**setHost\_print\_transform**

```
public void setHost_print_transform(String host_print_transform)
```

---

**setPrint\_model**

```
public void setPrint_model(String print_model)
```

---

**setDrawer1**

```
public void setDrawer1(boolean drawer1)
```

---

**setDrawer2**

```
public void setDrawer2(boolean drawer2)
```

---

**setEnvelope\_hopper**

```
public void setEnvelope_hopper(boolean envelope_hopper)
```

---

**setIs\_ascii899**

```
public void setIs_ascii899(boolean is_ascii899)
```

---

**setCustomized\_object**

```
public void setCustomized_object(String customized_object)
```

---

**setCustomized\_library**

```
public void setCustomized_library(String customized_library)
```

---

**setDo\_not\_print\_siso\_as\_space**

```
public void setDo_not_print_siso_as_space(boolean do_not_print_siso_as_space)
```

---

(continued from last page)

### **setTreat\_carriage\_return\_as\_new\_line**

```
public void setTreat_carriage_return_as_new_line(boolean  
treat_carriage_return_as_new_line)
```

---

### **setWindow\_minimized\_on\_start**

```
public void setWindow_minimized_on_start(boolean windowMinimized)
```

# com.sabratec.j2ee.framework.web.taglib

## Class GXPageTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.taglib.GXHtmlTag
        |
        +-com.sabratec.j2ee.framework.web.taglib.GXPageTag
  
```

### All Implemented Interfaces:

java.io.Serializable

```

public class GXPageTag
extends GXHtmlTag
  
```

### Fields inherited from class [com.sabratec.j2ee.framework.web.taglib.GXHtmlTag](#)

[HTML\\_TAG\\_ID](#)

## Constructor Summary

public [GXPageTag\(\)](#)

### Methods inherited from class [com.sabratec.j2ee.framework.web.taglib.GXHtmlTag](#)

[doEndTag](#), [doStartTag](#), [getId](#), [setGx\\_context](#), [setPageContext](#)

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXPageTag

public **GXPageTag**()



## com.sabratec.j2ee.framework.web.taglib Class GXRadioButtonListTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.taglib.GXRadioButtonListTag
  
```

### All Implemented Interfaces:

java.io.Serializable

### Direct Known Subclasses:

[GXAbstractRadioButtonList](#)

```

public class GXRadioButtonListTag
extends GXAbstractTag
  
```

This class represents a list of radio buttons. This tag is a parent tag of [GXAbstractRadioButton](#),

### Syntax:

```

<gx:radioButtonList id="<TAG ID>">
  <gx:radioButton value="1" checked="true">View</gx:radioButton>
  <gx:radioButton value="2">Edit</gx:radioButton>
</gx:radioButtonList>
  
```

To dynamically set the selected option use: `getTagsAccesor().setTagContent("TAG ID", "")`

To dynamically set the radio buttons list use: `getTagsAccesor().setTagList("", GXNameValueCollection)`

To read the the selected option use: `getTagsAccesor().getTagContent(<TAG ID>)`

### See Also:

[GXAbstractRadioButton](#)

## Constructor Summary

public	<a href="#">GXRadioButtonListTag()</a>
--------	--

## Method Summary

String	<a href="#">getDir()</a>
String	<a href="#">getHorizontal()</a>
void	<a href="#">setBorder</a> (String value)
void	<a href="#">setCellpadding</a> (String value)
void	<a href="#">setCellspacing</a> (String value)
void	<a href="#">setDir</a> (String value)
void	<a href="#">setHorizontal</a> (String value)

Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

Methods inherited from class `java.lang.Object`

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Constructors

### GXRadioButtonListTag

```
public GXRadioButtonListTag()
```

## Methods

### setBorder

```
public void setBorder(String value)
```

### setCellspacing

```
public void setCellspacing(String value)
```

### setCellpadding

```
public void setCellpadding(String value)
```

### setHorizontal

```
public void setHorizontal(String value)
```

### getHorizontal

```
public String getHorizontal()
```

### setDir

```
public void setDir(String value)
```

(continued from last page)

## **getDir**

```
public String getDir()
```

## com.sabratec.j2ee.framework.web.taglib Class GXRadioButtonTag

java.lang.Object

└ BodyTagSupport

└ [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

└ **com.sabratec.j2ee.framework.web.taglib.GXRadioButtonTag**

### All Implemented Interfaces:

java.io.Serializable

### Direct Known Subclasses:

[GXAbstractRadioButton](#)

```
public class GXRadioButtonTag
extends GXAbstractTag
```

This class represents a single radio button tag within a radio button list. This tag is a child of [GXAbstractRadioButtonList](#), and can't be used as a standalone tag.

#### Syntax:

```
<gx:radioButtonList id="<TAG ID>">
<gx:radioButton value="1" checked="true">View</gx:radioButton>
<gx:radioButton value="2">Edit</gx:radioButton>
</gx:radioButtonList>
```

To dynamically set the selected option use: `getTagsAccesor().setTagContent("", "")`

To dynamically set the radio buttons list use: `getTagsAccesor().setTagList("", GXINameValueCollection)`

To read the selected option use: `getTagsAccesor().getTagContent(<TAG ID>)`

#### See Also:

[GXAbstractRadioButtonList](#)

## Constructor Summary

public	<a href="#">GXRadioButtonTag()</a>
--------	------------------------------------

## Method Summary

void	<a href="#">setChecked</a> (String value) Called by the JSP page for setting the checked attribute to the tag.
void	<a href="#">setOnClick</a> (String value)
void	<a href="#">setValue</a> (String value) Called by the JSP page for setting the value attribute to the tag.

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXRadioButtonTag

```
public GXRadioButtonTag()
```

## Methods

### setValue

```
public void setValue(String value)
```

Called by the JSP page for setting the value attribute to the tag.

**Parameters:**

value - The value attribute value

---

### setChecked

```
public void setChecked(String value)
```

Called by the JSP page for setting the checked attribute to the tag.

**Parameters:**

value - The checked attribute value

---

### setOnClick

```
public void setOnClick(String value)
```

Called by the JSP page for setting the onclick attribute to the tag output html.

## com.sabratec.j2ee.framework.web.taglib Class GXSelectTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.taglib.GXSelectTag
  
```

### All Implemented Interfaces:

java.io.Serializable

### Direct Known Subclasses:

[GXAbstractSelectTag](#)

```

public class GXSelectTag
extends GXAbstractTag
  
```

This class represents a Select tag (HTML combobox).

#### Syntax:

```

<gx:select id="<TAG ID>">
  <option value="1">View</option>
  <option value="2">Edit</option>
</gx:select>
  
```

To dynamically set the selected option use: `getTagsAccesor().setTagContent("", "")`

To dynamically set the combobox option's list use: `getTagsAccesor().setTagList("", GXNameValueCollection)`

To read the the selected option use: `getTagsAccesor().getTagContent("")`

## Constructor Summary

public	<a href="#">GXSelectTag()</a>
--------	-------------------------------

## Method Summary

void	<a href="#">setDir</a> (String value)
void	<a href="#">setMultiple</a> (String value)
void	<a href="#">setOnchange</a> (String value)
void	<a href="#">setOnClick</a> (String value)
void	<a href="#">setSize</a> (String value)

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

```
equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait
```

---

## Constructors

### **GXSelectTag**

```
public GXSelectTag()
```

## Methods

### **setDir**

```
public void setDir(String value)
```

---

### **setOnChange**

```
public void setOnChange(String value)
```

---

### **setOnClick**

```
public void setOnClick(String value)
```

Called by the JSP page for setting the onclick attribute to the tag output html.

---

### **setSize**

```
public void setSize(String value)
```

---

### **setMultiple**

```
public void setMultiple(String value)
```

# com.sabratec.j2ee.framework.web.taglib

## Class GXSpanTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.tags.GXAbstractGenericTag
        |
        +-com.sabratec.j2ee.framework.web.taglib.GXSpanTag
  
```

### All Implemented Interfaces:

java.io.Serializable

```

public class GXSpanTag
extends GXAbstractGenericTag
  
```

## Constructor Summary

public	<a href="#">GXSpanTag()</a>
--------	-----------------------------

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractGenericTag](#)

[setDir](#)

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXSpanTag

```
public GXSpanTag()
```



## com.sabratec.j2ee.framework.web.taglib Class GXTableTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.taglib.GXTableTag
  
```

### All Implemented Interfaces:

java.io.Serializable

### Direct Known Subclasses:

[GXAbstractHtmlTableTag](#)

```

public class GXTableTag
extends GXAbstractTag
  
```

This class creates an HTML table tag according to the specified inner HTML template (tr, td, etc.), and the specified data table: [GXITable](#). The table tag will duplicate the first HTML row and will insert dynamic values from the data table. The binding of child tags to the data table is done using the ID attributes which match the relevant column name in the data table.

#### Syntax:

```

<gx:table id=i%ItemsTablei%>
  <tr>
  <th> ItemNumber</th>
  <th> Item Description</th>
  </tr>
  <tr>
  <td id=i%ItemNumberi%>dummy data</td>
  <td> <input id=i%ItemDesci% size=i%10i% value=i%sample datai%> </td>
  </tr>
</gx:table>
  
```

#### The result will be:

```

<table id=i%ItemsTablei%>
  <tr>
  <th> ItemNumber</th>
  <th> Item Description</th>
  </tr>
  <tr>
  <td id=i%ItemNumber_00i%>1007</td>
  <td> <input id=i%ItemDesc_000i% size=i%10i% value=i%Bananai%> </td>
  </tr>
  <tr>
  <td id=i%ItemNumber_001i%>1008</td>
  <td> <input id=i%ItemDesc_001i% size=i%10i% value=i%Applei%> </td>
  </tr>
  ...
</table>
  
```

*Note: The ID attributes of the cloned rows, will be changed to <ORIGINAL\_TAG\_ID>\_00<ROW INDEX>.*

The data table is set to the tag by using the method `getTagsAccesor().setTagTable(String, GXITable, GXITableBuildConfig, GXITableEvents)` which can be accessed using the `getTagsAccesor()` method.

The `setTagTable` method accepts also a table build configuration class which provides common parameters for the table creation and a table-events class, which provides you the ability to change the data and/or HTML of a created row (tr), cell (td), or a control (any other child tag under a cell).

#### See Also:

com.sabratec.applinx.framework.tables.GXITableBuildConfig,  
com.sabratec.j2ee.framework.web.tables.GXITableEvents, [GXIClientBaseObject.getTable\(\)](#),  
org.w3c.dom.Element

## Constructor Summary

public	<a href="#">GXTableTag()</a>
--------	------------------------------

## Method Summary

void	<a href="#">setBorder</a> (String value)
void	<a href="#">setCellpadding</a> (String value)
void	<a href="#">setCellspacing</a> (String value)

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class [java.lang.Object](#)

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### **GXTableTag**

```
public GXTableTag()
```

## Methods

### **setBorder**

```
public void setBorder(String value)
```

### **setCellspacing**

```
public void setCellspacing(String value)
```

### **setCellpadding**

```
public void setCellpadding(String value)
```

## com.sabratec.j2ee.framework.web.taglib Class GXTagsAccesorImpl

java.lang.Object

↳ com.sabratec.j2ee.framework.web.taglib.GXTagsAccesorImpl

### All Implemented Interfaces:

java.io.Serializable, [GXITagsAccesor](#)

public class **GXTagsAccesorImpl**  
 extends Object  
 implements [GXITagsAccesor](#), java.io.Serializable

Impl. class for [GXITagsAccesor](#)

### Constructor Summary

public	<a href="#">GXTagsAccesorImpl</a> (HttpServletRequest request)
--------	--

### Method Summary

void	<a href="#">AddHiddenFieldToForm</a> (String name, String value)
void	<a href="#">AddHtmlTextToForm</a> (String htmlText) Adds an HTML text to the JSP page.
void	<a href="#">AddJSToForm</a> (String jsString)
void	<a href="#">addTableKeyColumn</a> (String refTagId, String keyCol)
String	<a href="#">getBodyAttribute</a> (String attrName)
Hashtable	<a href="#">getBodyAttributes</a> ()
String	<a href="#">getFileName</a> (String refTagId)
String	<a href="#">getFormAttribute</a> (String attrName)
Hashtable	<a href="#">getFormAttributes</a> ()
String	<a href="#">getFormTopString</a> ()
Map	<a href="#">getHiddens</a> ()
java.io.InputStream	<a href="#">getInputStream</a> (String refTagId)
Hashtable	<a href="#">getInputTagAttributes</a> (String refTagid)

String	<a href="#">getPanelToUpdate()</a>
String	<a href="#">getPanelToUpdateContent()</a>
String	<a href="#">getTableName()</a>
String	<a href="#">getTableSelectedKey(String tagId)</a>
String[]	<a href="#">getTableSelectedKeys(String refTagId)</a>
String	<a href="#">getTagAttribute(String refTagId, String attrName)</a>
Hashtable	<a href="#">getTagAttributes(String refTagid)</a>
String	<a href="#">getTagContent(String tagId)</a>
String[]	<a href="#">getTagContents(String refTagName)</a>
boolean	<a href="#">isTagVisible(String refTagId)</a>
void	<a href="#">recycleBodyTag()</a>
void	<a href="#">recycleTag(String refTagId, Hashtable tagPrivateAttributes)</a>
void	<a href="#">removeTagAttribute(String refTagId, String attrName)</a>
void	<a href="#">setAttributeListIfEmpty(String refTagId, Hashtable attrList)</a>
void	<a href="#">setBodyAttribute(String attrName, String content)</a>
void	<a href="#">setBodyAttributeIfEmpty(String attrName, String content)</a>
void	<a href="#">setFormAttribute(String attrName, String content)</a>
void	<a href="#">setInputTagAttribute(String refTagId, String attrName, String content)</a>
void	<a href="#">setPageVisible(boolean visible)</a>
void	<a href="#">setPanelToUpdateContent(String content)</a>
void	<a href="#">setTagAttribute(String refTagId, String attrName, String content)</a>
void	<a href="#">setTagContent(String refTagId, String content)</a>
void	<a href="#">setTagContentIfEmpty(String refTagId, String content)</a>
void	<a href="#">setTagList(String refTagId, GXINameValueCollection list)</a>

void	<a href="#">setTagList</a> (String refTagId, Hashtable list)
void	<a href="#">setTagTable</a> (String tagId, <a href="#">GXITable</a> table)
void	<a href="#">setTagTable</a> (String refTagId, <a href="#">GXITable</a> table, com.sabratec.j2ee.framework.web.tables.GXITableBuildConfig config, GXITableEvents events) <b>Deprecated.</b> Use <a href="#">setTagTable(String, GXITable, GXITableBuildConfig, GXITableEvents)</a> instead
void	<a href="#">setTagTable</a> (String tagId, <a href="#">GXITable</a> table, GXITableBuildConfig config)
void	<a href="#">setTagTable</a> (String refTagId, <a href="#">GXITable</a> table, GXITableBuildConfig config, GXITableEvents events)
void	<a href="#">setTagVisible</a> (String refTagId, boolean visible)
void	<a href="#">setTagVisibleIfEmpty</a> (String refTagId, boolean visible)

**Methods inherited from class** java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

**Methods inherited from interface** [com.sabratec.j2ee.framework.web.tags.GXITagsAccesor](#)

[AddHiddenFieldToForm](#), [AddHtmlTextToForm](#), [AddJSToForm](#), [addTableKeyColumn](#), [getFileName](#), [getInputStream](#), [getTableName](#), [getTableSelectedKey](#), [getTableSelectedKeys](#), [getTagAttribute](#), [getTagContent](#), [setBodyAttribute](#), [setFormAttribute](#), [setPageVisible](#), [setTagAttribute](#), [setTagContent](#), [setTagList](#), [setTagList](#), [setTagTable](#), [setTagTable](#), [setTagTable](#), [setTagTable](#), [setTagVisible](#)

## Constructors

### GXTagsAccesorImpl

```
public GXTagsAccesorImpl(HttpServletRequest request)
```

## Methods

### setTagContent

```
public void setTagContent(String refTagId,
    String content)
```

### setTagContentIfEmpty

```
public void setTagContentIfEmpty(String refTagId,
    String content)
```

## getTagContents

```
public String[] getTagContents(String refTagName)
```

---

## getTagContent

```
public String getTagContent(String tagId)
```

---

## setTagVisible

```
public void setTagVisible(String refTagId,  
    boolean visible)
```

---

## setTagVisibleIfEmpty

```
public void setTagVisibleIfEmpty(String refTagId,  
    boolean visible)
```

---

## isTagVisible

```
public boolean isTagVisible(String refTagId)
```

---

## setTagList

```
public void setTagList(String refTagId,  
    Hashtable list)
```

---

## setTagTable

```
public void setTagTable(String tagId,  
    GXITable table)
```

---

## setTagTable

```
public void setTagTable(String tagId,  
    GXITable table,  
    GXITableBuildConfig config)
```

---

(continued from last page)

---

## setTagTable

```
public void setTagTable(String refTagId,  
    GXITable table,  
    com.sabratec.j2ee.framework.web.tables.GXITableBuildConfig config,  
    GXITableEvents events)
```

**Deprecated.** Use [setTagTable\(String, GXITable, GXITableBuildConfig, GXITableEvents\)](#) instead

---

## setTagTable

```
public void setTagTable(String refTagId,  
    GXITable table,  
    GXITableBuildConfig config,  
    GXITableEvents events)
```

---

## addTableKeyColumn

```
public void addTableKeyColumn(String refTagId,  
    String keyCol)
```

---

## getTableSelectedKey

```
public String getTableSelectedKey(String tagId)
```

---

## getTableSelectedKeys

```
public String[] getTableSelectedKeys(String refTagId)
```

---

## getTableName

```
public String getTableName()
```

---

## removeTagAttribute

```
public void removeTagAttribute(String refTagId,  
    String attrName)
```

---

## setTagAttribute

```
public void setTagAttribute(String refTagId,  
    String attrName,  
    String content)
```

## setInputTagAttribute

```
public void setInputTagAttribute(String refTagId,  
    String attrName,  
    String content)
```

---

## setAttributeListIfEmpty

```
public void setAttributeListIfEmpty(String refTagId,  
    Hashtable attrList)
```

---

## getTagAttribute

```
public String getTagAttribute(String refTagId,  
    String attrName)
```

---

## AddHiddenFieldToForm

```
public void AddHiddenFieldToForm(String name,  
    String value)
```

---

## getHiddens

```
public Map getHiddens()
```

---

## AddJSToForm

```
public void AddJSToForm(String jsString)
```

---

## AddHtmlTextToForm

```
public void AddHtmlTextToForm(String htmlText)
```

Adds an HTML text to the JSP page.

**Parameters:**

htmltext - the html text to add

---

## getFormTopString

```
public String getFormTopString()
```

---



(continued from last page)

---

**setBodyAttributeIfEmpty**

```
public void setBodyAttributeIfEmpty(String attrName,  
    String content)
```

---

**setBodyAttribute**

```
public void setBodyAttribute(String attrName,  
    String content)
```

---

**getBodyAttribute**

```
public String getBodyAttribute(String attrName)
```

---

**setFormAttribute**

```
public void setFormAttribute(String attrName,  
    String content)
```

---

**getFormAttribute**

```
public String getFormAttribute(String attrName)
```

---

**getTagAttributes**

```
public Hashtable getTagAttributes(String refTagid)
```

---

**getInputTagAttributes**

```
public Hashtable getInputTagAttributes(String refTagid)
```

---

**getBodyAttributes**

```
public Hashtable getBodyAttributes()
```

---

**getFormAttributes**

```
public Hashtable getFormAttributes()
```

---

(continued from last page)

---

## setTagList

```
public void setTagList(String refTagId,  
    GXINameValueCollection list)
```

---

## recycleTag

```
public void recycleTag(String refTagId,  
    Hashtable tagPrivateAttributes)
```

---

## recycleBodyTag

```
public void recycleBodyTag()
```

---

## getInputStream

```
public java.io.InputStream getInputStream(String refTagId)  
    throws java.io.IOException
```

---

## getFileName

```
public String getFileName(String refTagId)  
    throws java.io.IOException
```

---

## getPanelToUpdate

```
public String getPanelToUpdate()
```

---

## getPanelToUpdateContent

```
public String getPanelToUpdateContent()
```

---

## setPanelToUpdateContent

```
public void setPanelToUpdateContent(String content)
```

---

## setPageVisible

```
public void setPageVisible(boolean visible)
```

---

## com.sabratec.j2ee.framework.web.taglib Class GXTdTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.tags.GXAbstractGenericTag
        |
        +-com.sabratec.j2ee.framework.web.taglib.GXTdTag
  
```

### All Implemented Interfaces:

java.io.Serializable

```

public class GXTdTag
extends GXAbstractGenericTag
  
```

## Constructor Summary

public	<a href="#">GXTdTag()</a>
--------	---------------------------

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractGenericTag](#)

[setDir](#)

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXTdTag

```
public GXTdTag()
```

## com.sabratec.j2ee.framework.web.taglib Class GXTextAreaTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.tags.GXAbstractGenericTag
        |
        +-com.sabratec.j2ee.framework.web.taglib.GXTextAreaTag
  
```

### All Implemented Interfaces:

java.io.Serializable

```

public class GXTextAreaTag
extends GXAbstractGenericTag
  
```

## Constructor Summary

public	<a href="#">GXTextAreaTag()</a>
--------	---------------------------------

## Method Summary

void	<a href="#">setCols</a> (String cols)
void	<a href="#">setName</a> (String name)
void	<a href="#">setRows</a> (String rows)

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractGenericTag](#)

[setDir](#)

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXTextAreaTag

```
public GXTextAreaTag()
```

---

(continued from last page)

## Methods

### **setCols**

```
public void setCols(String cols)
```

---

### **setName**

```
public void setName(String name)
```

---

### **setRows**

```
public void setRows(String rows)
```

---

## Package

# com.sabratec.j2ee.framework.web.tags

### Overview

The purpose of this package is to provide the developer the ability to add "HTML like" tags to the JSP page. Though this is done without writing any code inside the tags, it is still possible to set dynamic contents to the tags.

This package contains tag library classes and a tag accessor which allows setting dynamic content to the HTML output of the tags.

The final HTML result of each tag is the matching HTML tag with dynamic content/attributes, added dynamically.

Each JSP page must be associated with a Java class that contains an instance of the tags accessor.

The tags accessor sets dynamic content to the tags.

The association is established by setting a root tag: `<gx:html gx_context="" >`

**Tip:** If you don't set a context class the page will work in design mode, and will not be connected to a data source (such as ApplinX) in the context class.

The HTML tag class starts the life cycle of the page:

`gx_onInit -> gx_onLoad -> Post back (submit) -> gx_preRender -> gx_onUnload`

these are all functions where you can use the object instance of the tags accessor `getTagsAccesor()` in order to pass dynamic content to each tag.

The association to each tag is established by setting an ID to each tag, and specifying the ID of the tag in the tags accessor's various methods.

### Using the Tag Library

To set a dynamic content to a tag for example, set the following code:

In `SamplePage.JSP`:

```
<gx:html gx_context="contexts.SamplePage">
```

```
...
```

```
<gx:input id=UserName cssClass=field1/>
```

In `SamplePage.java`:

```
String user = newUser; // can be retrieved from any data source.
```

```
getTagsAccesor().setTagContent(UserName, user)
```

The result will be:

```
<input id=UserName name=UserName class=field1 value=newUser/>
```

### Configuration

*Note: The following configuration is ready for use in any ApplinX application for JSP.*

Check that the tag library contains the following components:

- `gxframework.jar` should be in `WEB-INF/lib` folder.
- `GXTag.tld` should be in `WEB-INF` folder.
- `tags` folder should be in `WEB-INF/classes` including a list of Java classes for each tag type.
- `WEB-INF/web.xml` should contain the following declaration that imports the tag library:

```
<taglib>
  <taglib-uri>com/sabratec/j2ee/framework/tags</taglib-uri>
  <taglib-location>/WEB-INF/GXTags.tld</taglib-location>
</taglib>
```

- Each JSP page should have the following prefix declaration for the tag library:

```
<%@ taglib uri="com/sabratec/j2ee/framework/tags" prefix="gx" %>
```

The classes in this package are abstract in order to allow the developer to extend them easily.

For this purpose, in each new ApplinX project for JSP there is a `tags` folder in `WEB-INF/classes`, which contains Java classes.

Each class in the `tags` folder inherits from an abstract tag class in the tag library.

Associating the tags to the tags' classes is done in `GXTags.tld`.

The `tags` project classes folder is associated to the `GXTags.tld` file (and not directly to the tag library classes) in order to have immediate affect when a developer changes the relevant tag (in the project's `tags` folder).

## com.sabratec.j2ee.framework.web.tags Class GXAbstractAnchorTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.taglib.GXAnchorTag
        |
        +-com.sabratec.j2ee.framework.web.tags.GXAbstractAnchorTag
  
```

### All Implemented Interfaces:

java.io.Serializable

**Deprecated.** *If your class contains any customization you should inherit from:*

*com.sabratec.j2ee.framework.web.taglib.GXAnchorTag otherwise you may delete this class. GXTags.tld was updated during the web application upgrade process (by the Framework Manager Wizard) to point directly to:*

*com.sabratec.j2ee.framework.web.taglib.GXAnchorTag NOTE: Upgrading the web application using any other method other than the Framework Manager doesn't guaranty complete upgrade*

```

public class GXAbstractAnchorTag
extends GXAnchorTag
  
```

## Constructor Summary

public	<a href="#">GXAbstractAnchorTag()</a> <b>Deprecated.</b>
--------	---

Methods inherited from class [com.sabratec.j2ee.framework.web.taglib.GXAnchorTag](#)

[setHref](#), [setOnClick](#), [setOnmouseout](#), [setOnmouseover](#), [setOnserverclick](#)

Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXAbstractAnchorTag

```
public GXAbstractAnchorTag()
```

**Deprecated.**

(continued from last page)



## com.sabratec.j2ee.framework.web.tags Class GXAbstractBodyTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.tags.GXAbstractBodyTag
  
```

### All Implemented Interfaces:

java.io.Serializable

**Deprecated.** *<gx:body> tag is not required any more in jsp pages*

```

public class GXAbstractBodyTag
extends GXAbstractTag
  
```

### Constructor Summary

public	<a href="#">GXAbstractBodyTag()</a> <b>Deprecated.</b>
--------	---

### Method Summary

String	<a href="#">getId()</a> <b>Deprecated.</b>
void	<a href="#">setOnload(String value)</a> <b>Deprecated.</b>

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

### Constructors

#### GXAbstractBodyTag

```
public GXAbstractBodyTag()
```

**Deprecated.**

(continued from last page)

## Methods

### **getId**

```
public String getId()
```

**Deprecated.**

Retrieves the ID of the current tag

---

### **setOnload**

```
public void setOnload(String value)
```

**Deprecated.**

Called by the JSP page for setting the onload attribute to the HTML tag.

**Parameters:**

value - The title attribute value

## com.sabratec.j2ee.framework.web.tags Class GXAbstractCheckBoxTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.taglib.GXCheckBoxTag
        |
        +-com.sabratec.j2ee.framework.web.tags.GXAbstractCheckBoxTag
  
```

### All Implemented Interfaces:

java.io.Serializable

**Deprecated.** *If your class contains any customization you should inherit from: [GXCheckBoxTag](#) otherwise you may delete this class. GXTags.tld was updated during the web application upgrade process (by the Framework Manager Wizard) to point directly to: [GXCheckBoxTag](#) NOTE: Upgrading the web application using any other method other than the Framework Manager doesn't guaranty complete upgrade*

```

public class GXAbstractCheckBoxTag
extends GXCheckBoxTag
  
```

## Constructor Summary

public	<a href="#">GXAbstractCheckBoxTag()</a> <b>Deprecated.</b>
--------	---

### Methods inherited from class [com.sabratec.j2ee.framework.web.taglib.GXCheckBoxTag](#)

[setChecked](#), [setCheckedValue](#), [setOnClick](#), [setUncheckedValue](#)

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXAbstractCheckBoxTag

```
public GXAbstractCheckBoxTag()
```

**Deprecated.**

## com.sabratec.j2ee.framework.web.tags

### Class GXAbstractFormTag

```

java.lang.Object
  |
  +- BodyTagSupport
     |
     +- com.sabratec.j2ee.framework.web.tags.GXAbstractTag
        |
        +- com.sabratec.j2ee.framework.web.taglib.GXFormTag
           |
           +- com.sabratec.j2ee.framework.web.tags.GXAbstractFormTag
  
```

#### All Implemented Interfaces:

java.io.Serializable

**Deprecated.** If your class contains any customization you should inherit from: [GXFormTag](#) otherwise you may delete this class.

*GXTags.tld* was updated during the web application upgrade process (by the Framework Manager Wizard) to point directly to: [GXFormTag](#) NOTE: Upgrading the web application using any other method other than the Framework Manager doesn't guaranty complete upgrade

```

public class GXAbstractFormTag
extends GXFormTag
  
```

## Constructor Summary

public	<a href="#">GXAbstractFormTag()</a> <b>Deprecated.</b>
--------	---

Methods inherited from class [com.sabratec.j2ee.framework.web.taglib.GXFormTag](#)

[getId](#), [setOnsubmit](#), [setSupportFileUpload](#)

Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXAbstractFormTag

```
public GXAbstractFormTag()
```

**Deprecated.**

## com.sabratec.j2ee.framework.web.tags Class GXAbstractGenericTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.tags.GXAbstractGenericTag
  
```

### All Implemented Interfaces:

java.io.Serializable

### Direct Known Subclasses:

[GXTextAreaTag](#), [GXTdTag](#), [GXSpanTag](#), [GXImageTag](#), [GXDivTag](#), [GXBoldTag](#)

```

public abstract class GXAbstractGenericTag
extends GXAbstractTag
  
```

A generic tag that represents all label tags such as: span, div, p, font, b etc. Each label tag should implement `GXAbstractTag.getTagName()`

and should be written in `WEB-INF/GXTags.tld` as a tag declaration.

The default behavior of the method `buildHtml` renders the tag name, attributes list, inner HTML, and a closing tag.

To dynamically set content to the tag, use: `getTagsAccesor().setTagContent("", "")`

To dynamically set an attribute to the tag, use: `getTagsAccesor().setTagAttribute("", "", "")`

## Constructor Summary

public	<a href="#">GXAbstractGenericTag()</a>
--------	--

## Method Summary

void	<a href="#">setDir</a> (String value)
------	---------------------------------------

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

## Constructors

### GXAbstractGenericTag

```
public GXAbstractGenericTag()
```

(continued from last page)

## Methods

### **setDir**

```
public void setDir(String value)
```

## com.sabratec.j2ee.framework.web.tags Class GXAbstractHtmlTableTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.taglib.GXTableTag
        |
        +-com.sabratec.j2ee.framework.web.tags.GXAbstractHtmlTableTag
  
```

### All Implemented Interfaces:

java.io.Serializable

**Deprecated.** *If your class contains any customization you should inherit from: [GXTableTag](#) otherwise you may delete this class. GXTags.tld was updated during the web application upgrade process (by the Framework Manager Wizard) to point directly to: [GXTableTag](#) NOTE: Upgrading the web application using any other method other than the Framework Manager doesn't guaranty complete upgrade*

```

public class GXAbstractHtmlTableTag
extends GXTableTag
  
```

## Constructor Summary

public	<a href="#">GXAbstractHtmlTableTag()</a> <b>Deprecated.</b>
--------	--

### Methods inherited from class [com.sabratec.j2ee.framework.web.taglib.GXTableTag](#)

[setBorder](#), [setCellpadding](#), [setCellspacing](#)

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXAbstractHtmlTableTag

```
public GXAbstractHtmlTableTag()
```

**Deprecated.**

## com.sabratec.j2ee.framework.web.tags Class GXAbstractHtmlTag

```

java.lang.Object
  |
  +- BodyTagSupport
      |
      +- com.sabratec.j2ee.framework.web.tags.GXAbstractTag
          |
          +- com.sabratec.j2ee.framework.web.taglib.GXHtmlTag
              |
              +- com.sabratec.j2ee.framework.web.tags.GXAbstractHtmlTag
  
```

### All Implemented Interfaces:

java.io.Serializable

**Deprecated.** *If your class contains any customization you should inherit from: [GXHtmlTag](#) otherwise you may delete this class.*

*GXTags.tld was updated during the web application upgrade process (by the Framework Manager Wizard) to point directly to:*

[GXHtmlTag](#) *NOTE: Upgrading the web application using any other method other than the Framework Manager doesn't guaranty complete upgrade*

```

public class GXAbstractHtmlTag
extends GXHtmlTag
  
```

### Fields inherited from class [com.sabratec.j2ee.framework.web.taglib.GXHtmlTag](#)

[HTML\\_TAG\\_ID](#)

## Constructor Summary

public	<a href="#">GXAbstractHtmlTag()</a> <b>Deprecated.</b>
--------	---

### Methods inherited from class [com.sabratec.j2ee.framework.web.taglib.GXHtmlTag](#)

[doEndTag](#), [doStartTag](#), [getId](#), [setGx\\_context](#), [setPageContext](#)

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors



(continued from last page)

## **GXAbstractHtmlTag**

```
public GXAbstractHtmlTag()
```

**Deprecated.**

## com.sabratec.j2ee.framework.web.tags Class GXAbstractInputTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.taglib.GXInputTag
        |
        +-com.sabratec.j2ee.framework.web.tags.GXAbstractInputTag
  
```

### All Implemented Interfaces:

java.io.Serializable

**Deprecated.** *If your class contains any customization you should inherit from: [GXInputTag](#) otherwise you may delete this class. GXTags.tld was updated during the web application upgrade process (by the Framework Manager Wizard) to point directly to: [GXInputTag](#) NOTE: Upgrading the web application using any other method other than the Framework Manager doesn't guaranty complete upgrade*

```

public class GXAbstractInputTag
extends GXInputTag
  
```

## Constructor Summary

public	<a href="#">GXAbstractInputTag()</a> <b>Deprecated.</b>
--------	--

### Methods inherited from class [com.sabratec.j2ee.framework.web.taglib.GXInputTag](#)

[setChecked](#), [setDir](#), [setMaxLength](#), [setOnchange](#), [setOnClick](#), [setOnkeydown](#), [setOnkeypress](#), [setOnkeyup](#), [setOnserverclick](#), [setSize](#), [setSrc](#), [setTabIndex](#), [setType](#), [setValue](#)

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXAbstractInputTag

```
public GXAbstractInputTag()
```

**Deprecated.**

(continued from last page)

## com.sabratec.j2ee.framework.web.tags Class GXAbstractRadioButton

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.taglib.GXRadioButtonTag
        |
        +-com.sabratec.j2ee.framework.web.tags.GXAbstractRadioButton
  
```

### All Implemented Interfaces:

java.io.Serializable

**Deprecated.** *If your class contains any customization you should inherit from: [GXRadioButtonTag](#) otherwise you may delete this class. GXTags.tld was updated during the web application upgrade process (by the Framework Manager Wizard) to point directly to: [GXRadioButtonTag](#) NOTE: Upgrading the web application using any other method other than the Framework Manager doesn't guaranty complete upgrade*

```

public class GXAbstractRadioButton
extends GXRadioButtonTag
  
```

## Constructor Summary

public	<a href="#">GXAbstractRadioButton()</a> <b>Deprecated.</b>
--------	---

### Methods inherited from class [com.sabratec.j2ee.framework.web.taglib.GXRadioButtonTag](#)

[setChecked](#), [setOnClick](#), [setValue](#)

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXAbstractRadioButton

```
public GXAbstractRadioButton()
```

**Deprecated.**

## com.sabratec.j2ee.framework.web.tags Class GXAbstractRadioButtonList

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.taglib.GXRadioButtonListTag
        |
        +-com.sabratec.j2ee.framework.web.tags.GXAbstractRadioButtonList
  
```

### All Implemented Interfaces:

java.io.Serializable

**Deprecated.** *If your class contains any customization you should inherit from: [GXRadioButtonListTag](#) otherwise you may delete this class. GXTags.tld was updated during the web application upgrade process (by the Framework Manager Wizard) to point directly to: [GXRadioButtonListTag](#) NOTE: Upgrading the web application using any other method other than the Framework Manager doesn't guaranty complete upgrade*

```

public class GXAbstractRadioButtonList
extends GXRadioButtonListTag
  
```

## Constructor Summary

public	<a href="#">GXAbstractRadioButtonList()</a> <b>Deprecated.</b>
--------	---

### Methods inherited from class [com.sabratec.j2ee.framework.web.taglib.GXRadioButtonListTag](#)

[getDir](#), [getHorizontal](#), [setBorder](#), [setCellpadding](#), [setCellspacing](#), [setDir](#), [setHorizontal](#)

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXAbstractRadioButtonList

```

public GXAbstractRadioButtonList()
  
```

**Deprecated.**

(continued from last page)

## com.sabratec.j2ee.framework.web.tags Class GXAbstractSelectTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.taglib.GXSelectTag
        |
        +-com.sabratec.j2ee.framework.web.tags.GXAbstractSelectTag
  
```

### All Implemented Interfaces:

java.io.Serializable

**Deprecated.** *If your class contains any customization you should inherit from: [GXSelectTag](#) otherwise you may delete this class. GXTags.tld was updated during the web application upgrade process (by the Framework Manager Wizard) to point directly to: [GXSelectTag](#) NOTE: Upgrading the web application using any other method other than the Framework Manager doesn't guaranty complete upgrade*

```

public class GXAbstractSelectTag
extends GXSelectTag
  
```

## Constructor Summary

public	<a href="#">GXAbstractSelectTag()</a> <b>Deprecated.</b>
--------	---

### Methods inherited from class [com.sabratec.j2ee.framework.web.taglib.GXSelectTag](#)

[setDir](#), [setMultiple](#), [setOnchange](#), [setOnClick](#), [setSize](#)

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXAbstractSelectTag

```
public GXAbstractSelectTag()
```

**Deprecated.**

## com.sabratec.j2ee.framework.web.tags Class GXAbstractTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
  
```

### All Implemented Interfaces:

java.io.Serializable

### Direct Known Subclasses:

[GXJspIncludeTag](#), [GXFeatureDetectTag](#), [GXContextReleaseTag](#), [GXContextInitiatorTag](#), [GXAbstractGenericTag](#), [GXAbstractBodyTag](#), [GXTableTag](#), [GXSelectTag](#), [GXRadioButtonTag](#), [GXRadioButtonListTag](#), [GXInputTag](#), [GXHtmlTag](#), [GXFormTag](#), [GXCheckBoxTag](#), [GXAnchorTag](#)

```

public abstract class GXAbstractTag
extends BodyTagSupport
implements java.io.Serializable
  
```

This class is the abstract class for all the gx tags. It provides common functionality for all the inheriting classes such as:

- [getId\(\)](#)
- [getAttribute\(String\)](#)
- [getAttributes\(\)](#)

Each class that inherits from this class should implement two methods:

[getTagName\(\)](#) - to specify the tag name

[buildHtmlTag\(StringBuffer\)](#) - for building the HTML string of the specific tag

All the inheriting classes are initialized automatically by the JSP page, according to a specified tag in the JSP page.

For example: `<gx:TAG-NAME ...attributes...>...</gx:TAG-NAME>` and should not be initialized by the user.

The attributes are translated into set method in this class or the relevant inherited class.

A Set method is specified per each tag attribute and for common HTML attributes: `setCssClass`, `setStyle`, etc.

## Constructor Summary

public	<a href="#">GXAbstractTag()</a>
--------	---------------------------------

## Method Summary

int	<a href="#">doAfterBody()</a> Method is invoked after every body evaluation to control whether the body will be reevaluated or not.
int	<a href="#">doEndTag()</a> Triggers the tag build process.
int	<a href="#">doStartTag()</a> Overrides the tag library class <code>BodyTagSupport</code> and performs validation and further initialization.
String	<a href="#">getId()</a> Retrieves the ID of the current tag
String	<a href="#">getInnerHTML()</a> Used for retrieving the Inner HTML tag.



GXIWebPageContext	<a href="#">getMainContext()</a> Used for getting the main context class for the current tag.
String	<a href="#">getName()</a>
void	<a href="#">setAlign(String value)</a> Called by the JSP page for setting the align attribute to the tag output html.
void	<a href="#">setAttributes(String value)</a> Used for writing free text of attributes.
void	<a href="#">setBgcolor(String value)</a>
void	<a href="#">setCssClass(String cssClass)</a> Called by the JSP page for setting the css class of the gx tag.
void	<a href="#">setHeight(String value)</a> Called by the JSP page for setting the height attribute to the tag output html.
void	<a href="#">setId(String id)</a> Sets an ID identifier to the current tag.
void	<a href="#">setOnClick(String value)</a> Called by the JSP page for setting the onclick attribute to the tag output html.
void	<a href="#">setPageContext(PageContext pageContext)</a> Overrides the BodyTagSupport class, and is used for initializing the current tag.
void	<a href="#">setStyle(String value)</a> Called by the JSP page for setting the style attribute to the tag output html.
void	<a href="#">setTitle(String value)</a> Called by the JSP page for setting the title attribute to the tag output html.
void	<a href="#">setVisible(String value)</a> Uses for show/hide the tag.
void	<a href="#">setWidth(String value)</a> Called by the JSP page for setting the width attribute to the tag output html.

#### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Constructors

### GXAbstractTag

```
public GXAbstractTag()
```

## Methods

(continued from last page)

---

## getInnerHTML

```
public String getInnerHTML()
```

Used for retrieving the Inner HTML tag.  
For example: `<gx:span>some text</gx:span>`

**Returns:**

The tag inner HTML

---

## setId

```
public void setId(String id)
```

Sets an ID identifier to the current tag.  
The `set` method is called automatically by the JSP page when setting the ID attribute to a gx tag.  
The ID can be used to update content for the tag using [GXITagsAccesor.setTagContent\(String, String\)](#).

---

## getId

```
public String getId()
```

Retrieves the ID of the current tag

---

## getName

```
public String getName()
```

---

## setCssClass

```
public void setCssClass(String cssClass)
```

Called by the JSP page for setting the css class of the gx tag.  
Translated into the HTML "class" attribute.

**Parameters:**

`cssClass` - The css class name

---

## setPageContext

```
public void setPageContext(PageContext pageContext)
```

Overrides the `BodyTagSupport` class, and is used for initializing the current tag.

**Parameters:**

`pageContext` - The JSP page context

---

## doStartTag

```
public int doStartTag()  
throws JspException
```

Overrides the tag library class `BodyTagSupport` and performs validation and further initialization.

**See Also:**

`doStartTag()`

---

---

## getMainContext

```
public GXIWebPageContext getMainContext()
```

Used for getting the main context class for the current tag.

**Returns:**

The main context class for the current tag.

---

## doEndTag

```
public int doEndTag()  
    throws JspTagException
```

Triggers the tag build process. If the tag was set to not visible [GXITagsAccesor.setTagVisible\(String, boolean\)](#), the tag will not be rendered.

This method calls the abstract method `buildHtmlTag(StringBuffer)` in order for each inheriting class to build its HTML content.

---

## doAfterBody

```
public int doAfterBody()  
    throws JspTagException
```

Method is invoked after every body evaluation to control whether the body will be reevaluated or not.

**Returns:**

SKIP\_BODY

---

## setAttributes

```
public void setAttributes(String value)
```

Used for writing free text of attributes.

**Syntax:**

```
<gx:tag attributes="onmouseover='showImage()'; onmouseout='hideImage()';" ...>
```

**Parameters:**

value - The free text that specifies the attributes

---

## setVisible

```
public void setVisible(String value)
```

Uses for show/hide the tag. This method is called automatically by the JSP page, when placing a visible attribute to a tag.

Typical Usage: `<gx:tag visible="false">...`

false vaue is causing the tag not to be rendered

**Parameters:**

value - true/false if the tag should be visible.

**See Also:**

[GXITagsAccesor.setTagVisible\(String, boolean\)](#)

---

## setStyle

```
public void setStyle(String value)
```

Called by the JSP page for setting the style attribute to the tag output html.

---

---

(continued from last page)

**Parameters:**

value - The style attributes value

---

**setTitle**

```
public void setTitle(String value)
```

Called by the JSP page for setting the title attribute to the tag output html.

**Parameters:**

value - The title attribute value

---

**setOnClick**

```
public void setOnClick(String value)
```

Called by the JSP page for setting the onclick attribute to the tag output html.

**Parameters:**

value - The onclick attribute value

---

**setAlign**

```
public void setAlign(String value)
```

Called by the JSP page for setting the align attribute to the tag output html.

**Parameters:**

value - The align attribute value

---

**setWidth**

```
public void setWidth(String value)
```

Called by the JSP page for setting the width attribute to the tag output html.

**Parameters:**

value - The width attribute value

---

**setHeight**

```
public void setHeight(String value)
```

Called by the JSP page for setting the height attribute to the tag output html.

**Parameters:**

value - The height attribute value

---

**setBgcolor**

```
public void setBgcolor(String value)
```

---

## com.sabratec.j2ee.framework.web.tags Class GXContextInitiatorTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.tags.GXContextInitiatorTag
  
```

### All Implemented Interfaces:

java.io.Serializable

```

public class GXContextInitiatorTag
extends GXAbstractTag
  
```

This class is an alternative to the opening tag <gx:html> : [GXAbstractHtmlTag](#). It is required when the Web server doesn't support placing JSP Include files under a server tag.

#### Syntax:

```

<gx:init gx_context="<CONTEXT CLASS"/>
...
<gx:form>
...
</gx:form>
...
<gx:release/>
  
```

## Constructor Summary

public	<a href="#">GXContextInitiatorTag()</a>
--------	---

## Method Summary

int	<a href="#">doStartTag()</a>
void	<a href="#">setGx_context</a> (String gx_contextName)

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXContextInitiatorTag

```
public GXContextInitiatorTag()
```

---

(continued from last page)

## Methods

### **doStartTag**

```
public final int doStartTag()  
    throws JspException
```

Overrides the tag library class `BodyTagSupport` and performs validation and further initialization.

---

### **setGx\_context**

```
public void setGx_context(String gx_contextName)  
    throws ClassNotFoundException,  
        IllegalAccessException,  
        InstantiationException
```

## com.sabratec.j2ee.framework.web.tags

### Class GXContextReleaseTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.tags.GXContextReleaseTag
  
```

#### All Implemented Interfaces:

java.io.Serializable

```

public class GXContextReleaseTag
extends GXAbstractTag
  
```

This class is an alternative to the closing tag `</gx:html>` : [GXAbstractHtmlTag](#). It is required when the web server doesn't support placing JSP Include files under a server tag.

#### Syntax:

```

<gx:init gx_context="<CONTEXT CLASS"/>
...
<gx:form>
...
</gx:form>
...
<gx:release/>
  
```

## Constructor Summary

public	<a href="#">GXContextReleaseTag()</a>
--------	---------------------------------------

## Method Summary

int	<a href="#">doEndTag()</a> Method called at the end of tag.
-----	--

#### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

#### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXContextReleaseTag

```
public GXContextReleaseTag()
```

## Methods

### **doEndTag**

```
public final int doEndTag()  
    throws JspTagException
```

Method called at the end of tag.

**Returns:**

EVAL\_PAGE



## com.sabratec.j2ee.framework.web.tags Class GXFeatureDetectTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.tags.GXFeatureDetectTag
  
```

### All Implemented Interfaces:

java.io.Serializable

```

public class GXFeatureDetectTag
extends GXAbstractTag
  
```

## Constructor Summary

public	<a href="#">GXFeatureDetectTag()</a>
--------	--------------------------------------

## Method Summary

String	<a href="#">getAttributeName()</a>
void	<a href="#">setAttributeName(String m_name)</a>

### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

### Methods inherited from class java.lang.Object

[equals](#), [getClass](#), [hashCode](#), [notify](#), [notifyAll](#), [toString](#), [wait](#), [wait](#), [wait](#)

## Constructors

### GXFeatureDetectTag

```
public GXFeatureDetectTag()
```

## Methods

### getAttributeName

```
public String getAttributeName()
```

(continued from last page)

---

## **setAttributeName**

```
public void setAttributeName(String m_name)
```

## com.sabratec.j2ee.framework.web.tags Interface GXITagsAccesor

All Known Implementing Classes:

[GXTagsAccesorImpl](#)

public interface **GXITagsAccesor**

This class which can be accessed from the context classes as `getTagsAccesor()`, provides various methods for updating the various gx tags.

It serves both simple tags using `setTagContent`, `setTagAttribute`, or complex tags such as combobox, radio buttons and table.

### Method Summary

abstract void	<a href="#">AddHiddenFieldToForm</a> (String name, String value) Dynamically adds an input hidden field to the JSP page.
abstract void	<a href="#">AddHtmlTextToForm</a> (String htmlText) Adds an HTML text to the JSP page.
abstract void	<a href="#">AddJSToForm</a> (String jsString) Adds a JavaScript code to the JSP page.
abstract void	<a href="#">addTableKeyColumn</a> (String tagId, String keyCol) This method is used for setting the key column(s) of a gx table tag.
abstract String	<a href="#">getFileName</a> (String tagId) Retrieves a file name of an uploaded file according to the tag ID ( <code>&lt;gx:input type="file" id="...&gt;</code> ).
abstract java.io.InputStream	<a href="#">getInputStream</a> (String tagId) Retrieves an Input Stream for an uploaded file according to the tag ID ( <code>&lt;gx:input type="file" id="...&gt;</code> ).
abstract String	<a href="#">getTableId</a> () Used for retrieving the table tag ID in the current page
abstract String	<a href="#">getTableSelectedKey</a> (String tagId) Returns the value of the selected key, as specified in <a href="#">addTableKeyColumn(String, String)</a> . If key columns were not added, the row index is returned.
abstract String[]	<a href="#">getTableSelectedKeys</a> (String tagId) Returns the values of the selected keys, as specified in <a href="#">addTableKeyColumn(String, String)</a> .
abstract String	<a href="#">getTagAttribute</a> (String tagId, String attributeName) Returns the content of an attribute of a specific tag per tag id and the attribute name
abstract String	<a href="#">getTagContent</a> (String tagId) Retrieves the tag content from the Request scope.
abstract void	<a href="#">setBodyAttribute</a> (String attrName, String content) <b>Deprecated.</b> Use <code>addJSToForm(String jsString)</code> - <code>&lt;script&gt;document.body.&lt;ATTR_NAME&gt; = &lt;ATTR_VALUE&gt;;&lt;/script&gt;</code> instead
abstract void	<a href="#">setFormAttribute</a> (String attrName, String content) Sets a dynamic attribute to <code>&lt;gx:form&gt;</code> tag.

abstract void	<a href="#">setPageVisible</a> (boolean visible) When set to false, the page will not be rendered.
abstract void	<a href="#">setTagAttribute</a> (String tagId, String attrName, String content) Sets a dynamic attribute to the specified tag ID.
abstract void	<a href="#">setTagContent</a> (String tagId, String content) Sets content to a gx tag with the specified tag ID.
abstract void	<a href="#">setTagList</a> (String tagId, GXINameValueCollection list) This method provides a text-value collection to either a radio button list (<gx:radioButtonList>) or to a combo box element (<gx:select>).
abstract void	<a href="#">setTagList</a> (String tagId, Hashtable list) <b>Deprecated.</b> Use <i>setTagList(String tagId, com.sabratec.applinx.framework.GXINameValueCollection)</i> instead
abstract void	<a href="#">setTagTable</a> (String tagId, <a href="#">GXITable</a> table)
abstract void	<a href="#">setTagTable</a> (String tagId, <a href="#">GXITable</a> table, <a href="#">com.sabratec.j2ee.framework.web.tables.GXITableBuildConfig</a> config, <a href="#">GXITableEvents</a> events)
abstract void	<a href="#">setTagTable</a> (String tagId, <a href="#">GXITable</a> table, <a href="#">GXITableBuildConfig</a> config)
abstract void	<a href="#">setTagTable</a> (String tagId, <a href="#">GXITable</a> table, <a href="#">GXITableBuildConfig</a> config, <a href="#">GXITableEvents</a> events) This method is used for filling a <gx:table> tag with the data from the data table <a href="#">GXITable</a> .
abstract void	<a href="#">setTagVisible</a> (String tagId, boolean visible) When set to false, the specified tag ID will not be rendered.

## Methods

### setTagContent

```
public abstract void setTagContent(String tagId,
    String content)
```

Sets content to a gx tag with the specified tag ID. The content is set to the relevant tag according to the tag type:

- <gx:input> - the content is set in the value attribute.
- <gx:span> (or any other label tag) - the content is set as the inner HTML.
- <gx:select> - the content is set by the option whose value is equal to the specified content.
- <gx:radioButtonList> - the content is set by the radio button whose value is equal to the specified content.
- <gx:checkbox> - the check box is checked if the content equals the checked value.

#### Parameters:

tagId - The ID of the gx tag

content - The dynamic content to set to the gx tag

### getTagContent

```
public abstract String getTagContent(String tagId)
```

(continued from last page)

Retrieves the tag content from the Request scope. If `setTagContent` for the specified tag ID was already set it will be returned, otherwise the form/queryString value will be returned.

**Parameters:**

tagId - the content of the specified tag ID

**Returns:**

the tag's content/value

---

## setTagVisible

```
public abstract void setTagVisible(String tagId,  
    boolean visible)
```

When set to false, the specified tag ID will not be rendered.

**Parameters:**

tagId - The tag ID to hide

visible - true/false to determine whether to hide/show a tag

---

## setPageVisible

```
public abstract void setPageVisible(boolean visible)
```

When set to false, the page will not be rendered.

**Parameters:**

visible - true/false to determine whether to hide/show the page

---

## setTagAttribute

```
public abstract void setTagAttribute(String tagId,  
    String attrName,  
    String content)
```

Sets a dynamic attribute to the specified tag ID. When such a static attribute exists in gx tag in the JSP page, it will be overridden.

**Parameters:**

tagId - the tag ID

attrName - the name of the attribute to set

content - the content for the attribute

---

## setTagList

```
public abstract void setTagList(String tagId,  
    Hashtable list)
```

**Deprecated.** Use `setTagList(String tagId, com.sabratec.applinx.framework.GXINameValueCollection)` instead

---

## setTagList

```
public abstract void setTagList(String tagId,  
    GXINameValueCollection list)
```

This method provides a text-value collection to either a radio button list (`<gx:radioButtonList>`) or to a combo box element (`<gx:select>`). To use this method, initialize a name-value collection and add text-value pairs to it.

(continued from last page)

**Parameters:**

tagId - the tag ID of the radio button list/combo box which the dynamic list should be provided  
list - the list of text-value items

---

**setTagTable**

```
public abstract void setTagTable(String tagId,  
    GXITable table)
```

**See Also:**

[setTagTable\(String, GXITable, GXITableBuildConfig, GXITableEvents\)](#)

---

**setTagTable**

```
public abstract void setTagTable(String tagId,  
    GXITable table,  
    GXITableBuildConfig config)
```

**See Also:**

[setTagTable\(String, GXITable, GXITableBuildConfig, GXITableEvents\)](#)

---

**setTagTable**

```
public abstract void setTagTable(String tagId,  
    GXITable table,  
    com.sabratec.j2ee.framework.web.tables.GXITableBuildConfig config,  
    GXITableEvents events)
```

**setTagTable**

```
public abstract void setTagTable(String tagId,  
    GXITable table,  
    GXITableBuildConfig config,  
    GXITableEvents events)
```

This method is used for filling a <gx:table> tag with the data from the data table [GXITable](#).

**Parameters:**

tagId - The ID of <gx:table>  
table - The data table  
config - a configuration class with common options of how to build the table HTML  
events - a table events class which receives events on every new element creation (row,cell and a tag with a cell).

**See Also:**

[GXITableBuildConfig](#)  
[GXITableEvents](#)  
[GXAbstractHtmlTableTag](#)  
[GXIClientBaseObject.getTable\(\)](#)

---

**addTableKeyColumn**

```
public abstract void addTableKeyColumn(String tagId,  
    String keyCol)
```

(continued from last page)

This method is used for setting the key column(s) of a gx table tag. Setting a key column is needed when you are interested to know the key column value when a row is selected. For example, if you have collected a multiple screens table with an item number column, and you would like to show details of an item (according to the item number) when clicking on a button in this row.

If you will use `addTableKeyColumn("TABLE TAG ID","ItemNumber")` before the table is displayed, when you will select a row and post back to the context class, you will be able to retrieve the selected item number using [getTableSelectedKey\(String\)](#) and use it in order to find and drill down to the relevant row.

**Parameters:**

tagId - The table tag ID

keyCol - The key column name in [GXITable.getColumns\(\)](#)

---

## getTableNames

```
public abstract String getTableNames()
```

Used for retrieving the table tag ID in the current page

**Returns:**

The last built table name

---

## getTableSelectedKey

```
public abstract String getTableSelectedKey(String tagId)
```

Returns the value of the selected key, as specified in [addTableKeyColumn\(String, String\)](#). If key columns were not added, the row index is returned.

**Parameters:**

tagId - The table tag ID

**Returns:**

The key column value

---

## getTableSelectedKeys

```
public abstract String[] getTableSelectedKeys(String tagId)
```

Returns the values of the selected keys, as specified in [addTableKeyColumn\(String, String\)](#). Use this method when you specify more than one key column in the method `addTableKeyColumn`. If key columns were not added, the row index is returned.

**Parameters:**

tagId - The table tag ID

**Returns:**

A String array of the key columns values

---

## AddHiddenFieldToForm

```
public abstract void AddHiddenFieldToForm(String name,  
String value)
```

Dynamically adds an input hidden field to the JSP page.

**Parameters:**

name - The name of the hidden field

value - The value of the hidden field

(continued from last page)

---

## AddJSForm

```
public abstract void AddJSForm(String jsString)
```

Adds a JavaScript code to the JSP page. The script should be wrapped with `<script>...</script>` tag.

**Parameters:**

jsString - The JavaScript command(s)

---

## AddHtmlTextToForm

```
public abstract void AddHtmlTextToForm(String htmlText)
```

Adds an HTML text to the JSP page.

**Parameters:**

htmltext - the html text to add

---

## setBodyAttribute

```
public abstract void setBodyAttribute(String attrName,  
String content)
```

**Deprecated.** Use `addJSForm(String jsString)` - `<script>document.body.<ATTR_NAME> = <ATTR_VALUE>;</script>` instead

---

## setFormAttribute

```
public abstract void setFormAttribute(String attrName,  
String content)
```

Sets a dynamic attribute to `<gx:form>` tag.

**Parameters:**

attrName - The name of the attribute  
content - The content of the attribute

---

## getInputStream

```
public abstract java.io.InputStream getInputStream(String tagId)  
throws java.io.IOException
```

Retrieves an Input Stream for an uploaded file according to the tag ID (`<gx:input type="file" id="...>`).

**Parameters:**

tagId - the input file tag ID

**Returns:**

Input Stream of the uploaded file

---

## getFileName

```
public abstract String getFileName(String tagId)  
throws java.io.IOException
```



(continued from last page)

Retrieves a file name of an uploaded file according to the tag ID (<gx:input type="file" id="...>).

**Parameters:**

tagId - The input file tag ID

**Returns:**

The file name

---

## getTagAttribute

```
public abstract String getTagAttribute(String tagId,  
    String attributeName)
```

Returns the content of an attribute of a specific tag per tag id and the attribute name

**Parameters:**

tagId - the tag ID

attributeName - the attribute name

**Returns:**

the content of an attribute of a specific tag per tag id and the attribute name

## com.sabratec.j2ee.framework.web.tags

### Class GXJspIncludeTag

```

java.lang.Object
  |
  +-BodyTagSupport
    |
    +-com.sabratec.j2ee.framework.web.tags.GXAbstractTag
      |
      +-com.sabratec.j2ee.framework.web.tags.GXJspIncludeTag
  
```

#### All Implemented Interfaces:

java.io.Serializable

```

public class GXJspIncludeTag
extends GXAbstractTag
  
```

This class is the root of a JSP Include file and the tag that initializes and activates the JSP Include context class.

#### Syntax:

```

<gx:include gx_context="<CONTEXT CLASS>">
...
<img src=...
...
</gx:include>
  
```

This class throws the following events in the context class:

- gx\_onLoad - informs about the Load event of the Include file - gx\_onLoad()
- gx\_preRender - informs before the HTML of the Include file is rendered - gx\_preRender()
- gx\_onUnload - informs of the Unload event (for cleanup) - gx\_onUnload()
- gx\_onError - Used for error handling - gx\_onError(RuntimeException)()

## Constructor Summary

public	<a href="#">GXJspIncludeTag()</a>
--------	-----------------------------------

## Method Summary

int	<a href="#">doEndTag()</a> Method called at the end of the tag.
int	<a href="#">doStartTag()</a> Method called at the beginning of the tag.
void	<a href="#">setGx_context</a> (String gx_contextName)
void	<a href="#">setPageContext</a> (PageContext pageContext)

#### Methods inherited from class [com.sabratec.j2ee.framework.web.tags.GXAbstractTag](#)

[doAfterBody](#), [doEndTag](#), [doStartTag](#), [getId](#), [getInnerHTML](#), [getMainContext](#), [getName](#), [setAlign](#), [setAttributes](#), [setBgcolor](#), [setCssClass](#), [setHeight](#), [setId](#), [setOnClick](#), [setPageContext](#), [setStyle](#), [setTitle](#), [setVisible](#), [setWidth](#)

#### Methods inherited from class [java.lang.Object](#)

```
equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait
```

## Constructors

### **GXJspIncludeTag**

```
public GXJspIncludeTag()
```

## Methods

### **setPageContext**

```
public void setPageContext(PageContext pageContext)
```

Overrides the `BodyTagSupport` class, and is used for initializing the current tag.

### **doStartTag**

```
public final int doStartTag()  
    throws JspException
```

Method called at the beginning of the tag.

**Returns:**

`EVAL_BODY_TAG`

### **doEndTag**

```
public final int doEndTag()  
    throws JspTagException
```

Method called at the end of the tag.

**Returns:**

`EVAL_PAGE`

### **setGx\_context**

```
public void setGx_context(String gx_contextName)  
    throws ClassNotFoundException,  
        IllegalAccessException,  
        InstantiationException
```

## com.sabratec.j2ee.framework.web.tags Class GXTagFunctions

java.lang.Object

└-com.sabratec.j2ee.framework.web.tags.GXTagFunctions

public class **GXTagFunctions**  
extends Object

Internal Util class for common tasks of the package.

### Constructor Summary

public	<a href="#">GXTagFunctions()</a>
--------	----------------------------------

### Method Summary

static void	<a href="#">addAttributesToTag</a> ( <a href="#">GXITag</a> tag, Hashtable attributes)
static String	<a href="#">hashtableToNameValueString</a> (Hashtable attributes)
static void	<a href="#">renderAndRecycle</a> ( <a href="#">GXITag</a> tag, StringBuffer result)
static void	<a href="#">writeComplexRadio</a> (StringBuffer html, GXIWebContext gx_context, String tagId, String isHorizontal, String dir, String innerHTML, String val, String isChecked, Hashtable attributes)
static void	<a href="#">writeRadio</a> (StringBuffer html, String tagId, GXIWebContext gx_context, String radioVal, String isChecked, Hashtable attributes)

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Constructors

#### **GXTagFunctions**

public **GXTagFunctions**()

### Methods

(continued from last page)

---

## writeComplexRadio

```
public static void writeComplexRadio(StringBuffer html,
    GXIWebContext gx_context,
    String tagId,
    String isHorizontal,
    String dir,
    String innerHTML,
    String val,
    String isChecked,
    Hashtable attributes)
```

---

## writeRadio

```
public static void writeRadio(StringBuffer html,
    String tagId,
    GXIWebContext gx_context,
    String radioVal,
    String isChecked,
    Hashtable attributes)
```

---

## hashtableToNameValueString

```
public static String hashtableToNameValueString(Hashtable attributes)
```

---

## addAttributesToTag

```
public static void addAttributesToTag(GXITag tag,
    Hashtable attributes)
```

---

## renderAndRecycle

```
public static void renderAndRecycle(GXITag tag,
    StringBuffer result)
```

---

Package

**com.sabratec.util**

## com.sabratec.util Class GXPosition

java.lang.Object

└-com.sabratec.util.GXPosition

### All Implemented Interfaces:

Cloneable, java.io.Serializable

```
public class GXPosition
extends Object
implements java.io.Serializable, Cloneable
```

This class represents a position on the host screen. Each position is described by its coordinates (row and column).

This class is immutable.

### Field Summary

public static	<a href="#">DEFAULT</a>
---------------	-------------------------

### Constructor Summary

public	<a href="#">GXPosition()</a> Ctor for dotNet Xstream.Serializable
public	<a href="#">GXPosition(int row, int column)</a> Creates a new position.

### Method Summary

Object	<a href="#">clone()</a>
int	<a href="#">compareTo(Object otherPosition)</a> Position A is considered to be greater than position B if it is either in a greater row, or in the same row and with a greater column.
boolean	<a href="#">equals(Object otherPosition)</a> Tests if this position is equal to the given position. Two positions are considered equal if they are in the same row and column.
int	<a href="#">getColumn()</a> Returns the column value set for this position.
int	<a href="#">getRow()</a> Returns the row value set for this position
int	<a href="#">hashCode()</a>
String	<a href="#">toString()</a>

### Methods inherited from class java.lang.Object

---

```
equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait
```

---

## Fields

### DEFAULT

```
public static com.sabratec.util.GXPosition DEFAULT
```

## Constructors

### GXPosition

```
public GXPosition()
```

Ctor for dotNet Xstream.Serializable

### GXPosition

```
public GXPosition(int row,  
                  int column)
```

Creates a new position.

**Parameters:**

row - the row of the position.

column - the column of the position

## Methods

### getRow

```
public int getRow()
```

Returns the row value set for this position

**Returns:**

the row value set for this position

### getColumn

```
public int getColumn()
```

Returns the column value set for this position.

**Returns:**

the column value set for this position

### equals

```
public boolean equals(Object otherPosition)
```

Tests if this position is equal to the given position.

Two positions are considered equal if they are in the same row and column.



---

(continued from last page)

**Parameters:**

`otherPosition` - another position object

**Returns:**

Tests if this position is equal to the given position

---

**compareTo**

```
public int compareTo(Object otherPosition)
```

Position A is considered to be greater than position B if it is either in a greater row, or in the same row and with a greater column.

**Returns:**

-1 if this position is smaller than the given position

1 if this position is greater than the given position  
and 0 if the positions are equal

---

**toString**

```
public String toString()
```

---

**hashCode**

```
public int hashCode()
```

---

**clone**

```
public Object clone()
```

---

---

# Package

# com.sabratec.util.ftp

This package supplies an API for the ApplinX FTP mechanism.

It can be used instead of using the FTP dialog screens.

The main class in the package is GXFtpManager.

This is a singleton class and it can be accessed only via the `instance()` method.

Another important class is GXFtpRequest,

which is a data structure that contains all the relevant information for the FTP transmission.

**Below are two code examples of uploading and downloading files:**

**Code sample for uploading a file to a Mainframe host:**

```
GXFtpRequest uploadReq = new GXFtpRequest();
uploadReq.setUser(user);
uploadReq.setPassword(pass);
uploadReq.setServer(host ip address);
uploadReq.setRemoteFile(remote file using full path);
uploadReq.setValue(GXMFCCommands.COMD_MF_DATA_TYPE, GXMFCCommands.COMD_VAL_MF_DATA_TYPE_BIN)
try {
uploadReq.readFileToUpload(local file using full path);
GXFtpManager.instance().putFile(uploadReq);
} catch (GXGeneralException e) {
e.printStackTrace();
}
```

**Code sample for downloading a file from a Mainframe host:**

```
GXFtpRequest downloadReq = new GXFtpRequest();
downloadReq.setUser(user);
downloadReq.setPassword(pass);
downloadReq.setServer(host ip address);
downloadReq.setRemoteFile(remote file using full path);
downloadReq.setValue(GXMFCCommands.COMD_MF_DATA_TYPE, GXMFCCommands.COMD_VAL_MF_DATA_TYPE_BIN);
try {
GXFtpResponse resp = GXFtpManager.instance().getFile(downloadReq);
resp.writeFileToDisk(local file using full path);
} catch (GXFtpException e) {
e.getMessage();
}
```

## com.sabratec.util.ftp Class GXFtpConsts

java.lang.Object

└-com.sabratec.util.ftp.GXFtpConsts

public class **GXFtpConsts**  
extends Object

### Field Summary

public static final	<a href="#">ADDITIONAL</a> Value: <b>ADDITIONAL</b>
public static final	<a href="#">DATA</a> Value: <b>DATA</b>
public static final	<a href="#">LOCAL_FILE</a> Value: <b>LOCAL_FILE</b>
public static final	<a href="#">MODE</a> Value: <b>MODE</b>
public static final	<a href="#">PASSWORD</a> Value: <b>PASSWORD</b>
public static final	<a href="#">REMOTE_FILE</a> Value: <b>REMOTE_FILE</b>
public static final	<a href="#">SERVER</a> Value: <b>SERVER</b>
public static final	<a href="#">USER</a> Value: <b>USER</b>

### Constructor Summary

public	<a href="#">GXFtpConsts</a> ()
--------	--------------------------------

**Methods inherited from class** java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Fields

(continued from last page)

---

## SERVER

```
public static final java.lang.String SERVER
```

Constant value: **SERVER**

---

## USER

```
public static final java.lang.String USER
```

Constant value: **USER**

---

## PASSWORD

```
public static final java.lang.String PASSWORD
```

Constant value: **PASSWORD**

---

## LOCAL\_FILE

```
public static final java.lang.String LOCAL_FILE
```

Constant value: **LOCAL\_FILE**

---

## REMOTE\_FILE

```
public static final java.lang.String REMOTE_FILE
```

Constant value: **REMOTE\_FILE**

---

## ADDITIONAL

```
public static final java.lang.String ADDITIONAL
```

Constant value: **ADDITIONAL**

---

## MODE

```
public static final java.lang.String MODE
```

Constant value: **MODE**

---

## DATA

```
public static final java.lang.String DATA
```

Constant value: **DATA**

## Constructors

(continued from last page)

## **GXFtpConsts**

```
public GXFtpConsts()
```

## com.sabratec.util.ftp Class GXFtpException

```
java.lang.Object
  |
  +--GXGeneralException
       |
       +--com.sabratec.util.ftp.GXFtpException
```

```
public class GXFtpException
extends GXGeneralException
```

Exception thrown when unexpected or negative reply is received from the server. The `getReply()` method can be used to examine the reply that caused the exception.

### Constructor Summary

public	<a href="#">GXFtpException</a> (GXFtpReply reply, String msg, Throwable e) Constructs new GXFtpException with short explanation of the circumstance.
public	<a href="#">GXFtpException</a> (String msg) Constructs new GXFtpException with short explanation of the circumstance.
public	<a href="#">GXFtpException</a> (GXFtpReply reply) Convenience constructor; Creates new GXFtpException using "Unexpected" as the explanation.

### Method Summary

int	<a href="#">getCode</a> () Convenience method; gets FTP reply code of underlying reply object.
GXFtpReply	<a href="#">getReply</a> () Returns reply that caused this exception.
int	<a href="#">getType</a> () Convenience method; gets FTP reply type of underlying reply object.

#### Methods inherited from class java.lang.Object

`equals`, `getClass`, `hashCode`, `notify`, `notifyAll`, `toString`, `wait`, `wait`, `wait`

### Constructors

#### GXFtpException

```
public GXFtpException(GXFtpReply reply,
                    String msg,
                    Throwable e)
```

Constructs new GXFtpException with short explanation of the circumstance. The explanation is prepended to the text of the actual reply to form the exception message.

(continued from last page)

## GXFtpException

```
public GXFtpException(String msg)
```

Constructs new GXFtpException with short explanation of the circumstance. Useful when there is still no reply from the server

---

## GXFtpException

```
public GXFtpException(GXFtpReply reply)
```

Convenience constructor; Creates new GXFtpException using "Unexpected" as the explanation.

## Methods

### getReply

```
public GXFtpReply getReply()
```

Returns reply that caused this exception.

**Returns:**

GXFtpReply object that caused exception

---

### getType

```
public int getType()
```

Convenience method; gets FTP reply type of underlying reply object. Equivalent to calling getReply().getType().

**Returns:**

type of GXFtpReply object that caused exception

**See Also:**

getType

---

### getCode

```
public int getCode()
```

Convenience method; gets FTP reply code of underlying reply object. Equivalent to calling getReply().getCode().

**Returns:**

FTP reply code of GXFtpReply object that caused exception

**See Also:**

getCode

## com.sabratec.util.ftp

# Class GXFtpManager

java.lang.Object

└-com.sabratec.util.ftp.GXFtpManager

public class **GXFtpManager**  
extends Object

This class supplies a batch API for the ApplinX FTP mechanism.  
All the data for an ftp transmission is stored in a GXFtpRequest object.  
An GXFtpRequest object can be passed as a parameter to two different methods of GXFtpManager: getFile() and putFile()  
These methods can be called only via GXFtpManager singleton instance.  
Two code examples of uploading and downloading files can be found in the package overview.

## Method Summary

<a href="#">GXFtpResponse</a>	<a href="#">getFile(GXFtpRequest req)</a> getFile is an API method which is used to retrieve a file from a remote host using the FTP protocol.
static <a href="#">GXFtpManager</a>	<a href="#">instance()</a> instance() supplies an access to the class object (singleton). The object is created automatically in the background.
void	<a href="#">putFile(GXFtpRequest req)</a> putFile is an api method which transfers a file to a remote host using the FTP protocol.

## Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Methods

### instance

public static [GXFtpManager](#) **instance()**

instance() supplies an access to the class object (singleton).  
The object is created automatically in the background.

#### Returns:

The single instance of the class.

### putFile

public void **putFile(GXFtpRequest req)**  
throws [GXFtpException](#)

putFile is an api method which transfers a file to a remote host using the FTP protocol.

#### Throws:

[GXFtpException](#)



## getFile

```
public GXFtpResponse getFile(GXFtpRequest req)  
    throws GXFtpException
```

getFile is an API method which is used to retrieve a file from a remote host using the FTP protocol.

**Returns:**

[GXFtpResponse](#)

**Throws:**

[GXFtpException](#)

## com.sabratec.util.ftp Class GXFtpRequest

java.lang.Object

↳ com.sabratec.util.ftp.GXFtpRequest

public class **GXFtpRequest**  
extends Object

This class is used as a data structure for all the parameters which are relevant for an FTP transmission. Some of the data is stored in the object by designated methods, e.g.: `setUser()`. The rest of the data is stored using the `setValue()` method and pre defined constants such as:  
`setValue(GXMFCCommands.CMD_MF_DATA_TYPE, GXMFCCommands.CMD_VAL_MF_DATA_TYPE_BIN);`

An initialized object of this class can be passed as a parameter to each of the following GXFtpManager methods:

```
GXFtpManager.instance().putFile(GXFtpRequest);
GXFtpManager.instance().getFile(GXFtpRequest);
```

### Constructor Summary

public	<a href="#">GXFtpRequest()</a> Class constructor
--------	---

### Method Summary

String	<a href="#">getAdditionalCommand()</a> For internal use
byte[]	<a href="#">getLocalFile()</a> For internal use
byte[]	<a href="#">getLocalFileBytes()</a> For internal use
String	<a href="#">getPassword()</a> For internal use
String	<a href="#">getRemoteFile()</a> For internal use
String	<a href="#">getServer()</a> For internal use
String	<a href="#">getUser()</a> For internal use
String	<a href="#">getValue(String key)</a> For internal use
String	<a href="#">getValues()</a> For internal use
void	<a href="#">readFileToUpload(String filename)</a> Reads and stores the content of the local file into the request data structure.

void	<a href="#"><u>setAdditional</u></a> (String additionalCommands) Sets an additional user defined command for the FTP request.
void	<a href="#"><u>setLocalFileBytes</u></a> (byte[] fileByBytes) For internal use
void	<a href="#"><u>setPassword</u></a> (String password) Sets the remote host FTP password
void	<a href="#"><u>setRemoteFile</u></a> (String remoteFile) Sets the remote file name using the full path.
void	<a href="#"><u>setServer</u></a> (String server) Sets the FTP remote server IP address.
void	<a href="#"><u>setUser</u></a> (String user) Sets the FTP server user name.
void	<a href="#"><u>setValue</u></a> (String key, String value) Stores command values in the FTP request.

**Methods inherited from class** java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Constructors

### GXFtpRequest

public **GXFtpRequest**()

Class constructor

## Methods

### getValue

public String **getValue**(String key)

For internal use

### getValues

public String **getValues**()

For internal use

### setValue

public void **setValue**(String key,  
String value)

Stores command values in the FTP request.

For example:setValue(GXMFCCommands.CMD\_MF\_DATA\_TYPE, GXMFCCommands.CMD\_VAL\_MF\_DATA\_TYPE\_BIN);

---

(continued from last page)

**Parameters:**

key - command constant which can be either from the [GXMFCommands](#) class or from the [GXAS400Commands](#) class.

value - The cmd value, which can be a constant either from one of these classes ([GXMFCommands](#) or [GXAS400Commands](#)) or a positive number.

---

**getPassword**

```
public String getPassword()
```

For internal use

---

**setPassword**

```
public void setPassword(String password)
```

Sets the remote host FTP password

**Parameters:**

password - host password.

---

**getRemoteFile**

```
public String getRemoteFile()
```

For internal use

---

**setRemoteFile**

```
public void setRemoteFile(String remoteFile)
```

Sets the remote file name using the full path.

**Parameters:**

remoteFile - The full path name of the remote name.

---

**getServer**

```
public String getServer()
```

For internal use

---

**setServer**

```
public void setServer(String server)
```

Sets the FTP remote server IP address.

**Parameters:**

server

---

**getUser**

```
public String getUser()
```

For internal use

---

## setUser

```
public void setUser(String user)
```

Sets the FTP server user name.

**Parameters:**

user

---

## setLocalFileBytes

```
public void setLocalFileBytes(byte[] fileByBytes)
```

For internal use

---

## getLocalFileBytes

```
public byte[] getLocalFileBytes()
```

For internal use

---

## getLocalFile

```
public byte[] getLocalFile()
```

For internal use

---

## setAdditional

```
public void setAdditional(String additionalCommands)
```

Sets an additional user defined command for the FTP request.

**Parameters:**

additionalCommands

---

## getAdditionalCommand

```
public String getAdditionalCommand()
```

For internal use

---

## readFileToUpload

```
public void readFileToUpload(String filename)  
    throws GXGeneralException,  
           java.io.IOException
```

Reads and stores the content of the local file into the request data structure. Should be used before uploading a file.

**Parameters:**

filename

**Throws:**

GXGeneralException  
IOException

---

## com.sabratec.util.ftp Class GXFtpResponse

java.lang.Object

└-com.sabratec.util.ftp.GXFtpResponse

```
public class GXFtpResponse
extends Object
```

This class holds the data retrieved from an FTP download request.

### Constructor Summary

public	<a href="#">GXFtpResponse</a> (String fileName, byte[] arr) Constructor - For internal use
--------	---

### Method Summary

void	<a href="#">convertTextIfNeeded</a> (String mode) Converts the downloaded file to Windows/DOS/UNIX file format.
byte[]	<a href="#">getFileAsByteArr</a> ()
java.io.ByteArrayInputStream	<a href="#">getFileAsInputStream</a> () For internal use
String	<a href="#">getFileName</a> () For internal use

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Constructors

### GXFtpResponse

```
public GXFtpResponse(String fileName,
                    byte[] arr)
```

Constructor - For internal use

## Methods

### getFileAsByteArr

```
public byte[] getFileAsByteArr()
```

(continued from last page)

**getFileAsStream**

```
public java.io.ByteArrayInputStream getFileAsStream()
```

For internal use

---

**getFileName**

```
public String getFileName()
```

For internal use

---

**convertTextIfNeeded**

```
public void convertTextIfNeeded(String mode)
```

Converts the downloaded file to Windows/DOS/UNIX file format.

**Parameters:**

mode - possible values: "win", "dos" or "unix"

## com.sabratec.util.ftp Class GXFtpTypes

java.lang.Object

└-com.sabratec.util.ftp.GXFtpTypes

public class **GXFtpTypes**  
extends Object

### Field Summary

public static final	<a href="#">AS400</a> Value: 2
public static final	<a href="#">MAIN_FRAME</a> Value: 1
public static final	<a href="#">SIMPLE</a> Value: 0

### Constructor Summary

public	<a href="#">GXFtpTypes()</a>
--------	------------------------------

Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

### Fields

#### **SIMPLE**

public static final java.lang.String **SIMPLE**

Constant value: 0

#### **MAIN\_FRAME**

public static final java.lang.String **MAIN\_FRAME**

Constant value: 1

#### **AS400**

public static final java.lang.String **AS400**



(continued from last page)

Constant value: **2**

## Constructors

### **GXFtpTypes**

```
public GXFtpTypes()
```

---

Package

**com.sabratec.util.ftp.as400**

## com.sabratec.util.ftp.as400 Class GXAS400Commands

java.lang.Object

└-com.sabratec.util.ftp.as400.GXAS400Commands

public class **GXAS400Commands**  
extends Object

This class holds constants for the AS400 FTP commands and their possible values:

AS400 designated commands	Possible values	Description
CMD_AS400_DATA_TYPE	CMD_VAL_AS400_DATA_TYPE_ASC	ASCII
	CMD_VAL_AS400_DATA_TYPE_EBC	EBCDIC
	CMD_VAL_AS400_DATA_TYPE_BIN	Binary
CMD_AS400_MODE	CMD_VAL_AS400_DATA_TYPE_DBCS_ASC	ASCII double byte character set
	CMD_VAL_AS400_DATA_TYPE_DBCS_EBC	EBCDIC double byte character set
	CMD_VAL_AS400_DATA_TYPE_CCSID	Coded character set identifier
CMD_AS400_DS	CMD_VAL_AS400_MODE_BLOCK	
	CMD_VAL_AS400_MODE_STREAM	
CMD_AS400_DS	CMD_VAL_AS400_DS_FILE	Data structure file
	CMD_VAL_AS400_DS_RECORD	Data structure record

### Field Summary

public static final	<a href="#">CMD_AS400_DATA_TYPE</a> Value: <b>type</b>
public static final	<a href="#">CMD_AS400_DS</a> Value: <b>struct</b>
public static final	<a href="#">CMD_AS400_MODE</a> Value: <b>mode</b>
public static final	<a href="#">CMD_VAL_AS400_DATA_TYPE_ASC</a> Value: <b>a</b>
public static final	<a href="#">CMD_VAL_AS400_DATA_TYPE_BIN</a> Value: <b>i</b>
public static final	<a href="#">CMD_VAL_AS400_DATA_TYPE_CCSID</a> Value: <b>c</b>

public static final	<a href="#">CMD_VAL_AS400_DATA_TYPE_DBCS_ASC</a> Value: <b>b</b>
public static final	<a href="#">CMD_VAL_AS400_DATA_TYPE_DBCS_EBC</a> Value: <b>f</b>
public static final	<a href="#">CMD_VAL_AS400_DATA_TYPE_EBC</a> Value: <b>e</b>
public static final	<a href="#">CMD_VAL_AS400_DS_FILE</a> Value: <b>f</b>
public static final	<a href="#">CMD_VAL_AS400_DS_RECORD</a> Value: <b>r</b>
public static final	<a href="#">CMD_VAL_AS400_MODE_BLOCK</a> Value: <b>b</b>
public static final	<a href="#">CMD_VAL_AS400_MODE_STREAM</a> Value: <b>s</b>

## Constructor Summary

public	<a href="#">GXAS400Commands()</a>
--------	-----------------------------------

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Fields

### CMD\_AS400\_DATA\_TYPE

public static final java.lang.String **CMD\_AS400\_DATA\_TYPE**

Constant value: **type**

### CMD\_VAL\_AS400\_DATA\_TYPE\_ASC

public static final java.lang.String **CMD\_VAL\_AS400\_DATA\_TYPE\_ASC**

Constant value: **a**

### CMD\_VAL\_AS400\_DATA\_TYPE\_EBC

public static final java.lang.String **CMD\_VAL\_AS400\_DATA\_TYPE\_EBC**

Constant value: **e**

---

## **CMD\_VAL\_AS400\_DATA\_TYPE\_BIN**

```
public static final java.lang.String CMD_VAL_AS400_DATA_TYPE_BIN
```

Constant value: **i**

---

## **CMD\_VAL\_AS400\_DATA\_TYPE\_DBCS\_ASC**

```
public static final java.lang.String CMD_VAL_AS400_DATA_TYPE_DBCS_ASC
```

Constant value: **b**

---

## **CMD\_VAL\_AS400\_DATA\_TYPE\_DBCS\_EBC**

```
public static final java.lang.String CMD_VAL_AS400_DATA_TYPE_DBCS_EBC
```

Constant value: **f**

---

## **CMD\_VAL\_AS400\_DATA\_TYPE\_CCSID**

```
public static final java.lang.String CMD_VAL_AS400_DATA_TYPE_CCSID
```

Constant value: **c**

---

## **CMD\_AS400\_MODE**

```
public static final java.lang.String CMD_AS400_MODE
```

Constant value: **mode**

---

## **CMD\_VAL\_AS400\_MODE\_STREAM**

```
public static final java.lang.String CMD_VAL_AS400_MODE_STREAM
```

Constant value: **s**

---

## **CMD\_VAL\_AS400\_MODE\_BLOCK**

```
public static final java.lang.String CMD_VAL_AS400_MODE_BLOCK
```

Constant value: **b**

---

## **CMD\_AS400\_DS**

```
public static final java.lang.String CMD_AS400_DS
```

Constant value: **struct**

---

(continued from last page)

## **CMD\_VAL\_AS400\_DS\_FILE**

```
public static final java.lang.String CMD_VAL_AS400_DS_FILE
```

Constant value: **f**

---

## **CMD\_VAL\_AS400\_DS\_RECORD**

```
public static final java.lang.String CMD_VAL_AS400_DS_RECORD
```

Constant value: **r**

## **Constructors**

### **GXAS400Commands**

```
public GXAS400Commands()
```

---

Package

**com.sabratec.util.ftp.mainframe**

## com.sabratec.util.ftp.mainframe Class GXMFCCommands

java.lang.Object

└─com.sabratec.util.ftp.mainframe.GXMFCCommands

public class **GXMFCCommands**  
extends Object

This class holds constants for the Mainframe FTP commands and their possible values:

MF designated commands	Possible values	Description
CMD_MF_RECORD_FORMAT	CMD_VAL_MF_RECORD_FORMAT_FIXED	Fixed length block
	CMD_VAL_MF_RECORD_FORMAT_VB	Variable length
CMD_MF_DATA_TYPE	CMD_VAL_MF_DATA_TYPE_ASC	ASCII
	CMD_VAL_MF_DATA_TYPE_BIN	Binary
	CMD_VAL_MF_DATA_TYPE_EBCDIC	EBCDIC
	CMD_VAL_MF_DATA_TYPE_DBCS	Double byte character set
	CMD_VAL_MF_DATA_TYPE_UNICODE_2L	Unicode
	CMD_VAL_MF_DATA_TYPE_UNICODE_2B	Unicode
CMD_MF_BLOCKSIZE	#number of bytes	Block size
CMD_MF_PRIMARY	#number of tracks	Primary space
CMD_MF_SECONDARY	#number of tracks	Secondary space
CMD_MF_LRECL	#number	Logical record length

### Field Summary

public static final	<a href="#">CMD_MF_BLOCKSIZE</a> Value: <b>site blocksize=</b>
public static final	<a href="#">CMD_MF_DATA_TYPE</a> Value: <b>type</b>
public static final	<a href="#">CMD_MF_LRECL</a> Value: <b>site lrecl=</b>
public static final	<a href="#">CMD_MF_PRIMARY</a> Value: <b>site primary=</b>
public static final	<a href="#">CMD_MF_RECORD_FORMAT</a> Value: <b>site recfm=</b>
public static final	<a href="#">CMD_MF_SECONDARY</a> Value: <b>site secondary=</b>



public static final	<a href="#">CMD_VAL_MF_DATA_TYPE_ASC</a> Value: <b>a</b>
public static final	<a href="#">CMD_VAL_MF_DATA_TYPE_BIN</a> Value: <b>i</b>
public static final	<a href="#">CMD_VAL_MF_DATA_TYPE_DBCS</a> Value: <b>b</b>
public static final	<a href="#">CMD_VAL_MF_DATA_TYPE_EBCDIC</a> Value: <b>e</b>
public static final	<a href="#">CMD_VAL_MF_DATA_TYPE_UNICODE_2B</a> Value: <b>u 2 b</b>
public static final	<a href="#">CMD_VAL_MF_DATA_TYPE_UNICODE_2L</a> Value: <b>u 2 l</b>
public static final	<a href="#">CMD_VAL_MF_RECORD_FORMAT_FIXED</a> Value: <b>FB</b>
public static final	<a href="#">CMD_VAL_MF_RECORD_FORMAT_VB</a> Value: <b>VB</b>

## Constructor Summary

public	<a href="#">GXMFCCommands</a> ( )
--------	-----------------------------------

### Methods inherited from class java.lang.Object

equals, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

## Fields

### CMD\_MF\_RECORD\_FORMAT

public static final java.lang.String **CMD\_MF\_RECORD\_FORMAT**

Constant value: **site recfm=**

### CMD\_VAL\_MF\_RECORD\_FORMAT\_FIXED

public static final java.lang.String **CMD\_VAL\_MF\_RECORD\_FORMAT\_FIXED**

Constant value: **FB**

(continued from last page)

---

## **CMD\_VAL\_MF\_RECORD\_FORMAT\_VB**

```
public static final java.lang.String CMD_VAL_MF_RECORD_FORMAT_VB
```

Constant value: **VB**

---

## **CMD\_MF\_BLOCKSIZE**

```
public static final java.lang.String CMD_MF_BLOCKSIZE
```

Constant value: **site blocksize=**

---

## **CMD\_MF\_PRIMARY**

```
public static final java.lang.String CMD_MF_PRIMARY
```

Constant value: **site primary=**

---

## **CMD\_MF\_SECONDARY**

```
public static final java.lang.String CMD_MF_SECONDARY
```

Constant value: **site secondary=**

---

## **CMD\_MF\_DATA\_TYPE**

```
public static final java.lang.String CMD_MF_DATA_TYPE
```

Constant value: **type**

---

## **CMD\_VAL\_MF\_DATA\_TYPE\_ASC**

```
public static final java.lang.String CMD_VAL_MF_DATA_TYPE_ASC
```

Constant value: **a**

---

## **CMD\_VAL\_MF\_DATA\_TYPE\_BIN**

```
public static final java.lang.String CMD_VAL_MF_DATA_TYPE_BIN
```

Constant value: **i**

---

## **CMD\_VAL\_MF\_DATA\_TYPE\_EBCDIC**

```
public static final java.lang.String CMD_VAL_MF_DATA_TYPE_EBCDIC
```

Constant value: **e**

---

## **CMD\_VAL\_MF\_DATA\_TYPE\_DBCS**

```
public static final java.lang.String CMD_VAL_MF_DATA_TYPE_DBCS
```

---

---

(continued from last page)

Constant value: **b**

---

### **CMD\_VAL\_MF\_DATA\_TYPE\_UNICODE\_2L**

```
public static final java.lang.String CMD_VAL_MF_DATA_TYPE_UNICODE_2L
```

Constant value: **u 2 l**

---

### **CMD\_VAL\_MF\_DATA\_TYPE\_UNICODE\_2B**

```
public static final java.lang.String CMD_VAL_MF_DATA_TYPE_UNICODE_2B
```

Constant value: **u 2 b**

---

### **CMD\_MF\_LRECL**

```
public static final java.lang.String CMD_MF_LRECL
```

Constant value: **site lrecl=**

## Constructors

### **GXMFCOMMANDS**

```
public GXMFCOMMANDS()
```

# Index

## A

add 553, 572, 574, 577  
addAttributesToTag 741  
addBindingToTemplatePart 380  
addColumn 221, 244, 256, 272, 274, 285  
addColumns 221, 245  
addCompletionListener 502  
addFilter 264, 293  
AddHiddenFieldToForm 696, 735  
AddHtmlTextToForm 696, 736  
addInputField 15, 16  
addInputFields 16  
ADDITIONAL 748  
AddJSToForm 696, 735  
addNeighbor 553  
addRow 263, 293  
addRtlAttribute 605  
addSearchText 529  
addSegmentText 201  
addTableKeyColumn 695, 734  
addTagListener 501  
addVariable 8, 364  
addVariableArray 8  
addWaitCondition 86  
adoptHttpWrapper 485  
ALIGNMENT\_HORIZONTAL 496  
ALIGNMENT\_VERTICAL 496  
ANY\_IDENTIFIED\_SCREEN 48  
append 189, 197  
AppendFile 388  
APPLICATION\_RELOAD\_FAILED 325  
ARROWS\_ALL\_SCREEN 455  
ARROWS\_INPUT\_FIELDS 455  
ARROWS\_NONE 455  
AS400 394, 760  
attach 632

## B

bidiMatcher 197, 202  
BROWSER\_WINDOW\_SUPPORT 494  
build 195

BY\_APPLINX 394

## C

changeInputField 16  
clone 9, 161, 170, 366, 381, 745  
closeSession 61, 87  
CMD\_AS400\_DATA\_TYPE 764  
CMD\_AS400\_DS 765  
CMD\_AS400\_MODE 765  
CMD\_MF\_BLOCKSIZE 770  
CMD\_MF\_DATA\_TYPE 770  
CMD\_MF\_LRECL 771  
CMD\_MF\_PRIMARY 770  
CMD\_MF\_RECORD\_FORMAT 769  
CMD\_MF\_SECONDARY 770  
CMD\_VAL\_AS400\_DATA\_TYPE\_ASC 764  
CMD\_VAL\_AS400\_DATA\_TYPE\_BIN 765  
CMD\_VAL\_AS400\_DATA\_TYPE\_CCSID 765  
CMD\_VAL\_AS400\_DATA\_TYPE\_DBCS\_ASC 765  
CMD\_VAL\_AS400\_DATA\_TYPE\_DBCS\_EBC 765  
CMD\_VAL\_AS400\_DATA\_TYPE\_EBC 764  
CMD\_VAL\_AS400\_DS\_FILE 765  
CMD\_VAL\_AS400\_DS\_RECORD 766  
CMD\_VAL\_AS400\_MODE\_BLOCK 765  
CMD\_VAL\_AS400\_MODE\_STREAM 765  
CMD\_VAL\_MF\_DATA\_TYPE\_ASC 770  
CMD\_VAL\_MF\_DATA\_TYPE\_BIN 770  
CMD\_VAL\_MF\_DATA\_TYPE\_DBCS 770  
CMD\_VAL\_MF\_DATA\_TYPE\_EBCDIC 770  
CMD\_VAL\_MF\_DATA\_TYPE\_UNICODE\_2B 771  
CMD\_VAL\_MF\_DATA\_TYPE\_UNICODE\_2L 771  
CMD\_VAL\_MF\_RECORD\_FORMAT\_FIXED 769  
CMD\_VAL\_MF\_RECORD\_FORMAT\_VB 769  
COLORS\_ALL 621  
COLORS\_NONE 622  
COLORS\_REVERSED\_VIDEO 622  
compare 226  
compareTo 199, 745  
completeBuffer 643  
confirmCommand 107  
continueDownload 106  
continueUpload 107  
convertTextIfNeeded 759  
copyFrom 568

createBaseObject 60, 87

createTable 219, 228, 246, 269, 272, 274

## D

DATA 748

DEFAULT 744

DESTINATION\_FOLDER\_IS\_SAME 325

DESTINATION\_FOLDER\_IS\_SUBFOLDER 325

detachSession 61, 112

doAfterBody 723

doEndTag 659, 723, 727, 739

doStartTag 659, 722, 726, 739

## E

endSession 61, 112

equals 9, 80, 83, 116, 156, 158, 170, 206, 222, 223, 269, 277, 282, 286, 290, 294, 744

ERROR\_APPLICATION\_NOT\_DEFINED 316

ERROR\_CANNOT\_CONNECT\_HOST 315

ERROR\_CANNOT\_CONNECT\_SERVER 315

ERROR\_CANT\_DELETE\_ASSIGNED\_EXCEPTION\_PATH 319

ERROR\_CANT\_DELETE\_REFERENCED\_ENTITY 318

ERROR\_CENTRASITE\_REGISTRATION 328

ERROR\_CHANGING\_WEB\_SERVICE\_TARGET\_SERVER 327

ERROR\_CONCURRENT\_NUMBER\_OF\_USERS\_EXCEEDS\_LICENSE\_AGREEMENT 320

ERROR\_CONFIGURATION\_SAVE\_FAILED 322

ERROR\_CONNECTING\_DEVICE\_NAME 320

ERROR\_CONNECTION\_INFO 316

ERROR\_CREATING\_ENTITIES\_FROM\_WSDL 327

ERROR\_CREATING\_TABLE 320

ERROR\_CURSOR\_POSITION\_NOT\_SET 319

ERROR\_DB\_GENERAL 318

ERROR\_DEPLOYING\_WEB\_SERVICE 327

ERROR\_DEPLOYMENT\_GENERAL 327

ERROR\_DEPLOYMENT\_HANDLER\_NOT\_AVAILABLE 328

ERROR\_DISPLAY\_SESSION\_REQUEST\_FOR\_PRINTER\_SESSION 320

ERROR\_EXECUTING\_MAP\_BAD\_DESTINATION 320

ERROR\_EXECUTING\_MAP\_NO\_MAP\_IN\_APPL 320

ERROR\_EXECUTING\_MAP\_NO\_PATH\_BETWEEN\_SCREEN 320

ERROR\_EXECUTING\_MAP\_SCREEN\_NOT\_IN\_MAP 320

ERROR\_EXECUTING\_PATH\_FROMSCREENID 317

ERROR\_EXECUTING\_PATH\_GENERAL 317

ERROR\_EXECUTING\_PATH\_RESOLVE\_ACTION 319

ERROR\_EXECUTING\_PATH\_TOSCREENID 317

ERROR\_EXECUTING\_PATH\_TYPE\_EXCEPTION 319

ERROR\_EXECUTING\_PROCEDURE\_GENERAL 327

ERROR\_EXPORTING\_WEB\_SERVICE 327

ERROR\_FIELD\_CONTENT\_NOT\_SET 319

ERROR\_GENERAL 315

ERROR\_HOST\_EXISTS\_IN\_APPLICATION 322

ERROR\_HOST\_SESSION\_DISCONNECTED 317

ERROR\_IMPORT\_FILE\_REPOSITORY 319

ERROR\_INCOMPATIBLE\_VERSIONS 322

ERROR\_INCOMPATIBLE\_WSS\_VERSION 328

ERROR\_INCORRECT\_PASSWORD 316

ERROR\_INDEX\_OUT\_OF\_BOUND 316

ERROR\_INVALID\_LICENSE\_COMBINATION 323

ERROR\_INVALID\_LICENSE\_KEY 323

ERROR\_LICENSE\_FILE\_NOT\_FOUND 323

ERROR\_LICENSE\_TERMS\_VAIOLATION 321

ERROR\_LOGIN\_FAILED 317

ERROR\_MAP\_STEP\_ALREADY\_EXISTS 320

ERROR\_NATURAL\_DATA\_TRANSFER\_FAILURE 322

ERROR\_NATURAL\_DATA\_TRANSFER\_INVALID\_STATE 322

ERROR\_OVERWRITING 317

ERROR\_PATH\_NOT\_FOUND 318

ERROR\_PERMISSION\_DENIED 318

ERROR\_PREFS\_SAVE\_FAILED 318

ERROR\_PRINTER\_CONNECT\_ERROR 319

ERROR\_PRINTER\_DISABLED 317

ERROR\_REPLACING\_LICENSE 323

ERROR\_REPLAY\_DEVICE\_INCOMPATIBILITY 319

ERROR\_REPLAY\_FILE 316

ERROR\_REPLAY\_FILE\_NOT\_FOUND 316

ERROR\_RETRIEVING\_WSDL\_SERVICES 326

ERROR\_RETRIEVING\_WSDL\_SERVICES\_PERMISSION\_DENIED 327

ERROR\_SCREEN\_NOT\_SYNC 318

ERROR\_SECURITY\_SAVE\_FAILED 322

ERROR\_SERVICE\_CONNECTION\_NOT\_READY 322

ERROR\_SERVICE\_CONNECTION\_TIMEOUT\_EXPIRED

- 321  
ERROR\_SERVICE\_GENERAL 321  
ERROR\_SERVICE\_NO\_AVAILABLE\_CONNECTION 321  
ERROR\_SERVICE\_NOT\_ACTIVE 321  
ERROR\_SERVICE\_NOT\_FOUND 322  
ERROR\_SERVICE\_PATH\_NOT\_FOUND 321  
ERROR\_SESSION\_VARIABLE\_DOESNT\_EXIST 321  
ERROR\_SESSION\_VARIABLE\_TYPE\_MISMATCH 321  
ERROR\_SOCKET 315  
ERROR\_SYNCHRONIZING\_REPOSITORY 326  
ERROR\_TIMEOUT\_EXPIRED 317  
ERROR\_UNDEPLOYING\_WEB\_SERVICE 327  
ERROR\_UNKNOWN\_ACTION 318  
ERROR\_UNKNOWN\_SERVER\_ADDRESS 315  
ERROR\_UPDATING\_WEB\_SERVICE 327  
ERROR\_USER\_ALREADY\_ATTACHED 316  
ERROR\_USER\_NOT\_CONNECTED 315  
ERROR\_WAIT\_CONDITION\_NOT\_MET 316  
ERROR\_WAIT\_CONDITION\_NOT\_VALID 318  
executeColumnQuery 551  
executePath 90, 91  
executePositionQuery 552  
executeProcedure 91, 92  
executeQuery 551  
executeRowQuery 552  
executeTextQuery 551  
EXPORT\_APPLICATION\_ENTITIES\_FAILED 325
- ## F
- FAULTY\_SCREEN\_IMAGE 326  
fetch 61, 87  
FIELD\_EXISTS\_IN\_ACTIONS 324  
FIELD\_TYPE\_APPFIELD 77  
FIELD\_TYPE\_HOSTFIELD 78  
FILE\_DOES\_NOT\_EXIST 317  
FileName 388, 390  
filter 241, 299, 301, 304  
filterRows 264, 293  
find 525, 526, 527
- ## G
- get 571, 573, 576  
get\_ActionKey 425  
get\_AddJavascript 378  
get\_AdjustNeighbours 603, 617  
get\_Alignment 603  
get\_AllowTypeAhead 375  
get\_AlternateColors 433  
get\_AlternateCssName 434  
get\_ApplicationName 361  
get\_AttachInputTagEvents 470  
get\_AutomaticDownload 480  
get\_AutoSkipAllFields 456  
get\_BlinkingCaret 463  
get\_BlockNumericFields 460  
get\_BoundTemplateParts 385  
get\_Build 339  
get\_CaptureBrowserClose 378  
get\_CaptureTagsEvents 349  
get\_CaretAtEndOfField 461  
get\_CheckboxCss 603  
get\_CheckHostScreenUpdate 469  
get\_ClientBlinking 597  
get\_CloneComboxOnClientSide 436  
get\_ColorMode 597  
get\_ColorSets 460  
get\_ComboboxCss 603  
get\_CompleteListenersVector 509  
get\_DebugModules 448  
get\_DefaultExtension 481  
get\_DefaultFrameColumns 449  
get\_DefaultOpenedWindowHeight 475  
get\_DefaultOpenedWindowLeft 475  
get\_DefaultOpenedWindowTop 475  
get\_DefaultOpenedWindowWidth 475  
get\_Description 361  
get\_DesignMode 339  
get\_DoJapaneseDataTypeValidityCheck 463  
get\_DoubleClickActionKey 457  
get\_Dynamic 510  
get\_DynamicDisableCssClass 377, 434  
get\_DynamicFieldCheck 432  
get\_EmulationConfig 504  
get\_EmulationPasteBehavior 464  
get\_Enabled 420, 620  
get-Encoding 437  
get\_EncryptData 401  
get\_EngineConfig 440

---

get\_ErrorForm 342  
get\_ExternalCssRequestParamName 380  
get\_FailOnWarning 367  
get\_FieldsModification 352  
get\_FieldTypesInUse 340  
get\_Flicker 401  
get\_FontFamily 507  
get\_FontSize 503  
get\_FromRow 430  
get\_FtpConfig 350  
get\_GenerateTrOnClickEvent 432  
get\_GuiElementsConfig 504  
get\_HandleMenuSelection 461  
get\_HideOnly 626  
get\_HostAddress 395  
get\_HostDownloadForm 481  
get\_HostKeyCss 609  
get\_HostKeysConfig 505  
get\_HostNewPassword 366  
get\_HostPassword 362  
get\_HostType 395  
get\_HostUserName 360  
get\_IndexForm 354  
get\_Instant 354  
get\_InstantConfig 352  
get\_InstantEmulatorConfig 441  
get\_InstantForm 341  
get\_InstantWinForm 342  
get\_IsInstant 353  
get\_LabelFocus 457  
get\_LoadEmulationComponent 470  
get\_LoadPrinter 468  
get\_LogLevel 446  
get\_LogOffForm 375  
get\_LogoffMessage 449  
get\_LogoffOnBrowserClose 446  
get\_MacroConfig 347  
get\_MacrosFolder 399  
get\_MapPath 346  
get\_MozillaLogoffMessage 447  
get\_NaturalDataTransferConfig 380  
get\_OpenedWindowAttributes 476  
get\_OpenWindowCenter 476  
get\_PaintAllColumnHeight 508  
get\_Password 362  
get\_PasswordField 404, 411  
get\_PasswordFieldName 417  
get\_PathName 423  
get\_PerformSyncCheckInInstant 350  
get\_PopupCloseSentKey 476  
get\_ProceduresConfig 351  
get\_PromptBeforeSessionTimeOut 383  
get\_PromptOnBrowserClose 449  
get\_RadioButtonCss 604  
get\_Rectangle 502  
get\_ReflectBGColor 435  
get\_ReflectBGColors 343  
get\_ReflectEmulationBehaviour 344  
get\_ReflectFGColor 435  
get\_ReflectFGColors 343  
get\_ReflectHostCursor 344  
get\_ReflectHostProtected 346, 432  
get\_ReflectMaxLength 345  
get\_RenderAlternatingCssClass 617  
get\_RenderAppFieldCss 597  
get\_RenderArea 503  
get\_RenderEmulationAttributes 596  
get\_RenderingType 608  
get\_RenderIntensifiedCss 597  
get\_RenderTagsFromRightToLeft 509  
get\_RowSpacingPercentageFactor 508  
get\_SaveUserNameLocally 400  
get\_ScreenLocker 376  
get\_ScreenLockerText 385  
get\_ScreenName 417  
get\_SelectFieldOnFocus 462  
get\_ServerURL 359  
get\_ServiceName 363  
get\_SessionConfig 347  
get\_SessionId 360  
get\_ShowBlinkingFields 462  
get\_ShowIntermediateScreen 365  
get\_ShowLogConsole 448  
get\_SingleSignOnConfig 354  
get\_SsoConfig 353  
get\_SupportDupAndFieldMark 340  
get\_SupportPartialPageRendering 386  
get\_SupportTypeAheadV2 469  
get\_TableAlternating1CssClass 617  
get\_TableAlternating2CssClass 617

---

---

get\_TableBuildConfig 351  
get\_TableConfig 505  
get\_TableCssClass 617  
get\_TabOnInputsOnly 458  
get\_TerminationPath 386  
get\_TitleWindowFrameCssClass 626  
get\_ToRow 431  
get\_TrimLabels 341, 436  
get\_UploadForm 481  
get\_UseArrows 459  
get\_UseCache 374  
get\_UseCalendar 386  
get\_UseFolders 348  
get\_UseFramesForSubmit 385  
get\_UseJavaScriptsAsResource 381  
get\_UseKeyboardPFKeys 339  
get\_UseKeyboardPfKeys 459  
get\_UseModalWindows 348  
get\_UseOldJSEngine 385  
get\_UserExitsFile 468  
get\_UserField 404, 411  
get\_UserName 400  
get\_UserNameFieldName 417  
get\_UseScreenGroups 349  
get\_UseScriptsInPage 382  
get\_UseStateManager 376  
get\_Variable 366  
get\_Variables 364  
get\_VariablesModified 366  
get\_Version 338  
get\_VirtualDir 374  
get\_WebDownloadForm 481  
get\_WebEmulatorConfig 441  
get\_WebWindowName 386  
get\_WindowConfig 441  
get\_WindowFrameConfig 506  
get\_WindowFrameCssClass 626  
get\_WindowRelative 618  
get\_WritePerformanceLog 379  
getAction 104  
getActionKey 425  
getAdditionalCommand 757  
getAddJavascript 379  
getAlignment 544, 600  
getAllowTypeAhead 375  
getAlternateColors 433  
getAlternateCssName 434  
getAppFieldFullName 252, 281  
getAppFieldName 251, 281  
getAppFields 82, 102  
getApplicationConfig 118  
getApplicationName 12, 57, 361  
getAttribute 567  
getAttributeName 729  
getBaseObject 60, 111  
getBGColor 79, 99, 232  
getBodyAttribute 697  
getBodyAttributes 697  
getBottomMargin 565  
getBottomPadding 564  
getBounds 135  
getBoundTemplateParts 380  
getBuffer 642  
getBufferLength 643  
getBufferPosition 646  
getBuffers 124  
getBuild 339  
getCaption 104, 252, 281, 532, 535, 549  
getCaptureBrowserClose 378  
getCaptureTagsEvents 350  
getCells 557  
getCharactersPerLine 633  
getCheckboxCss 601  
getCheckedValue 535, 548  
getChildren 561  
getClientId 13  
getCloneComboxOnClientSide 436  
getCode 751  
getColor 205  
getColorMode 594  
getColorSets 459  
getColumn 256, 285, 744  
getColumnCount 255, 285  
getColumnName 239  
getColumnNames 304  
getColumnNumber 646  
getColumns 124, 220, 244, 255, 285  
getComboboxCss 602  
getCompletionListener 506  
getConnectionPool 66



---

getContent 79, 98, 223, 238, 248, 276, 568, 582, 584, 586  
getContents 50  
getCopyCount 254, 282  
getCornersCoordinates 222  
getCursor 161  
getCursorPosition 124  
getData 54, 55, 138, 142, 647  
getDataTransferCommand 109  
getDataTransferFilename 109  
getDataTransferState 108  
getDataTransferWorkfileCode 109  
getDataType 80, 99, 232, 251, 280  
getDebugModules 448  
getDefaultExtension 481  
getDefaultFrameColumns 447  
getDefaultOpenedWindowHeight 473  
getDefaultOpenedWindowLeft 473  
getDefaultOpenedWindowTop 474  
getDefaultOpenedWindowWidth 474  
getDefinedLowerRightCorner 235  
getDefinedUpperLeftCorner 235  
getDescription 361  
getDesignMode 339  
getDestinationScreenName 146  
getDir 682  
getDisplayPosition 104  
getDisplayText 104  
getDoubleClickActionKey 456  
getDynamicDisableCssClass 377, 434  
getDynamicFieldCheck 432  
getEABBuffer 158  
getEABColor 158  
getEmulationConfig 503  
getEncoding 436  
getEncryptData 401  
getEngineConfig 440  
getError 643  
getErrorForm 342  
getErrorMessage 643  
getExternalCssRequestParamName 380  
getFGColor 79, 99, 232  
getFieldAt 82, 101  
getFieldAttributeBuffer 158  
getFieldByCursorPosition 128  
getFieldByPosition 83, 102  
getFieldContent 126, 127  
getFieldCount 82, 101  
getFieldIndex 72  
getFieldInstance 83, 102, 126  
getFieldMatchQuery 208, 211, 212, 213  
getFieldName 72  
getFields 82, 102, 103, 125, 126, 129, 130, 209, 214, 215  
getFieldsModification 352  
getFieldTypesInUse 341  
getFile 753  
getFileAsByteArr 758  
getFileAsInputStream 758  
getFileName 698, 736, 759  
getFilters 264, 293  
getFirstAppfieldColumnIndex 237  
getFirstFieldInstance 82, 102  
getFirstRow 202  
getFlicker 18, 401  
getFolderPath 124  
getFont 205  
getFontFamily 507  
getFontSize 503, 552  
getFontWidth 509  
getFormAttribute 697  
getFormAttributes 697  
getFormatType 4  
getFormTopString 696  
getFromRow 430  
getFtpConfig 351  
getGenerateTrOnClickEvent 431  
getGlossary 52  
getGuiElementsConfig 504  
getHeaderCoordinates 222  
getHeaderLowerRight 235  
getHeaders 558  
getHeaderUpperLeft 235  
getHeightPixels 512  
getHiddens 696  
getHorizontal 682  
getHostAddress 58, 395  
getHostCategory 58  
getHostDeviceName 57  
getHostDeviceType 57  
getHostDownloadForm 479  
getHostField 568

---

---

getHostKeyCss 608  
getHostKeys 128  
getHostKeysConfig 504  
getHostKeysTagUserExit 384  
getHostNewPassword 67, 366  
getHostPassword 67, 363  
getHostScreen 517  
getHostService 66  
getHostType 394  
getHostUserName 66, 360  
getId 561, 657, 660, 705, 722  
getIndex 78, 97, 115, 231  
getIndexForm 354  
getInnerHTML 721  
getInputBorderWidth 509  
getInputFieldHeight 509  
getInputFields 15  
getInputMask 80, 100, 232  
getInputStream 698, 736  
getInputTagAttributes 697  
getInstantConfig 352  
getInstantEmulatorConfig 440  
getInstantForm 341  
getInstantWinForm 342  
getIsDynamicFont 510  
getItem 259, 265, 288, 293  
getItemContent 260, 265, 289, 294  
getItems 258, 288, 538, 545  
getItemsContents 259, 288  
getKeyAt 646  
getKeyboardMappingXML 58  
getKeys 160  
getKeysCount 645  
getLabelFocus 457  
getLanguage 58  
getLastAppfieldColumnIndex 237  
getLastFieldInstance 83, 103  
getLastRow 202  
getLength 78, 98, 231, 566  
getLineAt 629  
getLineCount 629  
getLineNumber 646  
getLines 630  
getLinesPerPage 633  
getLocalFile 757  
getLocalFileBytes 757  
getLogLevel 445  
getLogOffForm 376  
getLogoffMessage 447  
getLowerRightCorner 236  
getLowerRightPosition 20, 25  
getMacroConfig 347  
getMacrosFolder 399  
getMainContext 723  
getMapName 147  
getMapPath 346  
getMasterScreenName 269, 274  
getMozillaLogoffMessage 447  
getName 78, 97, 115, 122, 133, 172, 220, 231, 244, 251, 280, 548, 722  
getNaturalDataTransferConfig 381  
getNeighbor 553  
getNewRow 221, 245  
getNonActivityTimeOut 58  
getNumberOfPages 189  
getNumProcessedRecords 6  
getOffsetHeight 564  
getOffsetLeft 563  
getOffsetRight 563  
getOffsetTop 562  
getOnClick 533, 541  
getOpenedWindowAttributes 474  
getOriginalBuffer 630  
getPage 189  
getPageAt 642  
getPageBufferPosition 646  
getPageCount 642  
getPages 189, 642  
getPaintAllColumnHeight 508  
getPanelToUpdate 698  
getPanelToUpdateContent 698  
getParent 561  
getPassword 362, 409, 487, 489, 756  
getPasswordField 404, 410  
getPasswordFieldName 416  
getPasswordParameterName 485  
getPathExecutionLog 155  
getPathName 151, 423  
getPathResponse 149  
getPerformSyncCheckInInstant 350

---

getPopupCloseSentKey 474  
getPosition 71, 78, 97, 114, 231, 565  
getPrimaryKey 221, 245, 260, 289  
getPrint 632  
getPrintData 131  
getPrinterParameters 187  
getPrinterStatus 632  
getPrints 94  
getProceduresConfig 351  
getRadioButtonCss 602  
getReadOnlyBaseObject 61, 111  
getReflectBGColor 435  
getReflectBGColors 343  
getReflectEmulationBehaviour 344  
getReflectFGColor 435  
getReflectFGColors 343  
getReflectHostCursor 345  
getReflectHostProtected 346, 433  
getReflectMaxlength 345  
getRemoteFile 756  
getRenderArea 502  
getRenderConfig 554  
getRenderingType 608  
getReplayerInfo 120  
getReplayerStatus 120  
getReplayScreenData 120  
getReply 751  
getRow 263, 293, 744  
getRowByKey 266, 294  
getRowCount 263, 292  
getRows 124, 221, 245, 263, 292, 558  
getRowSpacingPercentageFactor 507  
getScreen 117, 118  
getScreenAt 129  
getScreenBuffer 158  
getScreenCount 129  
getScreenGroupNames 123  
getScreenLocker 377  
getScreenLockerText 377  
getScreenName 22, 78, 97, 231, 416  
getScreenNames 253, 281  
getScreens 130, 154  
getScreenSequenceNumber 78, 97, 231  
getScreenTagModel 516  
getSCSElements 630, 643  
getSegment 197  
getSegmentCoords 202  
getSegments 197  
getSegmentState 201  
getSegmentText 201  
getSelectedValue 539, 545  
getSeqNumber 123  
getSeqPageNumber 630  
getSeqPrintNumber 642  
getSeqScreenNumber 17, 118, 162  
getServer 756  
getServerContext 12, 365  
getServerURL 12, 359  
getServiceName 363  
getSessionConfig 347  
getSessionDescription 66  
getSessionID 11, 118  
getSessionId 360  
getSessionPassword 12  
getSignOnScreenRecognizer 420  
getSingleSignOnConfig 353  
getSsoExecuter 420  
getString 24  
getSupportDupAndFieldMark 340  
getTable 92, 93, 127  
getTableAlternating1CssClass 615  
getTableAlternating2CssClass 615  
getTableBuildConfig 351  
getTableConfig 505  
getTableCssClass 615  
getTableName 166, 695, 735  
getTables 127  
getTableSelectedKey 695, 735  
getTableSelectedKeys 695, 735  
getTagAttribute 696, 737  
getTagAttributes 697  
getTagById 551  
getTagContent 694, 732  
getTagContents 694  
getTagHeight 512  
getTagListeners 506  
getTagName 566  
getTags 553  
getTagWidth 512  
getTarget 542

---

---

getTerminationPath 383  
getText 540, 542, 555, 570  
getTimeout 18  
getTitle 135  
getTitleWindowFrameCssClass 625  
getTopMargin 564  
getTopPadding 564  
getToRow 431  
getTrimLabels 341, 436  
getType 251, 282, 646, 751  
getUncheckedValue 535  
getUploadForm 480  
getUpperLeftCorner 236  
getUpperLeftPosition 20, 25  
getUseArrows 458  
getUseCache 374  
getUseFolders 348  
getUseKeyboardPFKeys 340  
getUseModalWindows 348  
getUser 756  
getUserExitsFile 468  
getUserField 404, 411  
getUserId 69  
getUserName 400, 409, 487, 489  
getUserNameFieldName 416  
getUserParameterName 485  
getUserPasswordRetriever 419  
getUseScreenGroups 349  
getUseStateManager 376  
getValue 115, 583, 755  
getValues 172, 755  
getVariable 154, 364  
getVariableArray 155  
getVariableAt 155  
getVariableCount 155  
getVariableName 252, 281  
getVariableNames 155  
getVariables 8, 364  
getVersion 338  
getVirtualDir 375  
getVisualContent 80, 100, 232  
getWaitCodings 86  
getWebDownloadForm 479  
getWebEmulatorConfig 441  
getWebWindowName 385  
getWidthPixels 511  
getWindow 127  
getWindowConfig 441  
getWindowFrameConfig 506  
getWindowFrameCssClass 625  
getWindowLowerRight 123  
getWindows 128  
getWindowUpperLeft 123  
getWritePerformanceLog 379  
GX\_APPLICATION\_PARM\_ASSOCIATE\_DEVICE\_NAME 636  
GX\_APPLICATION\_PARM\_DEVICE\_NAME 636  
GX\_APPLICATION\_PARM\_DEVICE\_TYPE 636  
GX\_APPLICATION\_PARM\_DISPLAY\_DEVICE\_NAME 636  
GX\_APPLICATION\_PARM\_HOST\_ADDRESS 636  
GX\_APPLICATION\_PARM\_HOST\_PORT 636  
GX\_APPLICATION\_PARM\_IGNORE\_FIRST\_FORM\_FEE D 637  
GX\_APPLICATION\_PARM\_IGNORE\_FORMFEED\_IN\_TRANSPARENT 637  
GX\_APPLICATION\_PARM\_IGNORE\_HOST\_FORMATTING 637  
GX\_APPLICATION\_PARM\_IGNORE\_HOST\_SETTING\_FACTOR\_MAX\_CHARACTERS\_PER\_LINE 637  
GX\_APPLICATION\_PARM\_IGNORE\_HOST\_SETTING\_FACTOR\_MAX\_LINES\_PER\_PAGE 637  
GX\_APPLICATION\_PARM\_IGNORE\_TRANSPARENT 637  
GX\_APPLICATION\_PARM\_IGNORE\_VERTICAL\_CHANNEL\_SELECT 637  
GX\_APPLICATION\_PARM\_LANGUAGE 635  
GX\_APPLICATION\_PARM\_MESSAGE\_LIBRARY 636  
GX\_APPLICATION\_PARM\_MESSAGE\_QUEUE 636  
GX\_APPLICATION\_PARM\_REPLAY\_FILE 636  
GX\_APPLICATION\_PARM\_TRACE\_FILE 636  
GX\_APPLICATION\_PARM\_TRANSLATE\_ESCAPE 637  
GX\_APPLICATION\_PARM\_TRANSPARENT\_DATA\_IS\_ASCII 637  
GX\_FIELD\_ADJUST\_LEFT 48  
GX\_FIELD\_ADJUST\_NONE 47  
GX\_FIELD\_ADJUST\_RIGHT 47  
GX\_FIELD\_ADJUST\_RIGHT\_BLANK\_FILL 47  
GX\_FIELD\_ADJUST\_RIGHT\_ZERO\_FILL 47  
GX\_FIELD\_COLOR\_AQUA 35

- GX\_FIELD\_COLOR\_BLACK 35  
GX\_FIELD\_COLOR\_BLUE 35  
GX\_FIELD\_COLOR\_BROWN 35  
GX\_FIELD\_COLOR\_GRAY 36  
GX\_FIELD\_COLOR\_GREEN 35  
GX\_FIELD\_COLOR\_LIGHT\_AQUA 36  
GX\_FIELD\_COLOR\_LIGHT\_BLUE 36  
GX\_FIELD\_COLOR\_LIGHT\_GREEN 36  
GX\_FIELD\_COLOR\_LIGHT\_PURPLE 36  
GX\_FIELD\_COLOR\_LIGHT\_RED 36  
GX\_FIELD\_COLOR\_LIGHT\_WHITE 36  
GX\_FIELD\_COLOR\_NONE 35  
GX\_FIELD\_COLOR\_PINK 35  
GX\_FIELD\_COLOR\_RED 35  
GX\_FIELD\_COLOR\_WHITE 36  
GX\_FIELD\_COLOR\_YELLOW 36  
GX\_FIELD\_DATA\_TYPE\_ALPHA\_ONLY 46  
GX\_FIELD\_DATA\_TYPE\_ALPHANUMERIC 46  
GX\_FIELD\_DATA\_TYPE\_DBCS\_CAN\_CREATE\_SISO 47  
GX\_FIELD\_DATA\_TYPE\_DBCS\_ONLY 47  
GX\_FIELD\_DATA\_TYPE\_DIGITS\_ONLY 47  
GX\_FIELD\_DATA\_TYPE\_KATAKANA\_SHIFT 47  
GX\_FIELD\_DATA\_TYPE\_NUMERIC 46  
GX\_FIELD\_DATA\_TYPE\_REVERSED 47  
GX\_FIELD\_DATA\_TYPE\_SIGNED\_NUMERIC 47  
GX\_PRINT\_OBJECT\_STATUS\_COMPLETE 639  
GX\_PRINT\_OBJECT\_STATUS\_EMPTY 639  
GX\_PRINT\_OBJECT\_STATUS\_NOT\_COMPLETE 639  
GX\_PRINTER\_STATUS\_BUSY 638  
GX\_PRINTER\_STATUS\_CANCELLING 639  
GX\_PRINTER\_STATUS\_ERROR 638  
GX\_PRINTER\_STATUS\_INUSE 638  
GX\_PRINTER\_STATUS\_INVALID 638  
GX\_PRINTER\_STATUS\_PAPEROUT 638  
GX\_PRINTER\_STATUS\_READY 638  
GX\_PRINTER\_STATUS\_TIMEDOUT 638  
GX\_TABLE\_COLUMN\_DATA\_TYPE\_ALPHANUMERIC 250  
GX\_TABLE\_COLUMN\_DATA\_TYPE\_NUMERIC 250  
GX\_TABLE\_COLUMN\_TYPE\_APPFIELD 250  
GX\_TABLE\_COLUMN\_TYPE\_OTHER 251  
GX\_TABLE\_COLUMN\_TYPE\_VARIABLE 250  
GX\_VAR\_APPLICATION\_LANGUAGE 38  
GX\_VAR\_APPLY\_TRANSFORMATIONS 44  
GX\_VAR\_AS400\_KERBEROS\_ENCODING 46  
GX\_VAR\_AS400\_KERBEROS\_SERVICES\_TICKET 46  
GX\_VAR\_AS400\_LIBRARY 45  
GX\_VAR\_AS400\_MENU 46  
GX\_VAR\_AS400\_PASSWORD 45  
GX\_VAR\_AS400\_PROGRAM 46  
GX\_VAR\_AS400\_STARTUP\_RESPONSE 46  
GX\_VAR\_AS400\_USERNAME 45  
GX\_VAR\_CUT\_CONTENT\_TO\_MATCH\_HOST\_FIELD 44  
GX\_VAR\_DEVICE\_NAME 37  
GX\_VAR\_DEVICE\_TYPE 37  
GX\_VAR\_DISPLAY\_HIDDEN\_FIELDS 44  
GX\_VAR\_ENCODING\_LOGICAL 42  
GX\_VAR\_FIELDS\_WITH\_SUGGESTED\_NAMES 44  
GX\_VAR\_HEALTH\_CHECK\_CONNECTION 45  
GX\_VAR\_HEALTH\_CHECK\_CONNECTION\_DBID 45  
GX\_VAR\_HOST\_ADDRESS 37  
GX\_VAR\_HOST\_PORT 37  
GX\_VAR\_HOST\_WINDOW\_ENABLED 44  
GX\_VAR\_INCLUDE\_HOST\_FIELDS 43  
GX\_VAR\_NATURAL\_DATA\_TRANSFER\_DELIMITER 44  
GX\_VAR\_NATURAL\_DATA\_TRANSFER\_HEADERS\_USED 45  
GX\_VAR\_NATURAL\_DATA\_TRANSFER\_STREAM 45  
GX\_VAR\_NATUX\_OPTIONAL\_CUSTOM\_INFO 46  
GX\_VAR\_REMOVE\_CHARACTER 41  
GX\_VAR\_REMOVE\_CHARACTER\_BOTH\_SIDES 41  
GX\_VAR\_REPLAY\_DELAY 39  
GX\_VAR\_REPLAY\_FILE 38  
GX\_VAR\_RETURN\_FIELDS 44  
GX\_VAR\_RETURN\_SCREEN\_BUFFERS 40  
GX\_VAR\_SCREEN\_DIRECTION 39  
GX\_VAR\_THROW\_EXCEPTION\_ON\_INVALID\_INPUT 44  
GX\_VAR\_TRACE\_FILE 39  
GX\_VAR\_TRANSLATION\_LANGUAGE 39  
GX\_VAR\_TRIM\_FIELDS 42  
GX\_VAR\_TRIM\_MODE 43  
GX\_VAR\_UPPERCASE\_INPUT 37  
GX\_VAR\_VAL\_BUFFERS\_FIELD\_ATTRIBUTES 40  
GX\_VAR\_VAL\_BUFFERS\_NONE 40  
GX\_VAR\_VAL\_BUFFERS\_SCREEN\_DATA 40  
GX\_VAR\_VAL\_REMOVE\_CHARACTER\_ALL 41  
GX\_VAR\_VAL\_REMOVE\_CHARACTER\_BOTH\_SIDES\_

- 
- ALL\_FIELDS 42
  - GX\_VAR\_VAL\_REMOVE\_CHARACTER\_BOTH\_SIDES\_
  - NUMERIC\_FIELDS\_ONLY 42
  - GX\_VAR\_VAL\_REMOVE\_CHARACTER\_INPUT 41
  - GX\_VAR\_VAL\_REMOVE\_CHARACTER\_NONE 41
  - GX\_VAR\_VAL\_REPLAY\_DELAY\_NO\_DELAY 39
  - GX\_VAR\_VAL\_REPLAY\_DELAY\_SIMULATE\_HOST 39
  - GX\_VAR\_VAL\_SCREEN\_DIRECTION\_LTR 40
  - GX\_VAR\_VAL\_SCREEN\_DIRECTION\_RTL 40
  - GX\_VAR\_VAL\_TRIM\_FIELDS\_ALL 43
  - GX\_VAR\_VAL\_TRIM\_FIELDS\_INPUT\_AND\_BOTH 43
  - GX\_VAR\_VAL\_TRIM\_FIELDS\_INPUT\_ONLY 42
  - GX\_VAR\_VAL\_TRIM\_FIELDS\_NONE 43
  - GX\_VAR\_VAL\_TRIM\_MODE\_BOTH\_SIDES 43
  - GX\_VAR\_VAL\_TRIM\_MODE\_BY\_FIELD\_DIRECTION
  - 43
  - GX\_VAR\_VAL\_VT\_SEND\_CURSOR\_ARROWS 38
  - GX\_VAR\_VAL\_VT\_SEND\_CURSOR\_NONE 38
  - GX\_VAR\_VAL\_VT\_SEND\_CURSOR\_TAB 37
  - GX\_VAR\_VT\_AUTO\_SKIP\_WHEN\_FIELD\_IS\_FULL 38
  - GX\_VAR\_VT\_DYNAMIC\_INPUT\_CHECK 38
  - GX\_VAR\_VT\_KEY\_JUMP\_BETWEEN\_INPUT\_FIELDS
  - 38
  - GX\_VAR\_VT\_SEND\_CURSOR 37
  - GX\_VAR\_WORKING\_FOLDER 39
  - GX\_WAIT\_COND\_END\_OF\_PRINT 638
  - GX\_WAIT\_COND\_PRINTER\_READY 638
  - GX\_WEB\_APP\_VERSION 48
  - GXAbstractAnchorTag 703
  - GXAbstractBodyTag 705
  - GXAbstractCheckBoxTag 707
  - GXAbstractFieldMatchQuery 208
  - GXAbstractFormTag 708
  - GXAbstractGenericTag 709
  - GXAbstractHtmlTableTag 711
  - GXAbstractHtmlTag 712
  - GXAbstractHttpUserPasswordRetriever 484, 485
  - GXAbstractInputTag 714
  - GXAbstractNaturalDataTransferRequest 3
  - GXAbstractNaturalDataTransferResponse 5
  - GXAbstractRadioButton 716
  - GXAbstractRadioButtonList 717
  - GXAbstractSelectTag 719
  - GXAbstractSessionConnectionRequest 11
  - GXAbstractSignOnScreenRecognizer 403
  - GXAbstractSSOExecuter 405
  - GXAbstractTable 219
  - GXAbstractTag 721
  - GXActivatePrinterRequest 187
  - GXAddFieldToPreviousRowFilter 299
  - GXAnchorTag 650
  - GXAppConfig 338
  - GXAreaQuery 524
  - GXAS400Commands 766
  - GXAttachToSessionRequest 27
  - GXBaseObjectConstants 48
  - GXBidiTranslatorRequest 49, 50
  - GXBidiTranslatorResponse 51
  - GXBinaryRequest 53, 54
  - GXBinaryResponse 55
  - GXBoldTag 652
  - GXBook 188
  - GXCellable 223
  - GXCheckBoxTag 654
  - GXClientApplicationConfig 57
  - GXClientBaseObjectFactory 60
  - GXClientConfig 440
  - GXColumnNotFoundException 225
  - GXColumnsComparator 226
  - GXConfig 359
  - GXConnectionException 62
  - GXContextInitiatorTag 725
  - GXContextReleaseTag 727
  - GXCreateSessionRequest 64, 65
  - GXCreateSessionResponse 69
  - GXCursor 70, 71
  - GXDefaultTable 228
  - GXDivTag 655
  - GXEmulationTransformConfig 594
  - GXEndSessionRequest 74, 75
  - GXEngineConfig 445
  - GXFeatureDetectTag 729
  - GXField 78
  - GXFieldCollection 82
  - GXFieldCollectionQueryAppField 210
  - GXFieldCollectionQueryProtected 212
  - GXFieldTableCell 230
  - GXFormTag 657
  - GXFtpConfig 394
  - GXFtpConsts 748

---

GXFtpException 750, 751  
GXFtpRequest 755  
GXFtpResponse 758  
GXFtpTypes 761  
GXGeneralException 84  
GXGetPrintsRequest 191, 192  
GXGetScreenRequest 85  
GXGuiElementsTransformConfig 600  
GXHebrewTransform 605  
GXHostKeysTransformConfig 608  
GXHostTableUtils 234  
GXHTMLPrintBookBuilder 194  
GXHtmlTag 659  
GXHttpRequestUserPasswordRetriever 486, 487  
GXHttpSessionUserPasswordRetriever 488, 489  
GXIllegalPositionException 495  
GXImageTag 661  
GXInnerClientBaseObjectFactory 110  
GXInputField 114  
GXInputTag 664  
GXInstantEmulatorConfig 456  
GXJNLPTag 670  
GXJspIncludeTag 739  
GXLogNode 389  
GXMacroConfig 399  
GXMasterTable 269  
GXMFCommands 771  
GXMultipleRecordsTable 272  
GXNaturalDataTransferDownloadRequest 136, 137  
GXNaturalDataTransferDownloadResponse 138  
GXNaturalDataTransferException 140  
GXNaturalDataTransferUploadRequest 141, 142  
GXNaturalDataTransferUploadResponse 143  
GXNavigateException 144  
GXNavigateRequest 146  
GXNdtConfig 479  
GXNonDuplicateRowsFilter 301  
GXNonEmptyRowsFilter 303, 304  
GXPage 629  
GXPageTag 680  
GXPartialRowsTable 274  
GXPathException 149  
GXPathRequest 151  
GXPathResponse 154  
GXPerformanceMonitorNode 391  
GXPlainPage 196  
GXPoint 199  
GXPosition 744  
GXPresentationConstants 496  
GXPrinter 632  
GXPrinterSessionConstants 639  
GXPrintObject 641  
GXRadioButtonListTag 682  
GXRadioButtonTag 685  
GXRenderConfig 501  
GXRenderEvent 516  
GXResponseCodes 328  
GX SapPortalTransform 611  
GXScreenBuffers 157  
GXScreenCollectionFieldNameQuery 215  
GXScreenNameUndefinedException 275  
GXSelectTag 687  
GXSendKeysRequest 160  
GXSessionStatusResponse 162  
GXSetVariablesRequest 163  
GXSignOnRecognizerResponse 410  
GXSignOnScreenAutomaticRecognizer 412  
GXSignOnScreenByNameRecognizer 415  
GXSimpleTagQuery 527  
GXSpanTag 688  
GXSSOConfig 419  
GXSSOPathExecuter 422, 423  
GXSSOSendKeysExecuter 424, 425  
GXTableBuildConfig 430  
GXTableCell 276  
GXTableCellList 571  
GXTableColumn 279, 280  
GXTableColumnCollection 285  
GXTableRequest 166  
GXTableRow 288  
GXTableRowCollection 292  
GXTableRowList 573  
GXTableTag 690  
GXTableTransformConfig 614  
GXTagFunctions 740  
GXTagList 575, 576  
GXTagListener 519  
GXTagModelConstants 579  
GXTagsAccesorImpl 693  
GXTagUtil 511

---

- GXTdTag 699
  - GXTextAreaTag 700
  - GXTextQuery 529
  - GXTextSegment 201
  - GXTextSegmentState 205
  - GXTransformConfig 619
  - GXTransformConstants 622
  - GXUndefinedPositionException 513
  - GXVariable 169, 170
  - GXVariableArray 171
  - GXVariableTableCell 296
  - GXWaitForCursor 173, 174
  - GXWaitForScreen 175
  - GXWaitForString 176, 177
  - GXWaitHostQuiet 178, 179
  - GXWaitWhileCursor 180, 181
  - GXWaitWhileScreen 182
  - GXWaitWhileString 183, 184
  - GXWebAppConfig 374
  - GXWebEmulatorConfig 467
  - GXWindowConfig 472
  - GXWindowFrameTransformConfig 625
- ## H
- handleEvent 537
  - hasAcknowledge 192
  - hasAlarm 125
  - hasChildren 561
  - hasContent 629
  - hashCode 9, 170, 206, 745
  - hashtableToNameValueString 741
  - HOSTKEYS\_BUTTONS 622
  - HOSTKEYS\_DELETE 622
  - HOSTKEYS\_LINKS 622
  - HTML\_INPUT\_TYPE\_DATE 493
  - HTML\_INPUT\_TYPE\_DATETIME 493
  - HTML\_INPUT\_TYPE\_MONTH 493
  - HTML\_TAG\_ID 659
- ## I
- IMPORT\_APPLICATION\_CONFIG\_MISSING 326
  - IMPORT\_APPLICATION\_COULD\_NOT\_RESTORE\_OVER  
RIDEN\_APP\_FROM\_BACKUP 326
  - IMPORT\_APPLICATION\_ENTITIES\_FAILED 325
  - IMPORT\_APPLICATION\_FAILED 325
  - IMPORT\_APPLICATION\_HOST\_CATEGORY\_UNSUPPO  
RTED 326
  - INDEXATION\_PROCESS\_FAILED 325
  - initialize 584
  - insert 572, 574, 576
  - instance 588, 752
  - isAdjustNeighbours 601, 616
  - isAppField 79, 99, 115, 233
  - isAttachInputTagEvents 470
  - isAutoCursorJump 79, 99, 232
  - isAutoEnter 79, 98, 232
  - isAutomaticDownload 480
  - isAutoSkipAllFields 456
  - isBlinking 80, 99, 232
  - isBlinkingCaret 463
  - isBlockNumericFields 460
  - isBoundsIncludeBorder 135
  - isCaretAtEndOfField 460
  - isCaseSensitive 25
  - isCell 239
  - isChecked 534, 548
  - isCheckHostScreenUpdate 469
  - isClientBlinking 596
  - isColumnAppfieldColumn 236
  - isComplete 5, 629, 641
  - isCurrentPrint 641
  - isDataTransferCommandSynchronous 109
  - isDebugMode 73, 147, 152, 167
  - isDirectionRTL 125
  - isDisplayChanged 123
  - isDoJapaneseDataTypeValidityCheck 463
  - isEmphasis 629
  - isEmpty 642
  - isEmulationPasteBehavior 464
  - isEnabled 419, 619
  - isFailOnWarning 68, 366
  - isFeatureSupported 494
  - isFirstChunk 139
  - isFullDetails 167
  - isHandleMenuSelection 461
  - isHideOnly 626
  - isHighIntensified 79, 98, 232
  - isHostKeyField 80



isInstant 353  
isLoadEmulationComponent 468  
isLoadPrinter 467  
isLocked 125  
isLogoffOnBrowserClose 446  
isMasterRow 240, 253, 282  
isMemberOf 127  
isMultiple 80, 99, 231  
isNaturalDataTransferSupported 58  
isOpenWindowCenter 473  
isPassThroughData 641  
isPassword 569  
isPositionInTable 236  
isPrimaryKeyValid 242, 300, 302, 304  
isPromptBeforeSessionTimeOut 383  
isPromptOnBrowserClose 449  
isProtected 79, 98, 231, 297  
isReadOnly 119  
isRenderAlternatingCssClass 616  
isRenderAppFieldCss 596  
isRenderEmulationAttributes 595  
isRenderIntensifiedCss 596  
isRenderTagsFromRightToLeft 508  
isReversedVideo 80, 100, 233  
isRowValid 241, 300, 302, 304  
isRTL 50  
isSelectFieldOnFocus 462  
isShowBlinkingFields 462  
isShowIntermediateScreen 365  
isShowLogConsole 448  
isSignOnScreen 411  
isSupportPartialPageRendering 384  
isSupportTypeAheadV2 469  
isTabbingRTL 125  
isTabOnInputsOnly 458  
isTagVisible 694  
isToCopy 253, 282  
isTrimFields 58  
isTypingRTL 125  
isUnderlined 80, 100, 206, 233  
isUseCalendar 383  
isUseFramesForSubmit 382  
isUseJavaScriptsAsResource 381  
isUseKeyboardPfKeys 459  
isUseOldJSEngine 381

isUseScriptsInPage 382  
isVariable 170  
isVariableArray 154  
isVariablesModified 365  
isVisible 79, 98, 231, 567  
isWaitForSystemUnlock 179  
isWindow 123  
isWindowRelative 616  
isWindowRelativePositioning 16

## L

LABEL\_FOCUS\_BOLD 455  
LABEL\_FOCUS\_NONE 455  
LABEL\_FOCUS\_UNDERLINE 455  
LOCAL\_FILE 748  
LOG\_LEVEL\_DEBUG 445  
LOG\_LEVEL\_ERROR 445  
LOG\_LEVEL\_MESSAGE 445  
LOG\_LEVEL\_WARNING 445  
LOG\_MODE\_DEBUG 632  
LOG\_MODE\_NORMAL 632  
LogHistory 389  
LogLevel 389

## M

MAIN\_FRAME 394, 760  
MAPPING\_EXCEEDS\_LINE 324  
MAPPING\_OVERLAP 324  
MAPPING\_UTILITY\_FAILED 325  
MaxFileSize 389  
MESSAGE\_PATH\_BY\_STEP\_COMPLETE 314  
MESSAGE\_PATH\_COMPLETE 315  
MODE 748

## N

navigateTo 93  
NEIGHBOR\_ABOVE 578  
NEIGHBOR\_BELOW 578  
NEIGHBOR\_LEFT 579  
NEIGHBOR\_RIGHT 579  
newButton 589  
newCheckbox 591

newComboBox 590  
newGenericTag 590  
newHiddenTag 591  
newHtmlString 591  
newImage 591  
newLabel 588  
newLink 589  
newRadioButton 590  
newRadioButtons 590  
newStaticLabel 588  
newTable 589  
newTableCell 589  
newTableHeader 591  
newTableRow 589  
newTextField 589  
NO\_ERROR 315  
NO\_WARNING 314  
NULL 132

## O

OBJECT\_ALREADY\_EXISTS 324  
OBJECT\_NOT\_DELETED 324  
OBJECT\_NOT\_FOUND 324  
OBJECT\_NOT\_UPDATED 324  
onComplete 515, 605  
onNewButton 519, 611  
onNewCheckbox 520, 611  
onNewComboBox 520, 611  
onNewLabel 519, 611  
onNewLink 519, 611  
onNewRadioButtons 520, 611  
onNewTable 520, 612  
onNewTableCell 521, 612  
onNewTableRow 520, 612  
onNewTextField 519, 611  
OVERRIDE 132

## P

PASSWORD 748  
performSingleSignOn 405, 408  
PerSessionID 390  
putFile 752

## R

readExternal 4, 8, 13, 16, 27, 50, 52, 54, 68, 75, 86, 137, 142, 147, 152, 156, 161, 163, 167, 187, 189, 192, 197, 202, 206, 222, 269, 272, 274, 286, 290, 295  
readFileToUpload 757  
recognizeScreen 407, 412, 415  
recycle 588  
recycleBodyTag 698  
recycleTag 698  
refreshScreen 93  
rejectTransfer 107  
REMOTE\_FILE 748  
remove 554, 576  
removeAllListeners 506  
removeAttribute 567  
removeColumn 220, 245, 256, 285  
removeFilter 264, 293  
removeInputField 16  
removeItem 261, 289, 290  
removeRow 264, 293  
removeTagAttribute 695  
removeVariable 365  
renderAndRecycle 741  
renderInto 585  
replace 554, 576  
REPOSITORY\_NOT\_AVAILABLE 324  
REPOSITORY\_NOT\_CREATED 324  
REPOSITORY\_NOT\_SYNCHRONIZED 326  
RESTRICTED\_ACCESS\_TO\_URL 328  
RETRIEVE\_INSIDE\_AREA 524  
RETRIEVE\_OUTSIDE\_AREA 524

## S

saveUserNameLocally 400  
sendKeys 90  
SERVER 747  
SESSION\_CANCELED 328  
SESSION\_CANCELED\_BY\_ADMIN 328  
SESSION\_CANCELED\_BY\_INACTIVE\_TIMEOUT 328  
set\_ActionKey 425  
set\_AddJavascript 378  
set\_AdjustNeighbours 603, 617  
set\_Alignment 603

---

set\_AllowTypeAhead 375  
set\_AlternateColors 433  
set\_AlternateCssName 434  
set\_ApplicationName 361  
set\_AttachInputTagEvents 470  
set\_AutomaticDownload 480  
set\_AutoSkipAllFields 456  
set\_BlinkingCaret 463  
set\_BlockNumericFields 460  
set\_CaptureBrowserClose 378  
set\_CaptureTagsEvents 349  
set\_CaretAtEndOfField 461  
set\_CheckboxCss 603  
set\_CheckHostScreenUpdate 470  
set\_ClientBlinking 597  
set\_CloneComboxOnClientSide 436  
set\_ColorMode 597  
set\_ColorSets 460  
set\_ComboboxCss 604  
set\_DebugModules 448  
set\_DefaultExtension 481  
set\_DefaultFrameColumns 449  
set\_DefaultOpenedWindowHeight 475  
set\_DefaultOpenedWindowLeft 475  
set\_DefaultOpenedWindowTop 475  
set\_DefaultOpenedWindowWidth 475  
set\_Description 361  
set\_DesignMode 339  
set\_DoJapaneseDataTypeValidityCheck 463  
set\_DoubleClickActionKey 457  
set\_Dynamic 510  
set\_DynamicDisableCssClass 377, 434  
set\_DynamicFieldCheck 432  
set\_EmulationConfig 504  
set\_EmulationPasteBehavior 464  
set\_Enabled 420, 620  
set\_Encoding 437  
set\_EncryptData 401  
set\_EngineConfig 440  
set\_ErrorForm 342  
set\_ExternalCssRequestParamName 380  
set\_FailOnWarning 367  
set\_FieldsModification 352  
set\_FieldTypesInUse 340  
set\_Flicker 401  
set\_FontFamily 507  
set\_FontSize 503  
set\_FromRow 430  
set\_FtpConfig 354  
set\_GenerateTrOnClickEvent 431  
set\_GuiElementsConfig 509  
set\_HandleMenuSelection 461  
set\_HideOnly 626  
set\_HostAddress 395  
set\_HostDownloadForm 481  
set\_HostKeyCss 609  
set\_HostKeysConfig 505  
set\_HostNewPassword 367  
set\_HostPassword 363  
set\_HostType 395  
set\_HostUserName 360  
set\_IndexForm 354  
set\_Instant 353  
set\_InstantConfig 352  
set\_InstantEmulatorConfig 441  
set\_InstantForm 341  
set\_InstantWinForm 342  
set\_IsInstant 353  
set\_LabelFocus 457  
set\_LoadEmulationComponent 470  
set\_LoadPrinter 468  
set\_LogLevel 446  
set\_LogOffForm 376  
set\_LogoffMessage 450  
set\_LogoffOnBrowserClose 446  
set\_MacroConfig 347  
set\_MacrosFolder 400  
set\_MapPath 346  
set\_MozillaLogoffMessage 447  
set\_NaturalDataTransferConfig 381  
set\_OpenedWindowAttributes 476  
set\_OpenWindowCenter 476  
set\_PaintAllColumnHeight 508  
set\_Password 362  
set\_PasswordFieldName 417  
set\_PathName 423  
set\_PerformSyncCheckInInstant 350  
set\_PopupCloseSentKey 476  
set\_ProceduresConfig 354  
set\_PromptBeforeSessionTimeOut 383

---

---

set\_PromptOnBrowserClose 449  
set\_RadioButtonCss 604  
set\_Rectangle 502  
set\_ReflectBGColor 435  
set\_ReflectBGColors 343  
set\_ReflectEmulationBehaviour 344  
set\_ReflectFGColor 435  
set\_ReflectFGColors 343  
set\_ReflectHostCursor 344  
set\_ReflectHostProtected 346, 432  
set\_ReflectMaxlength 345  
set\_RenderAlternatingCssClass 617  
set\_RenderAppFieldCss 597  
set\_RenderArea 502  
set\_RenderEmulationAttributes 597  
set\_RenderingType 608  
set\_RenderIntensifiedCss 597  
set\_RenderTagsFromRightToLeft 509  
set\_RowSpacingPercentageFactor 508  
set\_SaveUserNameLocally 401  
set\_ScreenLocker 376  
set\_ScreenLockerText 385  
set\_ScreenName 417  
set\_SelectFieldOnFocus 462  
set\_ServerURL 359  
set\_ServiceName 363  
set\_SessionConfig 347  
set\_SessionId 360  
set\_ShowBlinkingFields 463  
set\_ShowIntermediateScreen 366  
set\_ShowLogConsole 449  
set\_SingleSignOnConfig 354  
set\_SsoConfig 354  
set\_SupportDupAndFieldMark 340  
set\_SupportPartialPageRendering 386  
set\_SupportTypeAheadV2 469  
set\_TableAlternating1CssClass 617  
set\_TableAlternating2CssClass 617  
set\_TableBuildConfig 351  
set\_TableConfig 505  
set\_TableCssClass 617  
set\_TabOnInputsOnly 458  
set\_TerminationPath 386  
set\_TitleWindowFrameCssClass 626  
set\_ToRow 431  
set\_TrimLabels 341, 436  
set\_UploadForm 482  
set\_UseArrows 459  
set\_UseCache 374  
set\_UseCalendar 386  
set\_UseFolders 348  
set\_UseFramesForSubmit 386  
set\_UseJavaScriptsAsResource 382  
set\_UseKeyboardPFKeys 339  
set\_UseKeyboardPfKeys 459  
set\_UseModalWindows 348  
set\_UseOldJSEngine 385  
set\_UserExitsFile 468  
set\_UserName 400  
set\_UserNameFieldName 417  
set\_UseScreenGroups 349  
set\_UseScriptsInPage 382  
set\_UseStateManager 376  
set\_Variables 364  
set\_VirtualDir 374  
set\_WebDownloadForm 481  
set\_WebEmulatorConfig 441  
set\_WebWindowName 386  
set\_WindowConfig 441  
set\_WindowFrameConfig 506  
set\_WindowFrameCssClass 626  
set\_WindowRelative 618  
set\_WritePerformanceLog 379  
setAcknowledge 192  
setActionKey 425  
setAdditional 757  
setAddJavascript 379  
setAddress 671  
setAdjustNeighbours 601, 616  
setAlign 724  
setAlignment 545, 601  
setAllowTypeAhead 375  
setAlternateColors 433  
setAlternateCssName 433  
setAppend\_to\_file 673  
setAppFieldFullName 281  
setAppFieldName 252, 281  
setApplication 671  
setApplicationName 11, 361  
setArea 524

---

---

setAssociate\_device\_name 672  
setAttachInputTagEvents 470  
setAttribute 566  
setAttributeListIfEmpty 696  
setAttributeName 730  
setAttributes 723  
setAuto\_reconnect\_number\_of\_tries 672  
setAuto\_reconnect\_time\_interval 672  
setAutomaticDownload 480  
setAutoSkipAllFields 456  
setBest\_fit\_row\_proportion 676  
setBgcolor 724  
setBlinkingCaret 463  
setBlockNumericFields 460  
setBodyAttribute 697, 736  
setBodyAttributeIfEmpty 696  
setBorder 682, 690  
setBottom\_margin 674  
setBottomMargin 565  
setBottomPadding 564  
setBypass\_gdi 677  
setCaption 252, 281, 533, 536, 549  
setCaptureBrowserClose 378  
setCaptureTagsEvents 350  
setCaretAtEndOfField 461  
setCellpadding 682, 690  
setCellspacing 682, 690  
setChange\_font\_size\_by\_chars\_per\_line 676  
setChange\_orientation\_by\_chars\_per\_line 676  
setCharacters\_per\_line 675  
setCharactersPerLine 633, 643  
setCheck\_each\_page\_separately 676  
setCheckboxCss 602  
setChecked 535, 548, 654, 666, 685  
setCheckedValue 535, 548, 654  
setCheckHostScreenUpdate 469  
setClientBlinking 596  
setClientId 13  
setCloneComboxOnClientSide 436  
setColor 205  
setColorMode 595  
setColorSets 459  
setCols 701  
setColumnNames 304  
setComboboxCss 602  
setComplete 6, 629  
setConnectionPool 66  
setContent 248, 277  
setContents 50  
setCopyCount 253, 282  
setCornersCoordinates 221  
setCPI 675  
setCpi\_translation 675  
setCssClass 722  
setCursor 161  
setCustomized\_library 678  
setCustomized\_object 678  
setData 54, 55, 139  
setDataType 251, 280  
setDebugMode 73, 147, 152, 167  
setDebugModules 448  
setDefaultExtension 481  
setDefaultFrameColumns 448  
setDefaultOpenedWindowHeight 473  
setDefaultOpenedWindowLeft 473  
setDefaultOpenedWindowTop 474  
setDefaultOpenedWindowWidth 474  
setDescription 362, 671  
setDesignMode 339  
setDestinationScreenName 147  
setDevice\_name 671  
setDir 665, 682, 687, 709  
setDisconnect\_previous\_session 672  
setDisplay\_device\_name 672  
setDisplayDeviceName 675  
setDo\_not\_add\_form\_feed\_at\_end\_of\_job 676  
setDo\_not\_print\_siso\_as\_space 678  
setDo\_not\_return\_print\_buffers 673  
setDoJapaneseDataTypeValidityCheck 463  
setDoubleClickActionKey 456  
setDrawer1 678  
setDrawer2 678  
setDynamicDisableCssClass 378, 434  
setDynamicFieldCheck 432  
setEmulationConfig 504  
setEmulationPasteBehavior 464  
setEnable\_presentation 673  
setEnabled 419, 620  
setEncoding 437  
setEncryptData 401

---

---

setEngineConfig 440  
setEntireTag 525  
setEnvelope\_hopper 678  
setErrorForm 342  
setExclude\_last\_line\_if\_empty 676  
setExclude\_last\_page\_if\_empty 676  
setExternalCssRequestParamName 380  
setFailOnWarning 68, 366  
setFeatureSupport 494  
setFieldIndex 72  
setFieldName 72  
setFieldsModification 353  
setFieldTypesInUse 341  
setFirstChunk 139  
setFlicker 19, 401  
setFont 205  
setFont\_bold 674  
setFont\_id\_translation 676  
setFont\_italic 674  
setFont\_name 674  
setFont\_size 674  
setfont\_width 674  
setFontFamily 507  
setFontSize 503  
setFontWidth 509  
setFormAttribute 697, 736  
setFromRow 430  
setFtpConfig 351  
setFullDetails 167  
setGenerateTrOnClickEvent 431  
setGlossary 52  
setGuiElementsConfig 504  
setGx\_context 660, 670, 726, 739  
setHandleMenuSelection 461  
setHeaderCoordinates 221  
setHeight 724  
setHideOnly 626  
setHorizontal 682  
setHost\_address 672  
setHost\_port 672  
setHost\_print\_transform 678  
setHostAddress 395  
setHostDownloadForm 479  
setHostKeyCss 609  
setHostKeysConfig 505  
setHostKeysTagUserExit 384  
setHostNewPassword 67, 366  
setHostPassword 67, 363  
setHostType 395  
setHostUserName 67, 361  
setHref 650  
setId 562, 584, 722  
setIgnore\_FF\_in\_transparent\_blocks 677  
setIgnore\_transparent\_blocks 677  
setIgnore\_vertical\_channel\_select 677  
setIndex 115  
setIndexForm 354  
setInnerText 581  
setInputBorderWidth 509  
setInputFieldHeight 509  
setInputTagAttribute 696  
setInstantConfig 352  
setInstantEmulatorConfig 440  
setInstantForm 342  
setInstantWinForm 342  
setIs\_ascii899 678  
setIsCaseSensitive 25  
setIsDynamicFont 510  
setIsHeader 555  
setIsInstant 353  
setIsMasterRow 253, 282  
setIsToCopy 253, 282  
setIsWrapTextOnMPP 629  
setItem 259, 289  
setItemContent 260, 266, 289, 294  
setItems 538, 545  
setKeys 161  
setLabelFocus 457  
setLeft\_margin 674  
setLength 566  
setLines\_per\_page 675  
setLinesPerPage 633, 643  
setLoadEmulationComponent 468  
setLoadPrinter 467  
setLocalFileBytes 757  
setLogLevel 446, 633  
setLoglevel 672  
setLogOffForm 376  
setLogoffMessage 447  
setLogoffOnBrowserClose 446

---

setLowerRightPosition 21, 25  
setLPI 675  
setLU1\_transparent\_byte 677  
setMacroConfig 347  
setMacrosFolder 399  
setMapName 147  
setMapPath 346  
setMax\_pages\_per\_print\_job 675  
setMaxlength 665  
setMessage\_lib 675  
setMessage\_queue 675  
setMinimal\_font\_size 675  
setMozillaLogoffMessage 447  
setMultiple 687  
setName 115, 133, 172, 220, 251, 281, 548, 701  
setNaturalDataTransferConfig 381  
setNumProcessedRecords 6  
setOffsetHeight 564  
setOffsetLeft 563  
setOffsetRight 563  
setOffsetTop 562  
setOnChange 665, 687  
setOnClick 533, 542  
setOnclick 650, 654, 664, 685, 687, 724  
setOnkeydown 665  
setOnkeypress 665  
setOnkeyup 665  
setOnload 706  
setOnmouseout 650, 662  
setOnmouseover 650, 662  
setOnserverclick 650, 664  
setOnsubmit 657  
setOpenedWindowAttributes 474  
setOpenWindowCenter 473  
setOrientation\_type 677  
setOutput\_file\_name 673  
setPageContext 659, 722, 739  
setPageVisible 698, 733  
setPaintAllColumnHeight 508  
setPanelToUpdateContent 698  
setPassword 362, 570, 671, 756  
setPasswordField 404, 411  
setPasswordFieldName 416  
setPasswordParameterName 485  
setPathExecutionLog 156  
setPathName 152, 423  
setPerformSyncCheckInInstant 350  
setPopupCloseSentKey 475  
setPosition 71, 114, 565  
setPrimaryKey 221, 246, 289  
setPrint\_as\_text 673  
setPrint\_model 678  
setPrinter\_device 673  
setPrintjob\_separator\_add\_new\_line 673  
setPrintjob\_separator\_text 673  
setProceduresConfig 352  
setPromptBeforeSessionTimeOut 383  
setPromptOnBrowserClose 449  
setTrace\_File 671  
setRadioButtonCss 602  
setRecalculate\_global\_fit 676  
setReflectBGColor 435  
setReflectBGColors 343  
setReflectEmulationBehaviour 344  
setReflectFGColor 434  
setReflectFGColors 343  
setReflectHostCursor 345  
setReflectHostProtected 346, 432  
setReflectMaxlength 345  
setRemoteFile 756  
setRenderAlternatingCssClass 616  
setRenderAppFieldCss 596  
setRenderArea 502  
setRenderEmulationAttributes 595  
setRenderingType 608  
setRenderIntensifiedCss 596  
setRenderTagsFromRightToLeft 508  
setReplay\_File 672  
setReplayScreen 120  
setRetrievalMode 525  
setRight\_margin 674  
setRowRange 525  
setRows 701  
setRowSpacingPrecentageFactor 507  
setRTL 50  
setSaveUserNameLocally 400  
setScreenLocker 377  
setScreenLockerText 377  
setScreenName 22, 416  
setScreenNames 253, 282

---

---

setSegmentState 201  
setSelectedValue 539, 545  
setSelectFieldOnFocus 462  
setSeqScreenNumber 17  
setServer 756  
setServerContext 12, 365  
setServerPort 671  
setServerURL 12, 360, 671  
setServiceName 363  
setSessionConfig 347  
setSessionDescription 65  
setSessionID 11  
setSessionId 360  
setSessionPassword 12  
setShowBlinkingFields 462  
setShowFirstRowsWithoutMaster 272  
setShowIntermediateScreen 365  
setShowLogConsole 448  
setSignOnScreen 411  
setSignOnScreenRecognizer 420  
setSingleSignOnConfig 353  
setSize 665, 687  
setSleep 673  
setSrc 662, 665  
setSsoExecuter 420  
setString 25  
setStyle 723  
setSupportDupAndFieldMark 340  
setSupportFileUpload 657  
setSupportPartialPageRendering 384  
setSupportTypeAheadV2 469  
setTabIndex 665  
setTableAlternating1CssClass 615  
setTableAlternating2CssClass 615  
setTableBuildConfig 351  
setTableConfig 505  
setTableCssClass 615  
setTableName 167  
setTabOnInputsOnly 458  
setTagAttribute 695, 733  
setTagContent 693, 732  
setTagContentIfEmpty 693  
setTagList 694, 697, 733  
setTagName 581, 586  
setTagTable 694, 695, 734  
setTagText 585  
setTagVisible 694, 733  
setTagVisibleIfEmpty 694  
setTarget 542  
setTerminationPath 384  
setText 540, 542, 556, 570  
setTimeout 18  
setTitle 724  
setTitleWindowFrameCssClass 625  
setTop\_margin 674  
setTopMargin 565  
setTopPadding 564  
setToRow 431  
setTransparent\_data\_is\_ASCII 677  
setTransparent\_end\_trigger 677  
setTransparent\_start\_trigger 677  
setTreat\_carriage\_return\_as\_new\_line 678  
setTrimLabels 341, 436  
setType 665  
setUncheckedValue 535, 654  
setUnderlined 206  
setUploadForm 480  
setUpperLeftPosition 21, 25  
setUseArrows 458  
setUseCache 374  
setUseCalendar 383  
setUseFolders 348  
setUseFramesForSubmit 382  
setUseHostService 66  
setUseJavaScriptsAsResource 381  
setUseKeyboardPFKeys 340  
setUseKeyboardPfKeys 459  
setUseModalWindows 348  
setUseOldJSEngine 381  
setUser 757  
setUserExitsFile 468  
setUserField 404, 411  
setUserid 671  
setUserName 400  
setUserNameFieldName 417  
setUserParameterName 485  
setUserPasswordRetriever 419  
setUseScreenGroups 349  
setUseScriptsInPage 382  
setUseStateManager 376



setValue 115, 583, 664, 685, 755  
setValues 172  
setVariableName 252, 281  
setVariables 8, 364  
setVirtualDir 375  
setVisible 567, 723  
setWait 673  
setWaitCondition 633  
setWebDownloadForm 480  
setWebEmulatorConfig 441  
setWebWindowName 385  
setWidth 724  
setWindow\_minimized\_on\_start 679  
setWindowConfig 441  
setWindowFrameConfig 506  
setWindowFrameCssClass 625  
setWindowRelative 616  
setWindowRelativePositioning 16  
setWritePerformanceLog 379  
ShortLongDescription 391  
SIMPLE 394, 760  
sort 220, 247, 267, 294  
startDownload 105  
startUpload 106

## T

toCSS 194  
toString 17, 72, 116, 152, 161, 199, 206, 222, 233, 282, 286,  
290, 295, 304, 366, 644, 647, 745  
TraceSessions 391  
TraceSessionsIDs 391  
TYPE\_APPFIELD 96  
TYPE\_HOSTFIELD 96  
TYPE\_HOSTKEY\_FIELD 97  
TYPE\_MULTIPLE\_APPFIELD 97

## U

UNKNOWN 132  
UPDATE\_NONE\_EXISTING\_ENTITY 326  
USER 748

## W

WARNING\_30\_DAYS\_EVAL\_VERSION 323  
WARNING\_60\_DAYS\_EVAL\_VERSION 323  
WARNING\_90\_DAYS\_EVAL\_VERSION 323  
WARNING\_DURING\_CONNECT 314  
WARNING\_EVALUATION\_EXPIRED 323  
WARNING\_FIELD\_CONTENT\_ALREADY\_EXIST 314  
WARNING\_FIELD\_IS\_PROTECTED 314  
WARNING\_PATH\_SCREEN\_NOT\_ADDED\_TO\_RESPONS  
E 314  
WARNING\_SCREEN\_IMAGE\_INSERT\_FAILED 314  
WARNING\_WAIT\_CONDITION\_FAILED 314  
writeComplexRadio 740  
writeExternal 4, 9, 13, 17, 27, 50, 52, 54, 68, 75, 86, 137, 142,  
148, 152, 156, 161, 164, 168, 187, 189, 192, 197, 202, 206,  
222, 269, 272, 274, 286, 290, 295  
writeRadio 741