

## **webMethods EntireX**

### **EntireX RPC Server for IMS Connect**

Version 10.9

April 2023

This document applies to webMethods EntireX Version 10.9 and all subsequent releases.

Specifications contained herein are subject to change and these changes will be reported in subsequent release notes or new editions.

Copyright © 1997-2023 Software AG, Darmstadt, Germany and/or Software AG USA, Inc., Reston, VA, USA, and/or its subsidiaries and/or its affiliates and/or their licensors.

The name Software AG and all Software AG product names are either trademarks or registered trademarks of Software AG and/or Software AG USA, Inc. and/or its subsidiaries and/or its affiliates and/or their licensors. Other company and product names mentioned herein may be trademarks of their respective owners.

Detailed information on trademarks and patents owned by Software AG and/or its subsidiaries is located at <http://softwareag.com/licenses>.

Use of this software is subject to adherence to Software AG's licensing conditions and terms. These terms are part of the product documentation, located at <http://softwareag.com/licenses/> and/or in the root installation directory of the licensed product(s).

This software may include portions of third-party products. For third-party copyright notices, license terms, additional rights or restrictions, please refer to "License Texts, Copyright Notices and Disclaimers of Third-Party Products". For certain specific third-party license restrictions, please refer to section E of the Legal Notices available under "License Terms and Conditions for Use of Software AG Products / Copyright and Trademark Notices of Software AG Products". These documents are part of the product documentation, located at <http://softwareag.com/licenses> and/or in the root installation directory of the licensed product(s).

Use, reproduction, transfer, publication or disclosure is prohibited except as specifically provided for in your License Agreement with Software AG.

**Document ID: EXX-IMSCONNECT-109-20230403**

## Table of Contents

1 About this Documentation .....	1
Document Conventions .....	2
Online Information and Support .....	2
Data Protection .....	3
2 Introduction to the RPC Server for IMS Connect .....	5
Overview .....	6
Administration using Command Central .....	6
Worker Models .....	8
3 Administering the RPC Server for IMS Connect using the Command Central GUI .....	9
Logging in to Command Central .....	10
Creating an RPC Server Instance .....	11
Configuring an RPC Server Instance .....	16
Viewing the Runtime Status .....	22
Starting an RPC Server Instance .....	23
Stopping an RPC Server Instance .....	24
Inspecting the Log Files .....	25
Changing the Trace Level Temporarily .....	26
Deleting an RPC Server Instance .....	27
4 Administering the RPC Server for IMS Connect using the Command Central Command Line .....	29
Creating an RPC Server Instance .....	30
Configuring an RPC Server Instance .....	32
Displaying the EntireX Inventory .....	49
Viewing the Runtime Status .....	50
Starting an RPC Server Instance .....	51
Stopping an RPC Server Instance .....	51
Inspecting the Log Files .....	52
Changing the Trace Level Temporarily .....	54
Deleting an RPC Server Instance .....	55
5 Configuring the RPC Server for IMS Connect with Local Scripts .....	57
Customizing the RPC Server .....	58
Configuring the RPC Server Side .....	60
Configuring the IMS Connect Side .....	63
Using SSL/TLS with the RPC Server .....	65
Starting the RPC Server .....	67
Stopping the RPC Server .....	67
Pinging the RPC Server .....	68
Running an EntireX RPC Server as a Windows Service .....	68
Application Identification .....	70
6 Extracting from Message Format Service .....	71
7 Server-side Mapping Files .....	73
Server-side Mapping Files in the RPC Server .....	74

Undeploying Server-side Mapping Files from the RPC Server .....	74
Change Management of Server-side Mapping Files .....	75
List Deployed Server-side Mapping Files .....	75
Check if a Server-side Mapping File Revision has been Deployed .....	75
8 Scenarios .....	77
COBOL Scenarios .....	78

# 1 About this Documentation

---

▪ Document Conventions .....	2
▪ Online Information and Support .....	2
▪ Data Protection .....	3

## Document Conventions

---

Convention	Description
<b>Bold</b>	Identifies elements on a screen.
Monospace font	Identifies service names and locations in the format <i>folder.subfolder.service</i> , APIs, Java classes, methods, properties.
<i>Italic</i>	Identifies:  Variables for which you must supply values specific to your own situation or environment. New terms the first time they occur in the text. References to other documentation sources.
Monospace font	Identifies:  Text you must type in. Messages displayed by the system. Program code.
{ }	Indicates a set of choices from which you must choose one. Type only the information inside the curly braces. Do not type the { } symbols.
	Separates two mutually exclusive choices in a syntax line. Type one of these choices. Do not type the   symbol.
[ ]	Indicates one or more options. Type only the information inside the square brackets. Do not type the [ ] symbols.
...	Indicates that you can type multiple options of the same type. Type only the information. Do not type the ellipsis (...).

## Online Information and Support

---

### Product Documentation

You can find the product documentation on our documentation website at <https://documentation.softwareag.com>.

In addition, you can also access the cloud product documentation via <https://www.software-ag.cloud>. Navigate to the desired product and then, depending on your solution, go to “Developer Center”, “User Center” or “Documentation”.

### Product Training

You can find helpful product training material on our Learning Portal at <https://knowledge.softwareag.com>.

## Tech Community

You can collaborate with Software AG experts on our Tech Community website at <https://tech-community.softwareag.com>. From here you can, for example:

- Browse through our vast knowledge base.
- Ask questions and find answers in our discussion forums.
- Get the latest Software AG news and announcements.
- Explore our communities.
- Go to our public GitHub and Docker repositories at <https://github.com/softwareag> and <https://hub.docker.com/publishers/softwareag> and discover additional Software AG resources.

## Product Support

Support for Software AG products is provided to licensed customers via our Empower Portal at <https://empower.softwareag.com>. Many services on this portal require that you have an account. If you do not yet have one, you can request it at <https://empower.softwareag.com/register>. Once you have an account, you can, for example:

- Download products, updates and fixes.
- Search the Knowledge Center for technical information and tips.
- Subscribe to early warnings and critical alerts.
- Open and update support incidents.
- Add product feature requests.

## Data Protection

---

Software AG products provide functionality with respect to processing of personal data according to the EU General Data Protection Regulation (GDPR). Where applicable, appropriate steps are documented in the respective administration documentation.

---

# 2 Introduction to the RPC Server for IMS Connect

---


- Overview ..... 6
- Administration using Command Central ..... 6
- Worker Models ..... 8

The EntireX RPC Server for IMS Connect allows standard RPC clients to communicate with IMS MPP programs. It works together with the IDL Extractor for COBOL and transforms RPC requests from clients into message to IMS, using IMS Connect.

## Overview

---

The RPC Server for IMS Connect acts on one side as an RPC server and on the other side as a client for IMS Connect. The RPC Server for IMS Connect is a Java-based component that can run on a different host to the one where IMS is running. This allows it to operate with a zero footprint of EntireX on the IMS host.

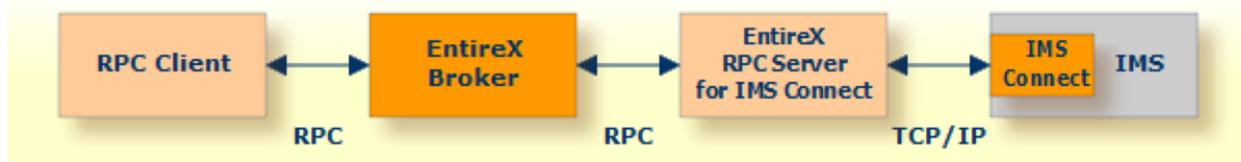


For existing IMS COBOL MPP programs, use the IDL Extractor for COBOL to extract the *Software AG IDL File* in the IDL Editor documentation for the RPC clients.

- For local extraction, all source files have to be stored locally on the same machine where the Designer is running.
- Remote extraction requires an RPC server running under z/OS with Extractor Service (Batch | IMS). See *Step 2: Select a COBOL Extractor Environment or Create a New One* in the IDL Extractor for COBOL documentation.

## Administration using Command Central

---

Software AG Command Central is a tool that enables you to manage your Software AG products remotely from one location. Command Central offers a browser-based user interface, but you can also automate tasks by using commands to remotely execute actions from a terminal or custom script (for example CI servers such as Jenkins, or generic configuration management tools such as Puppet or Chef).

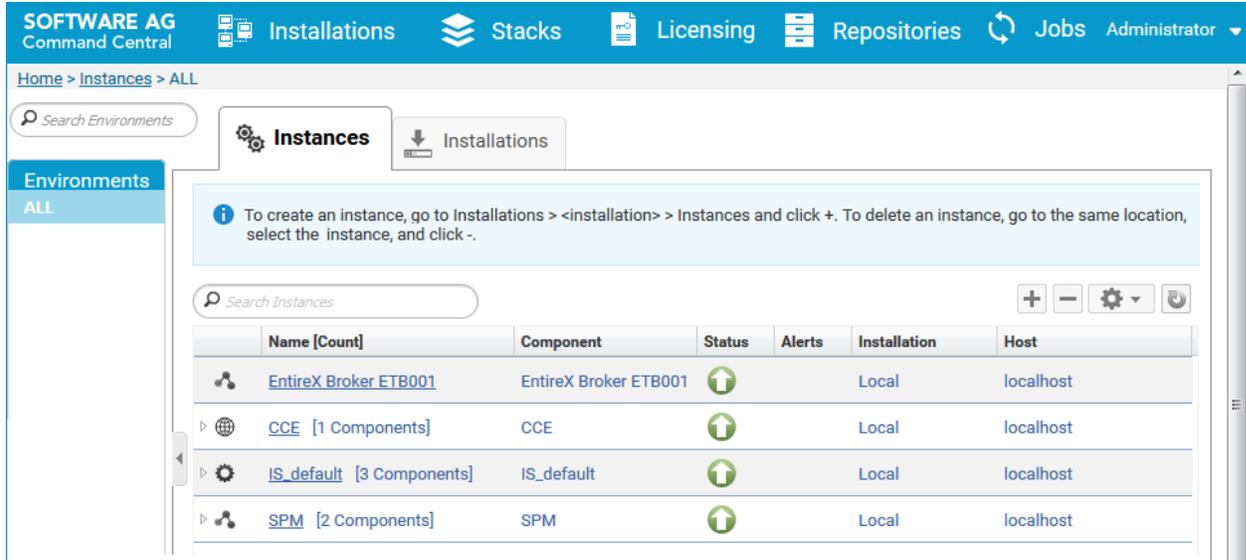


Command Central can assist with the following configuration, management, and monitoring tasks:

- Infrastructure engineers can see at a glance which products and fixes are installed, where they are installed, and compare installations to find discrepancies.
- System administrators can configure environments by using a single web user interface or command-line tool. Maintenance involves minimum effort and risk.
- Release managers can prepare and deploy changes to multiple servers using command-line scripting for simpler, safer lifecycle management.
- Operators can monitor server status and health, as well as start and stop servers from a single location. They can also configure alerts to be sent to them in case of unplanned outages.

The Command Central graphical user interface is described under [Administering the RPC Server for IMS Connect using the Command Central GUI](#). For the command-line interface, see [Administering the RPC Server for IMS Connect using the Command Central Command Line](#).

The core Command Central documentation is provided separately and is also available under **Guides for Tools Shared by Software AG Products** on the Software AG documentation website.

## Worker Models

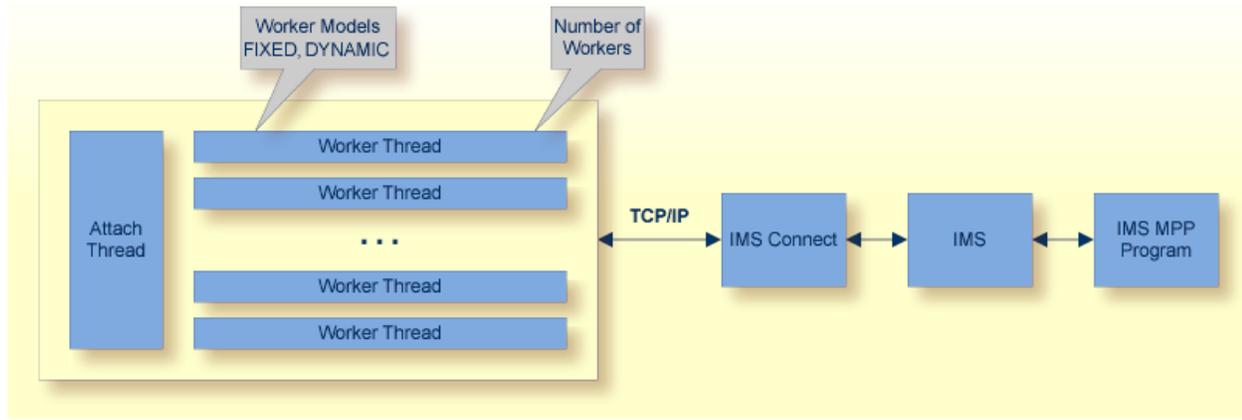

RPC requests are worked off inside the RPC server in worker threads. If you are using RPC conversations, each RPC conversation requires its own thread during the lifetime of the conversation. The RPC Server for IMS Connect can adjust the number of worker threads to the number of parallel requests. The RPC server provides two worker models:

- **FIXED**  
The *fixed* model creates a fixed number of worker threads. The number of worker threads does not increase or decrease during the lifetime of an RPC server instance.
- **DYNAMIC**  
The *dynamic* model creates worker threads depending on the incoming load of RPC requests.

For configuration with the Command Central GUI, see [Worker Scalability](#) under *Configuration > Server*.

For technical details, see property `entirex.server.fixedservers` under *Administering the RPC Server for IMS Connect*.

# 3 Administering the RPC Server for IMS Connect using the Command Central GUI

---

- Logging in to Command Central ..... 10
- Creating an RPC Server Instance ..... 11
- Configuring an RPC Server Instance ..... 16
- Viewing the Runtime Status ..... 22
- Starting an RPC Server Instance ..... 23
- Stopping an RPC Server Instance ..... 24
- Inspecting the Log Files ..... 25
- Changing the Trace Level Temporarily ..... 26
- Deleting an RPC Server Instance ..... 27

This chapter describes how to administer the EntireX RPC Server for IMS Connect, using the Command Central graphical user interface.


See also [Administering the RPC Server for IMS Connect using the Command Central Command Line](#). The core Command Central documentation is provided separately and is also available under **Guides for Tools Shared by Software AG Products** on the Software AG documentation website.

## Logging in to Command Central

Open an Internet browser and specify the URL of the Command Central Server as follows: `http://<Command_Central_host>:<Command_Central_port>`. This takes you to the Command Central **Login** page.

On Windows you can also get to the **Login** page from the Command Central Start Menu entry.


Provide your user credentials in the **Login** page and click **Log In**. This takes you to the page **Home > Instances:**

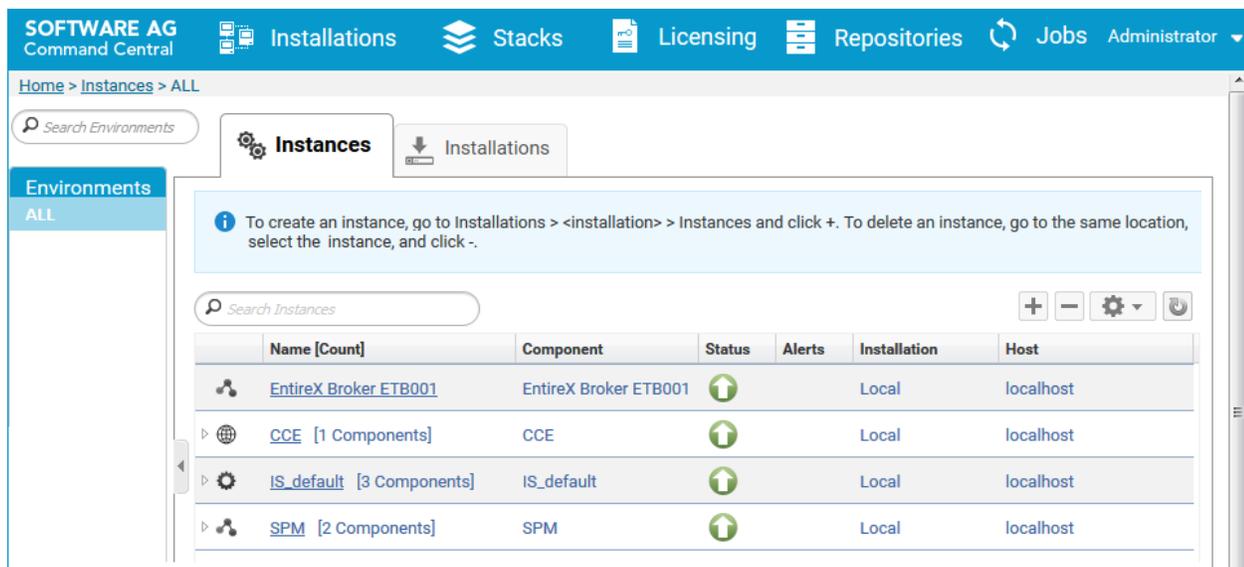


## Creating an RPC Server Instance

➤ To create an RPC Server for IMS Connect instance


- 1 In the Command Central home page, click the **Installations** tab.

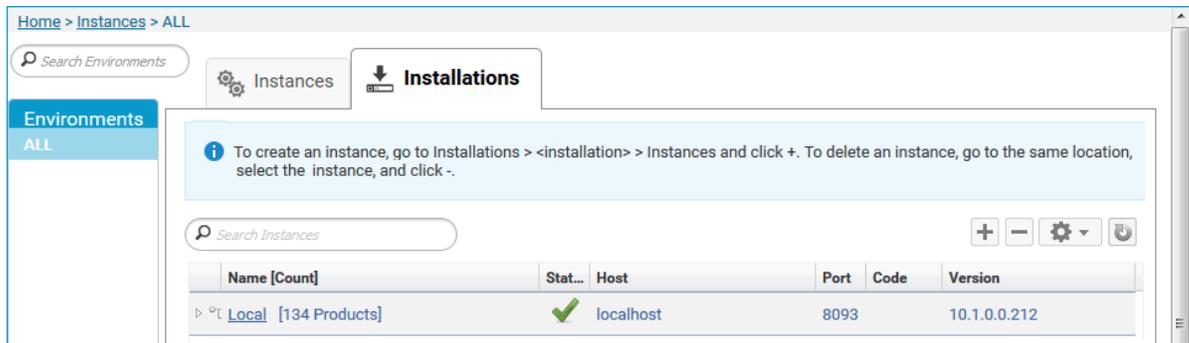

- 2 Click on the desired installation, for example **Local**, where you want to add an RPC Server for IMS Connect instance.

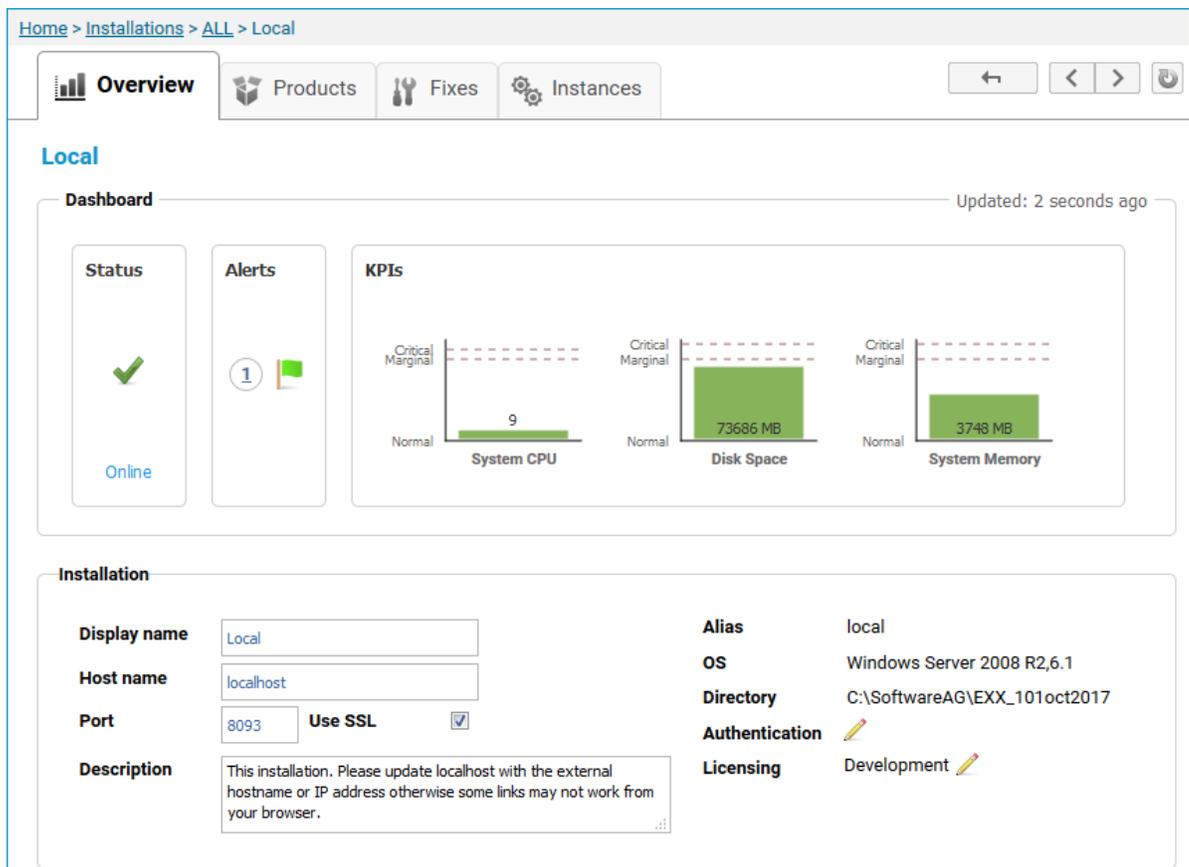


3 Click the **Instances** tab.

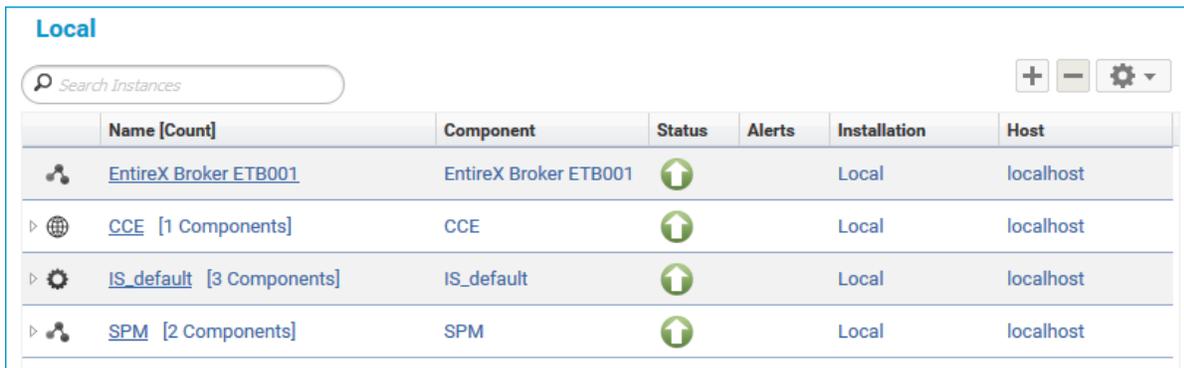

	Name [Count]	Component	Status	Alerts	Installation	Host
	<a href="#">EntireX Broker ETB001</a>	EntireX Broker ETB001	↑		Local	localhost
▶	<a href="#">CCE [1 Components]</a>	CCE	↑		Local	localhost
▶	<a href="#">IS_default [3 Components]</a>	IS_default	↑		Local	localhost
▶	<a href="#">SPM [2 Components]</a>	SPM	↑		Local	localhost

4 Click the  button in the upper right corner above the list and choose **EntireX RPC Server for IMS Connect**.

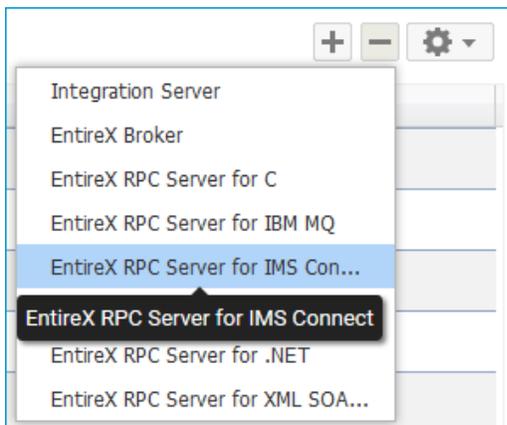

5 In the **Create Instance** wizard, fill in the fields in the main screen and in the **Server, Broker** and **IMS Connect** tabs.

**Main Screen**

Parameter	Description
Instance name	Required. Name of the runtime component, for example "MyRpcServer".
Register Windows Service for automatic startup	Optional. Register Windows Service for automatic startup. Default is not checked. If this parameter is checked, the RPC server can be controlled by the Windows Service Control Manager.

### Server Tab

Parameter	Description
RPC Server address	Required. The case-sensitive RPC server address has the format: CLASS/SERVER/SERVICE.
Administration port	Required. The administration port in range from 1025 to 65535.

### Broker Tab

Parameter	Description
<b>Connection</b>	
Transport	Transport over TCP or SSL. Default is TCP.
Broker host	Required. EntireX Broker host name or IP address. See <i>Using the Broker ID in Applications</i> in the RPC Programming documentation.
Broker port	Required. Port number in range from 1025 to 65535.
SSL trust store	Optional. Specifies the location of the SSL trust store.
<b>Credentials</b>	
User	Optional. The user ID for secured access to the broker.
Password	Optional. The password for secured access to the broker.

### IMS Connect Tab

Here you can modify the IMS Connect settings for the RPC Server for IMS Connect.

Parameter	Description
<b>Connection</b>	
Transport	Use TCP or SSL to communicate with IMS Connect.
IMS host	Host name or IP address where IMS Connect is running
IMS port	TCP or SSL port number where IMS Connect is listening.
IMS data store ID	Data store ID. Name of the IMS system that will receive transactions.
IMS encoding	Specify the appropriate EBCDIC encoding used by your IMS Connect. This codepage is also used when communicating with the EntireX Broker. Default cp037 is EBCDIC codepage with full Latin-1 character set.
<b>Credentials</b>	
RACF user ID	The user ID (max. 8 chars) as defined in your underlying mainframe security system (e.g. RACF).
RACF password	Password (max. 8 chars) as defined in your underlying mainframe security system (e.g. RACF).

- 6 Press **Next** to get to the **Summary** page to verify your input.

7 Press **Finish**.

The screenshot shows the 'Local' section of the Command Central GUI. At the top, there is a search bar labeled 'Search Instances'. Below it is a table with the following columns: Name [Count], Component, Status, Alerts, Installation, and Host. The table contains four rows of data:

Name [Count]	Component	Status	Alerts	Installation	Host
<a href="#">EntireX Broker ETB001</a>	EntireX Broker ETB001	↑		Local	localhost
▶ <a href="#">CCE</a> [1 Components]	CCE	↑		Local	localhost
▶ <a href="#">IS_default</a> [3 Components]	IS_default	↑		Local	localhost
▶ <a href="#">SPM</a> [2 Components]	SPM	↑		Local	localhost


An 'Operation triggered' dialog box is overlaid on the bottom right of the table. It contains the text 'Job operation is started successfully.' and two buttons: 'View Job' and 'Finish'.

The new instance *myRpcServer* appears in the list.

## Configuring an RPC Server Instance

> To configure an RPC Server for IMS Connect instance

- 1 In the Command Central home page, click the **Instances** tab.

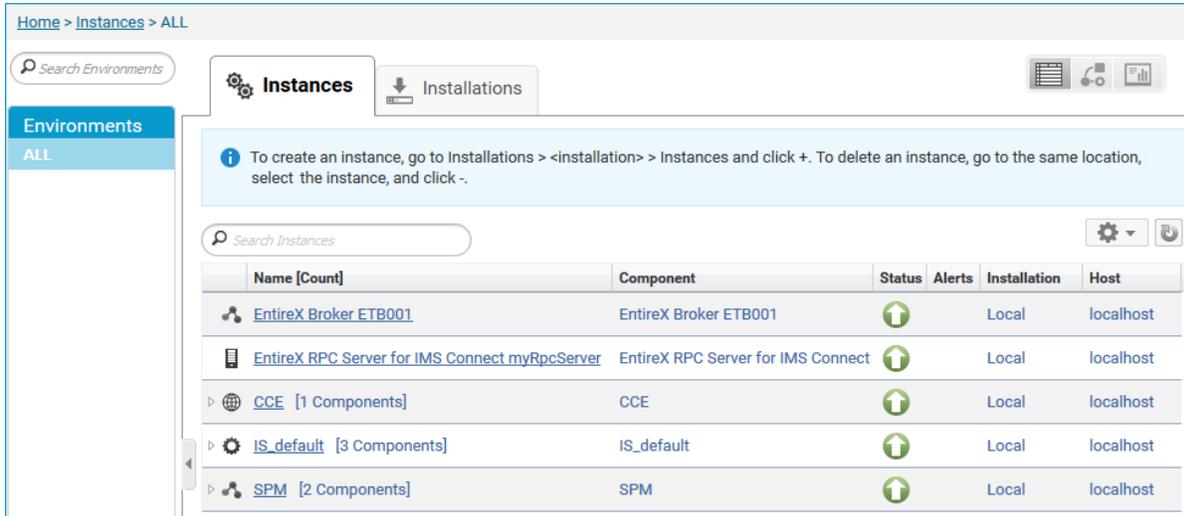

- 2 Click on the link associated with this instance to select the RPC server instance you want to configure.

The screenshot displays the Command Central GUI interface for the EntireX RPC Server for IMS Connect. At the top, there are navigation tabs: Overview (selected), Configuration, Logs, and Administration. Below the tabs, the instance name is "EntireX RPC Server for IMS Connect myRpcServer". The main content area is divided into two sections: "Dashboard" and "Details".

The "Dashboard" section, updated 22 seconds ago, contains three panels:
 


- Status:** Shows a green upward arrow and the text "Online".
- Alerts:** Shows a notification icon with the number "1" and a green square.
- KPIs:** Contains two bar charts. The first chart, "Active Workers", shows a value of 1. The second chart, "Busy Workers", shows a value of 0. Both charts have a y-axis with "Normal" and "Critical Marginal" levels.

The "Details" section contains a list of attributes:
 

- Display name:** EntireX RPC Server for IMS Connect (with a dropdown arrow)
- Component:** EntireX RPC Server for IMS Con...
- Host name:** localhost
- Authentication:** (with a pencil icon)
- Installation name:** Local
- Installation alias:** local

 To the right of these fields is an "Attributes" table with a "+" and "-" button. The table has two columns: "Name" and "Value".

- 3 Click the **Configuration** tab. EntireX supports the following configuration types, which are presented in a drop-down box when you click the down arrow below the **Configuration** tab label:

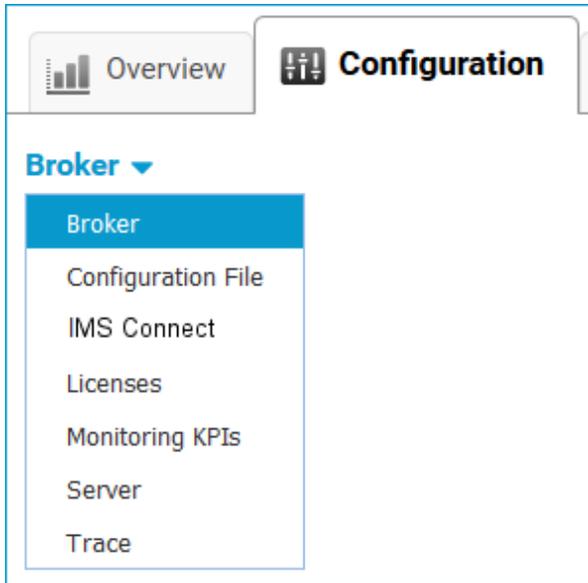

**Note:** All configuration changes require a restart of the instance to take effect.

- 4 Click **Edit** to modify the parameters on your selected configuration type.
- 5 Click **Test** to check the correctness of your input or **Apply** to save your changes.

The configuration options are described in more detail below:

- [Broker](#)
- [Configuration File](#)
- [IMS Connect](#)
- [Licenses](#)
- [Monitoring KPIs](#)
- [Server](#)
- [Trace Level](#)

## Broker

Parameter	Description
<b>Connection</b>	
Transport	Transport over TCP or SSL. Default is TCP.
Broker host	Required. EntireX Broker host name or IP address. See <i>Using the Broker ID in Applications</i> in the RPC Programming documentation.
Broker port	Required. Port number in range from 1025 to 65535.
SSL trust store	Optional. Specifies the location of the SSL trust store.
SSL trust password	Optional. The password of the SSL trust store.
SSL verify server	Optional. The RPC server as SSL client checks the identity of the broker as SSL server.

Parameter	Description
FIPS-140 mode	Optional. Enable FIPS-140 compliant SSL communication. Default is no.
<b>Credentials</b>	
User	Optional. The user ID for secured access to the broker.
Password	Optional. The password for secured access to the broker.

## Configuration File

Here you can view/edit the configuration file of the RPC Server for IMS Connect.

## IMS Connect

Here you can modify the IMS Connect settings for the RPC Server for IMS Connect.

Parameter	Description
<b>Connection</b>	
Transport	Use TCP or SSL to communicate with IMS Connect.
IMS host	Host name or IP address where IMS Connect is running
IMS port	TCP or SSL port number where IMS Connect is listening.
IMS data store ID	Data store ID. Name of the IMS system that will receive transactions.
IMS encoding	Specify the appropriate EBCDIC encoding used by your IMS Connect. This codepage is also used when communicating with the EntireX Broker. Default cp037 is EBCDIC codepage with full Latin-1 character set.
IMS socket timeout	Socket timeout for connection to IMS Connect (in milliseconds).
IMS SSL trust store	Specifies the location of the SSL trust store.
IMS SSL trust password	The password of the SSL trust store.
IMS SSL verify server	The RPC Server as SSL client checks the identity of IMS Connect as SSL server.
<b>Credentials</b>	
RACF user ID	The user ID (max. 8 chars) as defined in your underlying mainframe security system (e.g. RACF).
RACF password	Password (max. 8 chars) as defined in your underlying mainframe security system (e.g. RACF).
Use PassTicket <sup>(1)</sup>	Use PassTicket instead of password.
Application Name	Required if PassTicket is to be used instead of a password. Application name (1-8 chars) as defined in your RACF system. This property is ignored if RACF password is set.
Secured signon key	Required if PassTicket is to be used instead of a password. Secured signon key as defined in your RACF system. Must be exactly 16 characters long.
<b>Exit</b>	
IMS Connect exit	Use Old or New.

Parameter	Description
IMS Connect exit name	If left blank, the following defaults will be used: *SAMPLE* for old exit, *SAMPLE1* for new exit.

 **Notes:**

1. By default, PassTickets can only be used once during a one-second time interval. They are protected against replay. This limits the workload to one request per second.

 **Caution:** IBM provides a mechanism to bypass the PassTicket's replay mechanism, allowing higher workloads, but this introduces security risks. The option to bypass the PassTicket's replay mechanism should only be used in secure environments where access to generated PassTickets is limited to a secure or internal network. See your IBM documentation for more information.

### Licenses

Here you can view/set the license file in the EntireX installation. For details see *Import Product License Keys for Instances or Components* under *Getting Started with Command Central* in the separate Command Central documentation under *Software AG Suite & Cross-Product Guides*.

 **Note:** The license file is used for all EntireX instances in this installation.

### Monitoring KPIs

Here you can modify margins of monitored key performance indicators (KPIs) available for the RPC Server for IMS Connect: Active Workers and Busy Workers.

Key performance indicators (KPIs) enable you to monitor the health of your RPC Server for IMS Connect. The following KPIs help you administer, troubleshoot, and resolve performance issues:

KPI	Setting
Absolute number of Active Workers	entirex.generic.kpi.1.max=20
Critical alert relative to maximum	entirex.generic.kpi.1.critical=0.95
Marginal alert relative to maximum	entirex.generic.kpi.1.marginal=0.80
Absolute number of Busy Workers	entirex.generic.kpi.2.max=20
Critical alert relative to maximum	entirex.generic.kpi.2.critical=0.95
Marginal alert relative to maximum	entirex.generic.kpi.2.marginal=0.80

Do not change the other properties!

## Server

Here you can specify the RPC Server settings.

Parameter	Description
<b>RPC Server</b>	
RPC Server address	Required. The case-sensitive RPC server address has the format: CLASS/SERVER/SERVICE.
Administration port	Required. The administration port in range from 1025 to 65535.
Reconnection attempts	Required. Number of reconnection attempts to the broker. When the number of attempts is reached and a connection to the broker is not possible, the RPC Server for IMS Connect stops.
<b>Worker Scalability</b>	
Worker model	You can either have a fixed or dynamic number of workers. Default is dynamic (true). For more information see <a href="#">Worker Models</a> .
Fixed number	Required. Fixed number of workers. Must be a number in range from 1 to 255.
Minimum number	Required. Minimum number of workers. Must be a number in range from 1 to 255.
Maximum number	Required. Maximum number of workers. Must be a number in range from 1 to 255.

## Trace Level

Here you can set the trace level of the RPC Server for IMS Connect.

Parameter	Value	Description
Trace level	0 - 3	One of the following levels: 0 - None - No trace output (default). 1 - Standard - Minimal trace output. 2 - Advanced - Detailed trace output. 3 - Support - Support diagnostic. Use only when requested by Software AG Support.

## Viewing the Runtime Status

> To view the runtime status of the RPC server instance

- In the Command Central **Home** page, click the **Instances** tab and select the RPC Server for IMS Connect instance for which you want to see the runtime status (same as Step 1 under *Configuring a Broker Instance*).




The visual key performance indicators (KPIs) and alerts enable you to monitor the RPC Server for IMS Connect's health.

KPI	Description
Active Workers	Number of active workers.
Busy Workers	Number of busy workers.

## Starting an RPC Server Instance

➤ To start an RPC Server for IMS Connect instance from the Instances tab

- 1 In the Command Central home page, click the **Instances** tab.

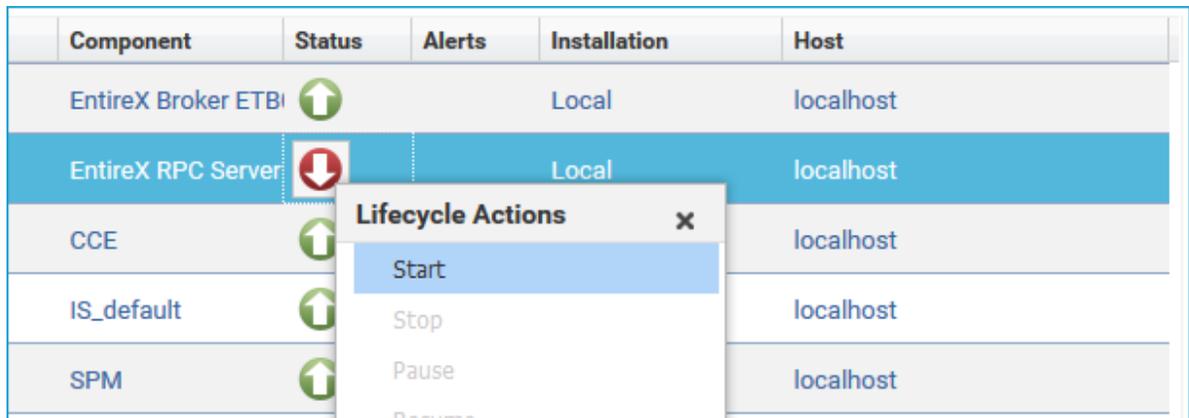


Component	Status	Alerts	Installation	Host
EntireX Broker ETB...	↑		Local	localhost
EntireX RPC Server	↓		Local	localhost
CCE	↑			localhost
IS_default	↑			localhost
SPM	↑			localhost

- 2 Select the status, and from the context menu choose **Start**.

➤ To start an RPC Server for IMS Connect instance from its Overview tab

- 1 In the Command Central home page, click the **Instances** tab and select the RPC Server for IMS Connect instance you want to start (same as Step 1 under *Configuring a Broker Instance*).

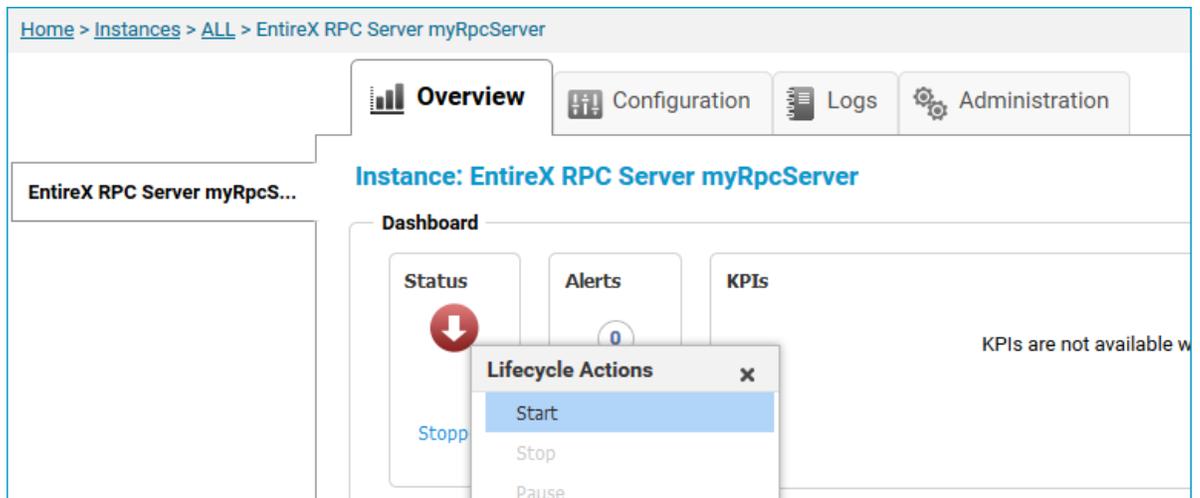

Home > Instances > ALL > EntireX RPC Server myRpcServer

Overview Configuration Logs Administration

Instance: EntireX RPC Server myRpcServer

Dashboard

Status Alerts KPIs


KPIs are not available w...

- 2 Select the status, and from the context menu choose **Start**.

## Stopping an RPC Server Instance

➤ To stop an RPC Server for IMS Connect instance from the Instances tab


- 1 In the Command Central home page, click the **Instances** tab.

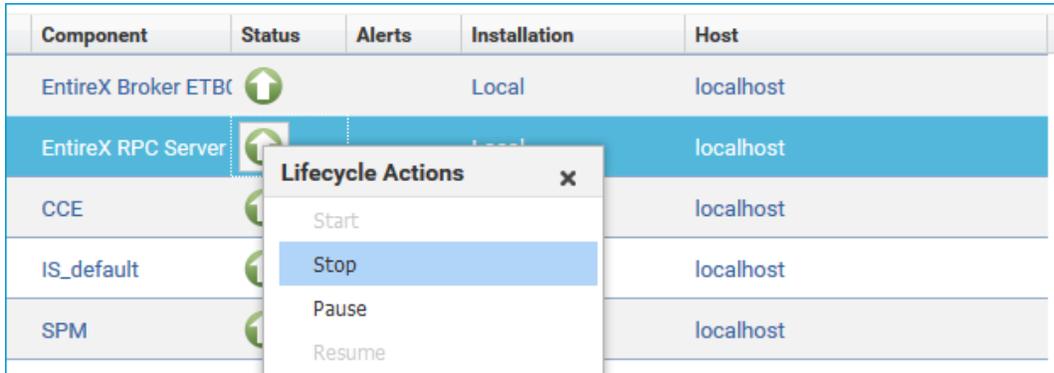

- 2 Select the status, and from the context menu choose **Stop**.

➤ To stop an RPC Server for IMS Connect instance from its Overview tab

- 1 In the Command Central home page, click the **Instances** tab and select the RPC Server for IMS Connect instance you want to stop (same as Step 1 under *Configuring a Broker Instance*).

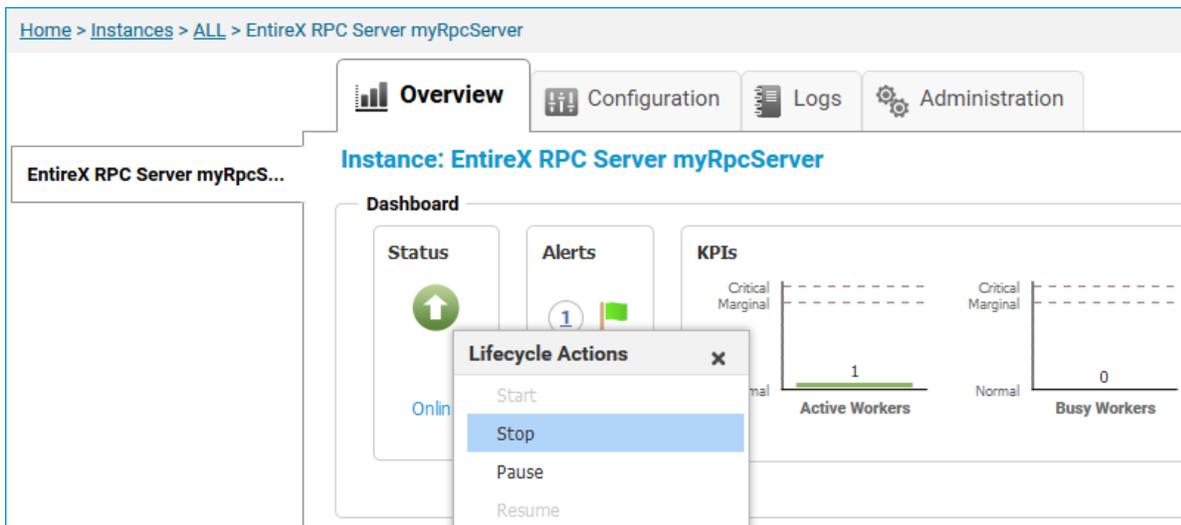

- 2 Select the status, and from the context menu choose **Stop**.

## Inspecting the Log Files

### ➤ To inspect the log files of an RPC Server for IMS Connect instance

- 1 In the Command Central home page, click the **Instances** tab, then click the link associated with the RPC Server for IMS Connect instance for which you want to inspect the log files (same as Step 1 under *Configuring a Broker Instance*).
- 2 Click the **Logs** tab:

The screenshot shows the Command Central GUI for an instance named "EntireX RPC Server for IMS Connect myRpcServer". The "Logs" tab is selected, displaying a table of log sources. The table has columns for "Alias", "Last Updated", "Size", and "Download".

Alias	Last Updated	Size	Download
<a href="#">server.log</a>	27 minutes ago	225 bytes	
<a href="#">console.log</a>	27 minutes ago	4.81 kB	

- 3 In the **Alias** column, click the link of the log file you want to inspect, for example *server.log*:


The screenshot shows the Command Central GUI with the "Logs" tab selected and "server.log" chosen. The log content is displayed in a text area, showing two entries:

```
2017-07-12 08:34:38.279/main-1 Start of RPC Server for IMS Connect 10.1.0.0.602
2017-07-12 08:34:38.280/main-1 Using property file C:\SoftwareAG_101\EntireX\config\rpc\EntireXCore
```

## Changing the Trace Level Temporarily

➤ To temporarily change the trace level of an RPC Server for IMS Connect instance

- 1 In the Command Central home page, click the **Instances** tab then click the link associated with the RPC Server for IMS Connect instance for which you want change the trace level temporarily (same as Step 1 under *Configuring a Broker Instance*).
- 2 In the **Administration** tab, select the trace level and press **Update**.

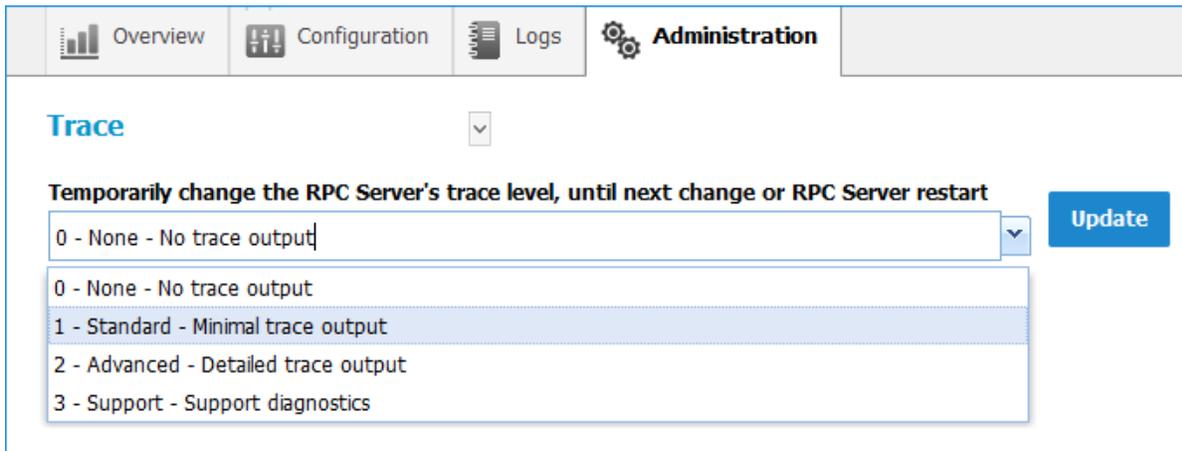


**Note:** If you want to set the trace level permanently, see [Trace Level](#) under *Configuring an RPC Server Instance*.

## Deleting an RPC Server Instance

### ➤ To delete an RPC Server for IMS Connect instance

- 1 In the list of EntireX RPC Server for IMS Connect instances for your selected installation (for example Local), select the instance you want to delete and click the  button in the upper right corner above the list.

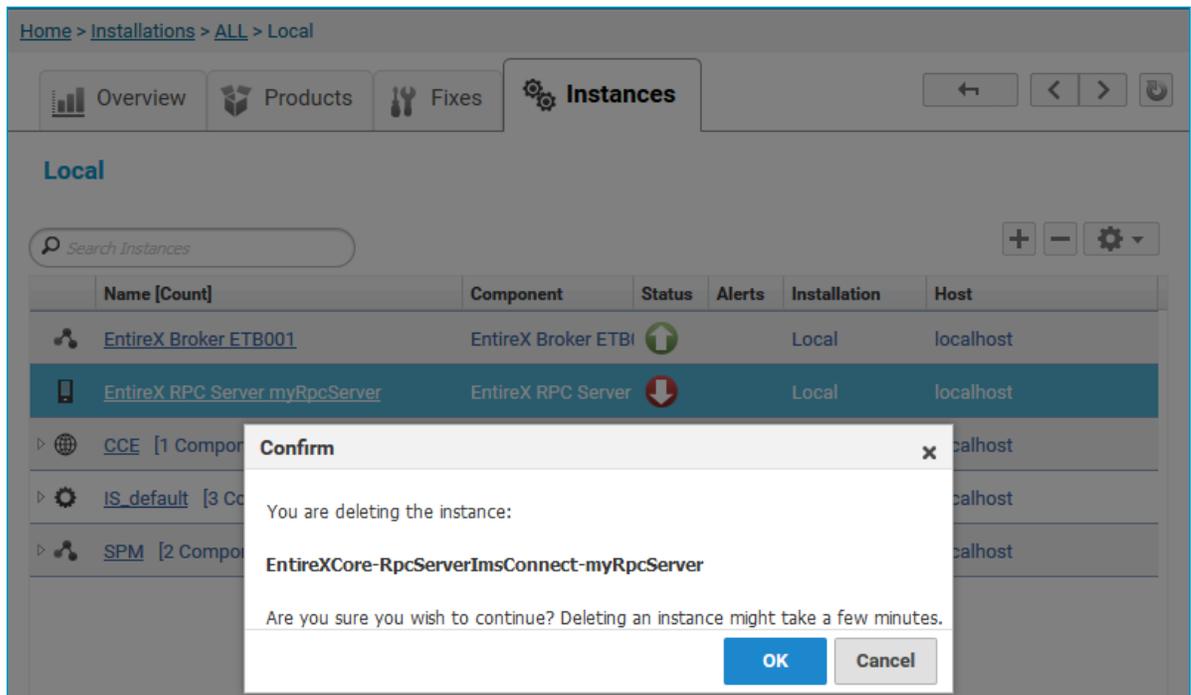

- 2 Click **OK** to confirm the uninstall of this RPC Server for IMS Connect instance.
- 3 In the next window, click **Finish**. The selected instance is removed from the list.



# 4 Administering the RPC Server for IMS Connect using the Command Central Command Line

---

- Creating an RPC Server Instance ..... 30
- Configuring an RPC Server Instance ..... 32
- Displaying the EntireX Inventory ..... 49
- Viewing the Runtime Status ..... 50
- Starting an RPC Server Instance ..... 51
- Stopping an RPC Server Instance ..... 51
- Inspecting the Log Files ..... 52
- Changing the Trace Level Temporarily ..... 54
- Deleting an RPC Server Instance ..... 55

This chapter describes how to administer the EntireX RPC Server for IMS Connect, using the Command Central command-line interface.

Administering the RPC Server for IMS Connect using the Command Central GUI is described under [Administering the RPC Server for IMS Connect using the Command Central GUI](#). The core Command Central documentation is provided separately and is also available under **Guides for Tools Shared by Software AG Products** on the Software AG documentation website.

## Creating an RPC Server Instance

The following table lists the parameters to include when creating an EntireX RPC instance, using the Command Central `create instances` commands.

Command	Parameter	Value	Opt/Req	Description
sagcc create instances	<i>node_alias</i>	<i>name</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>type</i>	RpcServerImsConnect	R	Required. EntireXCore instance type of RPC server. Must be "RpcServerImsConnect".
	<i>product</i>	EntireXCore	R	Required. Must be set to "EntireXCore".
	<i>instance.name</i>	<i>name</i>	R	Required. Name of the runtime component, for example "MyRpcServer".
	<i>install.service</i>	true   <u>false</u>	O	Optional. Register Windows Service for automatic startup. Default is false. If this parameter is true, the RPC server can be controlled by the Windows Service Control Manager.
	<i>server.address</i>	<i>class/server/service</i>	R	Required. The case-sensitive RPC server address has the format: CLASS/SERVER/SERVICE.
	<i>server.adminport</i>	1025-65535	R	Required. The administration port in range from 1025 to 65535.
	<i>broker.transport</i>	ssl   <u>tcp</u>	R	Transport over TCP or SSL. Default is TCP.
	<i>broker.host</i>	<i>name</i>	R	Required. EntireX Broker host name or IP address. See <i>Using the Broker ID in Applications</i> in the RPC Programming documentation.
	<i>broker.port</i>	1025-65535	R	Required. Port number in range from 1025 to 65535.

Command	Parameter	Value	Opt/Req	Description
	broker.user	<i>user</i>	O	Optional. The user ID for secured access to the broker.
	broker.password	<i>password</i>	O	Optional. The password for secured access to the broker.
	ims.transport	<i>ssl   tcp</i>	R	Use TCP or SSL to communicate with IMS Connect.
	ims.host	<i>name</i>	R	Host name or IP address where IMS Connect is running
	ims.port	<i>n</i>	R	TCP or SSL port number where IMS Connect is listening.
	ims.datastoreid	<i>name</i>	R	Data store ID. Name of the IMS system that will receive transactions.
	ims.encoding	<i>codepage</i>	R	Specify the appropriate EBCDIC encoding used by your IMS Connect. This codepage is also used when communicating with the EntireX Broker. Default cp037 is EBCDIC codepage with full Latin-1 character set.
	ims.user	<i>userid</i>	O	The user ID (max. 8 chars) as defined in your underlying mainframe security system (e.g. RACF).
	ims.password	<i>password</i>	O	Password (max. 8 chars) as defined in your underlying mainframe security system (e.g. RACF).

### Example

- To create a new instance for an installed EntireX of the type "RpcServerImsConnect", with name "MyRpcServer", with server address "RPC/SRV1/CALLNAT", using administration port 5757, with broker host name "localhost", listening on broker port 1971, using IMS transport TCP on host "IMSHOST", connected with port 3838, using IMS system "IMSSYS" and encoding "cp037" in the installation with alias name "local":

```
sagcc create instances local EntireXCore type=RpcServerImsConnect
instance.name=MyRpcServer server.address=RPC/SRV1/CALLNAT server.adminport=5757
broker.host=localhost broker.port=1971 ims.transport=TCP ims.host=IMSHOST
ims.port=3838 ims.datastoreid=IMSSYS ims.encoding=cp037
```

Information about the creation job - including the job ID - is displayed.

## Configuring an RPC Server Instance

---

Here you can administer the parameters of the RPC Server for IMS Connect. Any changes to parameters will be used the next time you start the RPC server.

- [Broker](#)
- [Configuration File](#)
- [IMS Connect](#)
- [Monitoring KPIs](#)
- [Server](#)
- [Trace](#)

### Broker

Here you can administer the parameters used for communication between the RPC Server for IMS Connect and EntireX Broker.

- [Parameters](#)
- [Displaying the Broker Settings of the RPC Server](#)
- [Updating the Broker Settings of the RPC Server](#)

### Parameters

Parameter	Value	Opt/Req	Description
BrokerTransport	TCP   SSL	R	Transport over TCP or SSL. Default is TCP.
BrokerHost	<i>name</i>	R	Required. EntireX Broker host name or IP address. See <i>Using the Broker ID in Applications</i> in the RPC Programming documentation.
BrokerPort	1025-65535	R	Required. Port number in range from 1025 to 65535.
BrokerUser	<i>user</i>	O	Optional. The user ID for secured access to the broker.
BrokerPassword	<i>password</i>	O	Optional. The password for secured access to the broker.
BrokerEncoding	<i>codepage</i>	R	Required. Encoding used for the communication between the RPC server and EntireX Broker.
BrokerSslTrustStore	<i>filename</i>	O	Optional. Specifies the location of the SSL trust store.
BrokerSslTrustStorePassword	<i>password</i>	O	Optional. The password of the SSL trust store.
BrokerSslVerifyServer	true   false	O	Optional. The RPC server as SSL client checks the identity of the broker as SSL server.

Parameter	Value	Opt/Req	Description
BrokerFipsMode	yes   <u>no</u>	O	Optional. Enable FIPS-140 compliant SSL communication. Default is no.

### Displaying the Broker Settings of the RPC Server

Command	Parameter	Opt/Req	Description
sagcc get configuration data	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>componentid</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".
	<i>instanceid</i>	R	Required. Must be "BROKER".
	<i>-o file</i>	O	Optional. Specifies the file where you want the output written.

### Example 1

- To display the Broker parameters of the RPC Server for IMS Connect "MyRpcServer" in the installation with alias name "local":

```
sagcc get configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer
BROKER
```

### Example 2

- To store the Broker parameters in the file *broker.json* in the current working directory:

```
sagcc get configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer
BROKER -o broker.json
```

Resulting output file in JSON format:

```
{
  "BrokerHost": "localhost",
  "BrokerPort": "1971",
  "BrokerTransport": "TCP",
  "BrokerUser": "testuser",
  "BrokerPassword": "",
  "BrokerEncoding": "Cp1252",
  "BrokerSslTrustStore": "",
  "BrokerSslVerifyServer": "true"
  "BrokerFipsMode": "no"
}
```

### Updating the Broker Settings of the RPC Server

Command	Parameter	Opt/Req	Description
sagcc update configuration data	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>componentid</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".
	<i>instanceid</i>	R	Required. Must be "BROKER".
	<i>-i file</i>	O	Optional. Specifies the file from where you want the input read.

#### Example

- To load the Broker parameters of the RPC Server for IMS Connect "MyRpcServer" in the installation with alias name "local" from the file *broker.json* in the current working directory:

```
sagcc update configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer
BROKER -i broker.json
```

See [Example 2](#) above for sample input file.

## Configuration File

Here you can administer the configuration file of the RPC Server for IMS Connect. Any changes will take effect after the next restart.

- [Displaying the Content of the RPC Server Configuration File](#)
- [Updating the Content of the RPC Server Configuration File](#)

### Displaying the Content of the RPC Server Configuration File

Command	Parameter	Opt/Req	Description
sagcc get configuration data	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>componentid</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".
	<i>instanceid</i>	R	Required. Must be "CONFIGURATION".
	<i>-o file</i>	O	Optional. Specifies the file where you want the output written.

#### Example 1

- To display the configuration file of the RPC Server for IMS Connect "MyRpcServer" in the installation with alias name "local":

```
sagcc get configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer
CONFIGURATION
```

#### Example 2

- To store the contents of the configuration file in the text file *configuration.txt* in the current working directory:

```
sagcc get configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer
CONFIGURATION -o configuration.txt
```

### Updating the Content of the RPC Server Configuration File

Command	Parameter	Opt/Req	Description
sagcc update configuration data	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>componentid</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".
	<i>instanceid</i>	R	Required. Must be "CONFIGURATION".
	<i>-i file</i>	O	Optional. Specifies the file from where you want the input read.

#### Example

- To load the contents of configuration file *configuration.json* in the current working directory:

```
sagcc update configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer
CONFIGURATION -i configuration.json
```

## IMS Connect

Here you can modify the IMS Connect settings for the RPC Server for IMS Connect.

- [Parameters](#)
- [Displaying the IMS Connect Parameters](#)
- [Updating the IMS Connect Parameters](#)

### Parameters

Command	Parameter	Opt/Req	Description
ImsTransport	<code>tcp</code>   <code>ssl</code>	R	Use TCP or SSL to communicate with IMS Connect.
ImsHost	<code>name</code>	R	Host name or IP address where IMS Connect is running
ImsPort	<code>port_no</code>	R	TCP or SSL port number where IMS Connect is listening.
ImsDataStoreId	<code>name</code>	R	Data store ID. Name of the IMS system that will receive transactions.
ImsEncoding	<code>cp037</code>   <code>codepage</code>	R	Specify the appropriate EBCDIC encoding used by your IMS Connect. This codepage is also used when communicating with the EntireX Broker. Default <code>cp037</code> is EBCDIC codepage with full Latin-1 character set.  Enable character conversion in the broker by setting the service-specific attribute <code>CONVERSION</code> to "SAGTRPC". See also <i>Configuring ICU Conversion</i> under <i>Configuring Broker for Internationalization</i> in the platform-specific Administration documentation. More information can be found under <i>Internationalization with EntireX</i> .
ImsUser	<code>user_id</code>	O	The user ID (max. 8 chars) as defined in your underlying mainframe security system (e.g. RACF).
ImsPassword	<code>password</code>	O	Password (max. 8 chars) as defined in your underlying mainframe security system (e.g. RACF).
ImsPassTicket <sup>(1)</sup>	<code>true</code>   <code>false</code>	O	Use PassTicket instead of password. Default is <code>false</code> .
ImsApplicationName	<code>application_id</code>	O	Required if PassTicket is to be used instead of a password. Application name (1-8 chars) as defined in your RACF system. This property is ignored if RACF password is set..

Command	Parameter	Opt/Req	Description
ImsSecuredSignonKey	<i>key_name</i>	O	Required if PassTicket is to be used instead of a password. Secured signon key as defined in your RACF system. Must be exactly 16 characters long.
ImsSslTrustStore	<i>truststore_name</i>	O	Specifies the location of the SSL trust store.
ImsSslTrustStorePassword	<i>password</i>	O	The password of the SSL trust store.
ImsSslVerifyServer	<i>yes</i>   <i>no</i>	O	The RPC Server as SSL client checks the identity of IMS Connect as SSL server.
ImsTimeout	<u>10000</u>   <i>n</i>	O	Socket timeout for connection to IMS Connect (in milliseconds).
ImsUseOldExit	<i>true</i>   <i>false</i>	O	Control the default exit name. True: *SAMPLE*, False: *SAMPLE1*.
ImsExitName	<i>xxx</i>	O	If left blank, the following defaults will be used: *SAMPLE* for old exit, *SAMPLE1* for new exit.



**Notes:**

1. By default, PassTickets can only be used once during a one-second time interval. They are protected against replay. This limits the workload to one request per second.



**Caution:** IBM provides a mechanism to bypass the PassTicket's replay mechanism, allowing higher workloads, but this introduces security risks. The option to bypass the PassTicket's replay mechanism should only be used in secure environments where access to generated PassTickets is limited to a secure or internal network. See your IBM documentation for more information.

**Displaying the IMS Connect Parameters**

Command	Parameter	Opt/Req	Description
sagcc get configuration data	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>componentid</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".
	<i>instanceid</i>	R	Required. Must be "IMS-CONNECT".
	<i>-o file</i>	O	Optional. Specifies the file where you want the output written.

**Example 1**

- To display the IMS Connect parameters of RPC Server for IMS Connect "MyRpcServer" in the installation with alias name "local":

```
sagcc get configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer
IMS-CONNECT
```

### Example 2

- To store the server parameters in the file *ims\_connect.json* in the current working directory:

```
sagcc get configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer
IMS-CONNECT -o ims_connect.json
```

Resulting output file in JSON format:

```
{
  "ImsTransport": "TCP",
  "ImsHost": "IMSHOST",
  "ImsPort": "3838",
  "ImsDataStoreId": "IMSSYS",
  "ImsEncoding": "cp037",
  "ImsUser": "",
  "ImsPassword": "",
  "ImsSslTrustStore": "",
  "ImsSslVerifyServer": "true",
  "ImsTimeout": "10000",
  "ImsUseOldExit": "true",
  "ImsExitName": ""
}
```

### Updating the IMS Connect Parameters

Command	Parameter	Opt/Req	Description
sagcc update configuration data	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>componentid</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".
	<i>instanceid</i>	R	Required. Must be "IMS-CONNECT".
	<i>-i file</i>	O	Optional. Specifies the file from where you want the input read.

### Example

- To load the IMS Connect parameters of the RPC Server for IMS Connect "MyRpcServer" in the installation with alias name "local" from file *http.json* in the current working directory:

```
sagcc update configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer  
IMS-CONNECT -i ims_connect.json
```

See [Example 2](#) above for sample output file.

## Monitoring KPIs

Here you can administer margins of monitored key performance indicators (KPIs) available for the RPC Server for IMS Connect: Active Workers and Busy Workers.

- [Parameters](#)
- [Displaying the Monitoring KPIs](#)
- [Updating the Monitoring KPIs](#)

### Parameters

Key performance indicators (KPIs) enable you to monitor the health of your RPC Server for IMS Connect. The following KPIs help you administer, troubleshoot, and resolve performance issues:

KPI	Setting
Absolute number of Active Workers	entirex.generic.kpi.1.max=20
Critical alert relative to maximum	entirex.generic.kpi.1.critical=0.95
Marginal alert relative to maximum	entirex.generic.kpi.1.marginal=0.80
Absolute number of Busy Workers	entirex.generic.kpi.2.max=20
Critical alert relative to maximum	entirex.generic.kpi.2.critical=0.95
Marginal alert relative to maximum	entirex.generic.kpi.2.marginal=0.80

Do not change the other properties!

### Displaying the Monitoring KPIs

Command	Parameter	Opt/Req	Description
sagcc get configuration data	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>componentid</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".
	<i>instanceid</i>	R	Required. Must be "EXX-MONITORING-KPIS".
	<i>-o file</i>	O	Optional. Specifies the file where you want the output written.

### Example 1

- To display the monitoring KPI properties of RPC Server for IMS Connect "MyRpcServer" in the installation with alias name "local" on stdout:

```
sagcc get configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer
MONITORING-KPI
```

### Example 2

- To store the monitoring KPI properties in the file *my.properties* in the current working directory:

```
sagcc get configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer
MONITORING-KPI -o my.properties
```

Resulting output file in text format:

```
entirex.entirex.spm.version=10.9.0.0.473
entirex.generic.kpi.1.critical=0.95
entirex.generic.kpi.1.id=\#1
entirex.generic.kpi.1.marginal=0.80
entirex.generic.kpi.1.max=20
entirex.generic.kpi.1.name=Active Workers
entirex.generic.kpi.1.unit=
entirex.generic.kpi.1.value=0
entirex.generic.kpi.2.critical=0.95
entirex.generic.kpi.2.id=\#2
entirex.generic.kpi.2.marginal=0.80
entirex.generic.kpi.2.max=20
entirex.generic.kpi.2.name=Busy Workers
entirex.generic.kpi.2.unit=
entirex.generic.kpi.2.value=0
```

### Updating the Monitoring KPIs

Command	Parameter	Opt/Req	Description
sagcc update configuration data	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>componentid</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".
	<i>instanceid</i>	R	Required. Must be "EXX-MONITORING-KPIS".
	<i>-i file</i>	O	Optional. Specifies the file from where you want the input read.

### Example

- To load the contents of file *my.properties* in the current working directory:

```
sagcc update configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer  
MONITORING-KPI -i my.properties
```

## Server

Here you can administer the parameters defining the registration name, the administration port and the behavior of the RPC Server for IMS Connect.

- [Parameters](#)
- [Displaying the Server Settings](#)
- [Updating the Server Settings](#)

## Parameters

Parameter	Value	Opt/Req	Description
ServerAddress	<i>class/server/service</i>	R	Required. The case-sensitive RPC server address has the format: CLASS/SERVER/SERVICE.
ServerAdminport	1025-65535	R	Required. The administration port in range from 1025 to 65535.
ReconnectionAttempts	<i>n</i>	R	Required. Number of reconnection attempts to the broker. When the number of attempts is reached and a connection to the broker is not possible, the RPC Server for IMS Connect stops.
WorkerScalability	<i>true</i>   <i>false</i>	R	You can either have a fixed or dynamic number of workers. Default is dynamic ( <i>true</i> ). For more information see <a href="#">Worker Models</a> .
FixNumber	1-255	R	Required. Fixed number of workers. Must be a number in range from 1 to 255.
MinWorkers	1-255	R	Required. Minimum number of workers. Must be a number in range from 1 to 255.
MaxWorkers	1-255	R	Required. Maximum number of workers. Must be a number in range from 1 to 255.

## Displaying the Server Settings

Command	Parameter	Opt/Req	Description
sagcc get configuration data	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>componentid</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".
	<i>instanceid</i>	R	Required. Must be "SERVER".
	<i>-o file</i>	O	Optional. Specifies the file where you want the output written.

### Example 1

- To display the server parameters of RPC Server for IMS Connect "MyRpcServer" in the installation with alias name "local" on stdout:

```
sagcc get configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer
SERVER
```

### Example 2

- To store the server parameters in the file *server.json* in the current working directory:

```
sagcc get configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer
SERVER -o server.json
```

Resulting output file in JSON format:

```
{
  "ServerAddress": "RPC/SRV1/CALLNAT",
  "ServerAdminport": "4711",
  "ReconnectionAttempts": "15",
  "WorkerScalability": "true",
  "FixNumber": "5",
  "MinWorkers": "1",
  "MaxWorkers": "10"
}
```

### Updating the Server Settings

Command	Parameter	Opt/ Req	Description
sagcc update configuration data	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>componentid</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".
	<i>instanceid</i>	R	Required. Must be "SERVER".
	<i>-i file</i>	O	Optional. Specifies the file from where you want the input read.

### Example

- To load the server parameters from the file *server.json* in the current working directory:

```
sagcc update configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer  
SERVER -i server.json
```

See [Example 2](#) above for sample input file.

## Trace

Here you can set the trace level of the RPC Server for IMS Connect.

- [Parameters](#)
- [Displaying the Trace Level](#)
- [Updating the Trace Level](#)

## Parameters

Command	Parameter	Opt/Req	Description
TraceLevel	0   1   2   3	R	One of the following levels: 0 - None - No trace output (default). 1 - Standard - Minimal trace output. 2 - Advanced - Detailed trace output. 3 - Support - Support diagnostic. Use only when requested by Software AG Support.

## Displaying the Trace Level

Command	Parameter	Opt/Req	Description
sagcc get configuration data	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>componentid</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".
	<i>instanceid</i>	R	Required. Must be "TRACE".
	<i>-o file</i>	O	Optional. Specifies the file where you want the output written.

## Example 1

- To display the trace level of RPC Server for IMS Connect "MyRpcServer" in the installation with alias name "local" on stdout:

```
sagcc get configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer TRACE
```

## Example 2

- To store the trace level in the file *trace.json* in the current working directory:

```
sagcc get configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer
TRACE -o trace.json
```

Resulting output file in JSON format:

```
{
  "TraceLevel": "0"
}
```

### Updating the Trace Level

Command	Parameter	Opt/Req	Description
sagcc update configuration data	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>componentid</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".
	<i>instanceid</i>	R	Required. Must be "TRACE".
	<i>-i file</i>	O	Optional. Specifies the file from where you want the input read.

### Example

- To load the trace level parameters from the file *trace.json* in the current working directory:

```
sagcc update configuration data local EntireXCore-RpcServerImsConnect-MyRpcServer
TRACE -i trace.json
```

See [Example 2](#) above for sample input file.

## Displaying the EntireX Inventory

### Listing all Inventory Components

The following table lists the parameters to include, when listing all EntireX instances, using the Command Central `list inventory` commands.

Command	Parameter	Opt/ Req	Description
sagcc list inventory components	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>componentid</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".

### Example

- To list inventory components of instance EntireX in the installation with alias name "local":

```
sagcc list inventory components local EntireXCore*
```

A list of all EntireX RPC Server runtime components will be displayed.

## Viewing the Runtime Status

---

The following table lists the parameters to include when displaying the state of an EntireX component, using the Command Central `get monitoring` commands.

Command	Parameter	Opt/Req	Description
sagcc get monitoring state	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>component_id</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".

### Example

- To display state information about the RPC Server for IMS Connect:

```
sagcc get monitoring state local EntireXCore-RpcServerImsConnect-MyRpcServer
```

Runtime status and runtime state will be displayed.

- Runtime *status* indicates whether a runtime component is running or not. Examples of a runtime status are ONLINE or STOPPED.
- Runtime *state* indicates the health of a runtime component by providing key performance indicators (KPIs) for the component. Each KPI provides information about the current use, marginal use, critical use and maximum use.

## Starting an RPC Server Instance

The following table lists the parameters to include when starting an EntireX RPC Server for IMS Connect, using the Command Central `exec lifecycle` commands.

Command	Parameter	Opt/Req	Description
sagcc exec lifecycle start	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>componentid</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".

### Example

- To start the RPC Server for IMS Connect "MyRpcServer" in the installation with alias name "local":

```
sagcc exec lifecycle start local EntireXCore-RpcServerImsConnect-MyRpcServer
```

Information about the job - including the job ID - will be displayed.

## Stopping an RPC Server Instance

The following table lists the parameters to include when stopping an EntireX RPC Server for IMS Connect, using the Command Central `exec lifecycle` commands.

Command	Parameter	Opt/Req	Description
sagcc exec lifecycle stop	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>componentid</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".

### Example

- To stop the RPC Server for IMS Connect "MyRpcServer" in the installation with alias name "local":

```
sagcc exec lifecycle stop local EntireXCore-RpcServerImsConnect-MyRpcServer
```

Information about the job - including the job ID - will be displayed.

## Inspecting the Log Files

Here you can administer the log files of the RPC Server for IMS Connect. The following table lists the parameters to include when displaying or modifying parameters of the RPC server, using the Command Central `list` commands.

- [List all RPC Server Log Files](#)
- [Getting Content from or Downloading RPC Server Log Files](#)

### List all RPC Server Log Files

Command	Parameter	Opt/Req	Description
sagcc list diagnostics logs	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>componentid</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".

### Example

- To list the log files of RPC Server for IMS Connect "MyRpcServer" in the installation with alias name "local" on stdout:

```
sagcc list diagnostics logs local EntireXCore-RpcServerImsConnect-MyRpcServer
```

### Getting Content from or Downloading RPC Server Log Files

Command	Parameter	Opt/Req	Description
sagcc get diagnostics logs	<i>node_alias</i>	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	<i>componentid</i>	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".
	full   tail   head	O	Optional. Shows full log file content, or only tail or head.
	export -o <i>file</i>	O	Optional. Creates a zip file of the logs.

### Example 1

- To list the tail of the log file content in the current working directory:

```
sagcc get diagnostics logs local EntireXCore-RpcServerImsConnect-MyRpcServer  
server.log tail
```

### Example 2

- To create a zip file *myfile.zip* of the logs:

```
sagcc get diagnostics logs local EntireXCore-RpcServerImsConnect-MyRpcServer  
export -o myfile.zip
```

## Changing the Trace Level Temporarily

Here you can temporarily change the trace level of a running RPC server. The following table lists the parameters to include when displaying or modifying parameters of an EntireX component, using the Command Central `exec administration` command. The change is effective immediately; there is no need to restart the RPC server.



**Note:** If you want to set the trace level permanently, see [Trace](#) under *Configuring an RPC Server Instance*.

### Displaying the Trace Level of a Running RPC Server

Command	Parameter	Opt/Req	Description
sagcc exec administration	component	R	Required. Specifies that a component will be administered.
	node_alias	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	Trace	R	Required. Specifies what is to be administered.
	load tracelevel=?	R	Required. Get the trace level.
	-f xml json	R	Required. Specifies XML or JSON as output format.

#### Example 1

- To display the current trace level of the RPC Server for IMS Connect "MyRpcServer" in the installation with alias name "local" in JSON format on stdout:

```
sagcc exec administration component local
EntireXCore-RpcServerImsConnect-MyRpcServer Trace load tracelevel=? -f json
```

#### Example 2

- To display the current trace level of the RPC Server for IMS Connect "MyRpcServer" in the installation with alias name "local" in XML format on stdout:

```
sagcc exec administration component local
EntireXCore-RpcServerImsConnect-MyRpcServer Trace load tracelevel=? -f xml
```

## Updating the Trace Level of a Running RPC Server

Command	Parameter	Opt/Req	Description
sagcc exec administration	component	R	Required. Specifies that a component will be administered.
	node_alias	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	componentid	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".
	Trace	R	Required. Specifies what is to be administered.
	update tracelevel	R	Required. Update temporarily the trace level of a running RPC server.
	-f xml json	R	Required. Specifies XML or JSON as output format.

### Example

- To change the current trace level of the running RPC Server with the name "MyRpcServer" in the installation with alias name "local":

```
sagcc exec administration component local
EntireXCore-RpcServerImsConnect-MyRpcServer Trace update tracelevel=2 -f json
```

## Deleting an RPC Server Instance

The following table lists the parameters to include when deleting an EntireX RPC Server instance, using the Command Central `delete instances` commands.

Command	Parameter	Opt/Req	Description
sagcc delete instances	node_alias	R	Required. Specifies the alias name of the installation in which the runtime component is installed.
	componentid	R	Required. The component identifier. The prefix is "EntireXCore-RpcServerImsConnect-".

### Example

- To delete an instance of an EntireX RPC Server for IMS Connect with the name "MyRpcServer" in the installation with alias name "local":

```
sagcc delete instances local EntireXCore-RpcServerImsConnect-MyRpcServer
```

Information about the deletion job - including the job ID - is displayed.

# 5      **Configuring the RPC Server for IMS Connect with Local**

## **Scripts**

---

▪ Customizing the RPC Server .....	58
▪ Configuring the RPC Server Side .....	60
▪ Configuring the IMS Connect Side .....	63
▪ Using SSL/TLS with the RPC Server .....	65
▪ Starting the RPC Server .....	67
▪ Stopping the RPC Server .....	67
▪ Pinging the RPC Server .....	68
▪ Running an EntireX RPC Server as a Windows Service .....	68
▪ Application Identification .....	70

The EntireX RPC Server for IMS Connect allows standard RPC clients to communicate with IMS MPP programs. It works together with the IDL Extractor for COBOL and transforms RPC requests from clients into message to IMS, using IMS Connect.

This chapter describes how to administer the RPC Server for IMS Connect with local scripts as in earlier versions of EntireX.

See also *Administering the RPC Server for IMS Connect with the Command Central GUI | Command Line*.

## Customizing the RPC Server

---

The following elements are used to set up the RPC Server for IMS Connect:


- [Configuration File](#)
- [Start Script](#)

### Configuration File

The default name of the configuration file is *entirex.imsconnect.properties*. The RPC Server for IMS Connect searches for this file in the current working directory.

You can set the name of the configuration file with `-Dentirex.server.properties=<your file name>` with `/` as file separator.

The configuration file contains the configuration for both parts of the RPC Server for IMS Connect.

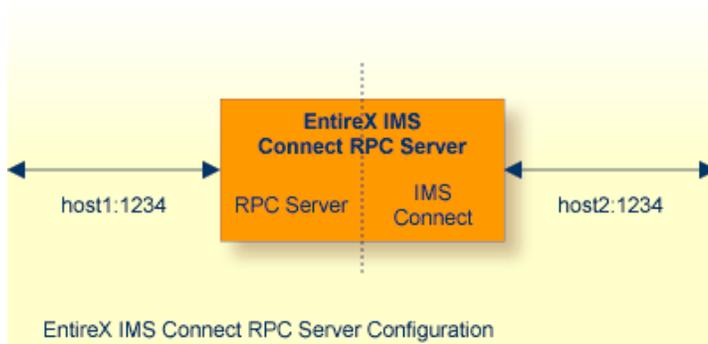

### Configuring more than one RPC Server

If you configure more than one RPC Server for IMS Connect that connects to the same broker, the following items must be distinct:

- the trace output file (property `entirex.server.logfile`)

- the log for the Windows Service (property `entirex.server.serverlog`)

### **Start Script**

The start script for the RPC Server for IMS Connect is called *imsconnectserver.bsh* (Linux) or *imsconnectserver.bat* (Windows) and is provided in the *bin* folder of the installation directory. You may customize this file. The RPC Server for IMS Connect itself is contained in the file *entirex.jar*.

## Configuring the RPC Server Side

The RPC Server for IMS Connect uses the properties that start with “entirex.server” for configuring the RPC server side.

Alternatively to the properties, you can use the command-line options. These have a higher priority than the properties set as Java system properties, and these have higher priority than the properties in the configuration file.

Property Name	Command-line Option	Default	Explanation
entirex.server.brokerid	-broker	localhost	Broker ID.
entirex.server.serveraddress	-server	RPC/SRV1/CALLNAT	Server address.
entirex.server.userid	-user	IMSRPCServer	The user ID for access to the broker.
entirex.server.fixedservers		no	<p>NO The number of worker threads balances between what is specified in entirex.server.minservers and what is specified in entirex.server.maxservers. This is done by a so-called attach thread. At startup, the number of worker threads is the number specified in entirex.server.minservers. A new worker thread starts if the broker has more requests than there are worker threads waiting. If more than the number specified in entirex.server.minservers are waiting for requests, a worker thread stops if its receive call times out. The timeout period is configured with entirex.server.waitserver. See worker model <a href="#">DYNAMIC</a>.</p> <p>YES The number of worker threads specified in entirex.server.minservers is started and the server can process this number of parallel requests. See worker model <a href="#">FIXED</a>.</p>
entirex.server.minservers		1	Minimum number of server threads.

Property Name	Command-line Option	Default	Explanation
entirex.server.maxservers		32	Maximum number of server threads.
entirex.server.restartcycles	-restartcycles	15	Number of restart attempts if the Broker is not available. This can be used to keep the RPC Server for IMS Connect running while the Broker is down for a short time.
entirex.server.password	-password	yes	The password for secured access to the broker. The password is encrypted and written to the property <code>entirex.server.password.e</code> . <ul style="list-style-type: none"> <li>■ To change the password, set the new password in the properties file.</li> <li>■ To disable password encryption, set <code>entirex.server.passwordencrypt=no</code>. Default=yes.</li> </ul>
entirex.server.properties	-propertyfile	entirex.server.properties	The name of the property file.
entirex.server.security	-security	no	Valid values: no   yes   auto   name of BrokerSecurity object.
entirex.server.compresslevel	-compresslevel	0 (no compression)	Enter the text or the numeric value: <p style="margin-left: 20px;">BEST_COMPRESSION      9</p> <p style="margin-left: 20px;">BEST_SPEED              1</p> <p style="margin-left: 20px;">DEFAULT_COMPRESSION -1 (mapped to              6)</p> <p style="margin-left: 20px;">DEFLATED                8</p> <p style="margin-left: 20px;">NO_COMPRESSION        0</p> <p style="margin-left: 20px;">N                         0</p> <p style="margin-left: 20px;">Y                         8</p>
entirex.server.waitattach		600S	Wait timeout for the attach server thread.
entirex.server.waitserver		300S	Wait timeout for the worker threads.
entirex.timeout		20	TCP/IP transport timeout.
	-help		Display usage of the command-line parameters.
entirex.server.	-logfile	standard output	Name of the log file.

Property Name	Command-line Option	Default	Explanation
logfile			
entirex.trace	-trace	0	Trace level.  0 No tracing, default. 1 Trace all broker calls and other major actions. 2 Dump the send and receive buffer. 3 Dump the buffers sent to the broker and received from the broker.

## Configuring the IMS Connect Side

These properties are used to configure the connection to IMS Connect.

Alternatively, you can use the command-line option. The command-line options have a higher priority than the properties set as Java system properties and these have higher priority than the properties in the configuration file

Name	Default Value	Explanation
ims.host		Host name or IP address where IMS Connect is running
ims.port		TCP or SSL port number where IMS Connect is listening.
ims.datastoreid		Data store ID. Name of the IMS system that will receive transactions.
entirex.bridge.targetencoding	cp037	Specify the appropriate EBCDIC encoding used by your IMS Connect. This codepage is also used when communicating with the EntireX Broker. Default cp037 is EBCDIC codepage with full Latin-1 character set.
ims.useoldexit	yes	yes Use old IMS Connect user message exit. Name is *SAMPLE*. no Use new IMS Connect user message exit. Name is *SAMPLE1*.
ims.exitname	*SAMPLE* (old exit) *SAMPL1* (new exit)	Name of IMS Connect user message exit.
ims.sockettimeout	10000	Socket timeout for connection to IMS Connect (in milliseconds).
ims.checkdfs	true	true, yes Check for DFS message. Return an error and do not return the message if it contains a DFS error message. false, no Do not check for DFS message.
ims.clientid		ID of the client that is used by IMS Connect (max. 8 chars).
ims.lterm		IMS LTERM override (max. 8 chars).
ims.userid		The user ID (max. 8 chars) as defined in your underlying mainframe security system (e.g. RACF).
ims.groupid		RACF group ID (max. 8 chars).

Name	Default Value	Explanation
ims.password		<p>Password (max. 8 chars) as defined in your underlying mainframe security system (e.g. RACF).</p> <p>The password is encrypted and written to the property <code>ims.password.e</code>.</p> <ul style="list-style-type: none"> <li>■ To change the password, set the new password in the properties file.</li> <li>■ To disable password and/or secured signon key encryption, set <code>entirex.server.passwordencrypt=no</code>.</li> </ul>
ims.applname <sup>(1)</sup>		<p>Required if PassTicket is to be used instead of a password. Application name (1-8 chars) as defined in your RACF system. This property is ignored if RACF password is set.</p>
ims.secured.signonkey <sup>(1)</sup>		<p>Required if PassTicket is to be used instead of a password. Secured signon key as defined in your RACF system. Must be exactly 16 characters long.</p> <p>The secured signon key is encrypted and written to the property <code>ims.secured.signonkey.e</code>.</p> <ul style="list-style-type: none"> <li>■ To change the secured signon key, set the new secured signon key in the properties file.</li> <li>■ To disable password and/or secured signon key encryption, set <code>entirex.server.passwordencrypt=no</code>.</li> </ul> <p>This property is ignored if <code>ims.password</code> is set.</p>
ims.sslparams		<p>SSL parameters. Same syntax as Broker ID.</p>
ims.mapping.folder		<p>This is the server-side mapping container, the folder where the RPC server expects server-side mapping files (Designer files with extension <code>.svm</code>).</p> <ul style="list-style-type: none"> <li>■ If <i>no</i> server requires server-side mapping (<code>.svm</code>) or you use server mapping files with extension <code>.cvm</code> only, you can omit this property.</li> </ul>

Name	Default Value	Explanation
		<ul style="list-style-type: none"> <li>■ If <i>one</i> server requires server-side mapping (.svm), this property must be specified.</li> </ul> <p>Server mapping files with extension .svm are no longer supported at design time by the Designer. You can still use them at runtime in a server-side mapping container. All special COBOL syntax and features supported by server mapping files with extension .svm are also covered by server mapping files with extension .cvm. See <i>When is a Server Mapping File Required?</i></p> <p>We recommend migrating .svm files to .cvm files. See <i>Migrating Server Mapping Files</i> under <i>Server Mapping Files for COBOL</i> in the Designer documentation.</p>
ims.useprogramname	false	Automatically use the IDL program name as transaction name. If set to "true" or "yes", 10 bytes are used for the transaction name. If set to a number, this number of bytes is used for the transaction name.



#### Notes:

1. By default, PassTickets can only be used once during a one-second time interval. They are protected against replay. This limits the workload to one request per second.



**Caution:** IBM provides a mechanism to bypass the PassTicket's replay mechanism, allowing higher workloads, but this introduces security risks. The option to bypass the PassTicket's replay mechanism should only be used in secure environments where access to generated PassTickets is limited to a secure or internal network. See your IBM documentation for more information.

## Using SSL/TLS with the RPC Server

To use SSL with the RPC Server for IMS Connect, you need to configure two sides:

### ■ IMS Connect Side

See parameter `ims.sslparams` under [Configuring the IMS Connect Side](#).

## ■ RPC Server Side

RPC servers can use Secure Sockets Layer/Transport Layer Security (SSL/TLS) as the transport medium. The term “SSL” in this section refers to both SSL and TLS. RPC-based servers are always SSL clients. The SSL server can be either the EntireX Broker or Broker SSL Agent. For an introduction see *SSL/TLS, HTTP(S), and Certificates with EntireX* in the platform-independent Administration documentation.

### > To use SSL

- 1 To operate with SSL, certificates need to be provided and maintained. Depending on the platform, Software AG provides sample certificates, but we strongly recommend that you create your own. See *SSL/TLS Sample Certificates Delivered with EntireX* in the EntireX Security documentation.
- 2 Set up the RPC Server for IMS Connect for an SSL connection.

Use the *URL-style Broker ID* with protocol `ssl://` for the Broker ID. If no port number is specified, port 1958 is used as default. Example:

```
ssl://localhost:22101?trust_store=C:\SoftwareAG\EntireX\etc\ExxCACert.p12&trust_passwd=ExxCACert&verify_server=no
```

If the SSL client checks the validity of the SSL server only, this is known as *one-way SSL*. Two SSL parameters must be specified on the SSL client side: `trust_store` and `trust_passwd`. The mandatory `trust_store` parameter specifies the file name of a PKCS#12 certificate store that must contain the certificate chain of the trusted certificate authority (CA) that issued the SSL server's certificate.

To unlock this certificate store, the password has to be set with SSL parameter `trust_passwd`. By default a check is made that the certificate of the SSL server is issued for the hostname specified in the Broker ID. The common name of the subject entry in the server's certificate is checked against the hostname. If they do not match, the connection will be refused. You can disable this check with SSL parameter `verify_server=no`.

If the SSL server additionally checks the identity of the SSL client, this is known as *two-way SSL*. In this case the SSL server requests a client certificate (the parameter `verify_client=yes` is defined in the configuration of the SSL server). Two additional SSL parameters must be specified on the SSL client side: `key_store` and `key_passwd`. This keystore must contain the private key of the SSL client. The password that protects the private key is specified with `key_passwd`.

The ampersand (&) character cannot appear in the password.

SSL parameters are separated by ampersand (&). See also *SSL/TLS Parameters for SSL Clients*.

- 3 Make sure the SSL server to which the RPC side connects is prepared for SSL connections as well. The SSL server can be EntireX Broker or Broker SSL Agent. See:
  - *Running Broker with SSL/TLS Transport* in the platform-specific Administration documentation

- Broker SSL Agent in the platform-specific Administration documentation

## Starting the RPC Server

---

### ➤ To start the RPC Server for IMS Connect

- Use the *Start Script*.

Or:

Under Windows you can use the RPC Server for IMS Connect as a Windows Service. See *Running an EntireX RPC Server as a Windows Service*.

## Stopping the RPC Server

---

### ➤ To stop the RPC Server for IMS Connect

- Use the command `stopService`. See *Stop Running Services* in Command Central's Command-line Interface.

Or:

Stop the service using Command Central's Graphical User Interface. See *Stopping a Service*.

Or:

Use the command-line utility `etbcmd`. See `ETBCMD` under *Broker Command-line Utilities* in the platform-specific Administration documentation.

Or:

Use `CTRL-C` in the session where you started the RPC server instance.

Or:

Under Linux, enter command `kill -process-id`.

## Pinging the RPC Server

---

### > To ping the RPC Server for IMS Connect

- Enter the following command:

```
java -classpath "$EXXDIR/classes/entirex.jar" ↵  
com.softwareag.entirex.rpcping.RPCServerPing -p <admin_port>
```

where *admin\_port* is the number of the administration port.

The ping command returns "0" if the server is reachable, and "1" if the server cannot be accessed.

## Running an EntireX RPC Server as a Windows Service

---

For general information see *Running an EntireX RPC Server as a Windows Service* in the Windows Administration documentation.

### > To run the RPC Server for IMS Connect as a Windows Service

- 1 Customize the *Start Script* according to your system installation.



**Note:** The script must pass external parameters to the RPC server and use the reduced signaling of the JVM (option `-Xrs`):

```
java -Xrs com.softwareag.entirex.ims.IMSRPCServer %*
```

If `-Xrs` is not used, the JVM stops and an entry 10164002 is written to the event log when the user logs off from Windows.

See also *Starting the RPC Server*.

- 2 Test your RPC server to see whether it will start if you run your script file.
- 3 Use the *EntireX RPC Service Tool* and install the `RPCService` with some meaningful extension, for example `MyServer`. If your *Start Script* is `imsconnectserver.bat`, the command will be

```
RPCService -install -ext MyServer ←  
-script install_path\EntireX\bin\imsconnectserver.bat
```

The log file will be called *RPCservice\_MyServer.log*.

- 4 In **Windows Services** menu (**Control Panel** > **Administrative Tools** > **Services**) select the service: Software AG EntireX RPC Service [MyServer] and change the property Startup Type from "Manual" to "Automatic".

## Application Identification

---

The application identification is sent from the RPC Server for IMS Connect to the Broker. It is visible with Broker Command and Info Services.

The identification consists of four parts: name, node, type, and version. These four parts are sent with each Broker call and are visible in the trace information.

For the RPC Server for IMS Connect, these values are:

Identification Part	Value
Application name	ANAME=IMS Connect RPC Server
Node name	ANODE=<host name>
Application type	ATYPE=Java
Version	AVERS=10.9.0.0

## 6 Extracting from Message Format Service

---

To extract interface definitions from Message Format Service (MFS) with MID and MOD definitions, use a command-line extractor. Run the extractor with the following command:

```
java -classpath <suite installation ↵  
folder>\IntegrationServer\packages\WmEntireX\code\jars\entirex.jar ↵  
com.softwareag.entirex.ims.extractor.MFSExtractor <inputfile>
```

The input file must be an MFS source with MID and MOD definitions. The output is an IDL file with the same name as the input file and suffix ".idl". Use the IDL file to generate connections and adapter services with the Integration Server Wrapper.



# 7 Server-side Mapping Files

---

- Server-side Mapping Files in the RPC Server ..... 74
- Undeploying Server-side Mapping Files from the RPC Server ..... 74
- Change Management of Server-side Mapping Files ..... 75
- List Deployed Server-side Mapping Files ..... 75
- Check if a Server-side Mapping File Revision has been Deployed ..... 75

Server-side mapping files have the extension `.svm`.

Server mapping files with extension `.svm` are no longer supported at design time by the Designer. You can still use them at runtime in a server-side mapping container. All special COBOL syntax and features supported by server mapping files with extension `.svm` are also covered by server mapping files with extension `.cvm`. See *When is a Server Mapping File Required?*

We recommend migrating `.svm` files to `.cvm` files. See *Migrating Server Mapping Files* under *Server Mapping Files for COBOL* in the Designer documentation.

See also *Source Control of Server Mapping Files* | *Comparing Server Mapping Files* | *When is a Server Mapping File Required?* | *Migrating Server Mapping Files* in the Designer documentation.

## Server-side Mapping Files in the RPC Server

---

Server-side mapping files (`.svm`) are stored as ordinary files in the server-side mapping container folder.

- If *no* server requires server-side mapping (`.svm`) or you are using server mapping files with extension `.cvm` only, you can omit the property `ims.mapping.folder`.
- If *one* server requires a server-side mapping file (`.svm`), provide the property `ims.mapping.folder`. See [Configuring the IMS Connect Side](#).

## Undeploying Server-side Mapping Files from the RPC Server

---

Undeploy a server mapping file (Designer file with extension `.svm`) from the RPC server manually. See *Server Mapping Files for COBOL*.

### ➤ To undeploy a server-side mapping file manually

- Delete the server-side mapping file from the server-side mapping container (directory or folder). See *Server Mapping Files for COBOL*.

## Change Management of Server-side Mapping Files

---

Under Linux and Windows, change management for a directory or folder (server-side mapping container, see [Server-side Mapping Files in the RPC Server](#)) is similar to change management within ordinary operating system directories (folders). All updates to the directory or folder done after a backup must be kept.

All Designer server-side mapping files (.svm) added since the last backup should be available. See *Server Mapping Files for COBOL* in the Designer documentation.

## List Deployed Server-side Mapping Files

---

Use the Windows Explorer or the Linux `ls` command to list the contents of the server-side mapping container (directory or folder). See [Server-side Mapping Files in the RPC Server](#).

## Check if a Server-side Mapping File Revision has been Deployed

---

Server-side mapping files in the server-side mapping container correspond to Designer file with extension .svm (same format). See *Server Mapping Files for COBOL* in the Designer documentation. Each line relates to an IDL program and contains a creation timestamp at offset 276 (decimal) in the format `YYYYMMDDHHIISSST`. Precision is 1/10 of a second. The creation timestamp can be checked.

The timestamp can be found on the same offset in the server-side mapping files stored in the server-side mapping container (directory or folder). See [Server-side Mapping Files in the RPC Server](#).



# 8

## Scenarios

---

- COBOL Scenarios ..... 78

## COBOL Scenarios

---

### Scenario I: Calling an Existing COBOL Server

» To call an existing COBOL server

- 1 Use the IDL Extractor for COBOL to extract the Software AG IDL and, depending on the complexity, also a server mapping file. See *When is a Server Mapping File Required?* under *Server Mapping Files for COBOL* in the Designer documentation.
- 2 Build an EntireX RPC client using any EntireX wrapper. For a quick test you can:
  - use the IDL Tester; see *EntireX IDL Tester* in the Designer documentation
  - generate an XML mapping file (XMM) and use the XML Tester for verification; see *EntireX XML Tester* in the XML/SOAP Wrapper documentation

See *Server Examples for z/OS IMS MPP* in the COBOL Wrapper documentation for COBOL RPC Server examples.