


Build an EntireX RPC Client and Use an Existing XML-based Server

This chapter covers the following topics:

- Generation Process
- Running the Application

Generation Process

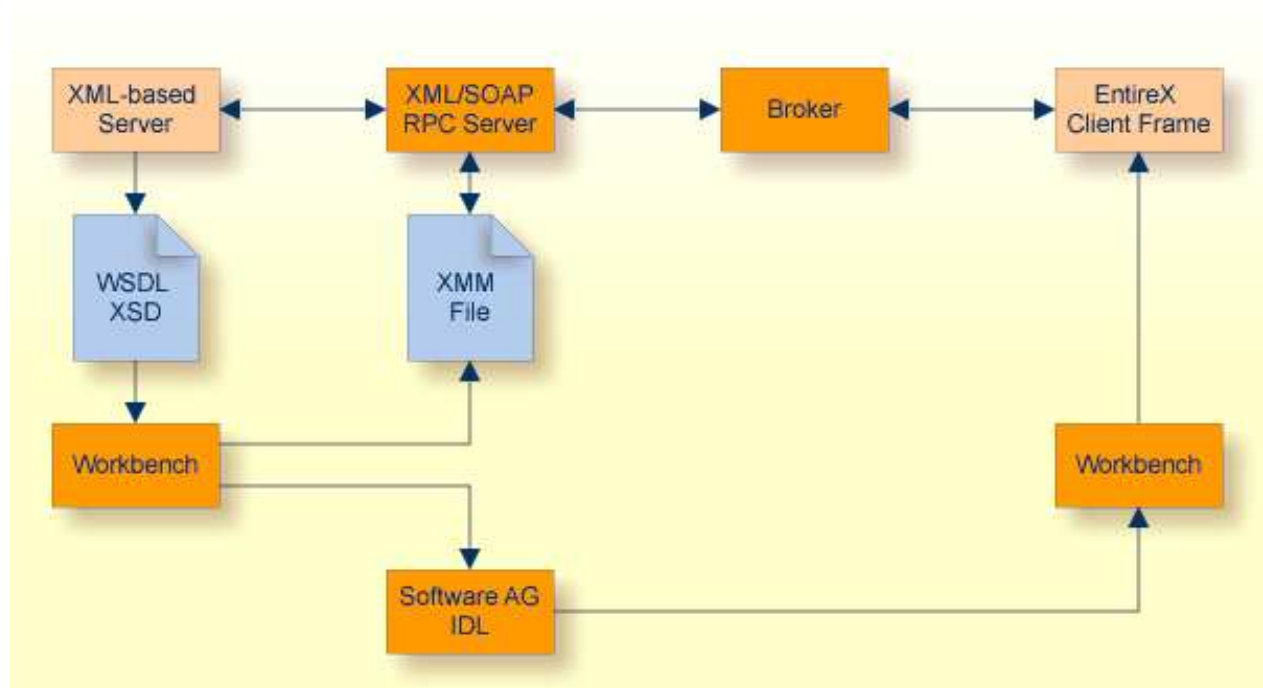

> To generate the application

1. If a WSDL file or an XML Schema file for the XML-based server exists, use the IDL Extractor for XML Schema or the IDL Extractor for WSDL, generating the IDL-XML-Mapping automatically.

Otherwise, write a suitable IDL file.

2. Select this generated or written IDL and open the context menu to generate the desired client frame or, if you are using Natural, write a Natural client.

Running the Application

> To run the application

1. Configure the XML/SOAP RPC Server. See *Administering the EntireX XML/SOAP RPC Server* under UNIX | Windows.
2. Start the EntireX Broker.
3. Start the XML/SOAP RPC Server.
4. Run the client application.