

# ApplinX Server Administrator

- Starting the Server Administrator
  - Logging On
  - Main Screen
- 

## Starting the Server Administrator

From the **Start** menu, select **Software AG > Administration > ApplinX Administration <version number>**.

Alternatively, you can run the Administrator from a remote PC (for example: on a Microsoft Windows operating system) and connect to the server using TCP/IP.

## Logging On

Once you start the ApplinX Administrator, the **Logon** screen is displayed. When this is the first time you are logging on, by default, "Administrator" will be displayed in the **User name** field. Type the server address (IPv4 and IPv6 address formats are supported) and port. When it is not the first time you are logging on, the Administrator will automatically try to connect to the last server it connected to.


## Main Screen

The screen consists of four parts:

- Title bar, menu bar and toolbar.
- ApplinX Explorer pane.
- Main view: The main view corresponds to the selected node/entity/session in the ApplinX Explorer.
- Status bar: The status bar displays information according to the object selected in the main view. The status bar may include information such as: the user name, application name, the number of users connected, indication of file tracing/replaying or the host address.

Operations, features and applications that the logged-in user is not authorized to use will be disabled or are invisible.

- ApplinX Explorer
- Toolbar
- Menu Bar

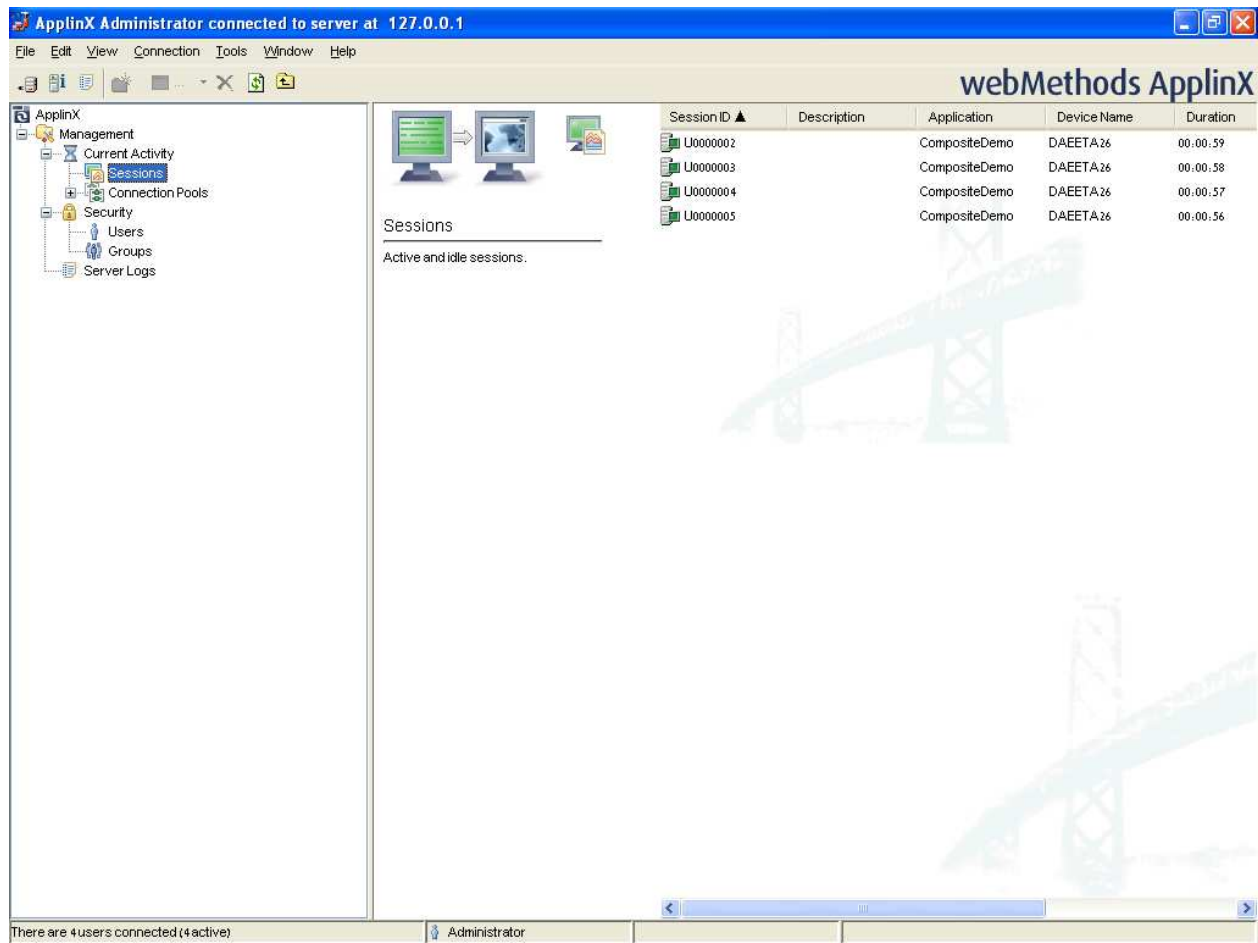











## ApplinX Explorer

Enables viewing and controlling users' activity, maintaining the server's configuration, viewing runtime information about connection pools, sessions, server logs, define hosts and design and configure applications.

ApplinX	The root node.
Management	Includes managerial functions.
Current Activity	Controls the sessions connected to the server, the server activity and the connection pools. The <b>Current Activity</b> node is unavailable when the ApplinX Administrator is not connected to the server.
Sessions	Lists the currently connected sessions.
Connection Pools	Provides runtime information regarding the connection pools.
Security	Holds the definitions of the users, their permissions and roles, and the user groups.
Server Logs	Lists the server logs.

## Toolbar

Icon	Description
	Disconnect from Server
	Connect to Server
	Server Information...
	Server Log
	New Folder
	New User
	New Group
	Delete
	Refresh
	Up One Level

## Menu Bar

### File Menu

Menu Item	Description
New	Creates a new user or group.
Open	Opens the selected item.
Delete	Deletes the selected item.
Properties	Opens the properties of the selected item.
Exit	Exits the Administrator.

### Edit Menu

Menu Item	Description
Select All	Selects all entities displayed in the main view.
Invert Selection	Selects all entities that were not selected, and deselects entities that were selected.

### View Menu

<b>Menu Item</b>	<b>Description</b>
ApplinX Explorer	Hides/shows the ApplinX Explorer tree area of the screen.
Summary	Hides/shows the summary area of the screen.
Server Log	Displays the server log.
Refresh	Refreshes the main view to match the data stored on the server.

### Connection Menu

<b>Menu Item</b>	<b>Description</b>
Connect/Disconnect	Connects and disconnects the Administrator from the server.
Cancel Session	Displays the <b>View Session</b> window of the selected session.

### Tools Menu

<b>Menu Item</b>	<b>Description</b>
Server Info	Displays the <b>Server Information</b> dialog box.
User Information	Displays the <b>User Information</b> dialog box.
Restart Log	Restarts the log.